
[2] Block Diagram

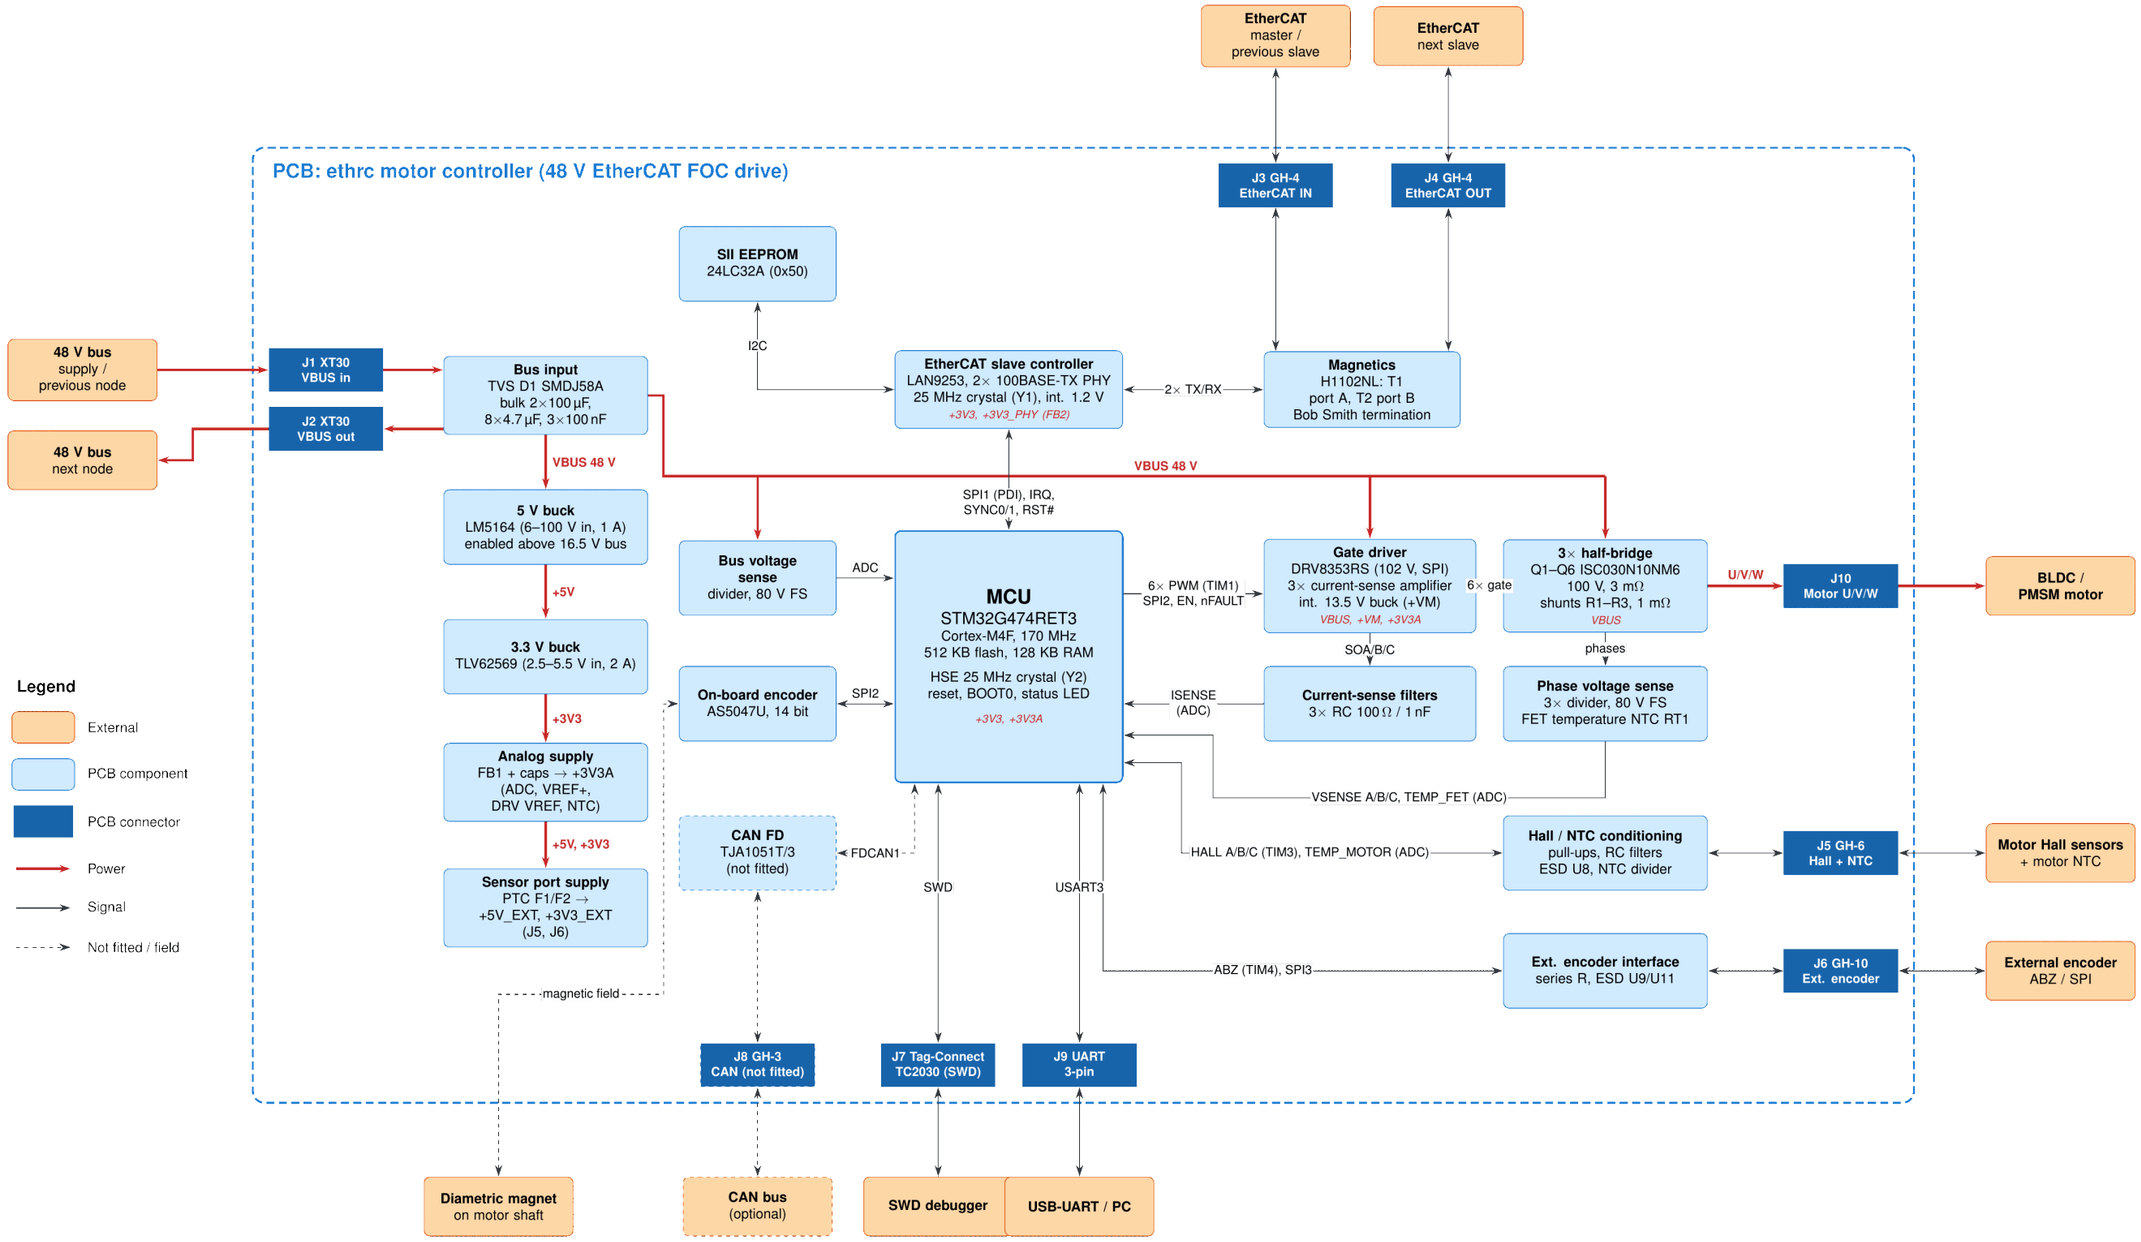

Target specifications:

Input voltage:	36-60 V
Continuous current:	25 A
Peak current:	65 A
Switching frequency:	20-60 kHz

Comments:	Company: ETH Robotics Club		Variant: PRELIMINARY	Git Hash: 1a83c5d
	Board Name: ETHRC Motor Controller		Project Name: BLDC Motor Controller	
Sheet Title: Block Diagram	File Name: Block Diagram.kicad_sch	Designer: Masiar Etemadi	Date: 2024-04-13	Revision: + (Unreleased)
Sheet Path: /Block Diagram/		Reviewer:	Size: A3	Sheet: 2 of 20