





A

Resistors limit input current to 638uA

2nd order filter, -3dB @ 33.9kHz

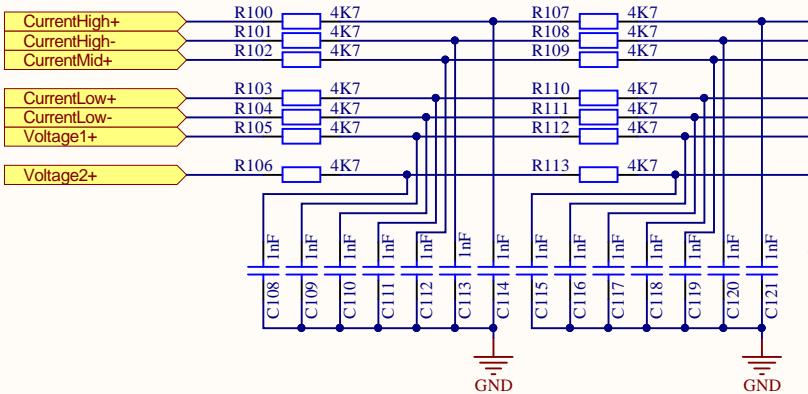

The medium range voltages can exceed the ADC supply during normal operation, we don't want the limiting currents to flow into the ADC

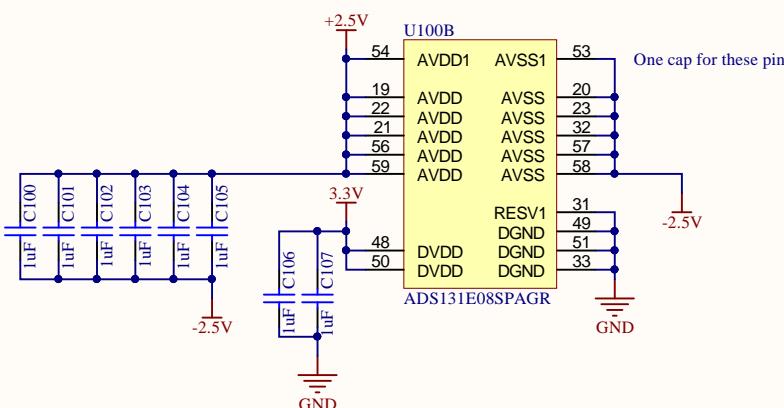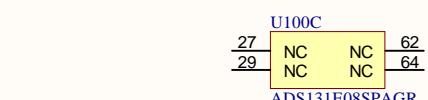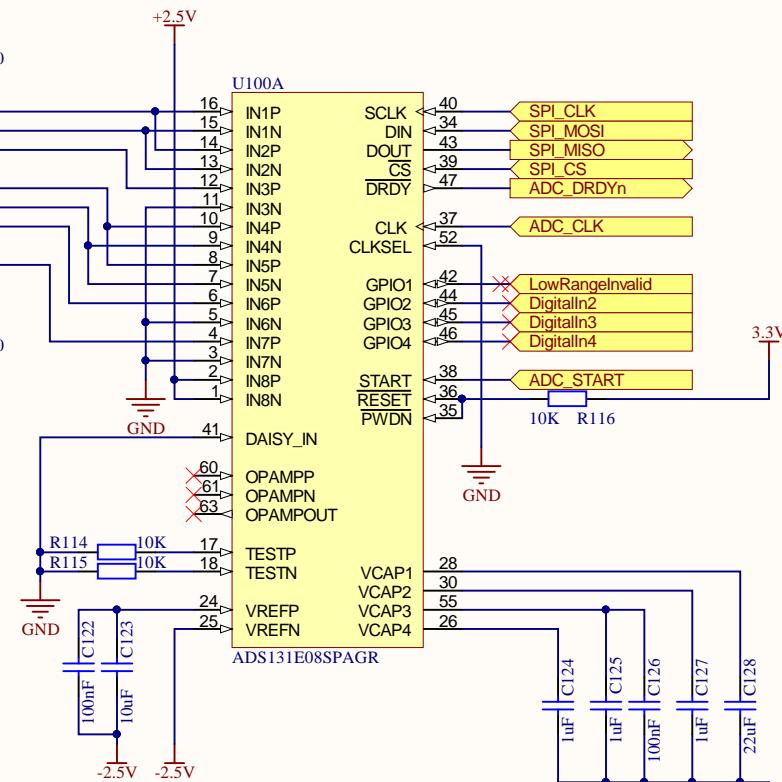

Eidgenössische Technische Hochschule Zürich
Swiss Federal Institute of Technology Zurich


Drawing number: 4 Rev. 1 Format: Laboratory: TIK Project: adc.SchDoc


Date: 26.10.2016 16:18:17 Format: A4 Q Drawn by: Stefan Lippuner

File: C:\Users\user\Documents\RocketLogger\hardware\pcb\Cape\adc.SchDoc Page 4 of 8

Drawing title:

ADC

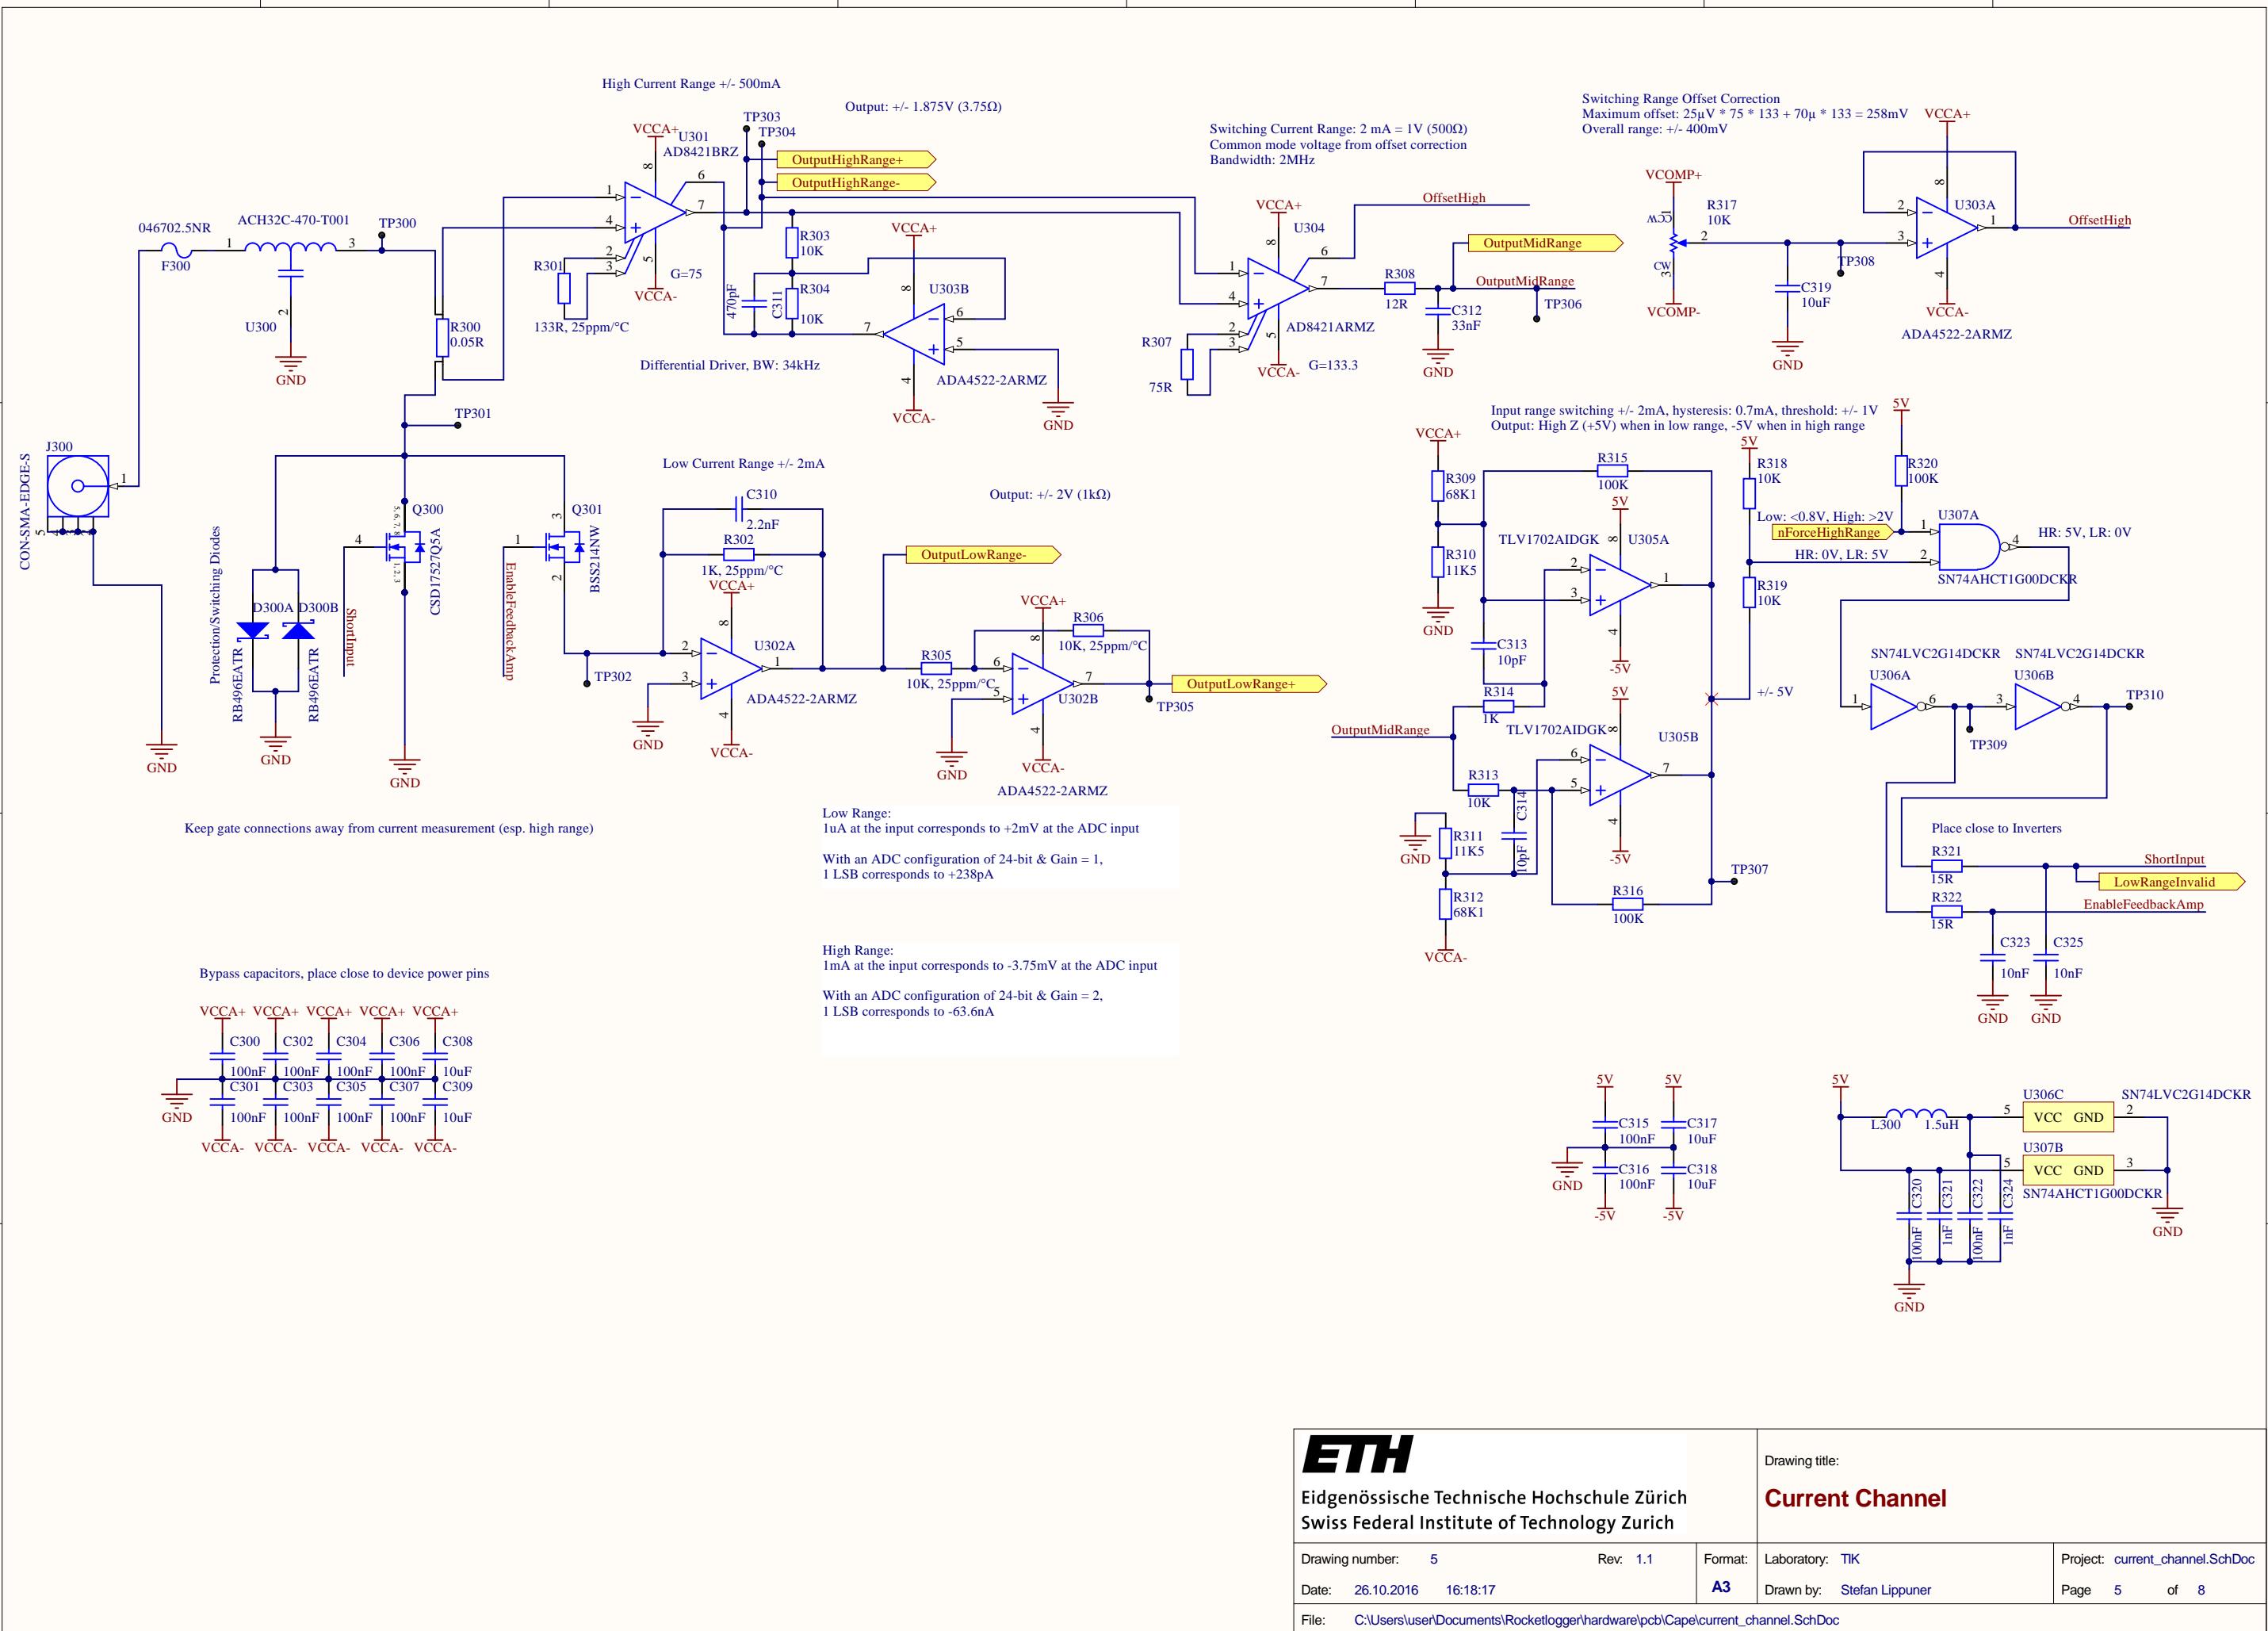


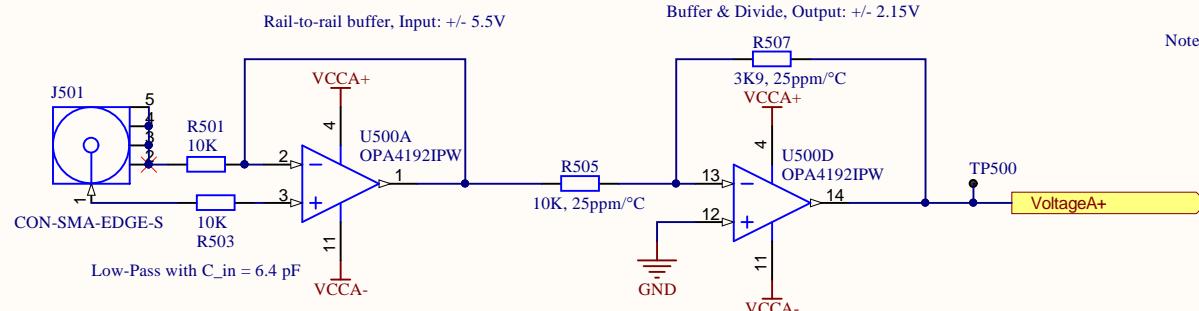


Note: Two channels share an Op Amp

1V at the input corresponds to -390mV at the ADC input

With an ADC configuration of 24-bit & Gain = 1,
1 LSB corresponds to -1.22uV

Note: For pseudo-differential inputs, the maximum amplitude
is +/- 2.2V

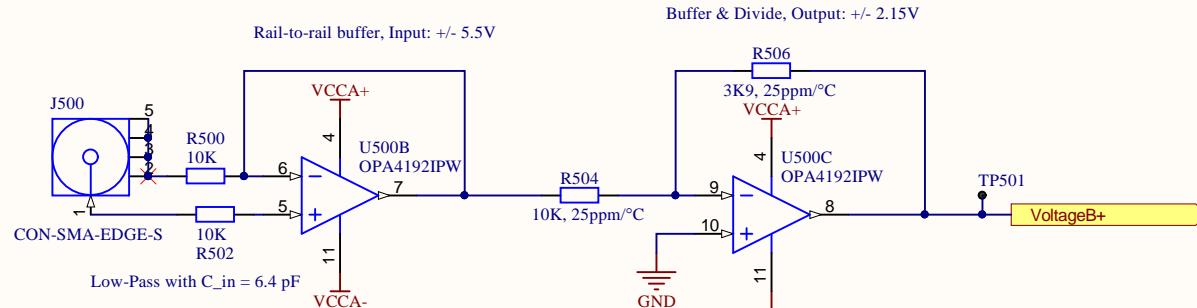

Eidgenössische Technische Hochschule Zürich
Swiss Federal Institute of Technology Zurich


Drawing title:

Voltage Channel

Drawing number:	6	Rev.	1	Format:	Laboratory:	TIK	Project:	voltage_channel.SchDoc
Date:	26.10.2016	16:18:17		A4 Q	Drawn by:	Stefan Lippuner	Page	6 of 8
File:	C:\Users\user\Documents\Rocketlogger\hardware\pcb\Cape\voltage_channel.SchDoc							

A

Note: All the digital inputs share the same (adjustable) threshold, defined in psu.SchDoc

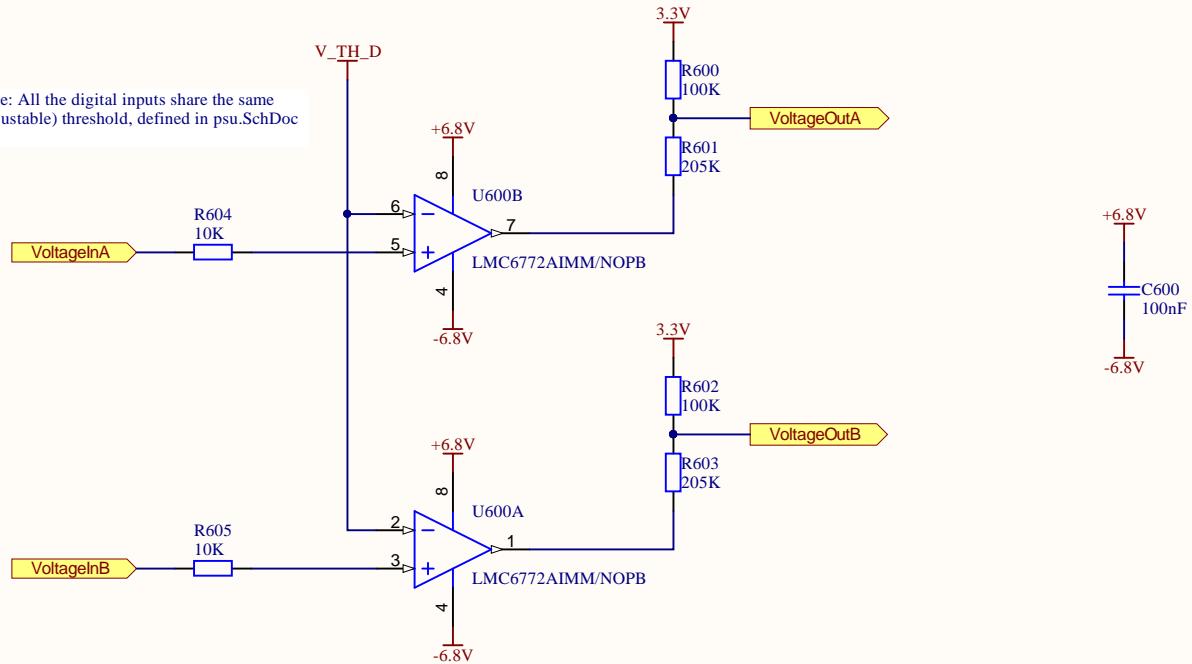

B

A

B

C

C

D

D




Eidgenössische Technische Hochschule Zürich
Swiss Federal Institute of Technology Zurich

Drawing title:


Digital Voltage Channel

Drawing number: 7	Rev. 1	Format: A4 Q	Laboratory: TIK	Project: digital_voltage_channel.SchDoc
Date: 26.10.2016 16:18:17		Drawn by: Stefan Lippuner		Page 7 of 8
File: C:\Users\user\Documents\Rocketlogger\hardware\pcb\Cape\digital_voltage_channel.SchDoc				

A


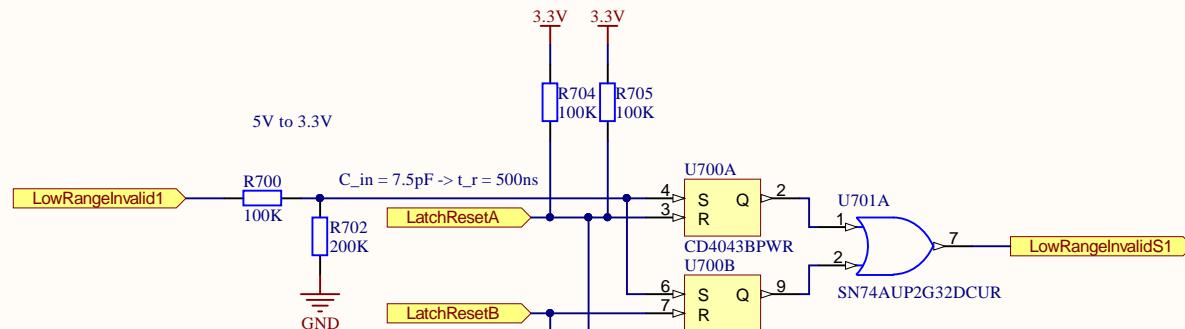


B

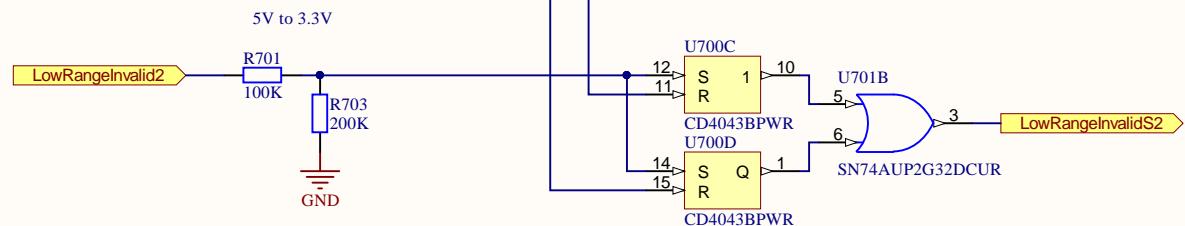

C

This circuit stretches the (potentially) short pulses on the LowRangelInvalid signals, such that the ADC can actually detect them. In order to guarantee that, the periods between the non-overlapping reset periods for the two latches must be longer than the sampling period.

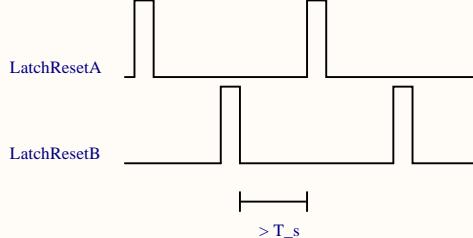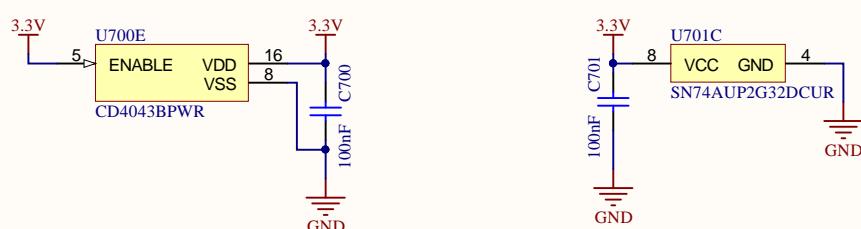

Eidgenössische Technische Hochschule Zürich
Swiss Federal Institute of Technology Zurich

Drawing title:

Range Valid Signal Stretching

Drawing number: 8	Rev. 1	Format: A4 Q	Laboratory: TIK	Project: range_valid_stretching.SchDoc
Date: 26.10.2016 16:18:17		Drawn by: Stefan Lippuner		
File: C:\Users\user\Documents\Rocketlogger\hardware\pcb\Cape\range_valid_stretching.SchDoc				Page 8 of 8

