
NOTES : TRIANGLE SYMBOLS IDENTIFY NOTES ON THIS DRAWING.

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	X1	PROTO RELEASE	2/1/25	AM
	A	RELEASE TO PRODUCTION, MPN CHANGE	06/10/25	AA
	B	UPDATE AS PER PCB REV B	07/14/25	AA

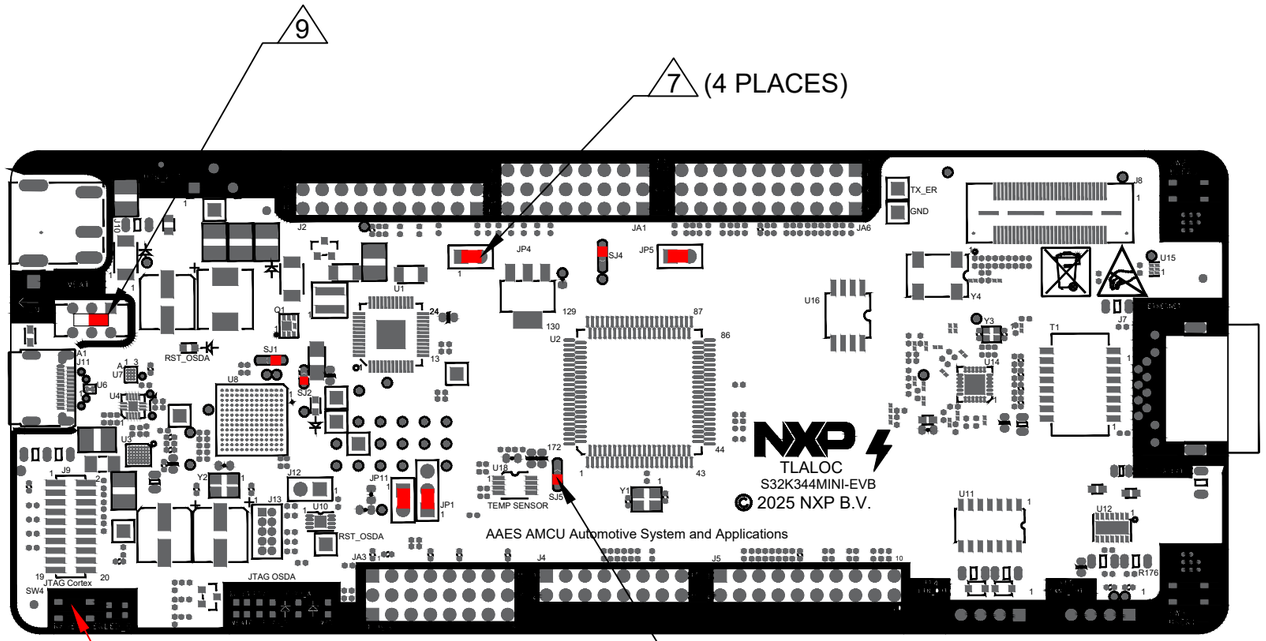

9. SET SWITCH SW5 AT POSITION 1-2 / 4-5.

10. COMPONENTS AT REF DES SW2, SW3 and SW4 ARE NOT WATER PROOF. DO NOT WASH THE BOARD AFTER ASSEMBLING THESE COMPONENTS.

NOTES:

1. ALL COMPONENTS MUST BE ABLE TO WITHSTAND THE Pb-FREE ASSEMBLY PROFILES DESCRIBED IN IPC/JEDEC J-STD-020C (LATEST VERSION)
2. WORKMANSHIP SHALL CONFORM TO IPC-A-610 (LATEST REVISION) - CLASS 2 STANDARD.
3. PART SUBSTITUTION CRITERIA : -
   ALL COMPONENT SUBSTITUTIONS MUST BE APPROVED AND DOCUMENTED BY NXP.
4. MAXIMUM LEAD PROTRUSION ON PRIMARY AND SECONDARY SIDE OF PRINTED WIRING BOARD IS .100".
5. IN CASES OF CONFLICT, ALL PLACEMENT LOCATIONS ARE TO BE GOVERNED BY THE X-Y CENTROID FILE, UNLESS EXPLICTLY STATED IN THIS ASSEMBLY DRAWING. SILKSCREEN REFERENCE DESIGNATORS ARE INCLUDED FOR CONVENIENCE ONLY
6. MEASURE THE PCB WARPAGE LEVEL AT ALL THE STAGES WHICH INCLUDES PCB INCOMING QUALITY INSPECTION, PCBA - IN PROCESS QUALITY INSPECTION AND OUTGOING QUALITY INSPECTION. REFER IP-A-600 AND IPC-TM650 (2.4.22 BOW & TWIST PERCENTAGE CALCULATION).

7. INSTALL 4 SHUNT APN: 211-79847 AS PER JUMPER CONFIGURATION TABLE, THIS IS THE DEFAULT SHIPPING CONFIGURATION AFTER ANY TESTING.

REF DES	JUMPER (DEFAULT)
JP11	1 - 2
JP4	1 - 2
JP5	1 - 2
JP1	1 - 2

8. ADD 4 SOLDER BLOB JUMPERS AS PER BELOW TABLE:

SODER BLOB JUMPER TABLE			
Ref Des	Position	Ref Des	Position
SJ1	1-2	SJ4	1-2
SJ2	1-2	SJ5	1-2

PRIMARY SIDE

RoHS : ALL PARTS, MATERIALS AND FINISHED ASSEMBLY SHALL MEET THE RoHS COMMISSION DELEGATED DIRECTIVE (EU) 2015 / 863 OF MARCH 31 2015 AMENDING ANNEX II TO DIRECTIVE 2011 / 65 / EU. A CERFIFICATE OF COMPLIANCE IS REQUIRED UPON REQUEST.

REACH : ALL PARTS, MATERIALS AND FINISHED ASSEMBLY SHALL NOT CONTAIN ANY OF THE SUBSTANCES OF VERY HIGH CONCERN (SVHC) ABOVE THE THRESHOLD VALUE PER THE CURRENT ECHA LIST OF SVHC'S, AND WITH THE ANNEX XIV OF REACH DIRECTIVE 76 / 769 / EEC.. A CERTIFICATE OF COMPLIANCE IS REQUIRED UPON REQUEST.

SOLDER PROCESS
Pb FREE ☒ YES ☐ NO

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
TOLERANCES ARE:
DECIMALS
.XX ±.020
.XXX ±.010
√ RMS ALL MACHINED SURFACES
BREAK ALL SHARP EDGES AND CORNERS, REMOVE BURRS.
UNDERLINED DIM. NOT TO SCALE.
THIRD ANGLE ORTHOGRAPHIC PROJECTION IS USED.

MATERIAL

FINISH

HEAT TREAT

PART NO. 700-94921

THIS DOCUMENT CONTAINS INFORMATION PROPRIETARY TO NXP AND SHALL NOT BE USED FOR ENGINEERING DESIGN, PROCUREMENT OR MANUFACTURE IN WHOLE OR IN PART WITHOUT THE CONSENT OF NXP

___ PUBI (PUBLIC INFORMATION)
_X_ FIUO (NXP INTERNAL USE ONLY)
___ FCP (FREESCALE CONFIDENTIAL PROPRIETARY)

	APPROVALS	DATE
DRAWN	A. MAGANA	07/14/25
CHECKED	A. ALVAREZ	07/14/25
DESIGN ENGINEER	A. QUIROZ	07/14/25

NXP Semiconductors
6501 WILLIAM CANNON DRIVE
AUSTIN, TEXAS 78735-8598 USA

TITLE
PWB ASSEMBLY
S32K344MINI-EVB

SIZE	FILE NAME	DWG. NO.	REV
B	ASY-94548.DXF	ASY-94921	B

SCALE 1:1 | DO NOT SCALE DRAWING | SHEET 1 OF 2


DWG. NO. ASY-94921 REV B

NOTES : TRIANGLE SYMBOLS IDENTIFY NOTES ON THIS DRAWING.

11. PLACE .25"X.25" PRINTED ASSEMBLY / SCHEMATIC REVISION LABEL (805-75258) WHERE SHOWN. PRINTED ON THIS LABEL MUST BE THE AGILE REVISION OF THE **SCH-94921 AND 700-94921** , NOT THE REVISION OF THIS DRAWING.

12. PLACE .25"X.25" PRINTED SERIAL NUMBER LABEL (805-75258) WHERE SHOWN.

13. INSTALL BUMPON APN: 280-76577 WHERE SHOWN (BLUE CIRCLES 7 PLACES)

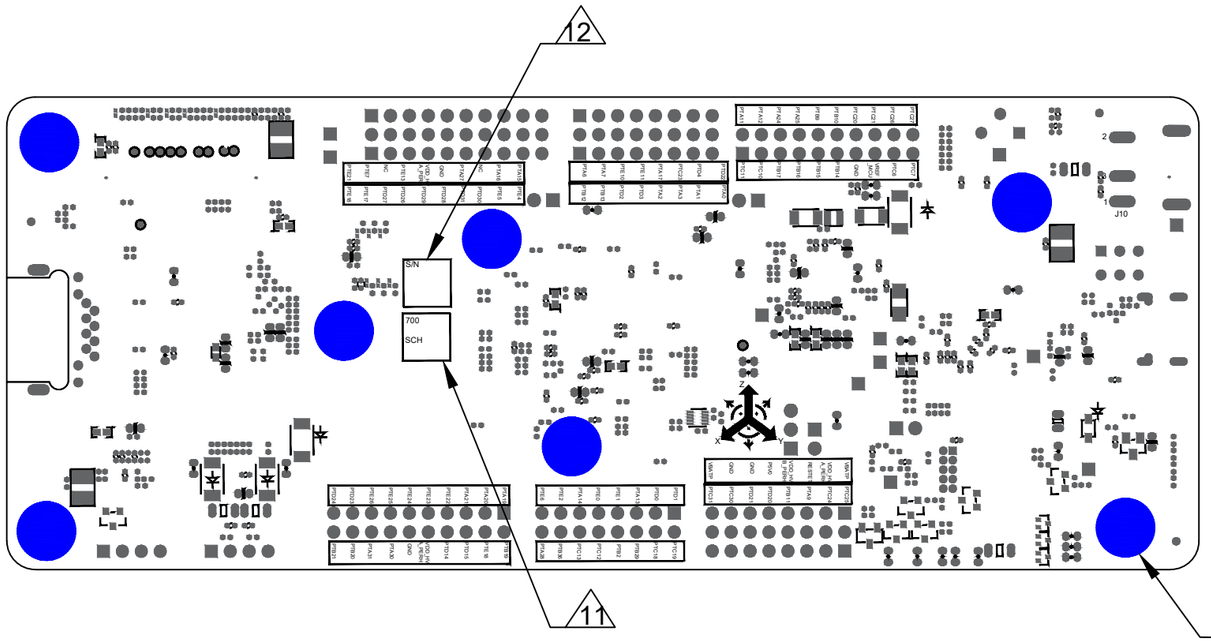

SECONDARY SIDE

DWG. NO. ASY-94921 REV B

NXP Semiconductors
6501 WILLIAM CANNON DRIVE
AUSTIN, TEXAS 78735-8598 USA

___ PUBI (PUBLIC INFORMATION)
_X_ FIUO (NXP INTERNAL USE ONLY)
___ FCP (NXP CONFIDENTIAL PROPRIETARY)

TITLE
PWB ASSEMBLY
S32K344MINI-EVB

SIZE	FILE NAME	DWG. NO.	REV
B	ASY-94548.DXF	ASY-94921	B

SCALE 1:1 | DO NOT SCALE DRAWING | SHEET 2 OF 2