❖ Now let the ball cool down, and check whether it passes through the ring.

☐ Passed through


☐ Not passed through

Solids expand due to heat and come back to the original state if heat is removed.

1.9 Uses of Thermal Expansion

Fitting the iron rim on the wooden wheel

The diameter of the iron ring is slightly less than that of the wooden wheel. Therefore, it cannot be easily slipped on from the rim of wooden wheel.




The iron ring is, therefore, first heated to a higher temperature so that it expands in size and the hot ring is then easily slipped over to the rim of the wooden wheel. Cold water is now poured on the iron ring so that it contracts in size and holds the wooden wheel tightly.

Rivetting

Rivets are used to join two steel plates together. Hot rivet is driven through the hole in the plates. One end of the rivet is hammered to form a new rivet head. When cooled, the rivet will contract and hold the two plates tightly together.



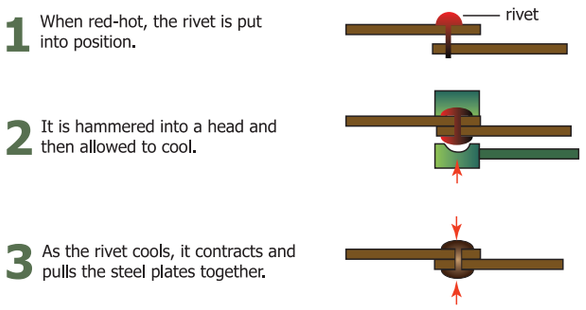

1.10 Thermal Expansion Examples

Give Reasons for the following

1. Gaps are left in between rails while laying a railway track.



_____

_____

_____

2. Gaps are left in between two joints of a concrete bridge.



_____

_____

_____

Cracking of a thick glass tumbler



Glass is a poor conductor of heat. When hot liquid is poured into the tumbler, the inner surface of the tumbler becomes hot and expands while the outer surface remains at the room temperature and does not expand. Due to this unequal expansion, the tumbler cracks.

Electric wires

Electric wires between electric posts contract on cold days and sag in summers. To solve this problem, we leave wires slack