11.7 Estimation of elements

After detecting the various elements present in a given organic compound by qualitative analysis it is necessary to determine their composition by weight. The estimation of carbon, hydrogen, nitrogen, sulphur halogens are discussed here. No dependable method is however available for determination oxygen and hence its amount is always determined by difference.

Estimation of carbon and hydrogen:

Both carbon and hydrogen are estimated by the same method. A known weight of the organic substance is burnt in excess of oxygen and the carbon and hydrogen present in it are oxidized to carbon dioxide and water, respectively.

$$C_x H_y + \underset{\text{(in excess)}}{O_2} \longrightarrow xCO_2 + \frac{y}{2} H_2O$$

The weight of carbon dioxide and water thus formed are determined and the amount of carbon and hydrogen in the organic substance is calculated.

The apparatus employed for the purpose consists of three units (i) oxygen supply (2) combustion tube (3) absorption apparatus. (see Fig. 11.2)

(1) Oxygen supply: To remove the moisture from oxygen it is allowed to bubble through sulphuric acid and then passed through a U-tube containing sodalime to remove CO_2. The oxygen gas free from moisture and carbondioxide enters the combustion tube.

(2) Combustion tube: A hard glass tube open at both ends is used for the combustion of the organic substance. It contains (i) an oxidized copper gauze to prevent the backward diffusion of the products of combustion (ii) a porcelain boat containing a known weight of the organic substance (iii) coarse copper oxide on either side and (iv) an oxidized copper gauze placed towards the end of the combustion tube. The combustion tube is heated by a gas burner.

(3) Absorption Apparatus: The combustion products containing moisture and carbon-dioxide are then passed through the absorption apparatus which consists of (1) a weighed U-tube

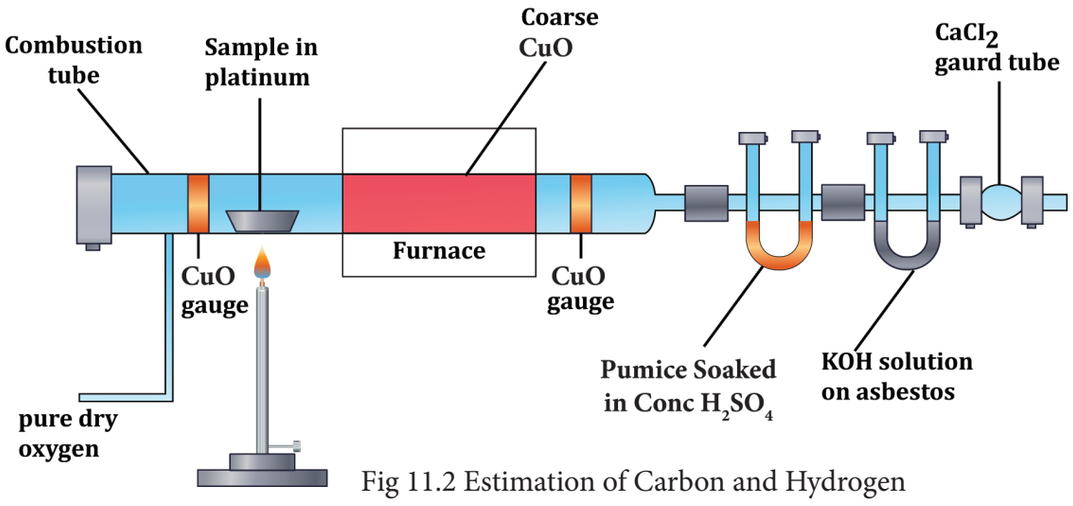


Fig 11.2 Estimation of Carbon and Hydrogen

11th Chemistry Chapter-11 Vol-2 EM.indd 140 09-01-2023 14:43:13