www.tntextbooks.in

In vector notation, the force acting on mass m_2 exerted by mass m_1 is $\vec{f}_{21} = \frac{Fm_2}{m_1 + m_2}\hat{}$

Note $\vec{f}_{12} = -\vec{f}_{21}$ which confirms Newton's third law.

3.3.4 Motion of Connected Bodies

When objects are connected by strings and a force F is applied either vertically or horizontally or along an inclined plane, it produces a tension T in the string, which affects the acceleration to an extent. Let us discuss various cases for the same.

Case 1: Vertical motion

Consider two blocks of masses m_1 and m_2 ($m_1 > m_2$) connected by a light and inextensible string that passes over a pulley as shown in Figure 3.15.

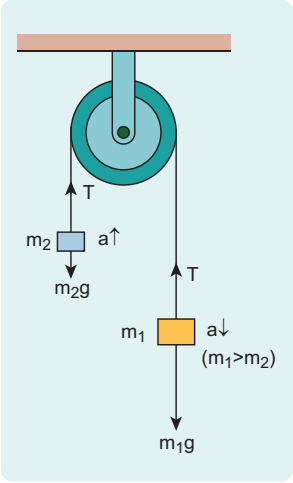


Figure 3.16 Free body diagrams of masses m_1 and m_2

Let the tension in the string be T and acceleration a. When the system is released, both the blocks start moving, m_2 vertically upward and m_1 downward with same acceleration a. The gravitational force $m_1 g$ on mass m_1 is used in lifting the mass m_2.

The upward direction is chosen as y direction. The free body diagrams of both masses are shown in Figure 3.16.

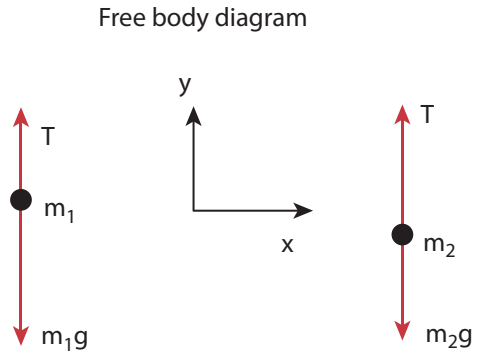


Figure 3.16 Free body diagrams of masses m_1 and m_2

Applying Newton's second law for mass m_2

$$T\hat{j} - m_2 g\hat{j} = m_2 a\hat{j}$$

The left hand side of the above equation is the total force that acts on m_2 and the right hand side is the product of mass and acceleration of m_2 in y direction.

By comparing the components on both sides, we get

$$T - m_2 g = m_2 a \qquad (3.9)$$

Similarly, applying Newton's second law for mass m_1

$$T\hat{j} - m_1 g\hat{j} = -m_1 a\hat{j}$$

As mass m_1 moves downward $(-\hat{j})$, its acceleration is along $(-\hat{j})$