www.tntextbooks.in

(b) Aerofoil lift

The wings of an airplane (aerofoil) are so designed that its upper surface is more curved than the lower surface and the front edge is broader than the real edge. As the aircraft moves, the air moves faster above the aerofoil than at the bottom as shown in Figure 7.35.

According to Bernoulli's Principle, the pressure of air below is greater than above, which creates an upthrust called the dynamic lift to the aircraft.

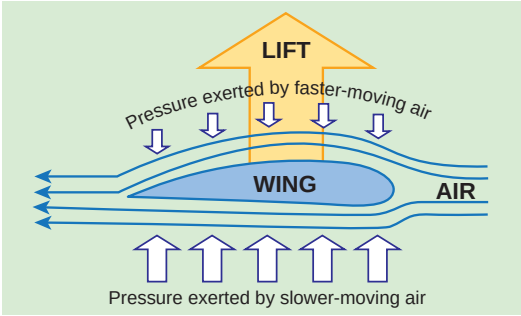


Figure 7.35 Aerofoil lift

(c) Bunsen burner

In this, the gas comes out of the nozzle with high velocity, hence the pressure in the stem decreases. So outside air reaches into the burner through an air vent and the mixture of air and gas gives a blue flame as shown in Figure 7.36.




Figure 7.36 Bunsen burner

(d) Venturimeter

This device is used to measure the rate of flow (or say flow speed) of the incompressible fluid flowing through a pipe. It works on the principle of Bernoulli's theorem. It consists of two wider tubes A and A' (with cross sectional area A) connected by a narrow tube B (with cross sectional area *a*). A manometer in the form of U-tube is also attached between the wide and narrow tubes as shown in Figure7.37. The manometer contains a liquid of density 'ρ_m'.

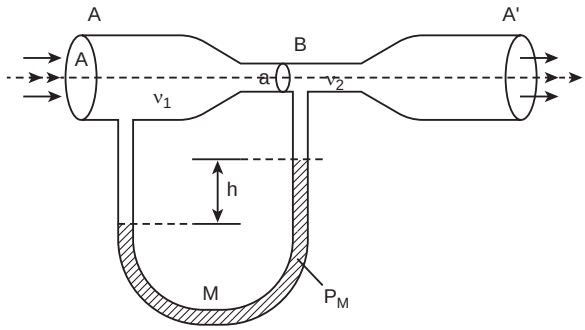


Figure 7.37 A schematic diagram of venturimeter

Let P_1 be the pressure of the fluid at the wider region of the tube A. Let us assume that the fluid of density 'ρ' flows from the pipe with speed 'v_1' and into the narrow region, its speed increases to 'v_2'. According to the Bernoulli's equation, this increase in speed is accompanied by a decrease in the fluid pressure P_2 at the narrow region of the tube B. Therefore, the pressure difference between the tubes A and B is noted by measuring the height difference ($\Delta P = P_1 - P_2$) between the surfaces of the manometer liquid.

From the equation of continuity, we can say that $Av_1 = a\, v_2$ which means that

$$v_2 = \frac{A}{a}\, v_1.$$

Using Bernoulli's equation,

$$P_1 + \rho\,\frac{v_1^2}{2} = P_2 + \rho\,\frac{v_2^2}{2} = P_2 + \rho\,\frac{1}{2}\left(\frac{A}{a}v_1\right)^2$$