



UV
DESINFECTION

VERTICAL
LAMP SYSTEM

LOW PRESSURE
HIGH OUTPUT

WASTEWATER

← Applications

- Wastewater Disinfection
- Wastewater Reuse
- CSO (Combined Sewer Overflow)

← Main characteristics

- Low Pressure extra-high output amalgam lamps
- Rated for outdoor/indoor use
- Vertical cross flow design
- Future upgrade flexibility



The Aquaray® 3X Vertical Lamp System offers a high amount of UV output within a reduced footprint while providing the degree of disinfection required for even the most stringent of effluent criteria, such as Reuse applications.

MAIN FEATURES

→ Energy conservation:

With a combination of variable-output electronic ballasts, highly efficient amalgam lamps and row-by-row lamp switching increments, the Aquaray® 3X ensures energy conservation by dose pacing based on flow rate.

→ Validated performance:

The Aquaray® 3X has been third party validated and completed strict bioassay testing.

→ Easy maintenance:

Due to the vertical design, the Aquaray® 3X includes easy access to the UV lamps and quartz sleeves. (no need to remove the UV module from channel)

→ Save space:

To minimize the footprint, the Aquaray® 3X utilizes Low Pressure High Output Amalgam lamps in a vertical design.

UV TECHNOLOGY: Aquaray® 3X

The Aquaray® 3X High Output Vertical Lamp Ultraviolet Disinfection System has been designed to provide disinfection for larger wastewater plants within a small footprint.

The germicidal effect of the UV light inactivates most micro-organisms such as bacteria, viruses and parasites, while

eliminating the need for dangerous chemicals.

The UV dose (UV intensity x contact time) defines the treatment efficiency which is provided by the unit. The effective dose applied depends on the UV transmittance of water to be treated as well as the proper hydraulic design of the UV system.

HOW IT WORKS

The low pressure high output amalgam lamps are powered by electronic ballasts to generate germicidal wavelengths of the UV spectrum. The lamps are inserted in quartz sleeves and isolated from the wastewater while delivering the required effluent inactivation.

UV sensors are installed to monitor the UV intensity from the lamps and guarantee that the proper intensity is delivered.

The periodic maintenance of the system has been made simple and efficient by allowing the replacement of the lamps without removal of the submerged UV modules from the channel.



TECHNICAL DATA

Model	Flow Rate per module	Number of lamps per module	Electrical Power per lamp
	MGD		W
Aquaray® 3X	5-6	36	406

Based on 30 mJ/cm² and 65% UVT

► Materials

- 316 stainless steel
- UV resistant materials

► Standards

- **Power Supply:** 230V/3ph/60Hz
- **Protection Class:** NEMA 4X (IP65)

- **Lamp Type:** low pressure high output amalgam
- **Ballast Type:** electronic variable output
- **Lamp configuration:** vertical cross flow
- **Average lamp life:** 12 000 hours



► Options

- In-Channel Air Scrub
- UVT Analyzer
- Chemical cleaning system
- Lifting Apparatus

► Remote control and alarms

- SCADA communication capability
- Dose pacing via external flow signal and UV transmittance
- Various alarms (low UV intensity, failed adjacent lamps, etc...)

DIMENSIONS

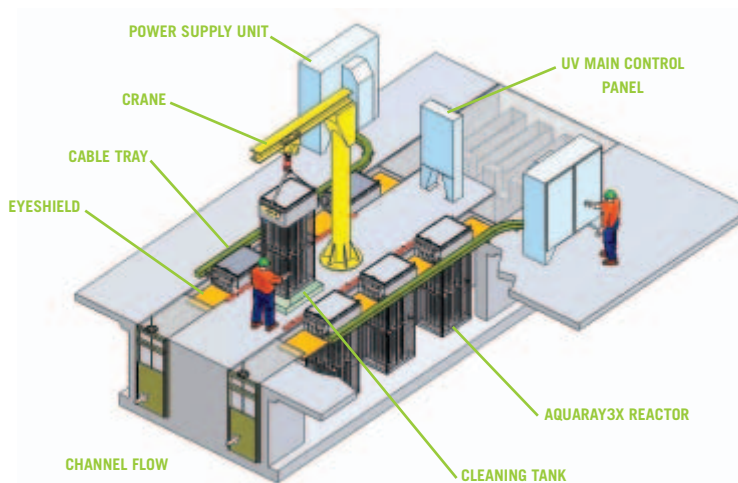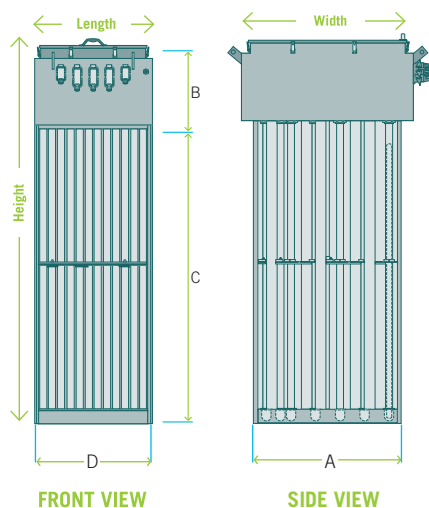

Model	Reactor Dimensions (inch)			
	A	B	C	D
Aquaray® 3X	36	21	74	29

Contacts

www.DEGREMONT-TECHNOLOGIES.COM

Ozonía North America

Ozonía International UV
Ozonía France
Ozonía Switzerland
Ozonía Triogen UK
Ozonía Russia OOO
Ozonía Korea
Ozonía China
Ozonía Japan

- info-ozonia@degtec.com
- info-ozoniaFR@degtec.com
- info-ozoniaFR@degtec.com
- info-ozoniaCH@degtec.com
- info-triogen@degtec.com
- info-ozoniaRU@degtec.com
- info-ozoniaKR@degtec.com
- info-china@degtec.com
- info-japan@degtec.com

- + 1 201 676 2525
- + 33 1 58 81 50 00
- + 33 1 58 81 50 00
- + 41 44 801 8511
- + 44 13 55 220 598
- + 7 831 434 1628
- + 82 31 701 9036
- + 86 10 659 73 860
- + 81 3 544 46 361

Manufacturers' Representative: