

Comparison of link layer of BLE and 802.15.4

Running on Contiki OS

Master Thesis

PrithviRaj Narendra

Supervisor

Simon Duquennoy

Senior Researcher, SICS

Academic Examiner

Mats Brorsson

Professor, KTH

EIT ICT Labs Master School Embedded Systems Program
School of Information and Communication Technology
KTH Royal Institute of Technology
Stockholm, Sweden

12th September, 2014

Abstract

Internet of Things (IoT) is at the peak of 2014's 'Hype Cycle for Emerging Technologies'. Fervent work is being carried out to achieve this vision of billions of interconnected smart devices by researchers, companies and hobbyists. This thesis project focuses on two key technologies fueling the development of IoT devices, namely Bluetooth Low Energy (BLE) and Contiki Operating System (OS). More specifically, this thesis aims to port Contiki OS to a BLE based hardware platform and compare the link layer of BLE with 802.15.4 based Medium Access Control (MAC) layers used in Contiki.

The process of porting began with compiling a list of 'must have' and 'nice to have' requirements for the BLE platform to which Contiki would be ported. An exhaustive list of features of the available platforms was aggregated and based on the requirements identified, the nrf51822 System on Chip (SoC) based platform was chosen. The vendor of this platform provided a BLE stack as a binary, which was used in this project. All the basic features of a Contiki port such as the Contiki clock for etimer, rtimer, serial-line and LEDs have implementations for the chosen platform. **1.The radio peripheral was left out since it was controlled by the stack in the binary, although an additional task of developing an BLE advertisement packet logger has been done from scratch.** This port has been utilized for a demo application and for the test cases described below.

The primary research output of this thesis is the comparison of performance of the link layer of BLE with 802.15.4 based ContikiMAC and Null-RDC layers of Contiki in terms of data rate, reliability, latency and energy consumption. Two test suites were designed to collect data of these four metrics and compare the two protocols. Some test cases also included presence of external interference caused by presence of heavy WiFi traffic. The scenario assumed is where one device is unconstrained with respect to availability of power while the other is not.

In terms of the data rate, the 802.15.4's NullRDC layer achieved the highest at 155 kbps without Clear Channel Assessment (CCA). The effect of WiFi interference overlapping in the channel of communication in case 802.15.4 can be seen when the data rate reduced to 61 kbps from 148 kbps in the case where interference was in a different channel. With 802.15.4 the data rate can be maximized by having Radio Duty Cycle (RDC) of 100%. The influence of frequency hopping in BLE can be noticed when the data rate decreased to only 23 kbps from 29 kbps when WiFi interference was introduced, both cases having RDC of around 27%. In BLE the effect of packets communicated per connection interval can be seen when communicating with an Android device as the data rate increased to 86 kbps, in which RDC was 44%.

Use of 802.15.4's CCA delivered a Packet Reception Ratio (PRR) of 99% and 79% with and without WiFi interference respectively. In case of BLE, the link layer's the simple acknowledgment scheme achieved a Packet Delivery Ratio (PDR) of 100%. Without WiFi interference, BLE achieved a PRR of almost 100%. When WiFi interference was introduced, PRR resurged back to greater than 99% when WiFi free channel map was used as compared to 80% when complete channel map, which shows working of Automatic Frequency Hopping (AFH).

802.15.4's latency was measured as 24 ms with Null-RDC and 90 ms with ContikiMAC. With BLE latency values ranging from 14 ms to 750 ms were observed. These tests to measure latency show the influence of link layer parameters such as 'connection interval' and 'slave latency', as well as whether the data is queried by the master node or the slave node. The change in symmetry of the connection with non-zero slave latency can be seen in case where the latency changes from 16 ms to 736 ms when the test case changes from the slave querying the data to the master querying the data. The master's RDC of 22% and slave's RDC of 0.6% also indicates the asymmetry in the connection. With these different configurations, the different use cases are also illustrated.

Sammanfattning

Hello Sammanfattning.

Acknowledgment

Foremost I would like to earnestly thank my supervisor at Swedish Institute of Computer Science (SICS), Simon Duquennoy, for agreeing to supervise me in a topic that I proposed, guiding me patiently, consistently reviewing and providing constructive feedback for my work. Next I would like to thank Thiemo Voigt and the Networked Embedded Systems group at SICS for their warm inclusiveness and assisting me whenever I needed help. As usual this open source work stands on the shoulders of giants, I'm thankful for their amazing work. For all the resources and guidance that I have received in various forms from my fellow netizens, I'm grateful to them. I thank EIT ICT Labs for believing in me and providing me this opportunity. As always, my family and friends have supported and encouraged me, and for that they have my heartfelt thanks.

Contents

Abstract	i
Sammanfattning	iii
Acknowledgment	v
List of Abbreviations	ix
List of Figures	xi
List of Tables	xii
1 Introduction	1
1.1 General Introduction to the Domain of the Thesis	1
1.2 Problem Definition	1
1.3 Problem Context	2
1.4 Goals	2
1.5 Outline of the report	2
2 Background	3
2.1 Porting the Contiki Operating System (OS) to a New Platform	3
2.2 Overview of Bluetooth Low Energy	4
2.2.1 Design objectives of Bluetooth Low Energy (BLE)	4
2.2.2 BLE network architecture	4
2.3 BLE stack overview	4
2.4 Overview of Contiki	5
2.5 Overview of 802.15.4	5
2.5.1 Physical layer	6
2.5.2 Medium Access Control (MAC) layer	6
3 Methodology	7
3.1 Research Process	7
3.2 Research Method	7
4 Literature Study	8
4.1 Evaluating the Performance of BLE	8
4.2 Evaluating the Performance of 802.15.4	9
4.3 Comparison of BLE and 802.15.4	9
5 Porting Contiki OS to a BLE platform	12
5.1 BLE Hardware Platform	12
5.1.1 Requirements of the hardware platform	12
5.1.2 Comparison and selection of the hardware platform	13

5.1.3	Overview of nrf51822 System-on-Chip (SoC) and its platform	13
5.2	Porting PCA10000 platform of nrf51822 to Contiki	14
5.2.1	Development Setup	14
5.2.2	Peripherals required for Contiki	14
6	Test Cases	17
6.1	Performance Metrics Definition	17
6.2	Test setup	18
6.2.1	BLE platform	18
6.2.2	802.15.4 platform	18
6.2.3	WiFi Interference	19
6.3	High-Throughput (HT) Test Design	20
6.4	Request-Response (RR) Test Design	21
7	Results and Analysis	24
7.1	High-Throughput Test	24
7.1.1	Graphical Representation of the Data Acquired	24
7.1.2	Analysis	25
7.2	Request-Response Test	27
7.2.1	Graphical Representation of Data Acquired	27
7.2.2	Analysis	28
7.3	Evaluation with existing research	30
8	Other Contributions	33
8.1	Advertisement Logger	33
8.2	Firmware for an Alarm Device	34
9	Conclusion and Future Work	36
9.1	Conclusion	36
9.2	Future Work	37
Appendix A Contiki Folder and Makefile Structure		40
A.1	Folder structure of Contiki	40
A.2	Makefile structure of Contiki	40
Appendix B Advertisement Logger's Implementation		42
B.1	Scanning BLE Advertisements	42
B.2	Software Architecture	43
B.2.1	Main Function	43
B.2.2	UART String Receive Handler	44
B.2.3	Scan Interval Timer Handler	45
B.2.4	Scan Window Timer Handler	45
B.2.5	Radio Interrupt Routine	46
Appendix C Appendix BLE SoC Comparison		47
Appendix D Data Acquired		49

This work is licensed under a Creative Commons Attribution 4.0 International License.



List of Abbreviations

6LoWPAN	IPv6 over Low power Wireless Personal Area Networks.
ADC	Analog to Digital Conversion.
AFH	Adaptive Frequency Hopping.
API	Application Programming Interface.
ATT	Attribute Protocol.
BER	Bit Error Rate.
BLE	Bluetooth Low Energy.
CCA	Clear Channel Assessment.
CCCD	Client Characteristic Configuration Descriptor.
CRC	Cyclic Redundancy Check.
CSMA	Carrier Sense Multiple Access.
GAP	Generic Access Profile.
GATT	Generic Attribute Profile.
GFSK	Gaussian Frequency Shift Keying.
GPIO	General Purpose Input-Output.
HF-CLK	High Frequency Clock.
HID	Human Interface Device.
HT	High-Throughput.
IC	Integrated Circuit.
IFS	Inter Frame Space.
IoT	Internet of Things.
ISM	Industrial, Scientific and Medical.
L2CAP	Logical Link Control and Adaptation Protocol.
LED	Light Emitting Diode.
LF-CLK	Low Frequency Clock.
MAC	Medium Access Control.
MCU	microcontroller.
NVIC	Nested Vectored Interrupt Controller.
OS	Operating System.
PAN	Personal Area Network.
PDR	Packet Delivery Ratio.
PHY	Physical Layer.
PRR	Packet Reception Ratio.
RAM	Random-Access Memory.
RDC	Radio Duty Cycle.
RR	Request-Response.
RSSI	Received Signal Strength Indicator.
RTC	Real Time Clock.
SDK	Software Development Kit.
SIG	Special Interest Group.
SoC	System-on-Chip.

UART	Universal Asynchronous Receiver/Transmitter.
UDP	User Datagram Protocol.
WSN	Wireless Sensor Network.

List of Figures

2.1	Typical BLE network	5
3.1	Thesis' tasks and steps in the research process	7
5.1	PCA10000 development board	13
6.1	Illustration of latency measurement	17
6.2	TmoteSky platform	18
6.3	2.4 GHz environment captured by rssi-scanner	19
6.4	Test setup for High-Throughput (HT) test cases	20
6.5	Setup to measure data rate with BLE	20
6.6	Illustration of the RR Test operation	21
6.7	Test modes for measuring latency using BLE	22
7.1	Data Rate	24
7.2	Reliability	24
7.3	Energy Consumption	25
7.4	Latency	27
7.5	Energy Consumption	27
7.6	Energy Consumption vs Latency	28
8.1	User Interface of Advertisement Logger	33
8.2	State Diagram of an alarm device from an user's perspective	34
8.3	State Diagram of an alarm appcessory controlled by BLE	35
A.1	Structure of Makefile inclusion in Contiki OS to form an example specific one	41
B.1	Scanning BLE advertisements	42
B.2	Main function flowchart	43
B.3	UART string receive handler flowchart	44
B.4	Scan interval timer handler flowchart	45
B.5	Scan window timer handler flowchart	45
B.6	Radio interrupt routine flowchart	46

List of Tables

- 6.1 List of Request-Response (RR) test cases using BLE 22
- 7.1 Latency in terms of master and slave Radio Duty Cycle (RDC) 28
- 7.2 Comparison of BLE data rate achieved 31

1 | Introduction

1.1 General Introduction to the Domain of the Thesis

A future is envisioned where objects around us can not only communicate with us but also themselves. These *smart* devices such as ranging from simple key-chains and chopping boards to complex bio-implants and automobiles can sense their surroundings, communicate with humans and other objects and react to commands and external environment. There has been a lot of work on the communication protocol aspect of this scenario of Internet of Things (IoT). This Master thesis looks into one such protocol prevalent in the low energy domain, namely *BLE* and compares it with another one called *802.15.4*. Also this project works with an OS developed specifically for IoT devices called *Contiki*.

BLE is an addition to the Bluetooth specification to enable development of low cost, tiny devices which can communicate wirelessly anywhere in the world while consuming ultra low power[1]. Being standardized by Bluetooth Special Interest Group (SIG) in 2010 with Bluetooth 4.0 version, it has been widely adopted in all the major mobile OSs and millions of devices capable of BLE communication have been sold. It has even spawned off a new category of devices called *apccessories*[2], called so because these ‘accessories’ devices are controlled from mobile ‘applications’.

Contiki is a permissive open source operating system for resource constrained, networked systems developed for this IoT vision, especially for Wireless Sensor Networks (WSNs)[3]. Contiki’s design is such that it can work with only 10 kB of Random-Access Memory (RAM) and 30 kB of non-volatile memory for code storage, making it suitable for even 8-bit microcontrollers (MCUs) running at few MHz. Contiki because its free, support to a wide variety of hardware platforms and the mature status of its development, it is used in wide range of projects ranging from commercial thermostats to research on badger behavior.

802.15.4 based transceivers form the basis for communication in majority of projects running on Contiki. 802.15.4 is a physical and MAC layer specification for low data rate wireless networks, defined in 2003[4]. Contiki’s networking stack does not use the standard 802.15.4 MAC, but in-house developed MAC layers such as ContikiMAC, Null-RDC and MiCMAC. This layer plays a critical role in determining the power consumption, data rate, latency and resistance to external interference and error in communication.

1.2 Problem Definition

Contiki is providing features to facilitate and ease development of IoT applications such as Coffee flash file system, MCU emulation (MSP430 and AVR based), network simulator (Cooja), power usage estimator (Energest), wide range of hardware platforms and a host of networking protocols including full standard IP stack, 6LoWPAN, RPL and CoAP. Adding support for BLE support for Contiki would go a long way in increasing the support Contiki offers for IoT applications, now that BLE has been so successful with its adoption in mobile devices. This makes even greater sense considering the fact that Bluetooth core specification 4.1 lays the ground framework for inclusion of IPv6 in BLE[5] and Internet Engineering Task Force (IETF) has a

working draft on transmission of IPv6 packets over BLE[6].

For product developers, researchers and hobbyists alike, a comparison of 802.15.4 and BLE's link layer would quite helpful for understanding their characteristics, knowing their pros & cons and finally identifying the suitable applications for these protocols. This would be especially useful in the context of being used in Contiki with the use of Contiki's MAC layers such as ContikiMAC and Null-RDC.

1.3 Problem Context

This Master thesis was done in the Networked Embedded Systems (NES) group of Swedish Institute of Computer Science (SICS) to yield greater insight in the BLE protocol and provide a base for further research in this topic.

1.4 Goals

This thesis project aims to start the process of including BLE support in Contiki by including a BLE based platform in the list of hardware platforms supported by Contiki. This is done by studying the BLE standard, comparing and choosing a BLE based hardware platform to Contiki can be ported to, followed by the actual porting and finally using the Contiki port.

The comparison of Contiki's 802.15.4 based MAC layers with BLE link layer starts by defining the performance metrics, namely data rate, latency, reliability and energy consumption. Test cases are then designed to compare these metrics for the two protocols. To study the effect of external interference, these test cases include scenarios with and without external WiFi traffic. This comparison of the two protocols is concluded by summarizing the data acquired, analyzing this information and comparing it with the information from the existing literature in this topic.

1.5 Outline of the report

This report starts off by providing the necessary background information required to follow this report in chapter 2. Chapter 3 provides an overview of the research process and methodology employed in this thesis. The existing literature available in this research topic is explored in chapter 4. The porting of Contiki to a new platform, specifically the nrf51822 based platform is described in chapter 5. The objectives of this research and the test cases designed to reach these objectives are detailed in chapter 6. Chapter 7 showcases the data acquired from conducting these tests in graphical forms, analyses this information and draws results. Chapter 8 briefly describes the additional work done in this thesis, not entirely in-line with the research process of this thesis. This report finishes off with providing the conclusions and recommends the prospective work that can be done in the direction of this research.

2 | Background*

Research articles involving the process of porting of Contiki OS to a hardware platform are presented in section 2.1.

2.1 Porting the Contiki OS to a New Platform

Contiki OS project originating in 2002 has been ported to an increasing number of hardware platforms [7]. Since Contiki is an open-source BSD Clause-3 licensed project, there are many projects in various hardware platforms based on a fork from the Contiki repository.

These hardware platforms' processors range across a spectrum of 8-bit (8051 and AVR), 16-bit (MSP430) to 32-bit (ARM Cortex-M, PIC32). Contiki has support for 802.15.4 based wireless communication with various external transceivers and SoCs with built in radio transceiver. Various common features of many platforms such as Light Emitting Diodes (LEDs), buttons and serial port have modules in Contiki for common Application Programming Interface (API) across platforms.

In [8] the authors describe Contiki's port to a CC2430 based platform manufactured by Sensinode Ltd. CC2430 is an enhanced Intel 8051 processor based SoC having 802.15.4 physical layer compatible radio transceiver. The authors fully debugged the port which had of a code footprint of about 100 kB, varying based on the compiler mode and the features enabled. Many new features were added to the port including support for Analog to Digital Conversion (ADC) unit, all the sensor available on the platform (accelerometer, light sensor, voltage and temperature sensors), watchdog timer and the general purpose buttons. Because of the limited stack availability of 233 bytes, many optimizations such as moving variables to external RAM memory space and re-writing the radio driver for CC2430 to prevent stack from overflowing.

Contiki was ported to two new platforms, namely MicaZ and TelosB in a Bachelor thesis [9]. TelosB, similar to the TMote-Sky platform, consists of a 8MHz 16-bit MSP430 MCU, a CC2400 transceiver with 802.15.4 Physical Layer (PHY) and a host of sensors to measure light, temperature and humidity. The port to TelosB was done by changing the port to the fully supported TMote-Sky platform. MicaZ platform consisted of a 8-bit Atmel ATmega128L MCU and a CC2400 transceiver. MicaZ platform needed rewriting of the code for processor abstraction so that the high level Contiki APIs could work.

Contiki has been ported into platform based on a ARM Cortex M3 processor to create a device wired with Ethernet to connected to the Internet [10]. Ethernet based networking with the libraries present in Contiki was developed in this project to demonstrate as a proof of concept.

There are many unofficial ports of Contiki to various hardware platforms, including ones based on ARM Cortex M3 based processors. This can be seen in the port to STM32F10x based platform [11] and LPC1768 based platform [12], both having Cortex M3 processor.

*Contains text & images from the Minor Thesis of the author 'Business Ideation for BLE', derived from this thesis' work

2.2 Overview of Bluetooth Low Energy

Rest of overview, from what is missed in 1st chapter. control and monitoring applications especially in the healthcare, fitness security and home entertainment industry.

2.2.1 Design objectives of BLE

BLE was designed by Bluetooth SIG from the ground up, which helped it achieve certain design goals. These design goals for this wireless personal area network were *low cost, worldwide operation, short range, robustness* and *low power*[13].

Low Power BLE aims to use a tiny batteries such as button cell to keep a device operating for months to years. To achieve this goal, BLE was optimized to communicate small amounts of data, such as the states of devices. Also BLE is optimized to have lower peak power requirements, which allows use of button cells to be used with BLE devices.

Worldwide Operation For a technology to be adopted, it is important that there is uniform conformity to the regulations around the world. The 2.4 GHz Industrial, Scientific and Medical (ISM) radio band is the only one available license free worldwide. The technology to develop wireless devices in this band is mature making it the suitable radio band for BLE.

Short Range BLE was designed to be for personal area network like Classic Bluetooth, which means that it is not a network to work with a cellular base station network. This design criterion goes hand in hand with *low power*.

Low Cost Lower power requirements mean that the batteries in BLE devices need to be smaller and have to be replaced less frequently, both resulting in a reduction of cost for both the manufacturer and the customer. The use of the ISM band for communication levels removes the licensing entry barrier for start-ups to develop BLE devices. BLE embraces simplicity in its pursuit to lower the cost. BLE supports only single-hop communication in a star network, which reduces the memory and processor requirement for supporting the protocol. Simplicity was the key factor for the choosing of Gaussian Frequency Shift Keying (GFSK) as the modulation scheme for BLE to result in low cost, small radio implementation of the radio in the Integrated Circuits (ICs) for BLE.

Robustness The 2.4 GHz space is crowded with devices communicating with various standards as well as spurious noise making the robustness a key criteria in developing BLE standard. BLE uses a multi-channel hopping mechanism called Adaptive Frequency Hopping (AFH) to detect, avoid and recover from interference. In addition to AFH, BLE uses Cyclic Redundancy Check (CRC) to detect and recover from bit-errors due to background noise.

2.2.2 BLE network architecture

Single and Dual devices, Advertisers and scanners, Master and Slave, Star Network, figure 2.1

2.3 BLE stack overview

Explain host and controller division. More details about link layer.

Image of the stack



Figure 2.1: Typical BLE network

The link layer of 802.15.4 consists of MAC layer on top of a RDC layer. For the RDC layer the Null-RDC and ContikiMAC driver will be tested in each of the test with Carrier Sense Multiple Access (CSMA) as the MAC layer. In case of Contiki-MAC the receiving node switches on periodically to sense if there are any packets that need to be received. The default time of this period is 125 ms. In case of null-RDC the radio receiver is never switched off, as the name suggests.

In BLE, the devices can assume different roles in the different layers of the protocol. In the link layer a device can be a 'Master' or a 'Slave'. In the Attribute Protocol (ATT) layer, a device can be a 'Client' and/or 'Server'. A server contains data and the client can request data from the server.

Physical layer

Link layer

Logical Link Control and Adaptation Protocol (L2CAP)

Generic Access Profile (GAP)

ATT

Generic Attribute Profile (GATT)

Security Manager

2.4 Overview of Contiki

????????????????? Which aspects of Contiki here?

2.5 Overview of 802.15.4

Mention that in this thesis the Contiki specific implementations of the 802.15.4 layers will be tested.

2.5.1 Physical layer

2.5.2 MAC layer

2.5.2.1 RDC layer

2.5.2.2 CSMA

3 | Methodology

3.1 Research Process

Figure 3.1 shows tasks performed in this thesis as boxes of the flow-chart and the steps of the research process on the left. The thesis report is also organized in this manner.

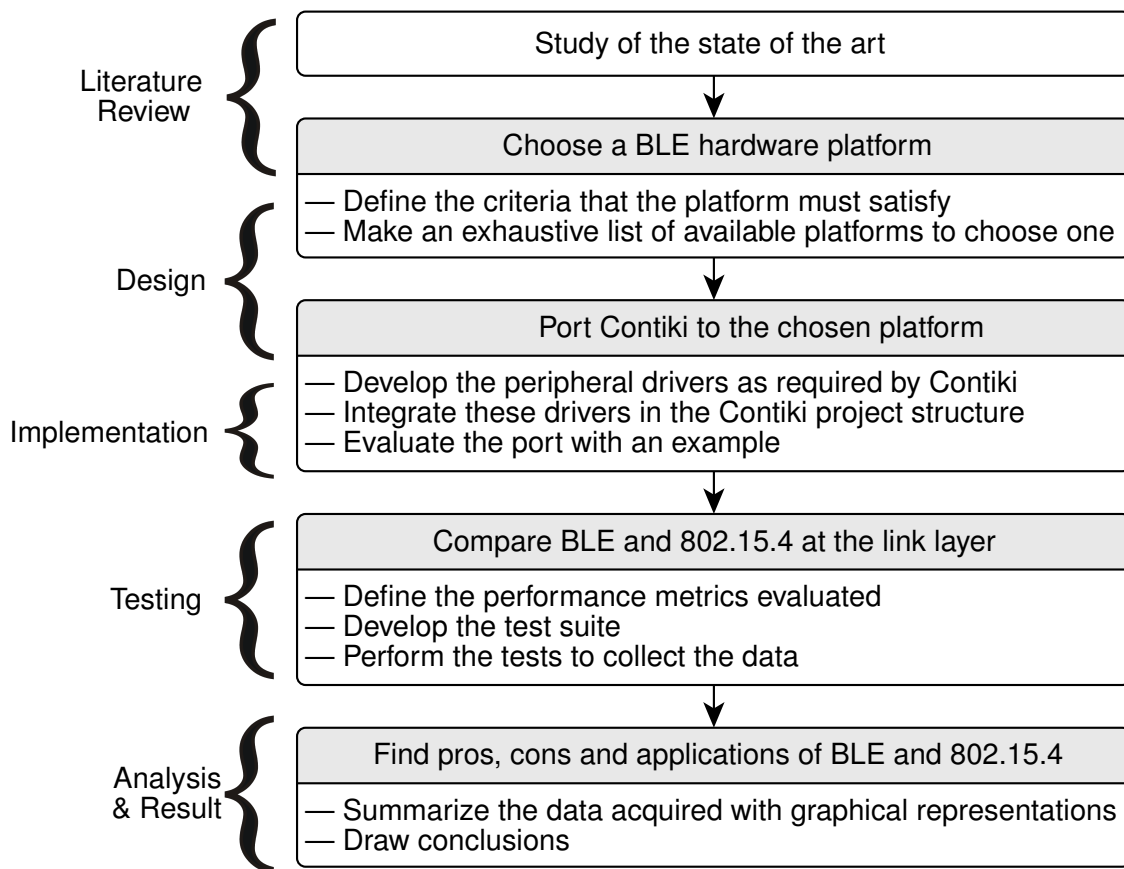


Figure 3.1: Thesis' tasks and steps in the research process

3.2 Research Method

In this experimental research large amount of data was generated to compare the two protocols mentioned, hence utilizing quantitative research method. The approach followed was deductive as the experiment started by defining the metric to measure, then designing the test to perform and finally deducting the conclusions based on the collected data from the tests.

The data collected was condensed with descriptive statistics and graphical representation was used to showcase this information[14]. Univariate analysis of all the metrics of the two protocols and bivariate analysis of some metrics was done to compare the two protocols from these graphical representation.

4 | Literature Study

This chapter provides a brief overview of the related work being done in the research community. Performance evaluation of BLE, 802.15.4 and their comparison are presented in section 4.1, 4.2 and 4.3 respectively.

4.1 Evaluating the Performance of BLE

In a paper [15] providing an overview and evaluation of BLE, its various parameters such as energy consumption, latency, maximum piconet size and throughput have been evaluated. Theoretical calculations were done to predict the lifetime of a BLE slave device running of a 230 mAh coin cell battery for different values of connection interval and slave latency. The average current consumption of a TI CC2540 BLE platform was plotted for the entire range of connection interval keeping the slave latency as zero. The estimate of the lifetime was also done with respect to various Bit Error Rate (BER). A latency measurement also has been done in this paper, where it measures the time to send a notification packet and receive the 'no more data' acknowledgment packet from the receiver in the link-layer. This interaction happening in the same connection event was measured as 676.7 μ s.

The same experimental setup [15] shows the maximum throughput between two CC2540 devices as 58.48 kbps considering a payload of 20 bytes. This is attributed to the fact that in each connection event with an interval of 7.5 ms four packets are not transmitted as in an ideal case. An analytical model of the throughput [16] has been developed for different BER and connection interval. Simulation results validate this model developed. This model show that the maximum throughput in case the BER is zero is 236.7 kbps, independent of the connection interval. An assumption made in this paper is that the master and slave device do not have any limit on the number of packets communicated in a connection interval.

The energy consumption for an advertiser and scanner is modeled for the activity of the scanner discovering the advertiser [17]. The current consumption for each phase of advertisement and scanning is measured. Using this information a model of the energy consumption is developed taking into account the advertising and scanning interval. The model developed is compared with experiments and validated.

The current consumption in the different phases of a connection event, namely waking up, pre-processing, the transmission-reception cycles and the post-processing is measured [18] to estimate the lifetime. The same article found the throughput achievable for a payload of 20 bytes as around 40 kbps. A recent journal article [19] develops a precise model of the energy consumption of BLE devices. A payload (20 bytes) throughput of 102 kbps is achieved in this paper, consistent with the manufacturer's claims [20]. The model developed is unique in the sense that it is the first one which encompasses all the modes of operation, all the relevant parameters and their possible values. The model is based upon the actual measured duration of various parameters and measured current in various phases of operation. This leads to a model which at most has 6% variation from actual measurement. The code base for the model is available so that it can be ported to the system being evaluated.

Based on the model developed and evaluated, a set of guidelines are provided for develop-

ers of BLE system to reduce energy consumption [19]. In the unconnected mode, the scanner is recommended to be continuously scanning in case the advertisers is expected to be found soon. In case of where a lot of time is spent scanning idly, the parameters of advertising interval and duty cycle of the scanner can be tweaked to minimize both the energy consumption and latency of discovery. In the connected mode, the recommendation is to completely fill the payload as possible and communicate as much data as possible within a connection event. In both modes, it was noted that although reducing the transmission power appropriate to the distance transmitted helped in reducing energy consumption, it was not as significant as the other factors.

The interference caused by WiFi over BLE advertisement packets and vice versa has been evaluated[21]. This paper tests two cases, one where a BLE advertising channel overlaps with a WiFi channel and one where it does not. In the case where there was no overlap of the two wireless protocols, there was negligible influence of each other. Increasing the advertising devices from 1 to 21 increased the CRC error and decreased the packets sniffed by the scanner per device from 40 to 22 because of the collision of the advertising packets. In case where there was overlap of the WiFi and BLE channels, there the WiFi throughput decreased to 50% as the number of advertisers increased from 1 to 21. The scanner experience a greater number of CRC errors, thereby decreasing the number of packets sniffed per device, decreasing to almost 50% of the previous case.

4.2 Evaluating the Performance of 802.15.4

As mentioned in [2.background](#), this thesis will not use the standard 802.15.4 standard MAC layer, only the 802.15.4 physical layer. The MAC layers used with 802.15.4 physical layer are ContikiMAC and Null-RDC. This is because of the amount of activity in the research community with these layers as compared to the standard 802.15.4 MAC layer. This section will briefly explain the research done to evaluate the performance of ContikiMAC and Null-RDC.

ContikiMAC is detailed in a technical report [22] which also evaluates its performance with few benchmarks.

[22] Adam Dunkels. “The ContikiMAC Radio Duty Cycling Protocol”. In: (Dec. 2011).

[23] Mathieu Michel and Bruno Quoitin. “Technical Report : ContikiMAC vs X-MAC performance analysis”. In: arXiv preprint arXiv:1404.3589 (Apr. 2014). arXiv: 1404.3589.

[24] M.-P. Uwase, M. Bezunartea, T.L. Nguyen, et al. “Experimental evaluation of message latency and power usage in WSNs”. In: 2014 IEEE International Black Sea Conference on Communications and Networking (BlackSeaCom). IEEE, May 2014, pp. 69–72.

4.3 Comparison of BLE and 802.15.4

BLE is relatively new protocol compared to 802.15.4, due to which there are few studies conducted comparing the two low power wireless protocols. The energy consumption of BLE and 802.15.4 was compared in terms of the amount of payload can be communicated per Joule of energy i.e. the energy utility measured with unit kByte/J [25]. It was found that for BLE the energy utility was independent of the throughput and depended on the number of packets communicated per connection event. The energy utility varied from around 325 to 525 kByte/J when the packets per connection event rose from one to four respectively. In case of 802.15.4, the energy utility did depend on the throughput. Until 1 kBps the energy utility increased with respect to the throughput, then plateaued at 300 kByte/J.

In the same paper [25] the energy utility of both BLE and 802.15.4 is measured when transmitting a payload over the link layer and when transmitting payload with IPv6 over Low power Wireless Personal Area Networks (6LoWPAN) with the application payload (up to 150 Bytes) as a factor. Both increase in a step-wise manner because of the maximum payload

capacity in both protocols with BLE having larger number of step because of the lesser payload capacity of 27 byte at the link layer. The overheads of the different 6LoWPAN frames can also be seen in both the protocols.

The effect of interference caused by User Datagram Protocol (UDP) packets sent over WiFi on the reception of packets is also considered for the two protocols [25]. It should be noted that the test build did not support AFH to avoid interference, so the authors tested only the non-connected mode for BLE. In that case, up to 1 m the interference resulted in only 5 to 20% of the packets being received successfully, depending on the overlap of the interfering WiFi channel over the advertising BLE channel. 1.5 m and above the WiFi interference affected the communication little. In case of 802.15.4, the WiFi interference closer than 0.5 m resulted in only 35% of the packets being communicated. At a distance of 1 m and above, the interference had negligible effect on the packets being communicated.

Another journal article [26] compares BLE, 802.15.4 and another wireless protocol SimpliciTI over various criteria of throughput (theoretical and experimental), minimum turnaround time, energy consumption of the transceivers and the memory resources required for the stack of these protocols. Minimum turnaround time here is the time required for requesting data and receiving it. SimpliciTI is an flexible open-source low-power proprietary radio protocol developed by TI for their wireless products, compatible with 802.15.4 transceivers. Similar to [16], a the calculation of the maximum throughput for BLE provided a value greater than 300 kbps, now at the link layer. Since SimpliciTI does not have rigid specification, its parameters can be tweaked for the maximum throughput to be calculated as 350 kbps. 802.15.4's maximum throughput was calculated to be between 150 and 200 kbps. The experimental evaluation of the throughput for SimpliciTI and 802.15.4 peaked at about 160 kbps and 145 kbps respectively accounting to the pre-processing operations and CCA inc case of 802.15.4. In case of BLE, the stack allowed different number of packets per connection event based on the link layer payload size. This resulted in a the throughput increasing irregularly with the payload, peaking at 122.6 kbps.

The minimum turnaround time measured for BLE was estimated to be below 1 ms since the reply was expected after the Inter Frame Space (IFS) in the same connection event. Experiments show that this is actually 7.6 ms. This is consistent with the minimum connection interval of 7.5 ms after which the reply is received in the next connection event. The minimum turnaround time was estimated as 1.92 to 10.08 ms and 0.7 to 5 ms for 802.15.4 and SimpliciTI respectively based on the mode of operation. The measured value was between 1.5 and 3 ms higher than the estimated value for both 802.15.4 and SimpliciTI. The energy consumption for the three protocols were measure per transmission and per byte transmitted. It was found that BLE transceiver consumed 2 to 7 times lower energy than the other two transceivers depending on the mode of operation.

One more article compare the energy consumption of BLE, ZigBee and ANT wireless protocols for a low duty cycle application sending few bytes of data periodically [27]. Standardized in 2003, ZigBee is a wireless, low cost, low power, mesh networking standard [28] typically used in home automation, industrial control, wireless sensor networks and the like. ZigBee uses 802.15.4 for its physical and MAC layer. ANT is another 2.4 GHz ISM based wireless sensor network protocol supporting many network architectures as point to point, broadcasting and mesh. Its typical applications are in fitness and sports Personal Area Network (PAN). In the article [27] the test case involves devices based on these three protocols initiating connection and transferring 8 bytes of data and then disconnecting periodically at an interval ranging from 5 to 120 seconds. From this test case, the authors found that the average current consumed by BLE was the lowest, followed by ZigBee and then ANT. The paper finds that on an average BLE takes the longest to connect at 1150 ms, followed by ANT at 930 ms and Zigbee being the fastest at 250 ms. The BLE test setup's parameters such as advertising interval, scanning interval and scanning duty cycle which effect the time for BLE connection to be established are

not mentioned in this paper.

5 | Porting Contiki OS to a BLE platform

This chapter describes the initial task of choosing the hardware platform supporting BLE and porting Contiki OS to this platform. This task was a pre-requisite to the next task of testing detailed in chapter 6. Section 5.1 explains the process of choosing a hardware platform and describes the chosen one. Section 5.2 describes the different aspects of porting Contiki to a new platform, with details of the specific port done in this project.

5.1 BLE Hardware Platform

As mentioned in section [3.ref4Porting](#) Contiki has been ported to many hardware platforms. Since one of the main feature of Contiki is its communication stack capable of running in resource constrained systems, the primary aspects of a hardware platform are the MCU and the communication interface. When choosing a hardware platform there are many other aspects that need to be considered as well. These include the availability of source code for peripheral drivers and examples, development environment (compiler, linker, programmer and debugger), development boards, documentation of the entire system and online forum for discussion.

There are two types of platforms, namely platforms which consist of circuit board with a discrete radio transceiver with a MCU controlling it and platforms which consist of a SoC containing both the MCU and radio transceiver in the same IC. For including BLE support in Contiki, a hardware platform needed to be chosen and this process is explained in this section.

5.1.1 Requirements of the hardware platform

The *mandatory* requirements for the platform would be:

- Must have a well supported and documented processor with good specifications.
- Availability of well documented datasheet and user manual.
- Availability of an evaluation/development kit.
- Enough memory to accommodate Contiki and BLE stack's requirements.
- Presence of basic peripherals such as timers and serial port required for Contiki.

The non-mandatory, although *nice to have* requirements for the platform would be:

- A SoC based platform. A SoC solution is preferred because of characteristics such as lower power consumption, lower circuit board area and lower total cost.
- For an open source project such as Contiki, a free and preferably open source development toolchain must support the platform.
- Presence of flexible power modes with low active and sleep power consumption.
- Availability of a good set of peripherals.
- Availability of BLE stack from the vendor, preferably with source code.

5.1.2 Comparison and selection of the hardware platform

With these requirements, based on the exhaustive comparison in Appendix C of the available SoC (BLE+MCU) solutions available today, a platform based on nRF51822 from Nordic Semiconductors would be a suitable option. As seen from the table in Appendix C, this platform would satisfy all the requirements mentioned above except for that the BLE stack would be available as a binary file, without the source code.

As shown in the table in Appendix C, recently many new promising BLE based SoCs have been released such as Quintic 9020, Dialog Semiconductor DA14580, Lapis ML7105 and Broadcom BCM20732. From the limited technical information available about them, their technical specifications would be suitable for a project like this. But because of the limited documentation about them, scarce availability and nascent support they are not suitable.

5.1.3 Overview of nrf51822 SoC and its platform

nrf51822 is a SoC made by Nordic Semiconductor for developing BLE and 2.4 GHz based wireless systems [29]. Most of the specification of this SoC can be found in the table in Appendix C. The ARM Cortex M0 present is a 32 bit, 3 stage pipeline processor with Von Neumann architecture. It is designed for low silicon die size, low cost and power. It has an integrated Nested Vectored Interrupt Controller (NVIC) responsible for handling processor exceptions and peripheral interrupts.

The development boards in the form of a USB dongle used for this thesis are called PCA10000. As seen in the figure 5.1, the top side of PCA10000 contains nrf51822 at the centre, powered from the USB port through a voltage regulator. This SoC is connected to a tri-colour RGB led, a 16 MHz crystal, a 32.768 kHz crystal and a PCB antenna with its matching network. On the other side of the PCB is the SEGGER JLink Lite Cortex M unit. This can program and debug using the Serial Wire Debug (SWD) port of nrf51822. Another useful feature of this board is that the SEGGER JLink unit provides a serial port over USB with hardware flow control (HWFC) to the computer that this dongle is connected to. This serial port is connected to the Universal Asynchronous Receiver/Transmitter (UART) port of nrf51822 [30].

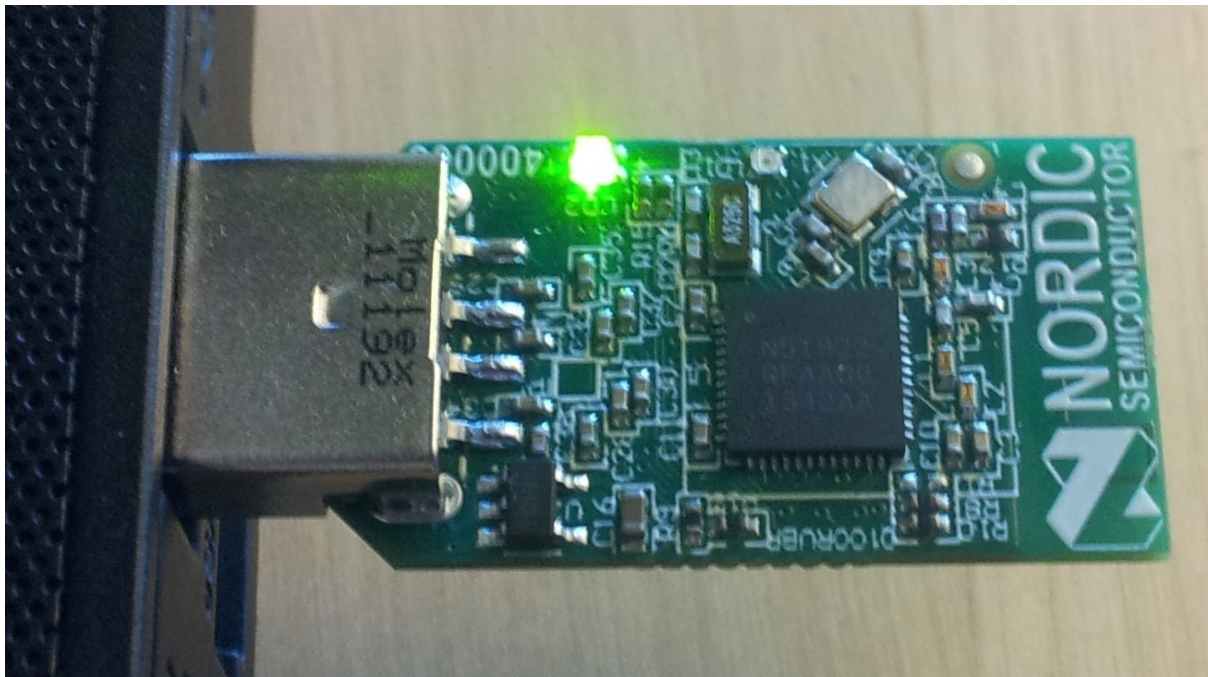


Figure 5.1: PCA10000 development board

Nordic Semiconductor provides BLE stack as a precompiled and linked binary file called *SoftDevice*. There are various of these SoftDevice binaries with different aspects of the BLE stack. The SoftDevice is stored in a protected area in the flash memory and has access to a protected section of RAM memory, preventing unauthorized access by the application code. The SoftDevice can be accessed through a specified set of API calls. These APIs are accessed by making a supervisor call to the processor causing an exception handler to run the SoftDevice. All calls are non-blocking, which means that the call will not stall the application making the call. And there are synchronous and non-synchronous calls, where the synchronous calls immediately return the result while the asynchronous calls start an operation that will send the result as an event to the application. The SoftDevice is used for accessing the BLE stack as it was out of the scope of this thesis project to implement a BLE stack from scratch.

A Software Development Kit (SDK) is provided for nrf51822 which contains the peripheral drivers, examples, the interface header files for the SoftDevices and their documentation. Two tools provided by Nordic Semiconductor have been extensively used in this thesis. *nRF Sniffer* is a tool used with the PCA10000 board and *Wireshark* application to capture, view and save the information of BLE packets being sent between two devices. This greatly helps in learning about BLE packets and debugging problems. This tool is capable of providing detailed information about almost all the segments of the captured packets. It was found during the thesis project that the nRF-Sniffer is not entirely capable of capturing each and every packet being communicated, which does limit its use as a tool to get feedback as one develops low level BLE drivers. Another invaluable tool provided by Nordic Semiconductor is *Master Control Panel*. It is an Android application which acts as a generic BLE application capable of discovering BLE devices, connecting and communicating with them while providing an overview of their Attribute database.

5.2 Porting PCA10000 platform of nrf51822 to Contiki*

This section describes the process of porting Contiki to a new platform, specifically the nrf51822 based PCA10000. The development setup is described in section 5.2.1 and the implementation of the peripheral drivers is described in section 5.2.2. Additional information of the folder and makefile structure of Contiki can be found in section A.1 and A.2 in Appendix A

5.2.1 Development Setup

Contiki was initially developed in a Linux based operating system, although Windows is also supported now. The porting of PCA10000 platform to Contiki was done in Ubuntu 13.10 and 14.04. The compiler suite used is GNU Tools for ARM Embedded Processors Version 4.8.3. The program used for programming the binary files compiled was SEGGER J-Link Commander V4.90 using the Segger JLink programmer on PCA10000. The front end used to write the code is the Eclipse IDE for C/C++ Developers Version Kepler Service Release 1 and Sublime Text. The porting was done to Contiki version 3.x, which is under active development.

5.2.2 Peripherals required for Contiki

This section details the implementation of the peripheral drivers done in this thesis so that the peripherals can be controlled with APIs specified by Contiki.

Contiki clock Contiki clock, which is the source for all the timers, except the rtimer, is provided by the RTC1 peripheral of nrf51822. RTC1 is chosen because when a SoftDevice is

*Available at <https://github.com/EarthLord/contiki> with complete Doxygen documentation

used, RTC0 will not be accessible for the user application. The Real Time Clock (RTC) peripheral uses the Low Frequency Clock (LF-CLK) of nrf51822, which can be generated by a crystal or RC oscillator to produce 32.768 kHz. For Contiki clock, in this thesis there are two driver implementations made, namely Tickless and Ticks as described below.

Ticks For this implementation the RTC1 peripheral is configured such that an interrupt is called for its every increment or *tick*, hence the name. This happens at 64 Hz, which is the default value of `CLOCK_SECOND`. In the interrupt routine, the current clock tick is incremented, an etimer poll is requested if an etimer has expired and every `CLOCK_SECOND`th interrupt the second count is incremented. The variable storing the clock 'ticks' and 'seconds' is returned upon their request from any other process.

Tickless In this implementation, the processor will not be woken up at every tick of the RTC peripheral, hence the name. To enable this, a small addition is required to the etimer and clock module present at `CONTIKI/core/sys`. Every time the next etimer expiration is computed, the clock module is informed of it. With this additional information the RTC can configure a compare interrupt to poll the etimer upon its expiry. The RTC1 peripheral is also configured to provide an interrupt only on its overflow so that it can be accounted for when calculating the seconds elapsed. For the 24-bit timer of RTC1, with `CLOCK_SECOND` as 64, the overflow interrupt would happen only once every $(2^{24}/64)$ second, that is almost every three days. Compared to interrupt happening few times a second in the 'Ticks' case this is a long time without the need for processor's involvement. With a Tickless implementation, both keeping track of the value of 'clock ticks' and polling the etimer upon its expiry is handled by the RTC peripheral rather than the processor, which would significantly reduce the power consumption without sacrificing any performance. Since changes need to be made to core Contiki library as mentioned above, this implementation is not supported natively by Contiki.

Rtimer An rtimer is implemented in Contiki's port to nrf51822 by using the *TIMER1* peripheral, which runs on the High Frequency Clock (HF-CLK) of 16 MHz. *TIMER1* was chosen as *TIMER0* is required by SoftDevice, in case it is used. Since rtimer is required with higher granularity than Contiki Clock, rtimer increments at rate of 62.5 kHz in its current implementation, which is every 16 μ s. This is achieved by *TIMER1* being configured as a 8-bit timer and providing an interrupt on overflow where the rtimer count is incremented. In the interrupt routine there is also a check to see if the scheduled rtimer task needs to be run by comparing the current rtimer count. It should be noted that Rtimer being run by *TIMER1* peripheral requires the HF-CLK to be active, thereby consuming additional power.

LEDs The PCA10000 board has a RGB LED unit on it. The port allows it to be controlled by the Contiki API. This is done through reading and writing to the General Purpose Input-Output (GPIO) port when the LED's status is read and LED's state is changed respectively. This implementation is present in 'platform' folder since they are a property of PCA10000.

Button(s) The PCA10000 board does not have any buttons. In case of porting a platform with physical buttons, its implementation would be also in the platform folder.

Serial Port The port of Contiki to PCA10000 platform offers abstraction of the UART peripheral of nrf51822, which will communicate with the serial port of the computer to which PCA10000 is connected to. Writing to the serial port is achieved by using the `printf()` function present in the `stdio.h` library by redirecting `printf` call's character stream to the UART peripheral. Instead of the default NewLib library, the Newlib-nano library is used so that the amount of memory required is reduced.

For receiving the data from the the *serial-line* module of Contiki is used. This module broadcasts an event when a series of characters are received ending with a 'newline' (\n) character. To use this module, it is initialized on boot and all the characters received by the UART port is sent to this module in the UART receive interrupt routine.

Radio Since the radio peripheral is completely controlled by the SoftDevice for implementing the BLE stack, it is untouched in this port. To use the radio peripheral, the APIs provided by the SoftDevice is used. To see the work done in this thesis regarding the radio peripheral, refer section 8.1.

6 | Test Cases

This chapter details the reasoning and design of the test cases used in this thesis. To provide a common platform for comparing BLE and 802.15.4, Contiki was ported to a platform supporting BLE as described in chapter 5. This chapter starts off with section 6.1 explaining all the metrics measured in the experiments performed. Section 6.2 follows by explaining the test platforms and tools used. Section 6.3 and 6.4 explains the two test suite designed to measure the metrics defined.

6.1 Performance Metrics Definition

The aim of this thesis is to compare the key characteristics of the link layer of BLE and 802.15.4. Note that as explained in [4.background](#), 802.15.4 here means the physical layer of 802.15.4 standard. The 802.15.4 standard MAC layer is not used, rather Null-RDC and ContikiMAC was used, both with CSMA layer. The scenario looked into in this thesis is of the case where there is communication between two device, one constrained in terms of power and the other not. This is typical of *accessories*, where one device is a powerful mobile device and the other is a battery operated single purpose device. In this section the four key performance metrics measured for both the wireless protocols are defined in the context of this thesis.

Data rate Data rate at the link layer is defined as the maximum amount of data transmitted per second for a protocol with packets containing the maximum allowed payload for the link layer. The data rate is expressed as both kilobits per second and packets per second.

Latency In this test the aim is to measure the effect of the link layer architecture and configuration on the latency observed by an layer on top when requesting data from another node. Latency is defined as the time from which the layer(s) above the link layer provides it the packet which asks for data from another node to the time the data from the other node is received. This is better understood by a generic illustration in figure 6.1.

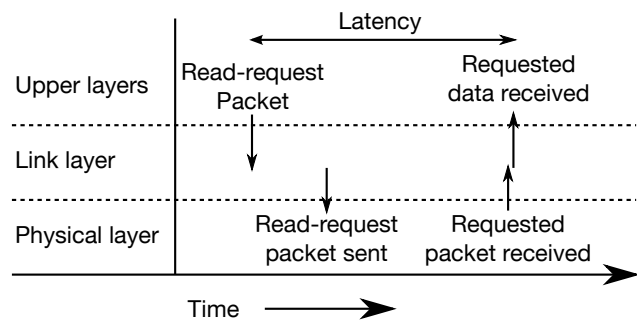


Figure 6.1: Illustration of latency measurement

Reliability Two criteria was used for measuring reliability when two nodes are communicating. Packet Reception Ratio (PRR) is defined as the ratio of the number of packets successfully received to the number of packets sent, both by the link layer. Packet Delivery Ratio (PDR) is defined as the ratio of the number of packets delivered to the number of packets sent, by the layer above the link layer in both the sender and receiver. While PRR measures the reliability of transfer of a single transfer of a packet, PDR measures the reliability of the link layer to communicate a packet as seen by the layer above it.

Energy Consumption The energy consumption in this project is indirectly measured as the Radio Duty Cycle (RDC), which is the ratio of the time for which the radio is switched on to the total time of the experiment. Measuring the energy consumption as RDC for different scenarios will be more useful to developers as this information will change little across platforms for the same protocol, whereas the actual energy consumed is reducing with every new platform introduced in the market, as seen in this presentation[31]. The processor time utilized by the protocol stack is not considered as this information could not be extracted from the SoftDevice APIs and also because of the different processor types in the two platforms (32-bit vs 16 bit).

6.2 Test setup

6.2.1 BLE platform

The platform used for BLE is PCA10000, which is described in section 5.1.3. Since BLE has an asymmetric architecture, a master device is required to communicate with a slave device. In all the tests the slave device is a PCA10000 board running on Contiki and peripheral BLE stack provided by the SoftDevice *S110* version 6.0.0. Depending on the test, the master device varied between either a PCA10000 board or an Android device. When a PCA10000 was used as master device, it ran on bare-metal code with central BLE stack provided by the SoftDevice *S120* version 1.0.0. This choice of use of Contiki for slave and bare-metal code for master is consistent with the assumption that the master is unconstrained and slave is not. The transmission power was 0 dBm for all the tests using PCA10000. Nexus 7 and Nexus 4, both at Android version 4.4.4 were the Android devices used for performing certain tests.

Communication was done at the Generic Attribute (GATT) layer because the binary from Nordic Semiconductor used in this project does not provide APIs to access the lower layers in both peripheral and central devices, hence evaluation at the link layer was done indirectly based on the inferences from the collected data. The default transmission power of 0 dBm was used. The radio state change notification event in the SoftDevice was enabled. This allowed logging of a timer to measure the energy consumption in terms of RDC.

6.2.2 802.15.4 platform

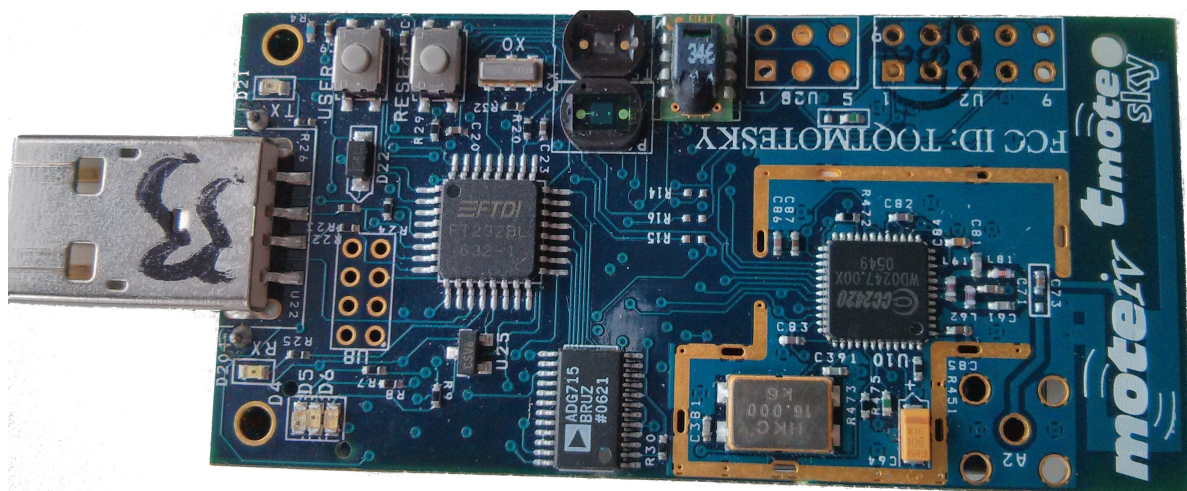


Figure 6.2: TmoteSky platform

Tmote-Sky platform, which is widely used and supports all the features of Contiki was used as the platform to test 802.15.4 performance. Shown in figure 6.2, Tmote-Sky is based on


MSP430-F1611 MCU and CC2420 2.4 GHz transceiver. It has a USB to serial converter on board to allow the MSP430 MCU to communicate with the serial port of a computer. It has additional sensors, buttons and memory which are not used in this project. The transmission power was unchanged from the default value of 0 dBm. The ‘energest’ module of Contiki was used to log the radio on and total time to calculate the energy consumption in terms of RDC.

6.2.3 WiFi Interference


In some of the tests described in the following sections, WiFi interference needed to be created to test the reliability of the wireless protocols with external interference. A open-source tool called `iperf` was used for creating this interference by sending UDP packets to the IP address of a router. The computer and router used are ThinkPad T420 and Netgear N300 router respectively, both supporting WiFi 802.11b/g/n standard. The aim of the interference pattern is to simulate streaming of large amount of data over WiFi. This was achieved by this command:

```
sudo iperf -c 192.168.1.1 -u -P 1 -i 1 -p 5001 -f M -b 54.0M -t 64 -T 1
```

Where ‘-c 192.168.1.1’ specifies that the packets are sent to the IP address specified (router’s IP), ‘-u’ to use UDP packets, ‘-P 1’ specifies one client thread to run, ‘-i 1’ specifies the bandwidth reporting interval as one second, ‘-p 5001’ specifies the server port to connect to as 5001, ‘-f M’ specifies the reporting format as MegaByte per second, ‘-b 54.0M’ specifies the data rate to be used as 54 Megabit per second, ‘-t 64’ specifies the transmission to happen for 64 second and ‘-T 1’ specifies that only one hop is allowed to reach destination. Although the data rate was specified as 54 Mbps i.e. 6.75 MBps, the actual data rate of transmission reported was around 3 MBps.

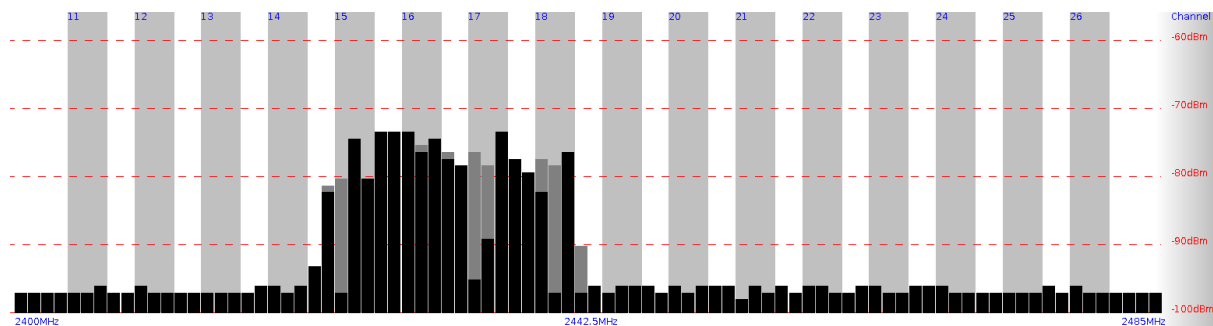

(a) Environment while running iperf tool to create interference

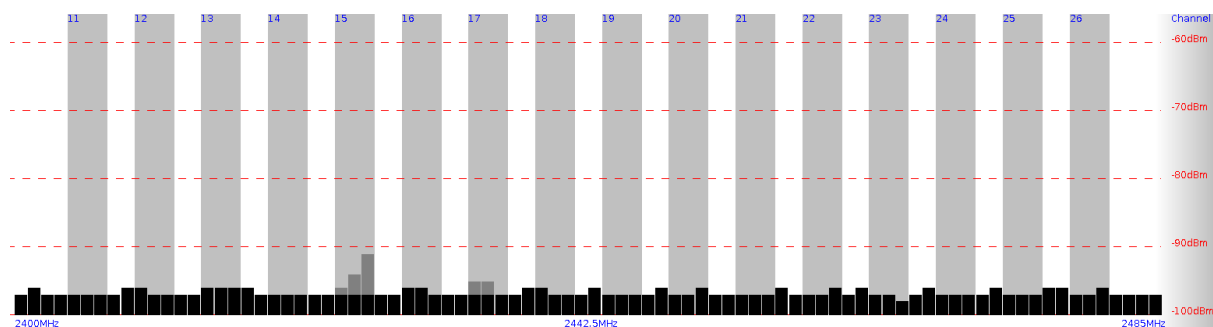

(b) Environment without creating interference

Figure 6.3: 2.4 GHz environment captured by rssi-scanner

To verify that the interference was created and to know which frequency range was occupied, the ‘rssi-scanner’ project was used*. This project is based on Tmote-Sky platform running on Contiki. The screen-shot of rssi-scanner shows a snapshot of the environment where the

* Available at: <http://sourceforge.net/p/contiki/projects/code/HEAD/tree/sics.se/rssi-scanner/>

test were conducted for the cases of with and without interference in figure 6.3a and 6.3b respectively, where y-axis shows the signal strength measured and x-axis is the frequency of the measurement.

6.3 High-Throughput (HT) Test Design

HT test aims to measure the maximum possible data rate of BLE and 802.15.4 at the LL with and without WiFi interference. For both protocols, the link layer contains the maximum payload allowed. Each run of the test will last for one minute to collect enough data to calculate the mean data rate. In each of the tests, the amount of time the radio is switched on (RDC), either transmitting or receiving, is logged to measure the energy consumption. The metrics measured in this test are data rate, reliability and energy consumption. The two nodes were kept 1 m apart and in case of environment with interference, the router to which the UDP packets were sent over WiFi was about 2.5 m from these nodes. In the cases where an Android device is not involved, they were conducted for 10 times and the median value of the 10 was used. The test with an Android device could not be automated, so the test was conducted once.

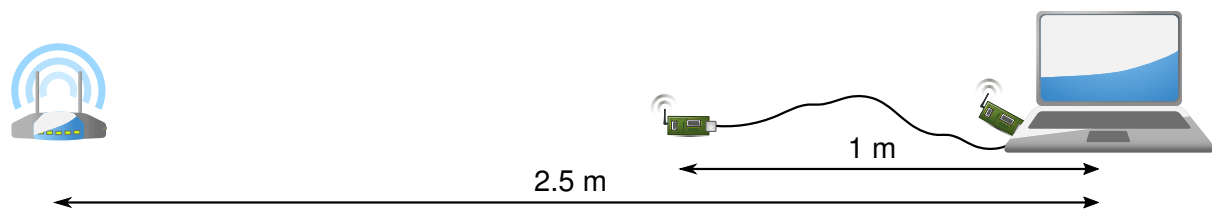


Figure 6.4: Test setup for HT test cases

BLE As shown in figure 6.5, the data rate is measured by sending data from the server to the client using *Notifications*, which are packets which are not acknowledged in the ATT layer. Since the link layer is not accessible with the SoftDevice used, a 20 byte payload was sent at the GATT layer as notification so that 27 byte data for the link layer's payload is achieved. The data rate is measured at the receiver i.e the Master device.

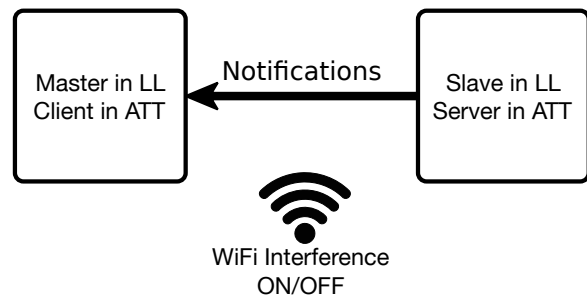


Figure 6.5: Setup to measure data rate with BLE

The number of packets sent and received at the ATT layer in the two nodes are logged to calculate the PDR. Also by logging the number of times the radio was switched on, the number of packets actually transmitted can be inferred, by which the PRR can be calculated.

BLE specification tells that a master device must change the channel map of a connection according to the 2.4 GHz environment so as to not face any interference. This is the *adaptive* part of AFH, which requires the master device to have information about the activity in the frequency spectrum used by BLE. S120 SoftDevice used for the central BLE stack by default uses the complete channel map and has an option for configuring it manually, but the channel map does not change automatically based on external interference. So in the tests without WiFi interference, the channel map consisted of all the channels. When WiFi interference was introduced, one test had the complete channel map and another had a *WiFi free* map of channels (0 to 6) and (20 to 36), which is 2404 to 2416 MHz and 2446 to 2478 MHz. This map was based on the interference noticed in figure 6.3a.

802.15.4 In case of 802.15.4, Null-RDC layer was modified to send packets with maximum payload size as soon as possible. One node is configured as transmitter and the other as receiver, with the data rate measured at the receiver. A payload of 110 byte was necessary for the link layer to achieve the maximum 127 byte packet size.

Three tests were designed to measure the data rate achievable with 802.15.4. In the first test without WiFi interference, channel 26 (2480 MHz) of 802.15.4 was used. In the second test with WiFi interference, channel 15 (2425 MHz) of 802.15.4 was used. In the third test, the Clear Channel Assessment (CCA) was disabled, so that the transmitting node ignores the external environment.

The various test cases conducted in the HT test suite are

- sky_sky_N_!CCA
- sky_sky_Y_26
- sky_sky_Y_15
- nrf_nrf_N_all
- nrf_nrf_Y_all
- nrf_nrf_Y_!Wifi
- nrf_N4_N
- nrf_N7_N

The legend of the naming of the test cases is

{source}_{destination}_{presence of WiFi interference(Y/N)}_{other conditions}

Where, sky = Tmote-Sky; nrf = nrf51822; N4 = Nexus4; N7 = Nexus7; !CCA = CCA disabled; 26,15 = channel used; all = All 40 BLE channels; !Wifi = WiFi free channels in BLE

6.4 Request-Response (RR) Test Design

The RR test aims to determine the latency for reading data from another node as explained in the latency paragraph in section 6.1. In all the tests the nodes were kept at a distance less than 10 cm from one another, since the tests we aimed to reflect an error-free environment. In this tests also the time the radio is switched on is logged in both the nodes to calculate RDC to interpret the energy consumption. The idea is to find the relation between energy consumption and latency based on different link layer configurations. Thus, the metrics evaluated in this test are latency and energy consumption.

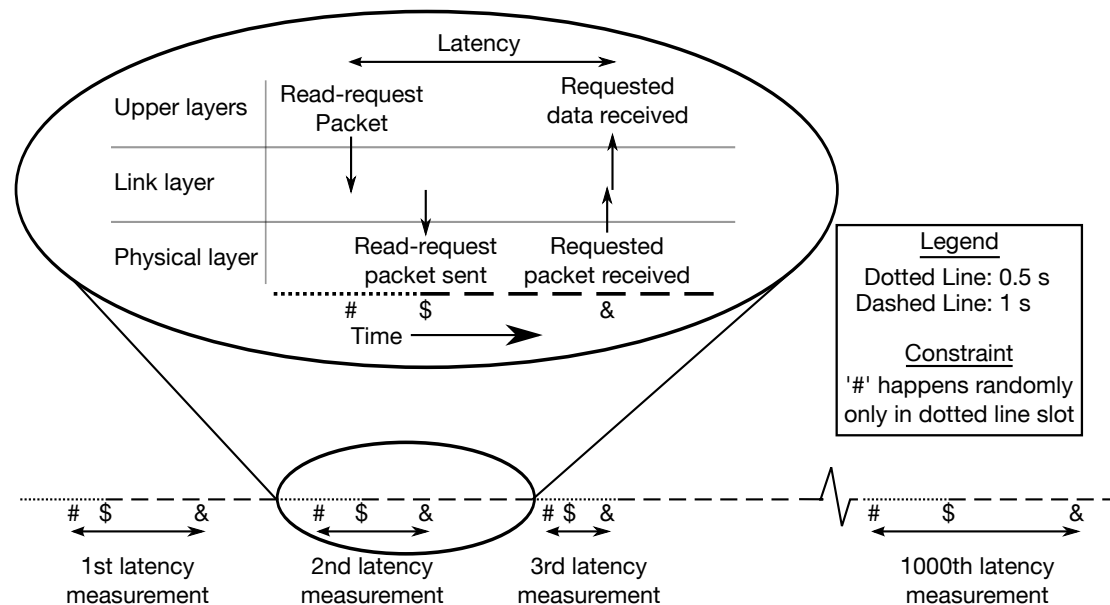


Figure 6.6: Illustration of the RR Test operation

The design of the test for both the protocols is shown in a generic diagram in figure 6.6. A latency measurement is done in every 1.5 second period, repeated thousand times. The link

layer is sent a 'read-request' packet from its upper layer after a random time in the first 0.5 second slot of this 1.5 second period, represented by '#' in figure 6.6. This randomization of the issuing of the read request ('#' event) ensures that there is any periodic communication between the nodes, the thousand measurements of latency will provide the range of values that can be expected with a particular scenario along with the power consumption. As explained in the latency paragraph in section 6.1, the latency measurement is the difference of the time between the '&' and '#' events shown in figure 6.6.

BLE In case of BLE, the use case used for the latency test is a central device which is master at link layer and client at ATT layer gets data from a peripheral device which is slave at link layer and server at ATT. This can be achieved in two modes as shown in figure 6.7a and 6.7b. In both cases it is the link ATT client which gets the data from the server. In the first case, the client asks for the data from the server, which responds with data. The latency measurement for this interaction happens at the client. In the second case, the server sends the data in an 'indication' packet, which is acknowledged by the client. In this case since it is the server that is getting the response from the master, the latency measurement happens in the server.

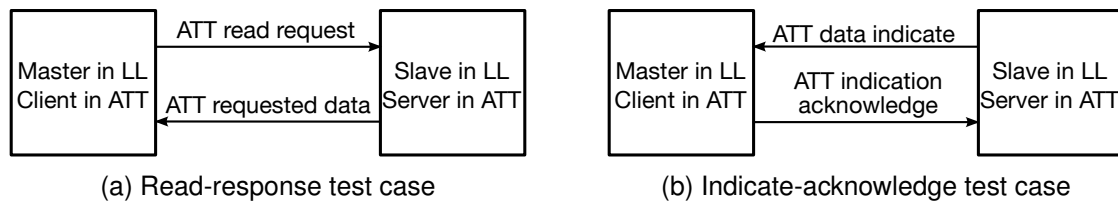


Figure 6.7: Test modes for measuring latency using BLE

In all the tests, the complete payload of 20 bytes for the ATT layer was used, which corresponds to 27 byte in the link layer. Two connection intervals of 7.5 ms and 125 ms were used for the tests. For each 'connection interval', tests were conducted with two different 'slave latency' parameter. The table 6.1 shows these values and the configuration for all the test cases in RR test using BLE. The intent here is to find the effect of the link layer configuration on the latency. By using different 'slave latency' values, the energy consumption of the asymmetric connecting devices can be evaluated. The value of the non-zero slave latency value is decided such that the worst case theoretical latency in a error free environment is less than one second. This is the reason for choosing the 'supervision timeout' of 1.5 s.

Test Case	Connection Interval	Slave Latency	Test Mode
7.5_0_r	7.5 ms	0	Read
7.5_0_i	7.5 ms	0	Indicate
7.5_65_r	7.5 ms	65	Read
7.5_65_i	7.5 ms	65	Indicate
125_0_r	125 ms	0	Read
125_0_i	125 ms	0	Indicate
125_3_r	125 ms	3	Read
125_3_i	125 ms	3	Indicate

Table 6.1: List of RR test cases using BLE

802.15.4 In the case of 802.15.4, one node is configured to send unicast messages and another is configured to receive these and send a response. The latency was measured using both ContikiMAC and Null-RDC. ContikiMAC uses the default 125 ms wake up interval for the

receiver. For payload size is same as in the test cases with BLE for comparing the latency for the same payload. The BLE test cases are designed such that the 7.5 ms connection interval tests can compare with Null-RDC test of 802.15.4 while the 125 ms connection interval tests can compare with the ContikiMAC test of 802.15.4.

The sending of the unicast packet and getting its response followed the same thousand iterations of 1.5 s intervals containing a 0.5 s period where the packet was randomly requested to be sent. The latency measurement happens as illustrated by figure 6.1 used to define the term latency in section 6.1.

7 | Results and Analysis

This chapter provides a graphical representation of the data acquired from conducting the tests designed in the last chapter. The raw data used to generate this graphs can be accessed in Appendix D. After the graphs their analysis is done to explain the various characteristics of the two wireless protocols according to the experimental results.

7.1 High-Throughput Test

The data acquired from the different test cases of the HT test suite is represented graphically below. The legend used for naming the test cases is same as described in section 6.3.

7.1.1 Graphical Representation of the Data Acquired

Note that in figure 7.1 there are two Y-axis representing the data rate in packets per second and kilobit per second. The link layer payload of 27 bytes and 110 byte was used for BLE and 802.15.4 respectively to calculate the data rate in kbps. The data used for the plot is the median of the 10 tests conducted, each of one minute. The standard deviation of the data rate from these 10 tests are also plotted.

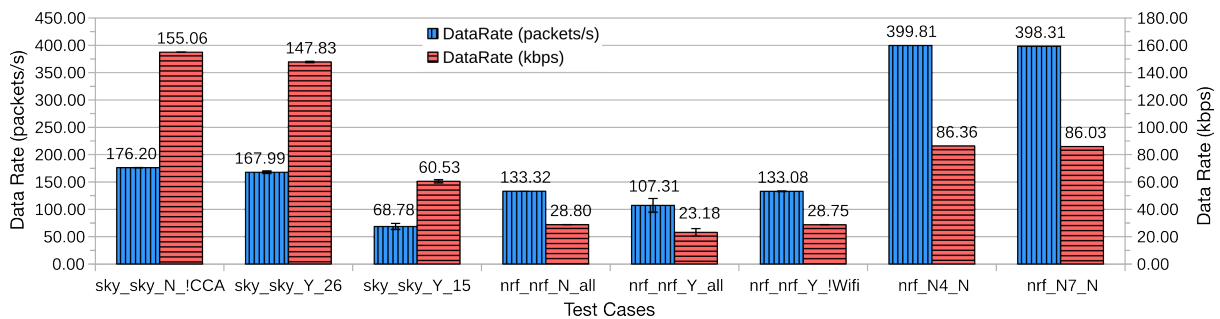


Figure 7.1: Data Rate

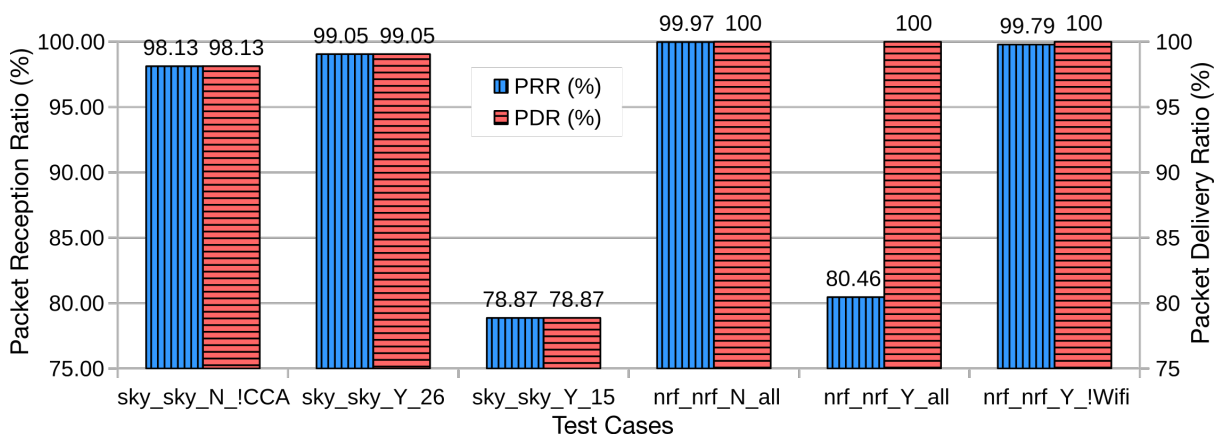


Figure 7.2: Reliability

The graph in figure 7.2 has Y-axes from 75 to 100 % for clearer representation of the PDR and PRR. As mentioned in section 6.3 the reliability was calculate in BLE by logging the number of times the radio was switched on as this information was accessible from the SoftDevice. This allowed the calculation of PRR with one packet per connection event. Since the android devices can communicate multiple packets per connection event, the PRR could not be calculated. Hence, those test cases are not plotted.

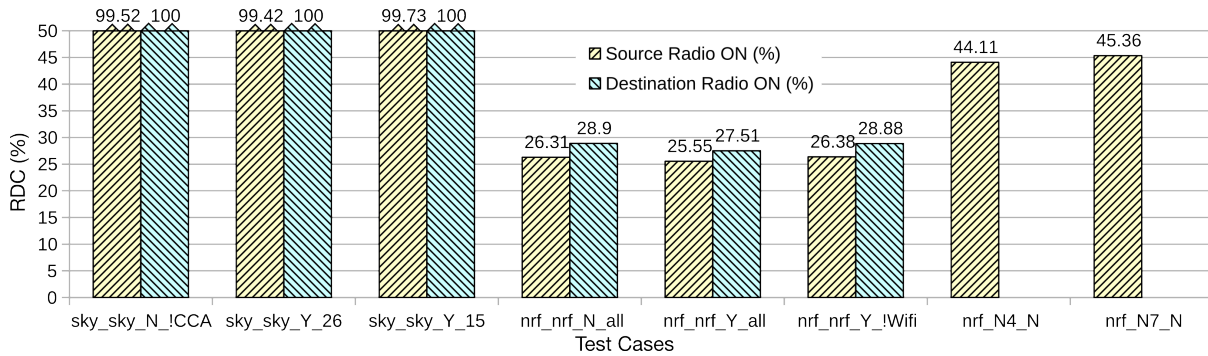


Figure 7.3: Energy Consumption

For a clearer representation of the graph, the y-axis in figure 7.3 is limited to 50%. The break in the graph shows when Tmote-Sky uses ~100% of radio duty cycle. In all the tests with BLE the source node was the slave device sending the notifications, while the destination node was the master device receiving them.

There was no easy way of accessing the low level information of BLE RDC on an Android device, so the energy consumption of these devices is not plotted. Moreover the energy consumption of such multi-purpose master device is less important than a single purpose slave device running on a meager battery.

7.1.2 Analysis

Data Rate The absolute data rate is higher in 802.15.4 than BLE although the number of packets transmitter per second is higher in BLE as seen in figure 7.1. This is because of the higher packet size of 802.15.4 and the bit rate of transmission of BLE is four time the bit rate of 802.15.4 at 1 Mbps.

For 802.15.4 the peak data rate of 155.06 kbps is achieved when CCA is not used. The use of CCA decreased the data rate slightly. When communicating using CCA in a channel not overlapping with external interference, the data rate was 147.83 kbps. When overlapping WiFi interference was introduced, most of the transmission slots were not utilized because of backing off by CCA. Appendix D shows that only 37% of the transmission slots were used, dropping the data rate considerably. With this 60.53 kbps data rate was achieved, which is higher than the data rate achieved by BLE communication between nodes of PCA10000 platform in any test case. Since 802.15.4's Null-RDC tries to send a packet as soon as possible, we can approximately calculate that the inference of WiFi traffic was not present 40.1% of the time by taking the ratio of the data rate with and without WiFi interference (60.53/147.85). **5.can do this?**

The SoftDevice used to implement the central stack allows only one packet to be communicated per connection interval. With this the theoretical data rate that can be achieved can be found out by

$$\text{Data Rate (packet/second)} = \frac{1}{\text{connection interval}} = \frac{1}{7.5ms} = 133.33 \text{ packet/second}$$

$$\text{Data Rate (kbps)} = \frac{(\text{bits per byte}) \times (\text{link layer payload in bytes})}{\text{connection interval}} = \frac{8 \times 27}{7.5ms} = 28.8 \text{ kbps}$$

The experimental results seen in figure 7.1 shows this is achieved accurately. When WiFi is introduced, the data rate drops from 28.8 kbps to 23.18 kbps, when all the channels are used. This is 81% of the WiFi free data rate. Figure 6.3a shows that 10 out of the 37 data channels are interfered by WiFi traffic. This means that the data rate should reduce by $(37-10)/37$, which is about 73% of the WiFi free data rate. The greater data rate achieved experimentally can be accounted to the fact that the WiFi traffic wasn't interfering 100% of the time as inferred earlier with 802.15.4 data rate.

When the WiFi free channels were used the data rate recorded was close to the theoretical data rate predicted. There was negligible influence of the WiFi traffic at all for BLE communication in this case. This shows that when frequency hopping channel map is chosen to avoid the interference, there is no effect on the data rate.

Communication of the PCA10000 with a Nexus4/7 master device achieved a greater data rate of about 86 kbps or ~400 packet/second. This is because the BLE stack in these Android devices support communication of multiple packets in a connection event, increasing the data rate achievable. With a connection interval of 7.5 ms, at an average there were around $(400 \times 7.5/1000)$ i.e. 3 packets of data received by the Android device per connection event.

Reliability In case of 802.15.4, the PDR and PRR is same since it does not have any communication failure detection and retransmission mechanism. This is left to the upper layer to handle. The link layer just tries initiate communication when there is no external interference present with its CCA. Figure 7.2 shows that the PRR achieved when CCA is switched off is 98.13%, the value being high since there was little external interference. While it can be seen that without CCA the data-rate is higher, the reliability decreases. By using CCA in a WiFi free channel, the PRR is 99.05%, which means that the CCA is effective in case of less interference in the operated channel. When there was heavy WiFi traffic in the same channel of communication, the CCA did work since only 36.82% of the transmission slots were used. Of these transmissions the PRR was 78.87%. This could happen when the interference starts after the carrier assessment, causing the packet to get corrupted. Here it can be seen that CCA of 802.15.4 has reduced effectiveness in case of heavy interference.

In case of BLE, figure 7.2 shows that the PDR is always 100% since BLE employs a simple acknowledgment scheme to detect if the communication has not been successful so that the packet can be retransmitted. This ensures that the upper layers can safely assume that the link layer is completely reliable. Without WiFi interference PRR was about 99.97%, which means that there were few retransmissions. With all the channels employed and with WiFi interference, the PRR reduced to 80.46%. This number is not low because of the frequency hopping used by BLE, which ensures that interference in one frequency range only effects the communication happening over the channels in that frequency range. The other data channels can still keep the communication flow intact. This shows that the frequency hopping when used over the complete channel map helps in sustaining the communication when there is external interference. When only the WiFi free channels were employed, there was no influence of the WiFi interference on PRR, which was 99.79%. This shows that when a master device has the capability of detecting external interference, it can adapt the frequency hopping channels so that there is negligible effect on the communication. Note that AFH can only help negate narrow band interference in the 2.4 GHz ISM band.

Energy Consumption As seen in figure 7.3, the radio of Tmote-Sky nodes is used nearly 100% the time in all the test cases of the HT test suite. This shows that in 802.15.4 the data rate can be maximized, by choosing an appropriate RDC layer like Null-RDC, although at the expense of energy consumption.

When the test cases where the communication happened between PCA10000 node, the source node had RDC between 25.5% and 26.5%. The destination nodes had RDC between

27.5% and 29%. From this we can see that when streaming data every connection interval, the energy consumption of the master and slave is similar, with the master node being a few percent higher. The energy consumption isn't affected by the presence of external interference in this case of the stack supporting one packet per connection event. This is because the radio must switch on anyway in each connection event to detect if the communication is successful. In case multiple packets per connection interval is supported, the energy consumption for streaming of data with external interference could be lower as the connection event ends prematurely. This could not be tested with the existing setup.

In case of communication with the Android devices, the source nodes had RDC of 44% to 45%. This is higher because multiple packets were communicated per connection interval, which also increased the data rate. This shows that when a master device can support communication of greater number packets per connection event, both the data rate and energy consumption increases.

7.2 Request-Response Test

The data acquired from the different test cases of the RR test suite is represented graphically below. The legend used for naming the test cases is same as described in section 6.4.

7.2.1 Graphical Representation of Data Acquired

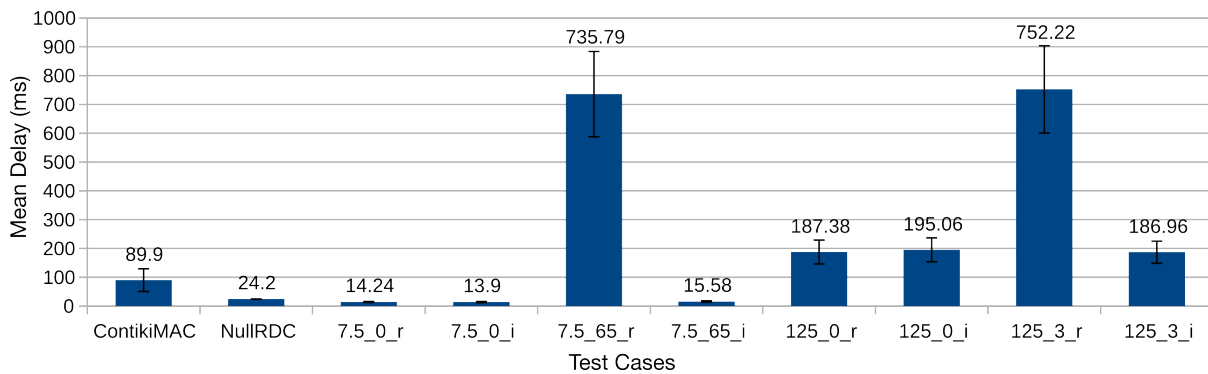


Figure 7.4: Latency

Figure 7.4 shows the mean of the thousand measurement of latency in ms for different cases of the RR test suite along with the standard deviation.

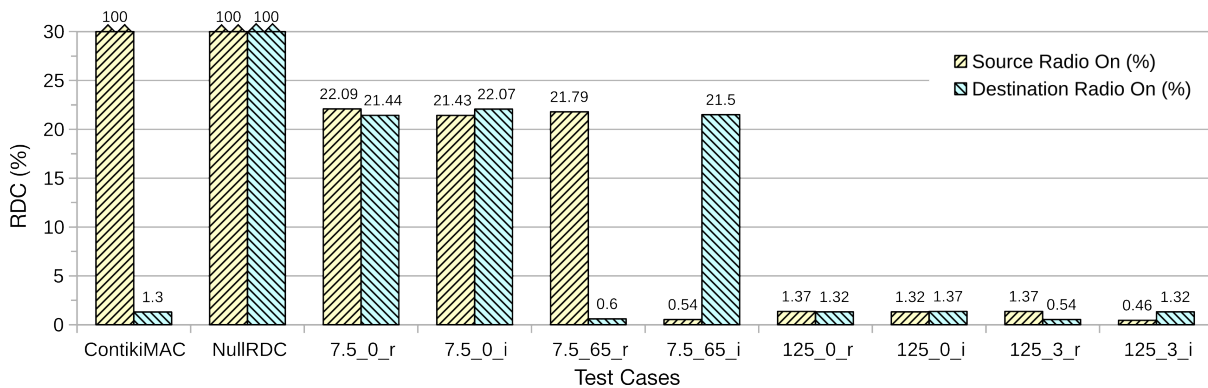


Figure 7.5: Energy Consumption

Figure 7.5 shows the energy consumption of the nodes in terms of the percentage of time the radio was switched on for the different cases of the RR test suite. Similar to the graph for

the HT tests, this graph is limited to 30% for clearer representation, especially of in test cases with low duty cycle.

In 802.15.4 the source and destination nodes can be identified based on who's sending and who's receiving. In case of BLE it is a bit more complicated since source and destination nodes change based on where the latency is being measured. In the tests with the master reading a packet from the slave, the master is the source while the slave is the destination. In tests with the slave sending an indication packet to the master and receiving an acknowledgment from it, the source and destination are inverted.

Latency (ms)	Master RDC (%)	Slave RDC (%)	Test case
14.24	22.09	21.44	7.5_0_r
13.9	22.07	21.43	7.5_0_i
735.79	21.79	0.6	7.5_65_r
15.58	21.5	0.54	7.5_65_i
187.38	1.37	1.32	125_0_r
195.06	1.37	1.32	125_0_i
752.22	1.37	0.54	125_3_r
186.96	1.32	0.46	125_3_i

Table 7.1: Latency in terms of master and slave RDC

Table 7.1 shows the latency measurement from the data acquired in the RR test in terms of BLE master and slave RDC in different test cases. With this data the graph in figure 7.6 was plotted to show the various possible latency values for different master and slave's energy consumption. Note that this table and graph includes data from the BLE test cases as it is made to evaluate the impact of the various configurations on latency in terms of energy consumption.

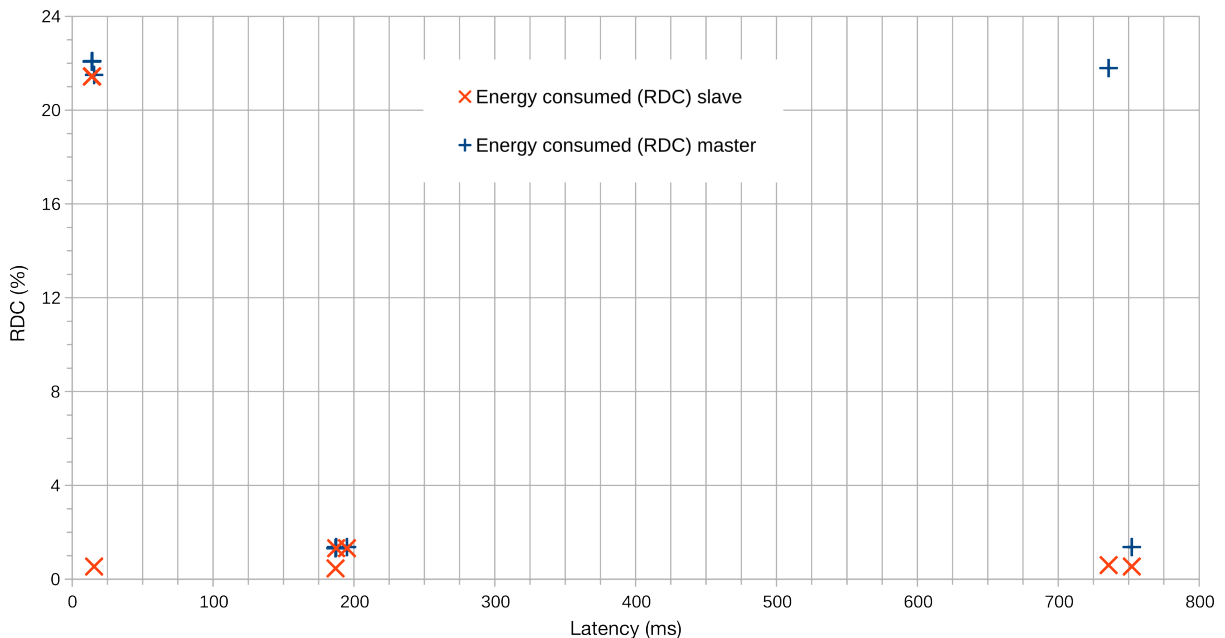


Figure 7.6: Energy Consumption vs Latency

7.2.2 Analysis

Latency The latency measurement as seen from figure 7.4 can vary in the order of magnitude among different tests. The least latency can be achieved using 802.15.4 when using Null-RDC,

which is about 24 ms. When using ContikiMAC, the average latency was about 90 ms, which can be attributed to the 125 ms interval with which the receiver wakes up. In this test case where the source was assumed to be unconstrained in terms of power, its radio was always listening, if not transmitting. This means that when the constrained destination node is ready to send the reply, the source node will be listening and get the reply immediately. This is the reason the average latency is less than the waking interval of the receiver. Note that in case both the nodes have a sleep and wake up routine, the latency would be greater than the waking interval. One disadvantage of various 802.15.4 based MAC standards is that there is no way of dynamically changing the link layer parameters. This is because there is no hierarchical master and slave concept to force particular link layer parameters.

Based on the link layer configurations used for BLE, the latency varied from a minimum of about 14 ms to a maximum of about 750 ms. The provision in BLE's link layer for changing these configurations while in a connection is an advantage since the latency can be adapted according to the requirement dynamically. The configuration of the slave latency value determines if there is any difference in the latency experienced based on whether the communication happens with a read request or an indication. With slave latency as zero, the latency of the read and indication case is almost same, with the average latency being around 14 ms with 7.5 ms connection interval and 190 ms with a connection interval of 125 ms. With a non-zero slave latency value, the read-request from the master node (client in ATT) has high latency since the slave node (server at ATT) will not react to the master at every connection interval as it is sleeping. With a slave latency value of 65, the master node can read a value from the slave node with a latency of about 736 ms, even with a connection interval of 7.5 ms. Similarly, with a slave latency of 3 and connection interval of 125 ms, the master will read a value from the slave with a latency of about 752 ms. When using indication to communicate data to a master, the latency can be low since the slave can decide to respond to the master when necessary to communicate. With a 7.5 ms connection interval and slave latency of 65, the latency is about 15 ms, which is similar to the latency experience with zero slave latency. Similarly, an indication providing the master with data experiences a latency of 187 ms with a connection interval of 125 ms and slave latency of 3. This is almost equal to the latency experienced with zero slave latency. This shows that use of indication does not effect the latency experienced to send data to a master node in a connection with non-zero slave latency.

With slave latency as zero, it can be seen that for an application layer the latency experienced is between one and two times the connection interval, the best case being close to one connection interval. This shows that a read-request communication happening in the same connection event is not possible. The read request is sent in one connection event and the requested data is sent back in the next connection event. This is because the 150 μ s inter frame time in a connection event is not enough for the resource constrained MCUs to respond back with the requested data.

Energy Consumption The energy consumption of the 802.15.4 source and destination node is 100% in terms of RDC in case of Null-RDC. This is as expected because of the nature of Null-RDC implementation. In case of ContikiMAC, the source node has 100% RDC while the destination has 1.3%. The source node has this high energy consumption because it is configured so. This is in accordance with the assumption of one node being unconstrained in terms of power. Usually the root node of a 802.15.4 network has access to a wall socket and gathers data from the other nodes. It is the destination node which is battery operated and has to conserve energy.

In case of BLE, the energy consumption of the nodes which have to switch on their radio every 7.5 ms have the highest RDC at around 21-22%. This includes both the source and destination when the slave latency is zero and connection interval is 7.5 ms. In case the slave latency of 65 is used, the master has RDC of around 21%, while the slave has a RDC

of only 0.6%. This is since the slave can choose only to respond to the master every 66th connection interval and sleep the rest of the time, thereby creating an asymmetric architecture. Similarly when the connection interval is 125 ms and slave latency is zero, both master and slave node have approximately equal RDC of 1.32 to 1.37%. By using a slave latency of 3 and the same connection interval, the slave nodes were able to sleep for longer duration leading to the reduction of RDC to around 0.6%.

Latency vs Energy Consumption Figure 7.6 clearly showcases the flexibility available in BLE in configuring the link layer dynamically. The parameter that allows that is slave latency. A symmetric connection is created when the slave latency is zero, causing slave to respond to the master in every connection interval. This scenario will result in the latency for a read response from either the master or the slave being almost equal. Also the RDC of the master and slave device will be similar. In this case there is a direct relation between the latency and connection interval, which means that if lower latency is required then more energy is consumed. This scenario is useful when the latency requirement for any communication started by the master is greater than that of the slave. An example for this scenario is a Human Interface Device (HID) that also provides feedback to the user, like as a game controller as a slave communicating with a gaming console as master. In this case there needs to be low latency for both the commands sent from the controller to the console, as well for the vibration feedback sent to the controller from the console. The test case that represent this in figure 7.6 are the ones with 7.5 ms connection interval and zero slave latency to achieve near instantaneous response.

By using a non-zero slave latency, the slave node can be sleepy by not having the responsibility to respond in every connection event. As figure 7.6 shows, this asymmetric connection creates a situation where the communication started from the slave has a latency as if the slave latency parameter was zero, since the master is communicating in all connection events. On the other hand, communication started by the master can experience high latency, since it has to wait till the master responds. This can be seen in the case 7.5_65_i where the slave can communicate with 14 ms latency with the master while having a RDC of only 0.54%, although the master's radio needs to be on for about 21.5% of the time. This scenario is useful with HID devices such as keyboards where there is usually no feedback to be the sleepy slave devices. This will allow them to have low latency to communicate the keys pressed while allowing them to sleep when the keyboard isn't used, hence extending battery life.

7.3 Evaluation with existing research

Data Rate Considering the research that looked into the data rate achievable, the data rate achieved in this project falls well within the maximum data rate achievable[16] of 236.7 kbps. The data rate in experiments have looked at the data rate from the link layer[26] or application layer[15][18][19], all of them by sending notification packets. To equalize the result with this experiment, the data rate is compared in terms of packets per second and presented in table 7.2.

This comparison shows that the data rate achieved is highly dependent on the BLE stack used. The BLE stack used, on both the master and slave device, determines parameters such as connection interval and packets consistently allowed to be transmitted per connection event with full application payload of 20 bytes. As seen from the table above, even though all the devices are following the BLE core specification, the limitations of the stacks for these two parameters determines the maximum data rate achievable. By improvements in the stack implementation, the data rate can be improved to reach closer to the limit of 236.7 kbps, thus extending BLE to application which require intermittent streaming of data.

This thesis project extends the research to data rate achievable in the presence of WiFi interference when using both complete and WiFi free BLE channel map. The energy con-

Article	Throughput (packet/second)	Devices communicating	Master device's stack
This expt.	133.3	PCA10000 to PCA10000	S120 v1.0.0
This expt.	399.8	PCA10000 to Nexus4/7	Android 4.4.4
[15]	365.5	CC2540 to CC2540 (dev board)	TI BLE Stack
[18]	250	CC2540 to CC2540 (dev board)	TI BLE Stack
[19]	637.5	Bluegiga BLE112 to BLE112	Bluegiga stack [20]
[26]	567.6	CC2540 to CC2540 (dev board)	TI BLE Stack v1.21

Table 7.2: Comparison of BLE data rate achieved

sumption in terms of RDC has been measured when sending data at maximum data rate, to two different master devices at different data rates.

External Interference As mentioned in section 4.3, in an experiment[25] the PRR was measured for receiving the advertisements of a slave by a master, while varying the distance of the source of interference. Similarly, the influence of WiFi on BLE advertisement and vice versa has been evaluated for up to 21 advertisers[21]. This thesis extends the research of the effect of WiFi interference on BLE in connection mode in terms of both PRR and PDR. Although automatic AFH was not available in the test setup in this project, the effect of AFH was analyzed by manually selecting the channel map without WiFi interference.

Reliability There has been research on reliability of receiving the advertisement packets by scanners in the presence of WiFi interference[21][25]. To the best of the author's knowledge, this is the first experiment which finds the reliability of the link layer of BLE when in a connection. This has been looked into with and without external WiFi interference.

Latency The latency for detection of a BLE advertiser by a scanner has been extensively modeled and verified[19][32]. Latency for periodic formation of BLE connection and transfer of data has been measured[27], although the advertising and link layer configuration has not been detailed. The time for a connection event with sending a packet with maximum payload is measured as latency[15]. One article has measured the latency for a read-request operation, where the time measurement starts and ends with sending and receiving the data at the physical layer to/from the link-layer[26]. This thesis project extends the research by exploring the influence of the link-layer parameters of connection interval and slave latency on the latency measurement for a read-request operation.

Energy Consumption Consistent with the name of the protocol, there has been extensive research on the energy consumption of a BLE devices. A recent paper has extensively and precisely modeled the energy consumption of BLE devices in during a connection and when being advertisers and scanners[19]. Various BLE ICs have their power consumption compared in a compared[31]. The battery life of a BLE device has been estimated for various connection and packet configuration[15]. There have been many research papers where the energy required for the different phases of a BLE transmission is accurately measured[26][25][18][17] for the CC254x SoC from Texas Instruments.

This thesis project complements this existing research by providing an idea of the energy consumed for various scenarios, especially useful for bivariate analysis with other metrics. With the existing models available, this information in terms of RDC can easily be converted to precise energy consumed for the platform used.

Comparison of BLE and 802.15.4 There has been research which compares BLE link layer with standard 802.15.4[26][25] and SimpliciTI[26]. To the best of our knowledge, this is the first experiment which compares BLE and 802.15.4 which uses ContikiMAC and Null-RDC MAC layer. This thesis project explores test case scenarios which are practically useful to a BLE device and application developer such as streaming data to different devices, effect of heavy WiFi interference and latency for a read-request operation, all with various link-layer configuration.

8 | Other Contributions

8.1 Advertisement Logger*

During the exploration phase of the thesis, the plan was to implement the required parts of the link layer of BLE from scratch. This included developing the entire radio driver. After looking into the radio peripheral of nrf51822 and working with it, this plan was abandoned due to lack of time to finish these tasks and the test cases. The work with the radio peripheral did result in developing a full-fledged BLE advertisement packet logger, whose interface (using CuteCom serial terminal) can be seen in figure 8.1. Detailed description can be found in Appendix B.

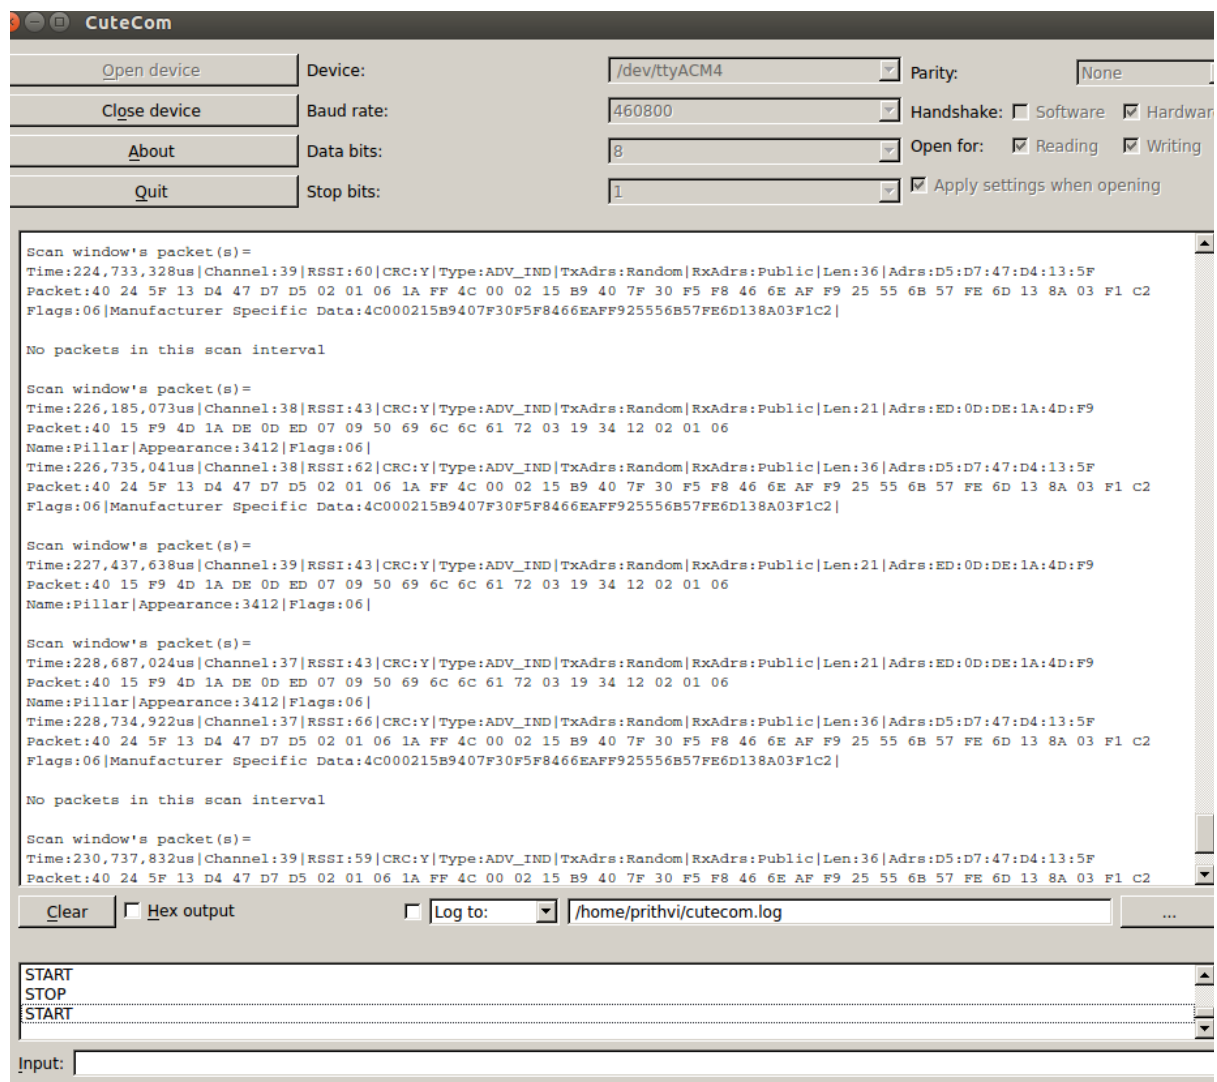


Figure 8.1: User Interface of Advertisement Logger

*Available at <https://github.com/EarthLord/nrf51AdvLogger> with Doxygen documentation

8.2 Firmware for an Alarm Device[†]

A demonstration application was developed to test the port of Contiki on the nrf51822 platform. This application consisted of an alarm device controlled by a mobile application. The PCA10000 platform was used for this development too. The operations of setting of the next alarm time, canceling the alarm and also silencing the alarm can be done from a mobile application. The *Master Control Panel* application by Nordic Semiconductor was used to test all the functionality.

The functioning of the alarm device with the mobile *App* controlling it from a user's perspective can be seen in the state diagram in figure 8.2

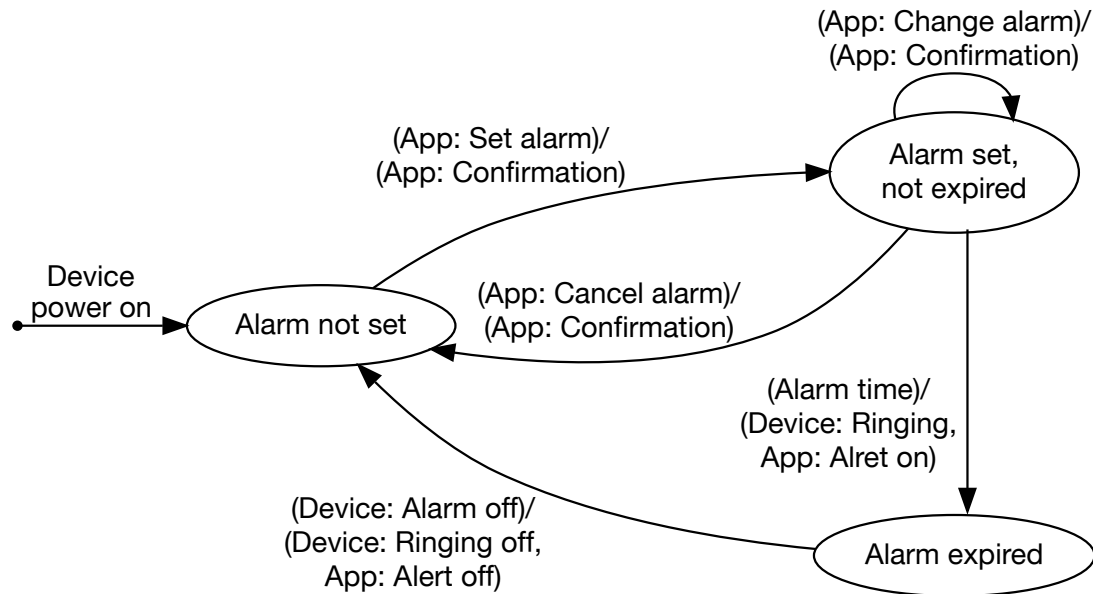


Figure 8.2: State Diagram of an alarm device from an user's perspective

To achieve this a custom *service* was created to contain two custom *characteristics*. One characteristic contained the time to the next alarm and the other characteristic contained the status of whether the alarm is set or not, both with Client Characteristic Configuration Descriptor (CCCD). The details of the two characteristics are:

Next alarm time (§)

- Read, write and notify allowed
- CCCD to disable/enable notifications
- Open link security mode
- No read/write authorization required
- 32-bit value
 - 0 implies no alarm set
 - Seconds to next alarm, if not 0

Alarm status (§)

- Read and notify allowed
- CCCD to disable/enable notifications
- Open link security mode
- No read/write authorization required
- 8-bit value
 - 1 if alarm is set or ringing
 - 0 if alarm is not set

Apart from these characteristics, Contiki etimers and Contiki serial-line module from the Contiki port to nrf51822 are used for this alarm. Since the PCA10000 platform is used for this alarm device's development, the 'ringing' of the alarm is done by flashing the LED on board and 'silencing' the alarm is done by sending a string through the serial port. The state diagram in figure 8.3 shows the implementation done for this alarm device. Note that (§) and (§) represent the characteristics described above.

[†]Available at <https://github.com/EarthLord/contiki/tree/master/examples/PCA10000-nrf/Pillar>

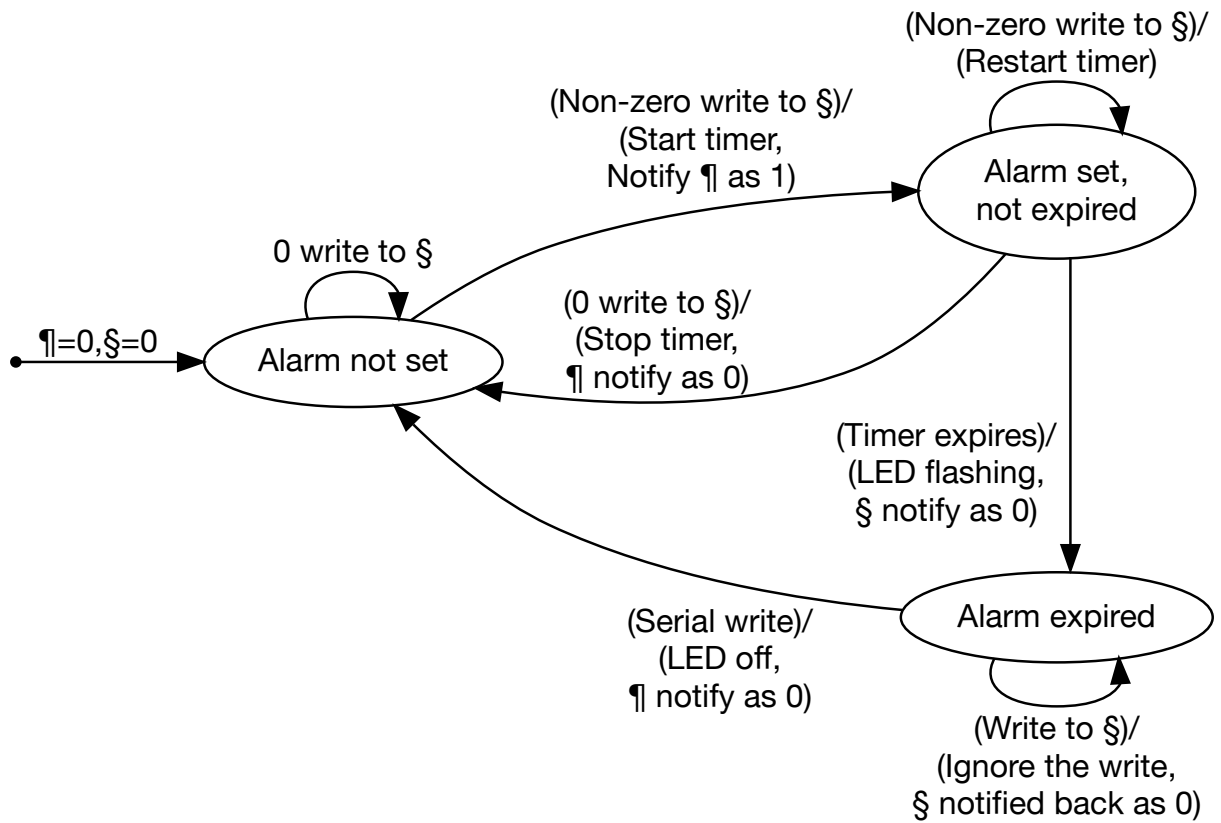


Figure 8.3: State Diagram of an alarm appcessory controlled by BLE

9 | Conclusion and Future Work

9.1 Conclusion

Contiki is ported to a BLE based platform, namely nrf51822 SoC based PCA10000. nrf51822 was chosen as the SoC to work with after comparing various commercially available SoCs in many criteria based on the formulated requirements of the platform. The port allowed all the basic peripherals of nrf51822 to be controlled by Contiki's libraries such as etimer, rtimer, serial-line and LEDs. The radio was not included in the port since the radio was controlled by a SoftDevice binary for BLE operations and also since the Contiki radio APIs are not compatible with BLE operations. The test cases and the alarm application developed with the Contiki verify its working.

Two test suites were designed to compare four metrics of the link layer of BLE and 802.15.4, where 802.15.4 refers to use of 802.15.4 physical layer and used of ContikMAC and Null-RDC MAC layers. The conducted test cases resulted in the following insights:

- The absolute data rate achievable with 802.15.4 is higher than BLE on the account of the greater link-layer payload size, which is 110 byte for 802.15.4 and 27 byte for BLE.
- The highest data rate achieved with 802.15.4 is when CCA wasn't used (155 kbps), followed by communicating with a channel not overlapping with external interference using CCA (148 kbps) and the case where the channel was interfered with WiFi signals was where the data rate recorded was least for 802.15.4 (61 kbps).
- In case of BLE, the highest data rate was recorded when communicating with an Android device (86 kbps), since the master device allowed multiple packets to be communicated in a connection interval. The data rate achieved between PCA10000 nodes was in-line with the theoretically calculated data rate when there was no external interference and when WiFi free channel map was used (29 kbps). Seen here is that if AFH is implemented, there is no degradation in the data rate in the presence of external interference. When there was WiFi interference and the complete channel map was used, the data rate dropped to 23 kbps.
- The data rate achieved in BLE communication depends highly on the stack, which limits the deciding parameters of connection interval and packets communicated consistently in each connection interval.
- CCA operation in 802.15.4 has greater efficiency in case of low external interference (99% PRR) as compared to high external interference (79% PRR).
- The acknowledgment scheme of BLE does result in 100% PDR for the layers above the link layer in all cases. The PRR with BLE is greater than 99% when there was no external interference and when WiFi free channel map was used. 80% PRR was achieved when all the channel map was used with external interference, which shows that narrow band interference affects only a small portion of the communication.
- When one packet was communicated per connection interval, the RDC was between 26 and 29%. This value increased to about 44% when an average of 3 packets were communicated per connection event.

- Null-RDC and ContikiMAC achieved a latency of 24 ms and 90 ms respectively for a read-response operation. ContikiMAC achieved this latency with the destination node achieving only 1.3% RDC.
- The latency measurement with BLE nodes ranged from 14 ms to 750 ms depending on the configuration. The variation of the symmetric of the connection can be illustrated in the case where the slave device's energy consumption drops drastically without change in the latency when using indication packets. This can result in cases where 14 ms latency can be achieved by a master and slave node consuming only 21.5% and 0.54% radio on time.
- Use cases where low latency is required for data to be communicated from the master to slave, the slave latency value used must be close to zero. In other cases large slave latency values can be used. The provision for dynamic update of the link layer parameters of a BLE connection is useful in optimizing these parameters for different scenarios.

9.2 Future Work

The lack of availability of a complete and open-source BLE stack is one of the major inhibiting factors faced by researchers working with BLE. This results in little or no flexibility in developing the test setup as needed for the research projects. Contiki is a mature platform under active development for IoT projects. This thesis project can provide a start to active development of an open-source BLE stack and support for greater number of BLE based platforms in Contiki.

References

- [1] Bluetooth SIG. "Bluetooth Core Specification Version 4.0". In: *Specification of the Bluetooth System* (2010).
- [2] Nick Hunn. *To Ubiquity and Beyond - Bluetooth Smart and the Growth of Accessories*. Tech. rep. 2013, p. 18.
- [3] *Contiki: The Open Source Operating System for the Internet of Things*. URL: <http://contiki-os.org/> (Retrieved on Feb. 17, 2014).
- [4] IEEE 802.15 WPANTM Task Group 4. *IEEE 802.15.4*. URL: <http://www.ieee802.org/15/pub/TG4.html> (Retrieved on Aug. 12, 2014).
- [5] IETF. *Bluetooth 4.0 update to 4.1 and what it means for IPv6 over Bluetooth Low-Energy*. 2014. URL: <http://www.ietf.org/proceedings/89/slides/slides-89-6lo-4.pdf>.
- [6] Johanna Nieminen, Basavaraj Patil, Teemu Savolainen, et al. *Transmission of IPv6 Packets over Bluetooth Low Energy [Working Draft]*. 2014. URL: <http://tools.ietf.org/html/draft-ietf-6lo-btle-01>.
- [7] *Contiki Hardware*. URL: <http://contiki-os.org/hardware.html> (Retrieved on Feb. 17, 2014).
- [8] George Oikonomou and Iain Phillips. "Experiences from porting the Contiki operating system to a popular hardware platform". English. In: *2011 International Conference on Distributed Computing in Sensor Systems and Workshops (DCOSS)*. IEEE, June 2011, pp. 1–6.
- [9] Alexandru Stan. "Porting the Core of the Contiki operating system to the TelosB and MicaZ platforms". Bachelor Thesis. International University Bremen, 2007.
- [10] Adriana Wilde, Richard Oliver, and Ed Zaluska. "Developing a low-cost general-purpose device for the Internet of Things". English. In: *2013 Seventh International Conference on Sensing Technology (ICST)*. IEEE, Dec. 2013, pp. 490–494.
- [11] Zoltan Padrah, Ales Verbic, Marko Mihelin, et al. "Connecting Contiki enabled Versatile Sensor Nodes via CC1101 radio". In: *NEWCOM++* (2011).
- [12] Voravit Tanyingyong, Robert Olsson, Markus Hidell, et al. "Design and Implementation of an IoT-controlled DC-DC Converter". eng. In: *2013 Sustainable Internet and ICT for Sustainability, SustainIT 2013* (2013), p. 6685199.
- [13] Robin Heydon. *Bluetooth Low Energy: The Developer's Handbook*. 1st ed. Prentice Hall, 2012, p. 368.
- [14] William M K Trochim and J P Donnelly. *"Descriptive Statistics" in Research methods: The concise knowledge base*. 3rd ed. Atomic Dog Pub., 2005.
- [15] Carles Gomez, Joaquim Oller, and Josep Paradells. "Overview and evaluation of bluetooth low energy: an emerging low-power wireless technology." In: *Sensors (Basel, Switzerland)* 12.9 (Jan. 2012), pp. 11734–53.

- [16] Carles Gomez, Ilker Demirkol, and Josep Paradells. "Modeling the Maximum Throughput of Bluetooth Low Energy in an Error-Prone Link". In: *IEEE Communications Letters* 15.11 (Nov. 2011), pp. 1187–1189.
- [17] Jia Liu and Canfeng Chen. "Energy analysis of neighbor discovery in Bluetooth Low Energy networks". In: *Nokia. (nd)* (2012).
- [18] Elke Mackensen, Matthias Lai, and Thomas M. Wendt. "Performance analysis of an Bluetooth Low Energy sensor system". In: *2012 IEEE 1st International Symposium on Wireless Systems (IDAACS-SWS)*. September. IEEE, Sept. 2012, pp. 62–66.
- [19] Philipp Kindt, Daniel Yunge, Robert Diemer, et al. "Precise Energy Modeling for the Bluetooth Low Energy Protocol". In: *CoRR* abs/1403.2 (Mar. 2014). arXiv: 1403.2919.
- [20] Mikko Savolainen. *Throughput with Bluetooth Smart technology : Bluegiga Technologies*. 2013. URL: <https://bluegiga.zendesk.com/entries/24646818-Throughput-with-Bluetooth-Smart-technology> (Retrieved on Aug. 5, 2014).
- [21] Jeroen Wyffels, Jean Pierre Goemaere, Bart Nauwelaers, et al. "Influence of Bluetooth Low Energy on WIFI communications and vice versa". en. In: ().
- [22] Adam Dunkels. "The ContikiMAC Radio Duty Cycling Protocol". In: (Dec. 2011).
- [23] Mathieu Michel and Bruno Quoitin. "Technical Report : ContikiMAC vs X-MAC performance analysis". In: *arXiv preprint arXiv:1404.3589* (Apr. 2014). arXiv: 1404.3589.
- [24] M.-P. Uwase, M. Bezunartea, T.L. Nguyen, et al. "Experimental evaluation of message latency and power usage in WSNs". In: *2014 IEEE International Black Sea Conference on Communications and Networking (BlackSeaCom)*. IEEE, May 2014, pp. 69–72.
- [25] Matti Siekkinen, Markus Hienkari, Jukka K Nurminen, et al. "How low energy is bluetooth low energy? Comparative measurements with ZigBee/802.15.4". In: *2012 IEEE Wireless Communications and Networking Conference Workshops (WCNCW)*. IEEE, Apr. 2012, pp. 232–237.
- [26] Konstantin Mikhaylov, Nikolaos Plevritakis, and Jouni Tervonen. "Performance Analysis and Comparison of Bluetooth Low Energy with IEEE 802.15.4 and SimpliciTI". In: *Journal of Sensor and Actuator Networks* 2.3 (Aug. 2013), pp. 589–613.
- [27] Artem Dementyev, Steve Hodges, Stuart Taylor, et al. "Power consumption analysis of Bluetooth Low Energy, ZigBee and ANT sensor nodes in a cyclic sleep scenario". English. In: *2013 IEEE International Wireless Symposium (IWS)*. IEEE, Apr. 2013, pp. 1–4.
- [28] ZigBee Alliance. *ZigBee Specification*. URL: <http://www.zigbee.org/Specifications.aspx> (Retrieved on Aug. 6, 2014).
- [29] Nordic Semiconductor. *nRF51822*. URL: <https://www.nordicsemi.com/eng/Products/Bluetooth-R-low-energy/nRF51822> (Retrieved on Mar. 9, 2014).
- [30] PrithviRaj Narendra. *Introduction to PCA10000 and using JLink Software with it in Ubuntu*. 2014. URL: <http://rumblingsofearthlord.wordpress.com/2014/01/22/introduction-to-pca10000-and-using-jlink-software-with-it-in-ubuntu/> (Retrieved on Aug. 10, 2014).
- [31] Jachen Bernegger and Marcel Meli. "Comparing the energy requirements of current Bluetooth Smart solutions". In: InES Institute of Embedded Systems. Nuremberg: Embedded World 2014, 2014.
- [32] Jia Liu, Canfeng Chen, and Yan Ma. "Modeling Neighbor Discovery in Bluetooth Low Energy Networks". In: *IEEE Communications Letters* 16.9 (Sept. 2012), pp. 1439–1441.

Chapter A | Contiki Folder and Makefile Structure

A.1 Folder structure of Contiki

When porting a new platform to Contiki, the three folders inside a Contiki distribution where additions need to be made are `cpu`, `examples` and `platform`. The content in these folders are as described below. The location of the Contiki distribution is represented by the path 'CONTIKI'. The port of nrf51822 SoC with its PCA10000 board also follows this convention.

CONTIKI/cpu In this folder, all the files contain implementation which is solely dependent on the SoC is present. This includes the code for the processor abstraction, the drivers of the peripherals of the SoC, makefile with commands for compiling and linking the code, linker file and the documentation of these implementation. The boot-loader or start-up code, if required is also present here. The peripheral drivers for peripherals such as timers and serial port must use the API format of Contiki so that the libraries of Contiki using these peripherals can operate correctly. The exact implementations of these drivers is explained in section 5.2.2.

CONTIKI/platform An SoC over time has increasing number of boards or systems that are based on it and these are referred as platforms in this folder. Every board has its own folder in this platform folder which contains files which contain implementation which is dependant on the particular board. These include the specification of the connections to the LEDs, buttons, sensors and serial ports, power sources, the clock sources, memories present and any other board specific details. Any peripheral driver implementation specific to the board is present here. The default project specifications such as the source and frequency of clock and serial baud-rate are defined here. The main function where the execution of the program starts and initialization of all the peripherals and libraries used by Contiki happens is present here.

CONTIKI/examples The examples folder contains all the files related to projects that are implemented using Contiki with any of the supported hardware platforms. The makefile where the make command is executed is present here. The compiled object and binary files are also stored here. The default specifications of the platform can be overridden by creating a `project-conf.h` in the specific example.

A.2 Makefile structure of Contiki

Introduction to makefile and include. There are multiple makefiles present across different folders that are included in the way shown in figure A.1 to form the complete makefile. In the most basic form these are the makefile in the example folder, 'makefile.include' in the Contiki root folder, 'makefile.TARGET' in the specific platform folder and 'makefile.CPU' in the specific cpu folder, where TARGET and CPU are specific to the project. The port of Contiki to nrf51822's platform follows this convention too.

The makefile in the project specific example folder, the different project source files are specified and the 'makefile.include' present in the root CONTIKI folder is added. 'make-

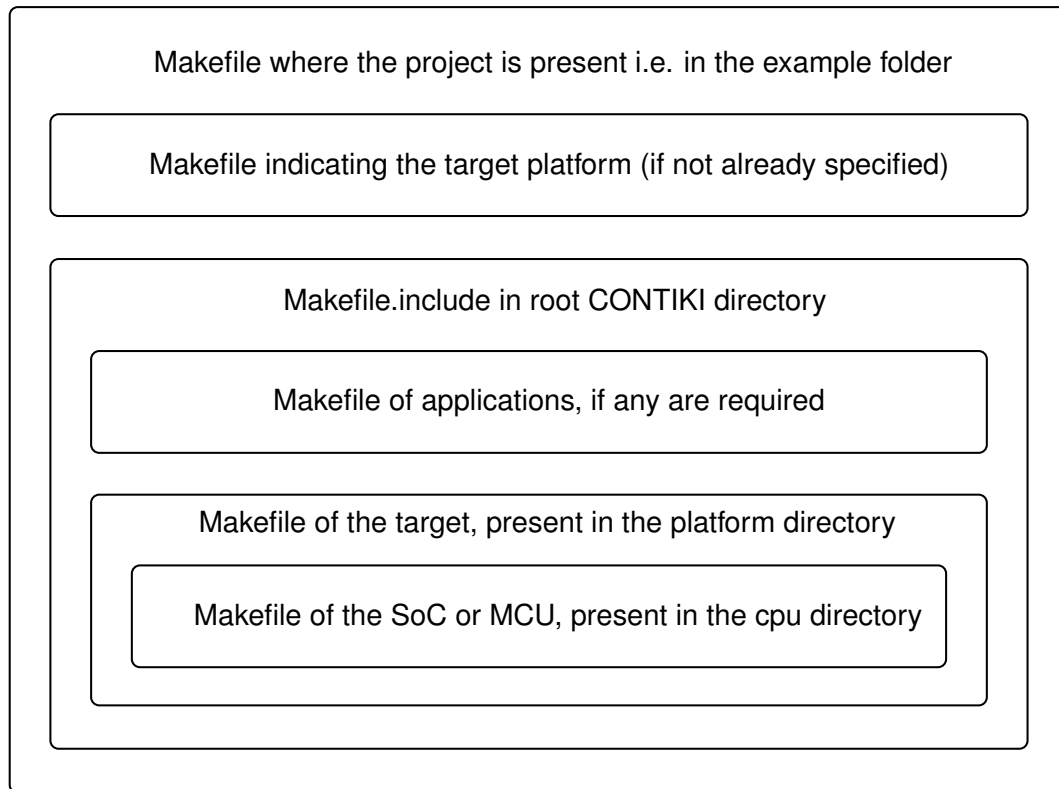


Figure A.1: Structure of Makefile inclusion in Contiki OS to form an example specific one

file.include' glues together all the required components of Contiki and provides the default implementation of compiling and linking. The target makefile in the specific platform directory is included here. In 'makefile.TARGET' the source files present in this directory are added, any Contiki modules required are added and the SoC or MCU makefile in the specific directory is added. The SoC or MCU makefile adds all the source files present in the CPU directory, specifies the command for compiling the code, linking the objects generated, uploading the executable binary or hex file.


The makefile in the example folder is where the make command is called. The operations that can be performed with this make command depends on the makefile. Usually the operations are cleaning (removing the object and binary files), compiling the source files into object files, linking these object files to create an executable file, creating a binary file from this executable file, uploading the binary to the SoC to start execution and so on. For the nrf51822 SoC additional operations of uploading the SoftDevice and erasing the flash are supported.

Chapter B | Advertisement Logger's Implementation

B.1 Scanning BLE Advertisements

According to the Bluetooth 4.0 Core specifications, an advertisement event consists of an advertising device periodically send advertisement packets. The interval of these advertising events can range from 20 ms to 10 s. In each of these advertising events an advertiser sends an advertising packet in each channel in an interval of 10 ms starting with channel 37. The objective of a BLE advertisement scanner would be to be able to receive the packets from at least one channel in an advertisement event, while saving power. To achieve this trade off, the radio duty cycles between receiving and disabled state, while being in the next advertising channel every time it is switched on. The total time of this periodic event is known as the *Scan Interval*, while the time the radio is on is known as *Scan Window*. The figure* B.1 depicts this process.

BLE Advertising

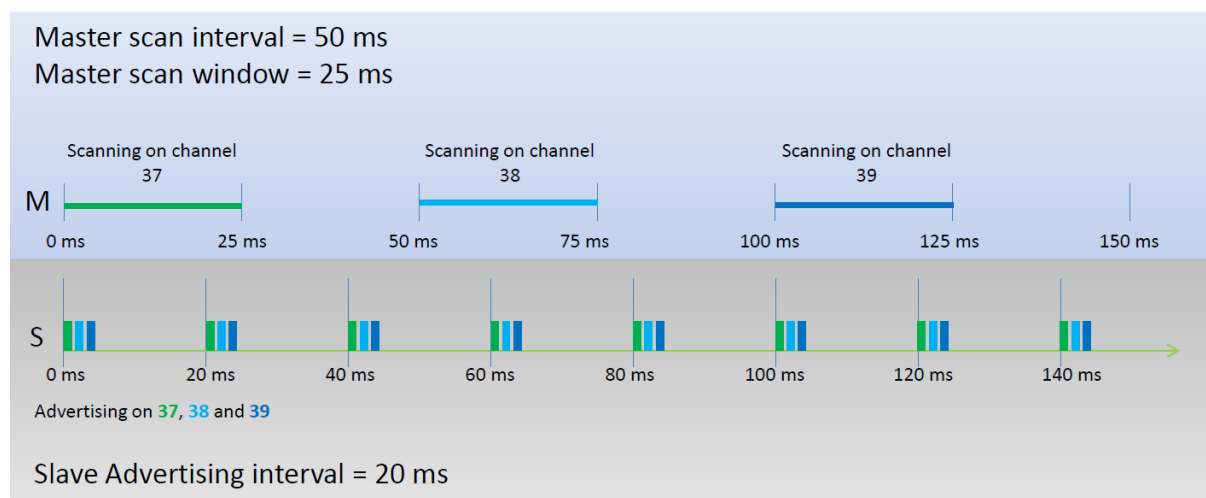

From this we can see that the following advertising packets will be picked up by the scanning device: $t=0$ ch=37, $t=20$ ch=37, $t=60$ ch=38, $t=100$ ch=39 and $t=120$ ch=39.

Figure B.1: Scanning BLE advertisements

*<https://devzone.nordicsemi.com/question/2535/what-is-the-minimum-time-for-a-app-and-a-peripheral-to-create-a-connection/>

B.2 Software Architecture

The following flow charts explain the software architecture of the *Advertisement Logger*.

B.2.1 Main Function

The execution of the program starts with the main function after reset as depicted by figure B.2. Note that the radio is initialized to continuously receive packets once it has started while also measuring the received signal strength RSSI.

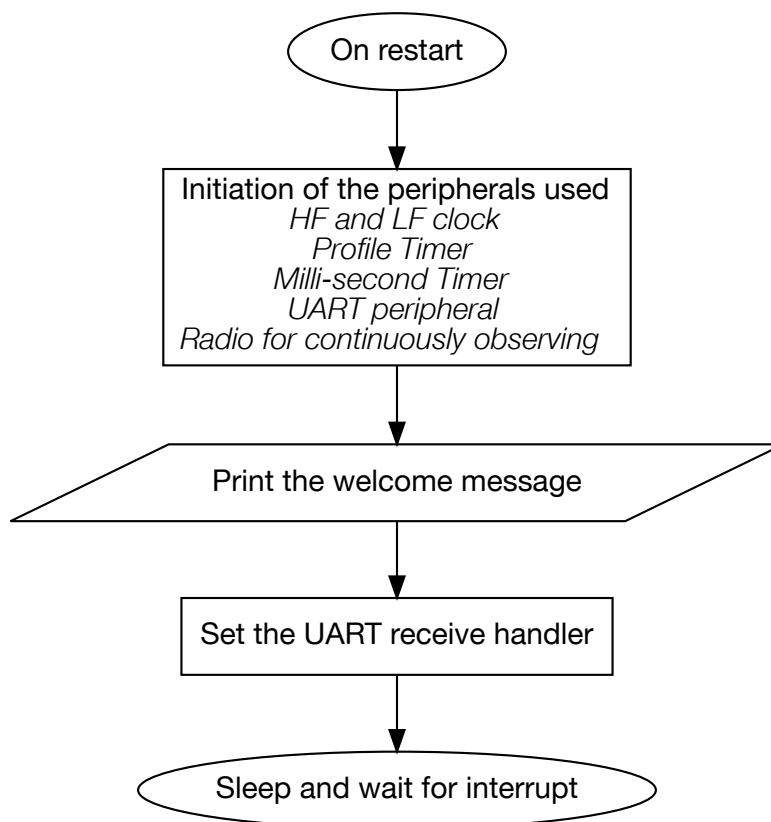


Figure B.2: Main function flowchart

B.2.2 UART String Receive Handler

The UART String Receive handler which gets a string sent to the SoC through an unsigned character pointer checks if the string is either START or STOP so that the scanning of the advertisements can be started or stopped respectively.

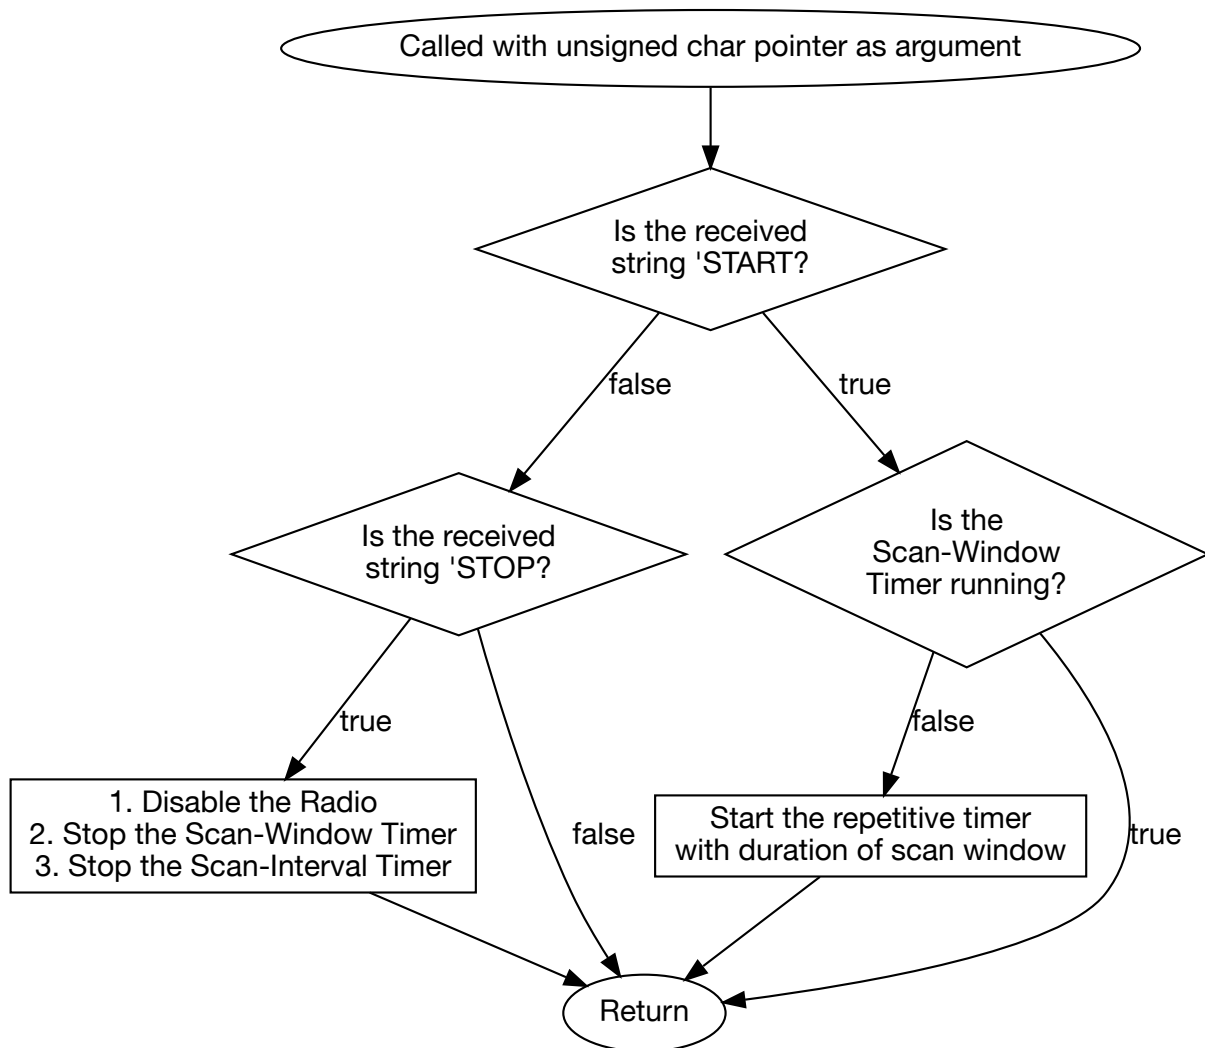


Figure B.3: UART string receive handler flowchart

B.2.3 Scan Interval Timer Handler

The scan interval timer is a repetitive timer with an interval equal to the scan interval. At the beginning of the scan interval this function performs 5 different tasks as shown in figure B.4.

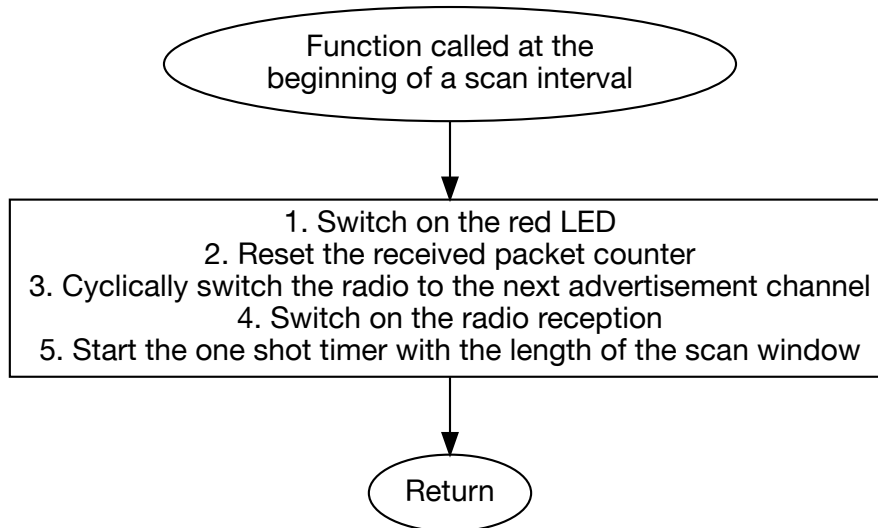


Figure B.4: Scan interval timer handler flowchart

B.2.4 Scan Window Timer Handler

The scan window timer is a single shot timer with an interval equal to the scan window. At the end of the scan window this function performs 3 different tasks as shown B.5.

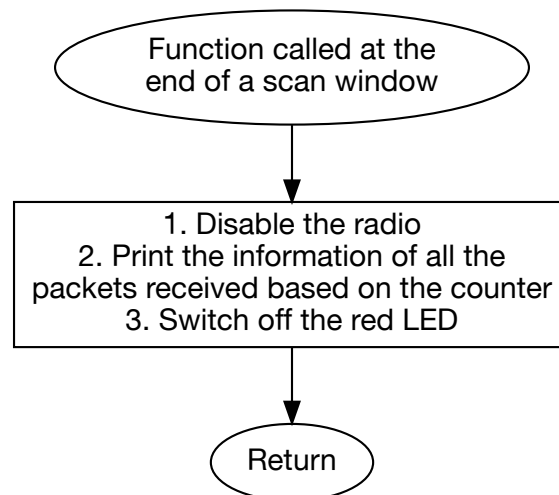


Figure B.5: Scan window timer handler flowchart

B.2.5 Radio Interrupt Routine

The radio peripheral is configured such that the end of a packet and the end of RSSI measurement trigger the interrupt. At the end of a packet, the packet's data is collected if there is space in the buffer. At the end of the RSSI measurement the RSSI value is saved. Note that when receiving a packet the 'end of RSSI measurement' event happens before the 'end of packet' event.

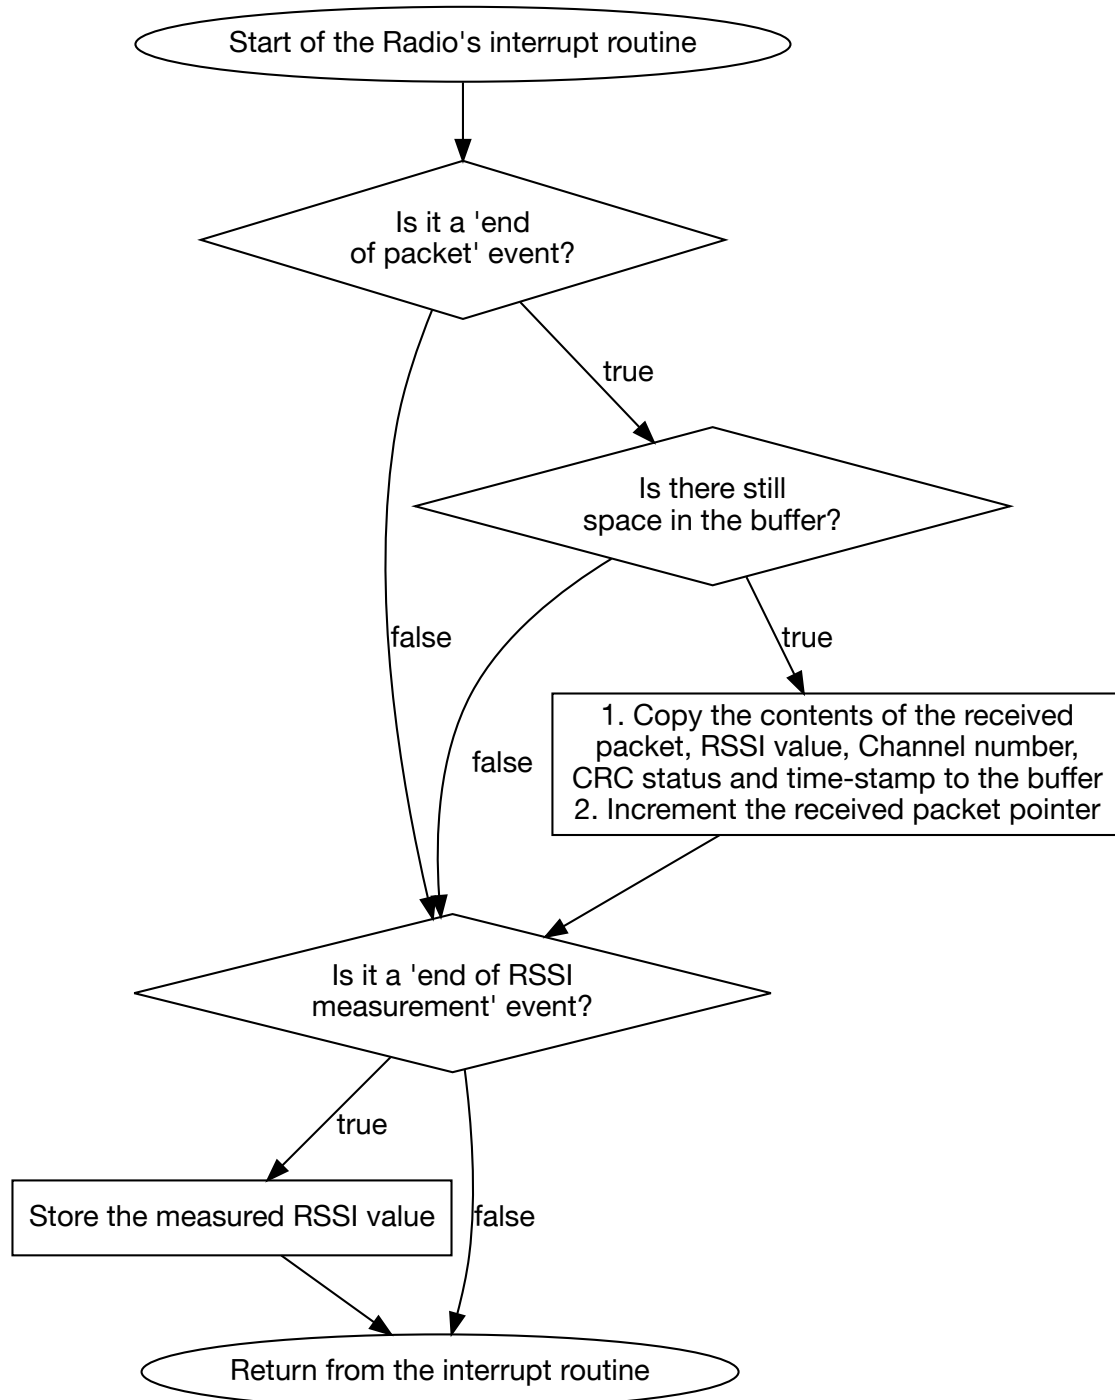


Figure B.6: Radio interrupt routine flowchart

Chapter C | Appendix | BLE SoC Comparison

The dense table in the next page compares many different parameters of the BLE SoCs available. This table was compiled in the first half of 2014. Because of the high pace at which the industry around BLE is progressing, many details here might not be accurate as time progresses.

The legend for the table is

- NA : The information is not available
- : The feature is not available

Platform	Unit	TI CC2540/1	CSR1001/ CSR1000	NordicSemi nRF51822	DialogSemi DA14580	Broadcom BCM20732	Quintic 9020	Lapis ML7105
Processor		8051	16 bit proprietary	Arm Cortex M0	Arm Cortex M0	Arm Cortex M3	Arm Cortex M0	Arm Cortex M0
Flash size	kB	128/256	64 (ROM)	128/256	32 (OTP)	NA	NA	64
RAM size	kB	8	64	16	42K SRAM & 8K Retention RAM	NA	NA	12 User code, 16 Data
RX Sensitivity	dBm	-93	-92.5	-93	-93	NA	-95	-85
TX Max Power		4	7.5	4	NA	NA	NA	3
GPIO		21	32	31	32	NA	31	
ADC		12 bit, 8 chl, up to 30 kHz	10 bit, 3 ch, up to 700 Hz	10 bit, 8 ch, upto 14 kHz	10 bit	Yes	Yes	-
I2C		1, if not USB	1	2	1	1	Yes	1
SPI		-	1	2	1	1	Yes	1
UART		2	1	1	1	1	Yes	1
USB		Full-Speed	-	-	-	-	-	-
DMA		5 Channel	1 channel	16 PPI,No DMA	NA	NA		-
Timer 32 bit		-	-	1				
Timer 16 bit		1	-	2	2+wakeup timer			
Timer 8 bit		2	-	-				
Other peripherals		OPAMP, Comparator, WDT, AES Encryption	AES, LED PWM	AES, WDT, Internal DC/DC regulator, RNG QDEC, 4 PWM channels,	AES, WDT, Internal DC/DC regulator, QDEC	DAC	DC/DC Regulator	AES, WDT
Active RX	mA	19.6	16	13	3.8	NA	8	9
Active TX at 0 dBm	mA	27	16	10.5	3.8	NA	8	9
Idle	mA		1	275 uA/MHz				3
Processor Off	uA	235						
RTC Timer on	uA	0.9	1.5	2.3 uA	0.6			2.9
External Interrupt	uA	0.4	0.4	0.5	0.6			0.7
Package		40 pin QFN	56 pin QFN	48 pin QFN	48&40 pin QFN, 34 WLCSP	32 pin QFN		WQFN32
BLE stack		Free, from TI	From CSR	From NordicSemi	Integrated in ROM	Yes, already in ROM		
Support Forum		TI E2E Community		Nordic DevZone	support.dialog- semiconudctor.c om/			
IDE to use		IAR Studio	Proprietary IDE	Keil, Eclipse+GCC	Keil	NA		
Development Board		CC2540DK, CC2540EMK	DK- CSR1000- 10048	nRF51822-EK	DA14580 Motherboard + WCSP or QFN daughterboards	BCM92073 2_BLE_KIT		
Price of Dev Board		101	300	108	NA	166		
Price of IC (single IC)	\$	5.62	3.1	3.84	NA	NA	NA	NA
Price of IC (bulk quantiy)	\$	2.59	NA	1.91	NA	NA	NA	NA

Chapter D | Data Acquired

The entire data acquired and results computed for both High-Throughput test and Request-Response test can be found in the tables in the following pages.