

Early Earthquake and Tsunami Warning Viewer

AQA A-Level Computing NEA Report

Yicheng Shao (Eason)

Candidate Number: 7616

15th March 2025

Abstract

Give a brief summary outline of your project.

©2024–2025 Yicheng Shao (Eason).

This work is licensed under a CC BY-NC-ND 4.0 licence.

This work is formatted using X_ELATEX.

The references are managed using JabRef [36] and compiled using BibLATEX.

The source code is available at [GitHub](#) EasonSYC/nea-report .

The relevant program source code is available at [GitHub](#) EasonSYC/EEETWV , licensed under the MIT Licence.

Contents

1 Analysis	8
1.1 Background Information	8
1.1.1 The Early Earthquake Warning System	8
1.1.2 Earthquake Terminology	8
1.2 Problem Area	9
1.3 Client and End User	9
1.4 Research Methodology	10
1.4.1 Client Interview	10
1.4.2 Existing Applications and Solutions	11
1.4.2.1 Supported Platforms	11
1.4.2.2 Earthquake Monitoring	11
1.4.2.3 Configuration Options	13
1.4.2.4 GUI Analysis	13
1.5 Features of proposed solution	16
1.6 Critical Path	18
1.6.1 Part 1. NIED and DM-D.S.S. API/WebSocket Connection	18
1.6.2 Part 2a. Real-time Monitoring Map	18
1.6.3 Part 2b. Past-earthquake Viewing	19
1.6.4 Part 3. Joint functionality	19
1.6.5 Part 4. Setting page for customisation	19
1.6.6 Part 5. Additional functionalities	19
1.7 Requirements Specification	20
1.8 Initial Modelling	20
1.8.1 Colour Scheme to Use	22
1.8.2 Details to Display	22
2 Design	25
2.1 Data Structures/Data modelling	25
2.1.1 External Data Sources	25
2.1.1.1 NIED Data Source	25
2.1.1.2 DM-D.S.S. Data Source	36
2.1.2 OOP Model	49
2.1.3 Algorithms	49
2.1.3.1 Wavefront Calculation	49
2.1.3.2 Shake Detection	52
2.2 User Interface	52
2.2.1 Real-Time Monitoring Screen	54
2.2.2 Past Earthquakes	55
2.2.3 Customisation Page	55
2.2.4 Joint Functionalities and Technicalities	55
2.3 Hierarchy Chart	56
2.4 Hardware & Software Requirements	56

3 Technical Implementation	59
3.1 Key Code Segments	59
3.1.1 Data structures	59
3.1.2 Modularity	59
3.1.3 Defensive Programming/Robustness	59
4 Testing	60
4.1 Test Strategy	60
4.2 Testing Video	60
4.3 System Tests (against original requirements' specification)	60
5 Evaluation	61
5.1 Requirements Specification Evaluation	61
5.2 Independent End-User Feedback	61
5.3 Improvements	61
A Code Listing	63
B Use of AI	70
C Bibliography	73

List of Tables

1.1	Comparison of target users and clients	9
1.2	Supported platforms of existing solutions	11
1.3	Feature comparison in monitoring of existing solutions	11
1.4	Feature comparison in configuration and customisability of existing solutions	13
1.5	Measurement methods	20
1.6	Requirements for Part 1	20
1.7	Requirements for Part 2(a)	21
1.8	Requirements for Part 2(b)	21
1.9	Requirements for Part 3	21
1.10	Requirements for Part 4 and 5	22
1.11	Colour Scheme for Application	23
2.1	Data available in 'Kyoshin' monitor	26
2.2	Sensors available in 'Kyoshin' monitor	27
2.3	Initial values for f_H	30
2.4	Initial values for f_S	31
2.5	Initial values for f_V	32
2.6	Necessary access permissions for DM-D.S.S.	37
2.7	Standard errors for API.	38
2.8	Errors for <code>socket.start</code>	41
2.9	Errors for WebSocket connection.	47
2.10	Distance intervals in JMA 2001.	51
2.11	Hardware Specification for App	57
4.1	Table of Tests.	60
5.1	Table of Evaluation.	61
5.2	Table of Feedback.	61

List of Figures

1.1	Feature introduction of JQuake	12
1.2	Feature introduction of Quarog	12
1.3	Customisable colour scheme of KEVI	13
1.4	Customisability of Quarog	13
1.5	Past earthquake pages for KEVI and SREV	14
1.6	Display of observation stations and regions of KEVI	14
1.7	Intensity tree on side panel of KEVI	15
1.8	Sidebar options of JQuake	15
1.9	Real-time and tsunami pages of KEVI	16
1.10	Real-time and tsunami pages of SREV	17
1.11	Main page for JQuake	17
1.12	JMA Colour Scheme for Measured Intensities	22
1.13	JMA Colour Scheme for Tsunamis	23
2.1	A comparison of the K-NET, F-net and Hi-net.	26
2.2	Distribution of the sensors of different nets.	27
2.3	Sample GIF image achieved from 'Kyoshin' Monitor	27
2.4	Scale colours of different measurements	28
2.5	The hue scale in HSL/HSV encoding	29
2.6	The values of (H, S, V) against pixel row r	29
2.7	The values of (H, S, V) against normalised height h	30
2.8	The fit result for $f_H : h \mapsto H$	31
2.9	The fit result for $f_S : h \mapsto S$	32
2.10	The fit result for $f_V : h \mapsto V$	33
2.11	Flow of data in NIED data sources	35
2.12	Relation between abstract variables	35
2.13	Colour generated using fitted functions	36
2.14	Control panel for API Keys	36
2.15	Class Diagram for Kyoshin Monitor data objects	49
2.16	Class Diagram for HTTP data objects	50
2.17	Class Diagram for WebSocket data objects	51
2.18	Shake detection flowchart and diagram.	53
2.19	Design of GUI for Real-Time Page.	54
2.20	Design of GUI for Past Earthquakes Page.	55
2.21	Design of GUI for Customisation Page.	56
2.22	Hierarchy chart of the whole application	57
B.1	Prompt to ChatGPT in [58], Part 1	70
B.2	Prompt to ChatGPT in [58], Part 2	71
B.3	Prompt to ChatGPT in [58], Part 3	72

List of Listings

2.1	ok status for API	37
2.2	error status for API	37
2.3	Cursor token sample JSON.	38
2.4	Contract list sample JSON.	39
2.5	Socket start sample request JSON.	40
2.6	Socket start sample response JSON.	40
2.7	Socket list sample response JSON.	42
2.8	Earthquake parameter sample response JSON.	43
2.9	Telegram list sample response JSON.	44
2.10	Past earthquake list sample response JSON.	46
2.11	WebSocket Ping JSON.	46
2.12	WebSocket Pong JSON.	47
2.13	WebSocket Error JSON.	47
2.14	WebSocket Data JSON.	48
2.15	JMA 2001 Wave Travel Tables.	51
A.1	Code for Polynomial Fit of Colour	68
A.2	Code generated by ChatGPT in [58]	69

List of Algorithms

1	Algorithm for f^{-1}	34
---	------------------------	----

Chapter 1

Analysis

Overview

This section introduces the background for the EEW system in place in Japan, consisting of EEW Forecasts and EEW Warnings, and together with the tsunami warnings. Concepts such as intensities, magnitude and epicentres are defined. Two key users and targets are identified, specifically passionate geologists and earthquake-sensitive industries, each having different requirements. A client in the former was interviewed, together with a thorough analysis and comparison of some existing solutions such as SREV, JQuake, KEVI and Quarog. A detailed requirement specification and the critical path is also outlined, consisting of DM-D.S.S. parsing, real-time monitoring, past-earthquake viewing and joint functionalities.

1.1 Background Information

1.1.1 The Early Earthquake Warning System

Earthquake is one of the most common natural disasters in the whole world, and direct consequences of earthquakes include tsunamis which could be catastrophic.

Japan, sitting on the intersection of the Eurasian, the Philippine and the North-American plates, is the countries with most earthquakes. Historically, the Great Kantō Earthquake (関東大震災) in 1923, the Great East Japan Earthquake (東日本大震災) in 2011 (a.k.a. the Tōhoku Earthquake) and the recent 2024 Noto Peninsula Earthquake (能登半島地震) all caused hundreds of deaths, both due to the result of the earthquake(s) and the resulting tsunami.

To provide protection to its residents, the Japan Meteorological Agency (JMA, 気象庁), together with the National Research Institute for Earth Science and Disaster Resilience (NIED, 防災科研) placed thousands of **earthquake sensors** across Japan (the Hi-net, the K-NET, the KiK-net and the F-NET), with several of them lying deep in the sea bed, measuring displacement, velocity and acceleration, which are connected to multiple servers, including two located in Ōsaka and Tōkyo.

Using data obtained from the sensors, computers do some complicated algorithms (mentioned below) to send out **early earthquake warnings (EEWs, 緊急地震速報)** automatically within milliseconds. There are two types of EEWs:

1. **EEW (Forecast, 予報).** Sent out to **highly-dependent industries** (e.g. rail industry, power plants) and **subscribed users**, when maximum intensity level of more than 3, or a magnitude of more than 3.5 is expected.
2. **EEW (Warning, 警報).** Sent out to **everyone** via TV, Radio, Mobile Phone, SMS, etc., when a maximum intensity level of more than 4 is expected.

After the earthquake, JMA staff will determine the location and severity of tsunami warnings to be issued, if necessary.

1.1.2 Earthquake Terminology

- **Intensity (震度).** The intensity describes the intensity vibration of a point due to an earthquake. It is not unique to an earthquake - **different places can have different intensities** due to the

distance to the epicentre, and intensity will also change over time. JMA measures intensity using **9 levels: 1, 2, 3, 4, 5–, 5+, 6–, 6+ and 7** in increasing order.

- **Magnitude/Scale.** The magnitude of an earthquake describes the energy released in the earthquake in a logarithmic scale. **It is unique to an earthquake.**
- **Epicentre/Hypocentre.** The epicentre is the surface point directly above the true centre of the earthquake.
- **Focal Depth.** The focal depth is the depth of the true centre of the earthquake.
- **P-Wave and S-Wave.** These are seismic waves, sourced from the true centre of the earthquake, travelling at different speeds, with Primary (P)-Wave travelling faster and Secondary (S)-Wave travelling slower.

1.2 Problem Area

The main goal of this application is to provide a visualisation of the earthquake/tsunami related data feed(s) provided by JMA's affiliated institution, Disaster Mitigation Data Send Service (DM-D.S.S), and some other data feeds as well. There are numerous apps providing a list of recent earthquakes, the real-time data measured by the sensors, and the real time earthquake warning displayed on a map, but rarely are there good apps that combine all those features together satisfactorily, with just the necessary features the author needs.

Some applications are no longer being updated due to change in the user's policy of the related data feed. Furthermore, most of the apps available are only in Japanese, not in English or my home language Chinese, which can create trouble for the author to understand.

1.3 Client and End User

The primary target of this application will be passionate geographers and geologists who are interested in the study of earthquake observations and predictions. The age group of this vary all the way from primary-school students to adults, including the author who has been amazed by the technology since the age of 12. They could take any employment, ranging from students to full-time jobs. Their proficiency usually varies, since there are people new to this field who probably does not have much knowledge, so the interface of the application should be relatively user-friendly and understandable, hiding unnecessary technical complexities.

Another target client could be industries which highly rely on earthquake predictions due to the risk imposed by earthquakes. High-speed railway and nuclear power plants are good examples of this. Therefore, the staff in charge monitoring will usually have higher proficiency and would like more detailed data of the earthquake. However, they will only need the necessary data from earthquakes happening close to them and only require intensity data of the point in interest (e.g. the power plant). To put this into context, an earthquake happening 1000 km away from them does not need to be fed into their system, while they would like to see the intensity of the shock and the arrival time of the seismic waves to decide the actions. In fact, the author really likes investigating on the rail industry, whose infrastructure could be greatly affected by earthquakes.

Table 1.1 compares relative features of these two target users/clients.

Feature	Primary Target	Secondary Target
Description	Passionate Geologists	Earthquake-Sensitive Industries
Age	Varies (Middle School – Adults)	Work Age
Reason	Monitor Live & Latest Earthquakes	Monitor Risks to Infrastructure
Proficiency	Varies (Beginner – Amateur)	Trained Professional
General Requirements	Monitor Overall Movement	Alert intensity and arrival time at certain location

Table 1.1: Comparison of target users and clients

1.4 Research Methodology

1.4.1 Client Interview

The author interviewed my friend Wesley Ma, who is a passionate geologist on earthquake studies and also monitor earthquakes regularly.

1. *Which earthquake monitoring apps do you use?*

Response: JQuake, SREV, Quarog, KEVI, Kyoshin-Monitor (Support discontinued), Kiwi Monitor (Support discontinued)

2. *Do you subscribe/pay to services such as DM-D.S.S. to use earthquake monitoring apps, and do you think it is worth the price?*

Response: Yes. However, DM-D.S.S. is a little expensive. However, the price becomes more affordable considering the information provided by the subscription.

3. *Do you watch YouTube livestreams on earthquake monitoring?*

Response: I do not usually watch the live streams, as almost no one who has already has a monitoring app will use the stream. They provide mostly the same information as the applications, just real-time streaming the windows.

4. *Why do you use earthquake monitoring apps?*

Response: To monitor the earthquake. This is derived from my interest in broadcasting culture in Japan. This eventually led me to be intrigued with the development of earthquake monitoring technologies and theories in Japan.

5. *How often do you use earthquake monitoring apps (e.g. all the time/after school/only after big earthquakes)?*

Response: After big earthquakes. But I usually open one or two apps for all-day monitoring to catch potential major (or medium) earthquakes.

6. *Describe the advantages and disadvantages of each of them, mentioning the specific features.*

Response:

- SREV is a good one, but it is only available in a browser with no app.
- Kyoshin-Monitor and Kiwi Monitor are relatively more stable, but the source is not the same as that from the former two apps, and its support is also discontinued.
- Quarog has weak response time and interacting interface.
- JQuake is the most developed app, which includes nearly all functions that can be thought of. However sometimes the connection of WebSocket is unstable.
- KEVI does not have the sound files configured by default. Some information are not displayed clearly enough.

7. *What features do you use the most/least?*

Response: Basic earthquake notifications, and should be including sufficient and prompt information.

8. *What features are redundant in the earthquake monitoring apps you use?*

Response: KEVI has a weather monitoring function, which could be redundant. But that could be caused by the different purposes of the app. Hence, no further comments. It is not a bad thing.

9. *What are the critical features of an earthquake monitoring app?*

Response: To provide accurate, prompt and detailed information according to the source released by the JMA, the information display interface should be easy to read and understand. This is not only helping the people who like to monitor, but more importantly, provides the easiest way to the people who really need to seek information to minimise the harm brought by earthquakes and successive disaster.

10. *What additional features would you like to have in those existing apps?*

Response: Summarise all the useful features from different apps into one app. Stable connection. Nothing else.

1.4.2 Existing Applications and Solutions

Based on the applications the author uses and the feedback from interviewee, there are the following commonly-used applications:

- JQuake
- Scratch Real-time Earthquake Viewer (SREV), available in compiled form at [kotoho7/scratch-realtime-earthquake-viewer-page](#)
- Kyoshin EEW Viewer for Ingen (KEVI), available at [ingen084/KyoshinEewViewerIngen](#)
- Quarog

1.4.2.1 Supported Platforms

Supported platforms of those apps are listed in Table 1.2. In particular, note that SREV is a web-based and GitHub Pages-hosted application therefore supporting all platforms. KEVI is written in .NET Framework and supports the second most platforms, with JQuake not supporting Linux and Quarog only supporting Windows.

Platform	JQuake	SREV	KEVI	Quarog
Windows	✓	✓	✓	✓
macOS	✓	✓	✓	
Linux	✓	✓	✓	
Android/iOS		✓		

Table 1.2: Supported platforms of existing solutions

1.4.2.2 Earthquake Monitoring

An overview feature table of monitoring is included in Table 1.3. In particular, note that due to the nature of SREV being Scratch-programmed and web-based, it reached a special agreement with DM-D.S.S. to use the API without the need of all users paying for this, since it is hard to integrate such function into a web application.

Quarog is a relatively new application and only supports basic functionalities of EEW Viewing and past earthquake listing, as shown in Figure 1.2. JQuake is solely dedicated to earthquake and tsunami monitoring as shown in Figure 1.1, while KEVI has features like rain clouds map and natural disaster warning which is beyond the scope of this analysis (which is a burden to users only requiring earthquake monitoring and a waste of storage space).

It is worth noting that for SREV, DM-D.S.S. is integrated with special permission with no login required. For JQuake, although it has tsunami warnings/special warnings, the tsunami forecast is not available, since they use a different data source.

Feature	JQuake	SREV	KEVI	Quarog
NIED Real-time Shake Support	✓	✓	✓	
DM-D.S.S. WebSocket Support	✓	✓	✓	✓
Real-time Sensor Data	✓	✓	✓	
Vibration Alert	✓	✓	✓	
Past Earthquake List	✓	✓	✓	✓
Past Earthquake Details		✓	✓	✓
Tsunami Warning	✓	✓	✓	
Real-time EEW	✓	✓	✓	✓
Calculated Seismic Wavefronts	✓	✓	✓	✓
User-Defined Key Monitor Point	✓		✓	
Sub-Map for the Okinawa Area	✓		✓	
Replay	✓		✓	

Table 1.3: Feature comparison in monitoring of existing solutions

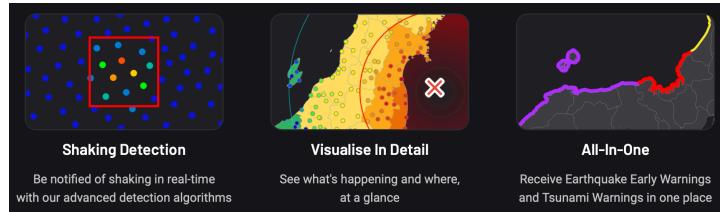


Figure 1.1: Feature introduction of JQuake, screenshot from website



Figure 1.2: Feature introduction of Quarog, screenshot from website
Top-left: Past earthquake information; Top-right: Real-time EEW;
Bottom-Left: Past earthquake list; Bottom-Right: Details of EEW

1.4.2.3 Configuration Options

There are also a variety of configuration options available for all apps, as listed in Table 1.4. Both KEVI and Quarog supports the adjustment of the colour theme, and Quarog even supports changing the style of how blocks are displayed and coloured as shown in Figure 1.3 and 1.4. Playing a sound on the speaker is also common among the apps to remind the user of earthquakes.

Feature	JQuake	SREV	KEVI	Quarog
DM-D.S.S. Login	✓		✓	✓
Sound Alert	✓	✓	✓	✓
System Notification			✓	
Colour Theme			✓	✓
Map Colouring Style			✓	✓

Table 1.4: Feature comparison in configuration and customisability of existing solutions

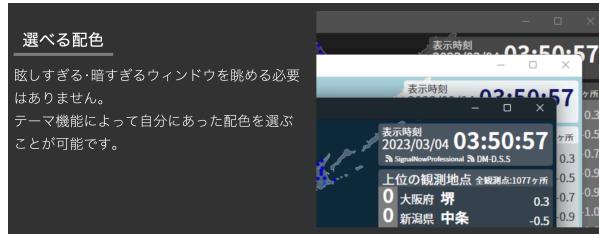


Figure 1.3: Customisable colour scheme of KEVI, screenshot from website



Figure 1.4: Customisability of Quarog, screenshot from website

1.4.2.4 GUI Analysis

All applications are similar in a way, that their past earthquakes list is displayed on a sidebar.

For Quarog and KEVI, an earthquake can be selected from the sidebar to view the details of, as in Figure 1.5. They will both colour on the map the maximum observed intensities by regions. While KEVI chooses to display the regions as colours and also provide an overlay of the observed intensities by observation stations (which will only appear after zoomed in enough, as in Figure 1.6), Quarog chooses to have a separate button to switch between display of regions, and the display of observation stations.

In particular for KEVI, there is also a tree structure on a panel displaying the details of the observed intensities by hierarchy structure, consisting of prefectures, skipping regions, then districts, then the exact observation stations, as shown in Figure 1.7.

As for SREV, the selected earthquake will be displayed on the map and coloured by region, but no information on observation stations will be provided. For JQuake, it is impossible to select a particular earthquake, but only possible to replay the past earthquake, and jump to an external weather service to view the details, as shown in Figure 1.8.

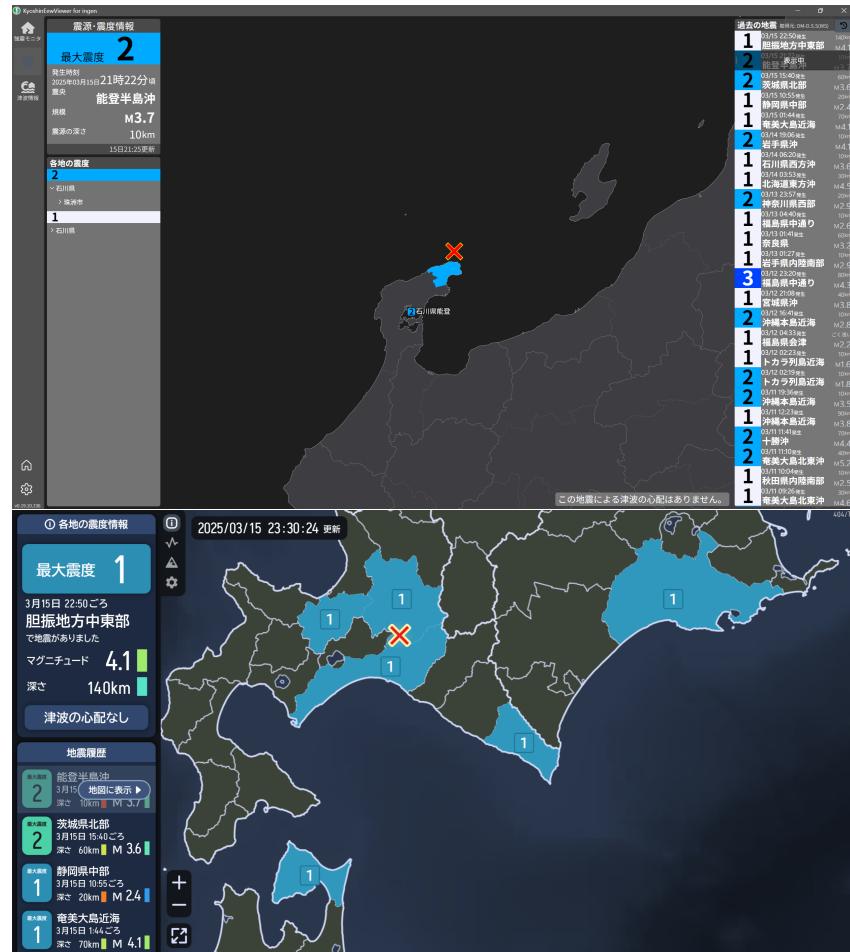


Figure 1.5: Past earthquake pages
Top: KEVI; Bottom: SREV

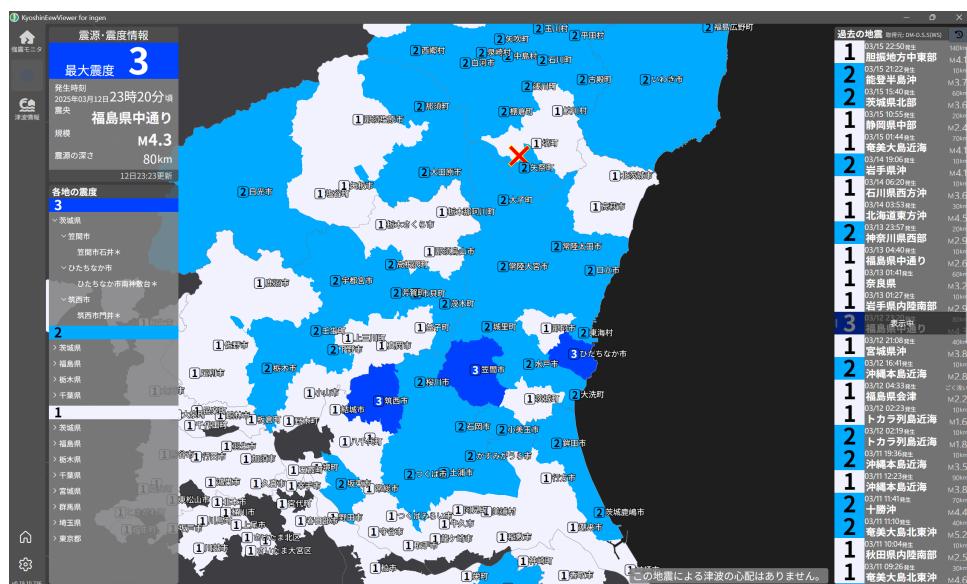


Figure 1.6: Display of observation stations and regions of KEVI



Figure 1.7: Intensity tree on side panel of KEVI



Figure 1.8: Sidebar options of JQuake
 Globe: Link to Yahoo! weather service page for earthquake;
 Time-lapse: Replay of earthquake

A significant difference between the applications is how they split the different functionalities. For KEVI and SREV, there are separate pages for real-time monitoring, past-earthquake viewing and tsunami warnings, as shown in Figure 1.9 for KEVI, and Figure 1.10 for SREV.

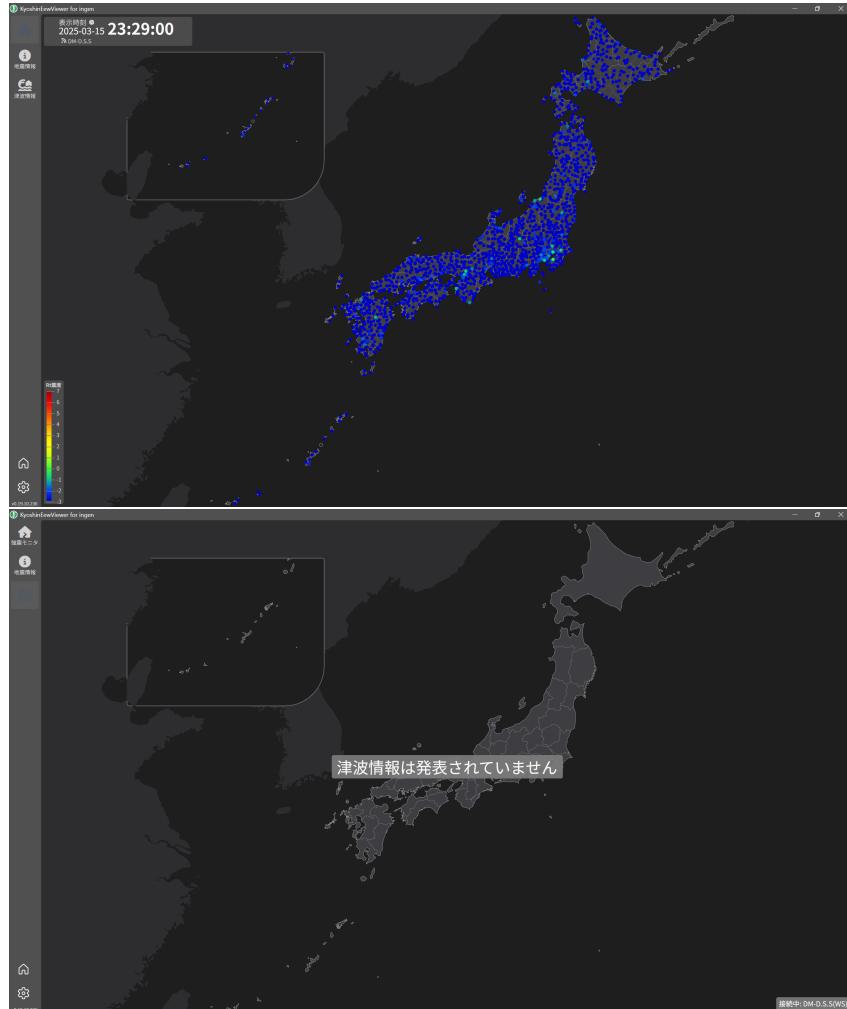


Figure 1.9: Real-time and tsunami pages of KEVI

On the contrary, since JQuake's map only supports replay and real-time functionality (EEW and tsunami), there is only one page, as shown in Figure 1.11. Quarog will automatically switch the map to display EEWs if EEWs are issued, and change the sidebar to display the predicted intensities of EEWs, as shown in Figure 1.2.

1.5 Features of proposed solution

Based on the potential user/client interview results, and the research into the existing solutions, the following key features should appear in the solution, since they are essential to earthquake monitoring applications:

1. DM-D.S.S. Login functionality (for the data source)
2. Real-Time Sensor Shake Intensity Data
3. EEW Visualisation (w/ Calculated Seismic Wavefronts)
4. Past Earthquake List (w/ Option to review details)
5. Tsunami Warning Visualisation

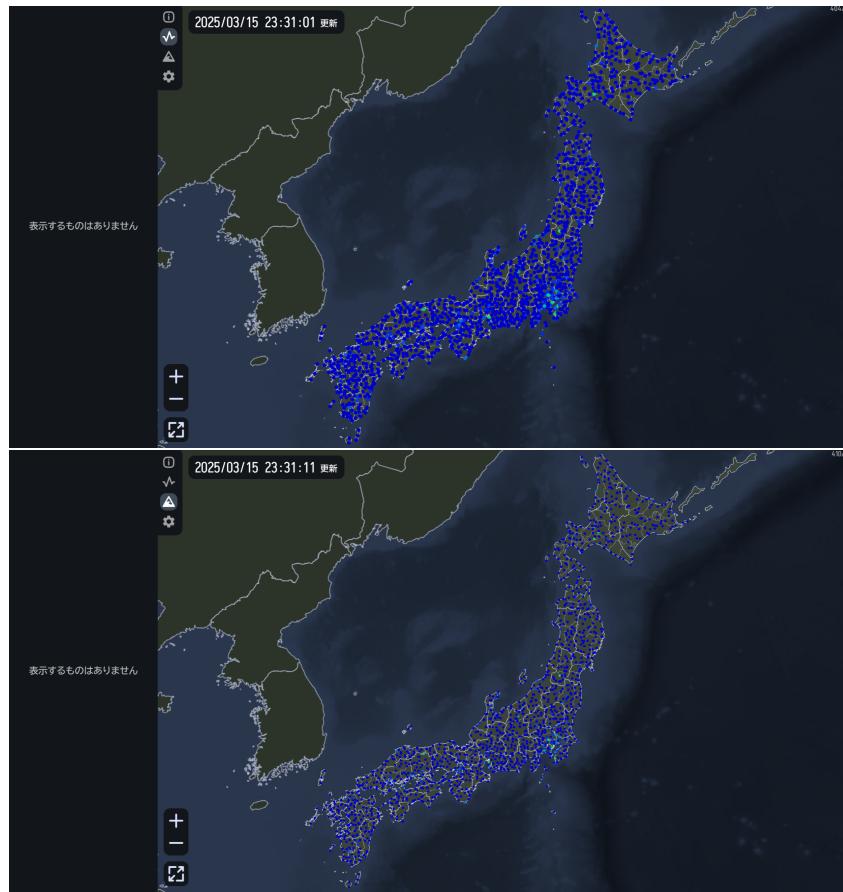


Figure 1.10: Real-time and tsunami pages of SREV

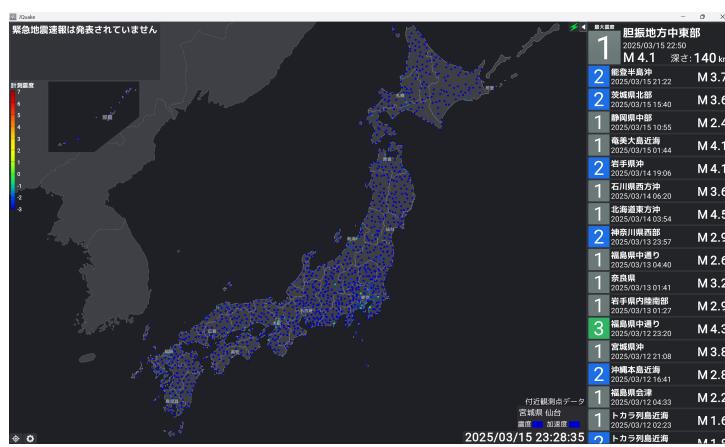


Figure 1.11: Main page for JQuake

However, due to the limitation of time, the following functionalities are excluded from the scope of this project, which include mostly the customisation parts, ranked in decreasing importance:

1. Shake detection algorithm (based on real-time sensor data)
2. User-Defined Key Monitor Point
3. (Customisable) Sound Alert
4. Customisable Colour Theme

The following features are considered too complicated for the scope for this project and the time constraints, hence not considered:

1. Replay (due to a server needing to store past data)
2. Sub-Map for the Okinawa Area (due to the difficulty in implementation)

With those key features implemented, the application should mirror all essential functionalities of an earthquake monitoring application, as compared to the four existing solutions above.

1.6 Critical Path

The functionality of this application can essentially be divided into $1 + 2 + 1 + a + b$ steps, where the 1 is to receive information from the API/WebSocket provided by DM-D.S.S. and NIED, and 2 is to, briefly saying:

1. Real-time Monitoring: Produce a real-time map to monitor real time vibration and plot real-time EEW/tsunami warnings
2. Past-earthquake Viewing: Produce a menu to select an earthquake to display information on the map.

The next 1 is to merge these two functions, specifically the functionality to switch back to the real-time monitoring option immediately when a new EEW is released (to make sure the user does not miss any information on real-time EEWs while looking at past earthquake information).

The a is to implement a setting page for customisation and some additional features, and the b is to implement additional functionalities that are excluded from this project, but could be completed if there is time.

1.6.1 Part 1. NIED and DM-D.S.S. API/WebSocket Connection

1. Investigate into the list of APIs/WebSockets that should be used by the application.
2. Investigate into patterns of the response data, and design the classes/DTOs using correct OOP patterns such as inheritance and composition.
3. Implement classes/DTOs to convert the information into C# objects.
4. Implement classes/DTOs to convert telegrams into C# objects.
5. Use API Key to test the functionality of this system.
6. Implement OAuth 2 login functionality to reduce complexity and increase security.

1.6.2 Part 2a. Real-time Monitoring Map

1. Display a map in the application.
2. Extract the data from the real-time measured intensities of observation stations from the data source.
3. Display the data on the map using a default colour scheme at the correct positions.
4. Colour the monitoring points using a colour scheme on the map.

5. Investigate into and implement an algorithm to calculate seismic wave fronts, using necessary data provided by the JMA.
6. Plot and colour real time EEWs, considering special cases such as:
 - Cancellation of EEW;
 - Upgrade from EEW Forecast to EEW Warning;
 - Multiple Earthquakes (hence displaying multiple epicentres, and switching between earthquakes in details display);
 - Assumed Hypocentre (hence using a different hypocentre symbol to display).
7. Colour areas on the map with the maximum expected intensity.
8. Plot on the map the hypocentre of the earthquake, using the correct symbol.
9. Plot and colour real time tsunami warnings.

1.6.3 Part 2b. Past-earthquake Viewing

1. Plot a sidebar of a list to display path earthquakes.
2. Provide a button to refresh the sidebar, and another one to load more earthquakes.
3. Provide a functionality to choose an earthquake from the sidebar to view the detailed information on the earthquake (e.g. magnitude, epicentre, time, additional message).
4. Plot the hypocentre of the earthquake.
5. Plot the observed maximum intensities on the map by regions.
6. Plot the intensities measured by each observation station on the map.
7. Provide external link to view earthquake in the weather service provider website.

1.6.4 Part 3. Joint functionality

1. Provide sidebar to switch between real-time monitoring and past-earthquake viewing, and settings options.
2. Implement automatic functionality to switch back to real-time earthquake when an EEW/Tsunami Warning is being published.

1.6.5 Part 4. Setting page for customisation

1. Provide a text box to input the API Key, and a button to confirm the API Key.
2. Provide a button to connect and authorise with OAuth 2.0.
3. Provide a button to connect to the WebSocket.
4. Display a list of current WebSocket connections, and provide a button to refresh such list.
5. Provide two dropdown menus, to choose the sensors to display on the real-time map (all sensors, or borehole only), and the data to display (real time intensity, PGA, PGV, PGD, etc.).

1.6.6 Part 5. Additional functionalities

1. Investigate into and implement an algorithm to detect shakes based on the observed data.
2. Provide functionality to define a specific point on the map, and display the measured intensity at that point.
3. Play sound alerts when EEW/Tsunami warnings are received.
4. Provide custom sound alert settings to specify the file to the sound alert.
5. Provide custom colour theme settings to specify the colour scheme of the colouring on the map.

1.7 Requirements Specification

A detailed specification is defined here that is to be aimed to be fulfilled at the end of the project, split into four sections:

1. **NIED and DM-D.S.S. Functionality** – Corresponding to **Part 1**, in Table 1.6
2. **Real-Time Earthquake Monitoring** – Corresponding to **Part 2a**, in Table 1.7
3. **Past-earthquake Viewing** – Corresponding to **Part 2b**, in Table 1.8
4. **Joint functionalities** – Corresponding to **Part 3**, in Table 1.9
5. **Settings Page** – Corresponding to **Part 4**, in Table 1.10
6. **Additional functionalities** – Corresponding to **Part 5**, also in Table 1.10, marked with a *

Those objectives marked with an * are optional depending on time, since they are not core functionalities for the project.

The objectives here are SMART, meaning they are specific, measurable, achievable, realistic and timely.

Table 1.5 gives abbreviations for the types of testing.

Test Method	Abbr.
Unit Testing	UT
Integrated Testing	IT

Table 1.5: Measurement methods

Req. №	Description	Success Criteria	Test
1(i)	Connect to DM-D.S.S. using an API Key	Included in header for requests	UT
1(ii)	Call HTTP-Based APIs	Calls to correct URLs with specified parameters where applicable	UT
1(iii)	Connect to WebSocket Data Feed	Successful connection with regular pings/pongs	IT
1(iv)	Obtain stable connection on WebSocket	Connected for 1 hour under reliable internet connection	IT
1(v)	Parse API calls JSON into C# objects	Information parsed with correct values	UT
1(vi)	Recognise schema for JSON Telegrams	Correct JSON schema recognised	UT
1(vii)	Parse JSON Telegrams into C# objects	Parsed into correct type with correct values	UT
1(viii)	Exception handling for incorrect JSON	Exceptions thrown	UT
1(ix)	Exception handling for failed connections	Exceptions thrown	UT
1(x)	Integrated DM-D.S.S. functionalities	Correct objects created	IT
1(xi)	Connect to DM-D.S.S. using OAuth2	Access token included in header for requests	IT
1(xii)	Refresh tokens when expired using OAuth2	New access token successfully obtained with the refresh token	IT

Table 1.6: Requirements for Part 1

1.8 Initial Modelling

Some initial ideas on the applications are considered in this section, but more detailed design will be reflected in the GUI design section in the next chapter.

Req. №	Description	Success Criteria	Test
2a(i)	Display real-time observed data on map	Coloured points at correct locations	IT
2a(ii)	Display current time at the corner	Time displayed and refresh every second	IT
2a(iii)	Display details of current EEW	Details displaying correctly	IT
2a(iv)	Plot epicentre of EEW on map	Epicentre at correct position with correct symbol	IT
2a(v)	Calculate seismic wavefronts position	Correct result from dataset	UT
2a(vi)	Plot seismic wavefronts	Correct wavefronts at correct positions	IT
2a(vii)	Colour expected max. intensity of regions	Correctly coloured	IT
2a(viii)	Update/Cancel EEW when appropriate	Update reflecting on both the details and the map	IT
2a(ix)	Handle multiple simultaneous EEWs	Switch between details of EEWs at regular intervals	IT
2a(x)	Display tsunami warnings when issued	Details displaying correctly	IT
2a(xi)	Colour shorelines from tsunami warnings	Coloured at correct location	IT

Table 1.7: Requirements for Part 2(a)

Req. №	Description	Success Criteria	Test
2b(i)	Display past-earthquake side list using data from DM-D.S.S.	Displayed and updated	IT
2b(ii)	Refresh button to refresh the latest earthquakes	Loaded and displayed	IT
2b(iii)	Load more button to load extra earthquakes	Loaded and displayed	IT
2b(iv)	Display the time, location, depth, intensity and magnitude of earthquake on the side list	Correctly formatted and displayed	IT
2b(v)	Select an earthquake item from list	Selection functioning	UT
2b(vi)	Display details of selected earthquake on sidebar	Correctly formatted and displayed	IT
2b(vii)	Colour map by the maximum intensity of regions of selected earthquake	Correctly coloured	IT
2b(viii)	Plot hypocentre of selected earthquake	Correctly plotted	IT
2b(ix)	Plot observed maximum intensities of observation stations of selected earthquake	Correctly plotted and coloured	IT
2b(x)	Provide link to external weather services for details	Linked to correct website and earthquake	IT

Table 1.8: Requirements for Part 2(b)

Req. №	Description	Success Criteria	Test
3(i)	Provide sidebar to switch between real-time, past earthquake and settings	Sidebar functioning and able to switch pages	IT
3(ii)	Sidebar has an expansion/hide button to show/hide names	Button working as described	IT
3(iii)	Switch to real-time monitoring map when EEWs and tsunami warnings are issued	Page switched	IT

Table 1.9: Requirements for Part 3

Req. №	Description	Success Criteria	Test
4(i)	Provide with functionality to set API Key or connect to OAuth2 to authenticate	Authentication functioning	IT
4(ii)	Provide button to connect and disconnect from WebSocket	Button functioning	IT
4(iii)	Provide button to view a list of WebSocket connections	List displayed	IT
4(iv)	Provide button in the list to disconnect a particular WebSocket	Button functioning to disconnect	IT
4(v)	Provide dropdown menus to select sensors and data to display on the map	Correct data displayed on the real-time map	IT
4(vi)	Provide an easy-to-use GUI	Potential user gives rating of more than 7 out of 10	UT
4(vii)*	Provide page to design colour scheme	Functional design page and applied to the whole UI	UT
4(viii)*	Play sound when events happen and provide option to customise sound files	Correct sound played when required	IT
4(ix)*	Provide option to define a point on the map to monitor	Functioning as specified in Part 2a	IT
4(x)*	Display real-time shake data at a user-defined point	Display the name of the point with acceleration and intensity	IT
4(xi)*	Provide sub-map to display Okinawa Area	Map functioning as specified in Part 2	IT

Table 1.10: Requirements for Part 4 and 5

1.8.1 Colour Scheme to Use

Although most built-in applications tend to introduce their own colour schemes, the author decided to follow the standard guidance provided by the JMA [71] and use the official colour scheme, to prevent any confusion and make the application generally accessible.

Figure 1.12 shows the JMA Colour Scheme for measured intensities, and Figure 1.13 shows the JMA Colour Scheme for different levels of tsunami warnings (the row for the tsunami is highlighted).

表 2-2 数値が高くなるほど危険度が増す情報の配色（震度）								
使用する基本配色 (RGB 値)	■ 180,0,104	■ 165,0,33	■ 255,40,0	■ 255,153,0	■ 255,230,0	■ 250,230,150	■ 0,65,255	■ 0,170,255
震度	震度7	震度6強	震度6弱	震度5強	震度5弱	震度4	震度3	震度2

Figure 1.12: JMA Colour Scheme for Measured Intensities

In addition to these colours, for tsunami informational advisory, the colour 80FFFF ■ is used, in accordance with the colour used for no release of river flooding warning, and for endings of tsunamis warnings, the colour F2F2FF ■ is used, in accordance with the minimal level (the extremely light grey) in Figure 1.13.

The colour F0F0F0 ■ is used for intensity zero (i.e. any intensity less than intensity 1), and C8C8CB ■ is used for unknown intensities.

A similar colour scheme is used for EEW warnings. Specifically, the same colour as tsunami warning is used for EEW warnings, and the same colour as endings of tsunami warnings is used for EEW cancellation. For EEW forecasts, the colour FFAA00 ■ (in accordance with the orange colour in Figure 1.13) is used, and for EEW final reports, the same colour is used as unknown intensities.

A summary of the colours used is in the table below.

1.8.2 Details to Display

Comparing the information provided by the different applications, the following information about an earthquake will be displayed in the sidebar, as consistent with most applications analysed:

- Maximum observed intensity of earthquake;

表 1-2 警報・注意報及びこれに類する情報の配色（台風・津波・噴火等の情報）

使用する基本配色 (RGB 値)	← 警戒度 大 →			警戒度 小	発表なし
	200,0,255	255,40,0	255,170,0		
台風情報(経路図)		暴風域		強風域	
台風情報(暴風域に入る確率) 時間変化	70~100%	30~70%		5~30%	
台風情報(暴風域に入る確率) 分布表示				発表中	発表なし
海上警報	台風警報	暴風警報	強風警報	風警報	
大津波警報・津波警報・津波注意報	大津波警報・津波警報(幅2倍)	津波警報		津波注意報	
噴火警報・予報 (噴火警戒レベル導入火山)	レベル 5 避難	レベル 4 避難準備	レベル 3 入山規制	レベル 2 火口周辺規制	レベル 1 活火山であることに留意
噴火警報・予報 (噴火警戒レベル未導入火山)	居住地域 厳重警戒		入山危険	火口周辺危険	活火山であることに留意
噴火警報・予報 (海底火山)			周辺海域警戒		活火山であることに留意
レーダー・ナウキヤスト(雷)	活動度4	活動度3	活動度2	活動度1	
レーダー・ナウキヤスト(竜巻)		発生確度2		発生確度1	

Figure 1.13: JMA Colour Scheme for Tsunamis

Purple: Special Warning; Red: Tsunami Warning; Yellow: Tsunami Caution

Intensity	Colour	EEW Level	Colour	Tsunami Warning Level	Colour
?	C8C8CB				
0	F0F0F0				
1	F2F2FF				
2	00AAFF	Forecast	FFAA00	Information	80FFFF
3	0041FF	Warning	FF2800	Caution	FAF500
4	FAE696	Final	C8C8CB	Warning	FF2800
5-	FFE600	Cancelled	F2F2FF	Special Warning	C800FF
5+	FF9900			None	F2F2FF
6-	FF2800				
6+	A50021				
7	B40068				

Table 1.11: Colour Scheme for Application

- Time of the earthquake;
- Name of position of hypocentre;
- Depth of hypocentre;
- Magnitude of the earthquake.

In addition to these, on the side panel, the following information will be displayed in addition to the previous ones:

- Last updated time of information;
- The tree of intensities measured by observation stations, in hierarchy structure of:
 1. Intensity; then by
 2. Prefecture; then by
 3. Regions; then by
 4. Cities/Districts; finally
 5. Observation Stations.
- Any additional text provided by the JMA on the report, where applicable.

Note there is an extra level of regions in the hierarchy tree, compared to KEVI.

As for the EEW warning, there are slightly different information displayed, due to different information provided, and the nature of the EEW. The following information will be displayed:

- The level of the EEW warning;
- The serial number of the EEW warning,
- Maximum predicted intensity of earthquake;
- Origin time of the earthquake;
- Name of position of hypocentre;
- Warning text if the hypocentre is assumed (as a JMA requirement);
- Depth of hypocentre;
- Magnitude of the earthquake;
- Precision/Accuracy of information on hypocentre, depth and magnitude;
- Warning text if the earthquake has low accuracy (as a JMA requirement);
- Last updated time of the information,
- Any additional text provided by the JMA on the report, where applicable.

Note that (as a JMA requirement), if the hypocentre is assumed for algorithmic reasons, then the hypocentre details and the magnitude have no seismological meaning, and the information on origin time, the position of hypocentre, the depth of hypocentre and the magnitude of the earthquake will be hidden

The information displayed for a tsunami warning will be relatively simple:

- The level of the tsunami warning;
- Any additional text provided by the JMA on the report, where applicable.

Chapter 2

Design

Overview

This section includes a breakdown of the application into sections of data processing, GUI functionalities and joint functionalities. The use of external sources including DM-D.S.S. and NIED data sources is discussed, together with the relevant formats (JSON) and the objects related. UML class diagrams are included to discuss OOP relations of classes, records (record classes) and enums including the use of inheritance, composition, association and aggregation. They also implement different interfaces. Design patterns that should be included in the application are also introduced and outlined. An outline of the design of the user interface is included. The expected hardware requirements of the systems are also listed, but any laptop with an up-to-date operating system (running Windows or macOS) should be able to run the program.

2.1 Data Structures/Data modelling

2.1.1 External Data Sources

There are two data sources this program will use: the NIED and the DM-D.S.S. Specifically, the former one is used to achieve the real-time shake data of the sensor points which were set up by the government (whose data is free to use), and the latter one is used to achieve past earthquake information and EEW information sent out by the JMA (which is pay-to-use). Note that DM-D.S.S. does also provide the real-time intensity data of the observation points, however it is pay-to-use only for companies and institutions on request. Therefore, it will not be feasible to use this data source in the program since one of the principle target users is people passionate in monitoring earthquakes.

2.1.1.1 NIED Data Source

As mentioned before, NIED has numerous 'earthquake observation nets' across Japan. Specifically, there is the K-NET and KiK-net [78], which is dedicated to the observation of strong seismic motion. The K-NET consists of approximately 1000 sensors located across Japan, while the KiK-net also includes some sensors which are located within the earth, which will often have different readings compared to those located on the surface. They are extremely capable of detecting strong motion of ground. Furthermore, the K-NET and the KiK-net provides real-time intensity data webpage of two types, the 'Kyoshin' (強震) monitor and the long-period ground motion (LPGM, 長周期地震動) monitor (not working at the time of investigation). The Hi-net [77] stands for high-sensitivity seismograph network, and it is dedicated for observation of minor motions of the ground. They release the waveforms to those who are researching seismic movements. As for the F-net [76] which stands for the Full Range Seismograph Network of Japan, which is used to analyse the mechanism of a certain earthquake by analysing movements. None of the three nets provide a real-time API data feed.

Having compared the functionalities described above of the K/KiK-net, Hi-net and F-net and how they feed the data sources, the most suitable data source to reflect real-time motion of ground movements will be the **K/KiK-net**'s data feed, since it detects strong ground movements and is available real-time for the purpose of the application. (This is also the data source that JQuake and KEVI use in fact.)

In fact, in addition to these three networks, there are also the S-net, the DONET and the N-net, which detects the ground seismic movements in the sea. These data were adapted by SREV, but this is beyond the scope of this NEA analysis.

A comparison from the official website of MOWLAS (Monitoring of Waves on Land and Seafloor) [79] of the three nets are included in Figure 2.1 and a map of the distribution of the sensors are included in Figure 2.2.

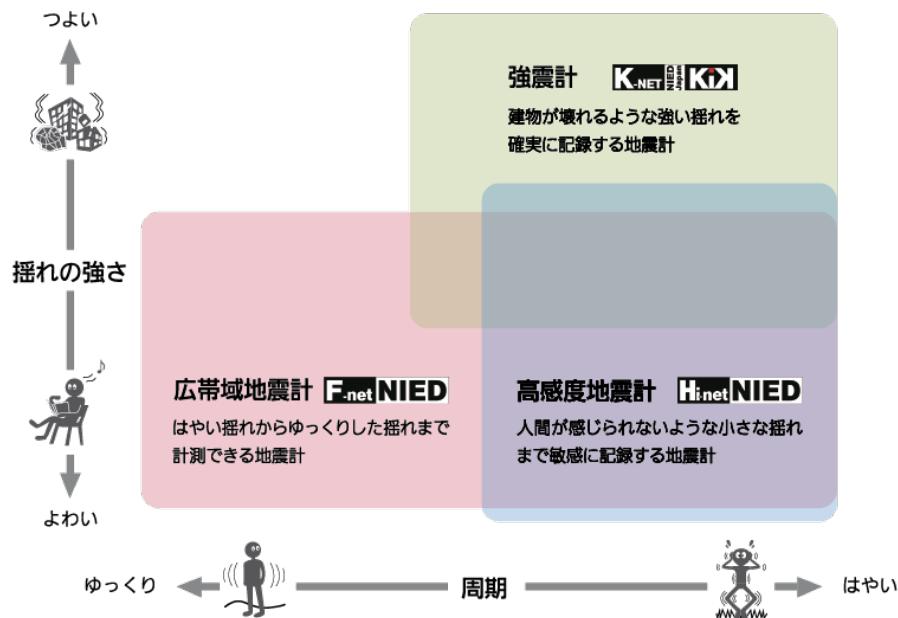


Figure 2.1: A comparison of the K-NET, F-net and Hi-net.

Achieving image format data source The data source fed by the 'Kyoshin' Monitor is split into 8 types (detailed below in Table 2.1), and each type split into 2 types of data sources, surface sensors and borehole (earth) sensors, with codes in Table 2.2. The link to the GIF image is in the following format:

[http://www.kmoni.bosai.go.jp/data/map_img/RealTimeImg/\[#1\]_\[#2\]/\[yyyyMMdd\]/\[yyyyMMdd\]\[hhmmss\].\[#1\]_\[#2\].gif](http://www.kmoni.bosai.go.jp/data/map_img/RealTimeImg/[#1]_[#2]/[yyyyMMdd]/[yyyyMMdd][hhmmss].[#1]_[#2].gif)

In the link, the [yyyyMMdd] and the [hhmmss] part should be replaced with the date and time respectively (in JST, UTC+8), and the #1 replaced with the codes detailed below for the data types, and #2 replaced with the codes detailed below for data sources. An example of the imaged achieved is in Figure 2.3.

Data Type	Description/Meaning	Code in #1
Real-time Shindo	Real-time Measured Intensity	jma
PGA	Peak (Maximal) Ground Acceleration	acmap
PGV	Peak (Maximal) Ground Velocity	vcmap
PGD	Peak (Maximal) Ground Displacement	dcmap
Response 0.125Hz	Response spectrum for 0.125Hz PGV	rsp0125
Response 0.250Hz	Response spectrum for 0.250Hz PGV	rsp0250
Response 0.500Hz	Response spectrum for 0.500Hz PGV	rsp0500
Response 1.000Hz	Response spectrum for 1.000Hz PGV	rsp1000
Response 2.000Hz	Response spectrum for 2.000Hz PGV	rsp2000
Response 4.000Hz	Response spectrum for 4.000Hz PGV	rsp4000

Table 2.1: Data available in 'Kyoshin' monitor



Figure 2.2: Distribution of the sensors of different nets.

Sensor Type	Description/Meaning	Code in #2
Surface	K-NET and KiK-net sensors	s
Borehole	KiK-net sensors within earth	b

Table 2.2: Sensors available in 'Kyoshin' monitor

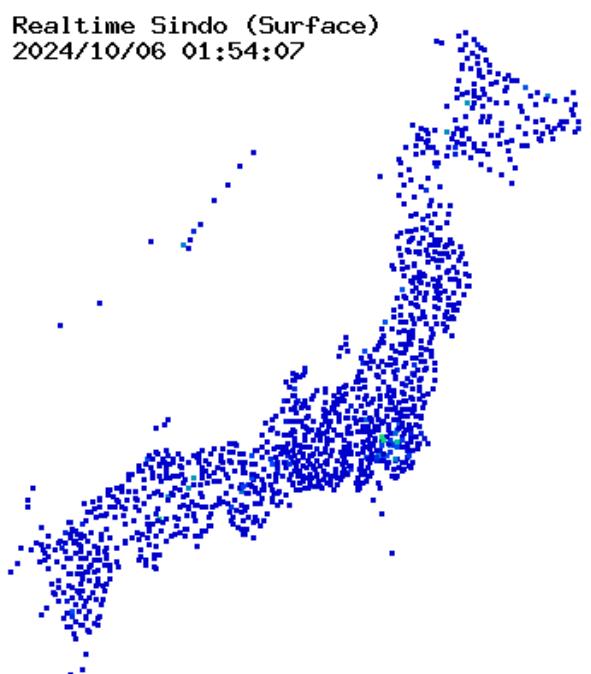


Figure 2.3: Sample GIF image achieved from 'Kyoshin' Monitor

Extracting colour for each observation point Unfortunately, it seems to the author (and is widely accepted in the EEW monitoring app development society) that the position of the points (squares) on the image does not follow any significant pattern of position, i.e. there is no obvious conversion of coordinates to us from the official longitude/latitude locations to the positions on the image. Therefore, a manual conversion one-to-one mapping has to be developed.

NIED does have an official released list of observation points, which include their names and positions. This list has around 1700 of those observation points. However, in the actual image (like those in Figure 2.3), there are only 1000 of those in use in real time, consistent with K-NET's official introduction, and the rest 700 of those are invalid observation points. Therefore, it will be worth removing them from the list of earthquake monitoring points, before attempting to make the dictionary.

Unfortunately, 1000 is still quite a lot for us to deal with. Luckily, Ingen who used a similar approach to develop the KEVI application has already made such a mapping inside his open-source application in the file ShindoObsPoints.mpk.lz4 within [GitHub/ingen084/KyoshinEewViewerIngen](#), and even developed an editor for this at [GitHub/ingen084/KyoshinShindoPlaceEditor](#).

Due to the limited time for this NEA, the author will primarily use the pre-determined observation points for the K-NET and the KiK-net by Ingen in JSON format.

This paragraph referred to [34].

Converting colour to number format for further processing The true numerical data does not seem fully necessary at the first glance (since we might just as well just achieve the colour from the image and just plot them on the map, without the need to convert to a colour and back). However, for us to detect the shake in certain regions, it is necessary for us to achieve the numerical value to run the algorithm on it. Nevertheless, it is just good to have the number for us to have the numerical value for potential future developments.

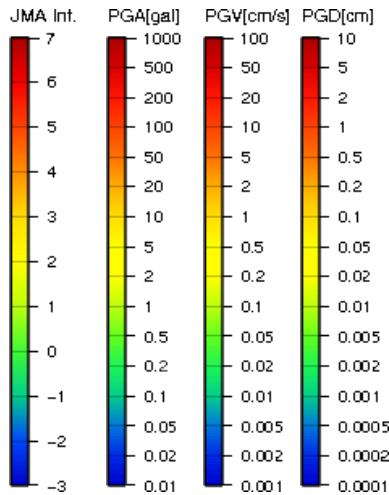


Figure 2.4: Scale colours of different measurements

As shown in Figure 2.4, the NIED 'Kyoshin' Monitor does indeed provide a scale of colours and reference to numerical values. However, there is a chance that a certain colour is not 'exactly' mapped on the scale, and further concerning that it is very slow and difficult to 'loop over' a colour legend, it is necessary to have an algorithmic-approach (numerical mapping-based approach) to map the colours in the colour space to numerical values (and back) is necessary.

Abstraction of colour scale Notice that the scale for PGA/PGV/PGD follow a logarithmic scale, while measured intensity follows a linear scale (though noting that the way intensity and magnitude is calculated is logarithmic as well). Therefore, if we normalise the vertical distance from the bottom of the axis h to $0 \leq h \leq 1$ (i.e. $h = 0$ at the bottom of the scale, $h = 1$ at the top of the scale), and if we denote intensity using I in JMA scale, PGA as a in gal, PGV as v in cm per second, and PGD as s in

cm, from the scale, the following transforming formulae obviously hold:

$$\begin{aligned} I = 10h - 3 &\iff h = \frac{I + 3}{10}, \\ a = 10^{5h-2} &\iff h = \frac{\lg a + 2}{5}, \\ v = 10^{5h-3} &\iff h = \frac{\lg v + 3}{5}, \\ x = 10^{5h-4} &\iff h = \frac{\lg x + 4}{5}. \end{aligned}$$

However, it is worth noting that NIED did use 1, 2, 5, 10 on the logarithmic scale at equal intervals, so it is not a perfect logarithmic scale. The author is unsure why they designed the scale like this, nor if it's an intended approximation. Nevertheless, the logarithmic scale is a good enough approximation.

The next step is to develop a mapping from this colour space \mathcal{C} to h , which of course should be invertible. Denote this as $f : [0, 1] \rightarrow \mathcal{C}$.

Describing colour numerically We consider using a suitable base to decompose \mathcal{C} . The colour of the given scale is an immediate suggestion to use a base containing **hue**, which in fact is designed to describe how human perceive colour, and unlike RGB and CMYK which uses principle colours to describe colour. A hue scale is shown in Figure 2.5.



Figure 2.5: The hue scale in HSL/HSV encoding

Therefore, a colour in the colour space \mathcal{C} can be represented as a 3-D vector $\mathcal{C} \ni C = (H, S, V)$, where $H \in [0, 360]$ in degrees is the hue value, $S \in [0, 1]$ stands for the saturation, and $V \in [0, 1]$ stands for the value (a brightness). And hence we will be able to decompose f into three components $f = (f_H, f_S, f_V)$.

Figure 2.6 plots the values of H, S and V against h (this is the graph of f and its components) of discrete values of h , and depending on the result we will attempt some fit/regression to a suitable function.

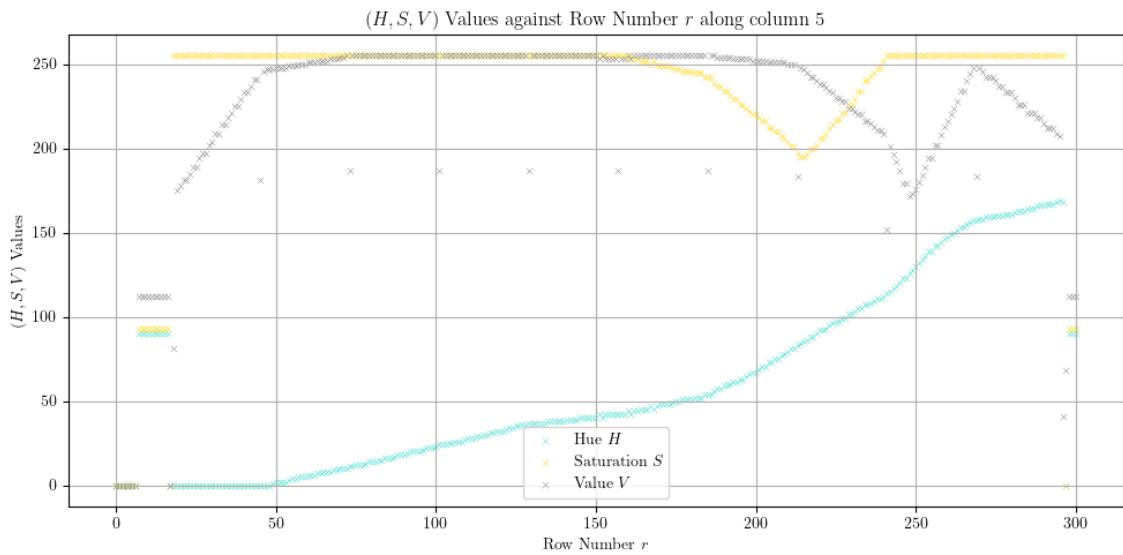


Figure 2.6: The values of (H, S, V) against pixel row r

Notice that in this plot, all values of (H, S, V) in fact range from 0 to 255, as in an 8-bit binary.

It is worth noting that the scale has some space on the top (to show the type), and some space at the bottom. Notice that when the row $r = 17$ and $r = 297$ have values significantly different, so we extract the rows $r = 18$ and $r = 296$ to correspond (linearly) to $h = 1$ and $h = 0$, i.e.,

$$h = 1 - \frac{r - 18}{278}.$$

Figure 2.7 shows the result of this transformation being applied.

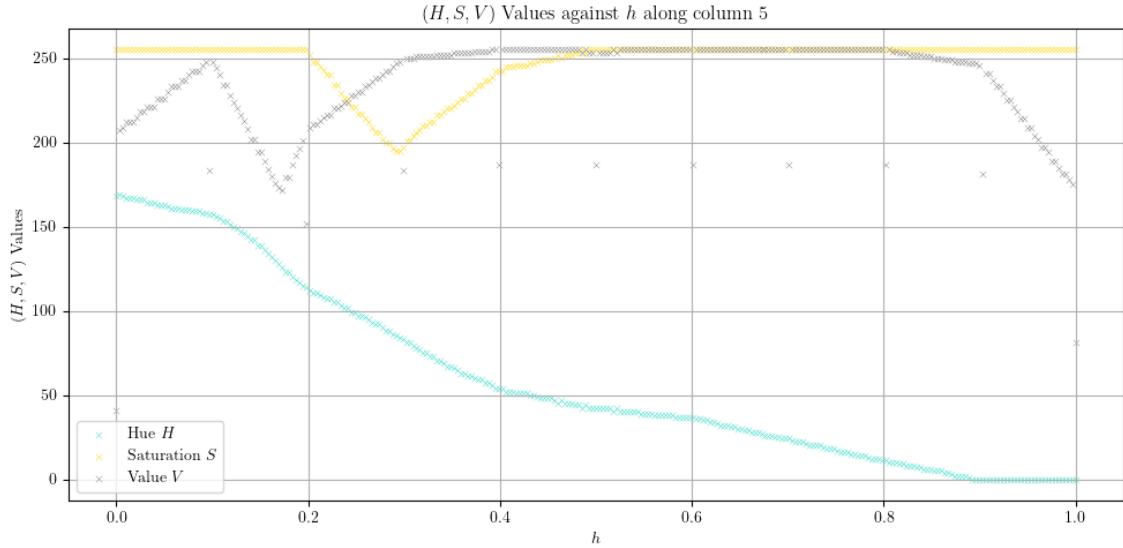


Figure 2.7: The values of (H, S, V) against normalised height h

From here onwards, all values of (H, S, V) will be adjusted to be within the range which they should be in, i.e. $H \in [0, 360], S \in [0, 1], V \in [0, 1]$.

Finding f_H in terms of h We consider finding f_H first, which is the cyan line. Notice that its trend can be split into 4 parts:

- $h \in [0, 0.1]$: linear;
- $h \in [0.1, 0.6]$: curving, ideally a cubic;
- $h \in [0.6, 0.9]$: linear;
- $h \in [0.9, 1]$: constant (0).

h	$H = f_H(h)$
0	237
0.1	222
0.6	51
0.9	0
1	0

Table 2.3: Initial values for f_H

Furthermore, boundary conditions in Table 2.3 are applied to ensure that the function is continuous and nicely-behaving while matching the existing data. We use the following function to apply the fit:

$$f_H(h) = \begin{cases} -150h + 237, & h \in [0, 0.1], \\ \odot, & h \in [0.1, 0.6], \\ -170h + 153, & h \in [0.6, 0.9], \\ 0, & h \in [0.9, 1]. \end{cases}$$

Here,

$$\begin{aligned}\odot &= \frac{222 \cdot (h - 0.3) \cdot (h - 0.4) \cdot (h - 0.6)}{(0.1 - 0.3) \cdot (0.1 - 0.4) \cdot (0.1 - 0.6)} \\ &+ \frac{y_1 \cdot (h - 0.1) \cdot (h - 0.4) \cdot (h - 0.6)}{(0.3 - 0.1) \cdot (0.3 - 0.4) \cdot (0.3 - 0.6)} \\ &+ \frac{y_2 \cdot (h - 0.1) \cdot (h - 0.3) \cdot (h - 0.6)}{(0.4 - 0.1) \cdot (0.4 - 0.3) \cdot (0.4 - 0.6)} \\ &+ \frac{51 \cdot (h - 0.1) \cdot (h - 0.3) \cdot (h - 0.4)}{(0.6 - 0.1) \cdot (0.6 - 0.3) \cdot (0.6 - 0.4)}.\end{aligned}$$

Here, m_1 is the gradient of the line for $h \in [0, 0.1]$, $y_1 = f_H(0.3)$, $y_2 = f_H(0.4)$ for $h \in [0.1, 0.6]$ (using Lagrange Polynomial), and the equation between $h \in [0.6, 0.9]$ is in fact fixed due to the initial conditions.

By applying a curve fit to the original data, the following results are obtained:

$$(y_1, y_2) = (115, 79.5).$$

Plotting H and $f_H(h)$ against h gives us Figure 2.8, which is decent.

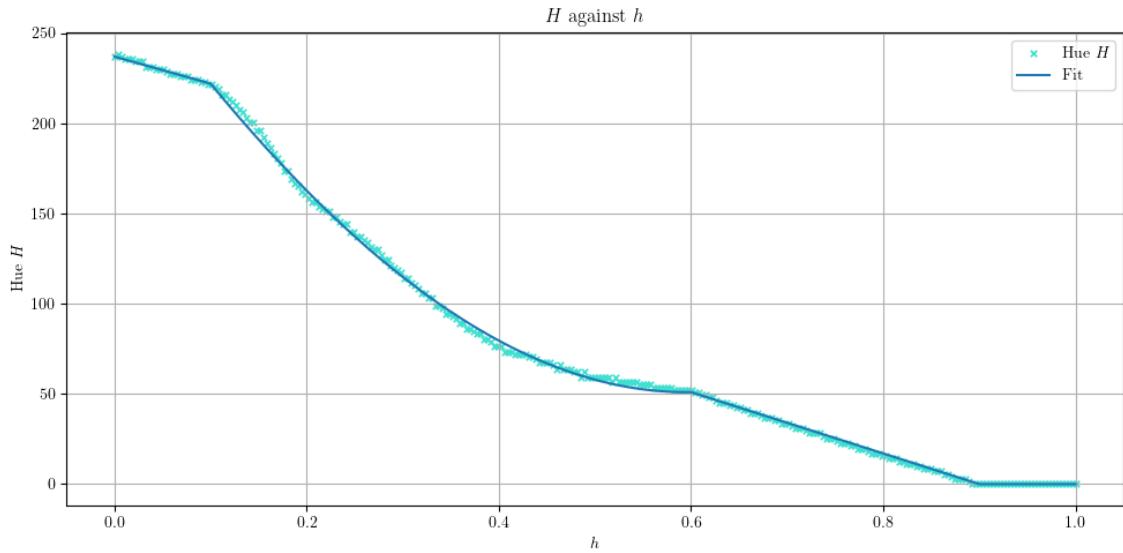


Figure 2.8: The fit result for $f_H : h \mapsto H$

Finding f_S in terms of h As for $f_S(h)$, the obvious thing to do is to split it into 5 (4) piecewise functions, specifically $f_S = 1$ for $h \in [0, 0.2] \cup [0.5, 1]$, and three linear functions for $h \in [0.2, 0.29]$, $h \in [0.29, 0.4]$ and $h \in [0.4, 0.5]$. Initial values are included in Table 2.4.

h	$S = f_S(h)$
0	1
0.2	1
0.29	0.765
0.4	0.95
0.5	1
1	1

Table 2.4: Initial values for f_S

This gives us that

$$f_S(h) = \begin{cases} 1, & h \in [0, 0.2], \\ -2.611h + 1.522, & h \in [0.2, 0.29], \\ 1.682h + 0.277, & h \in [0.29, 0.4], \\ 0.5h + 0.75, & h \in [0.4, 0.5], \\ 1, & h \in [0.5, 1]. \end{cases}$$

Plotting this out gives Figure 2.9.

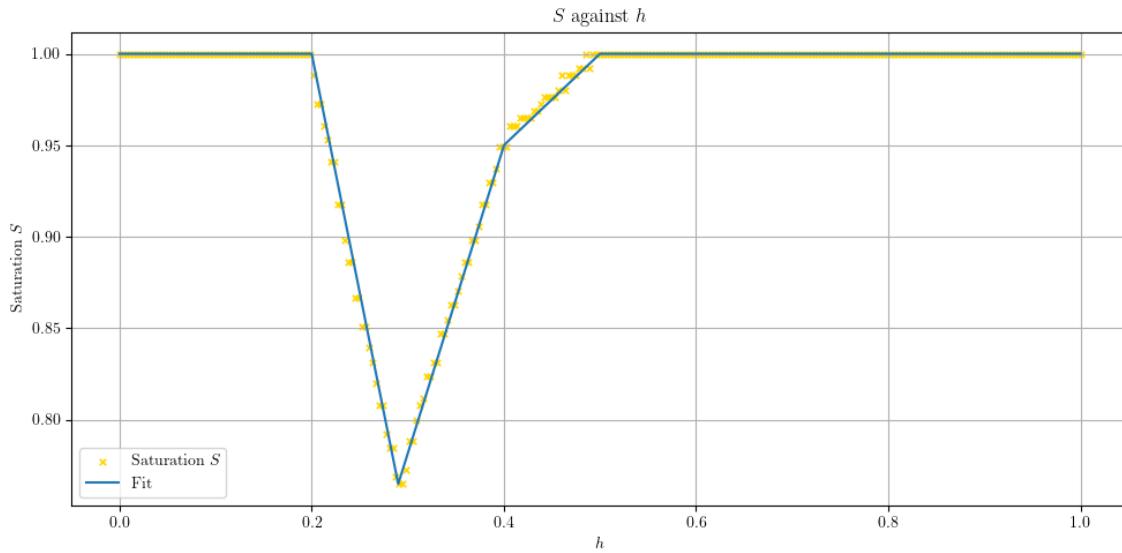


Figure 2.9: The fit result for $f_S : h \mapsto S$

Finding f_V in terms of h As for $f_V(h)$, we shall divide it into even more piecewise linear functions. Specifically, I chose to divide the interval $[0, 1]$ at $0, 0.1, 0.172, 0.2, 0.3, 0.4, 0.8$ and 0.9 . Initial values are included in Table 2.5.

h	$V = f_V(h)$
0	0.8
0.1	0.98
0.172	0.66
0.2	0.82
0.3	0.98
0.4	1
0.8	1
0.9	0.97
1	0.68

Table 2.5: Initial values for f_V

This gives us the piecewise function

$$f_V(h) = \begin{cases} 1.8h + 0.8, & h \in [0, 0.1], \\ -4.444h + 1.424, & h \in [0.1, 0.172], \\ 5.714h - 0.323, & h \in [0.172, 0.2], \\ 1.6h + 0.5, & h \in [0.2, 0.3], \\ 0.2h + 0.92, & h \in [0.3, 0.4], \\ 1, & h \in [0.4, 0.8], \\ -0.3h + 1.24, & h \in [0.8, 0.9], \\ -2.9h + 3.58, & h \in [0.9, 1]. \end{cases}$$

Plotting this out gives us Figure 2.10.

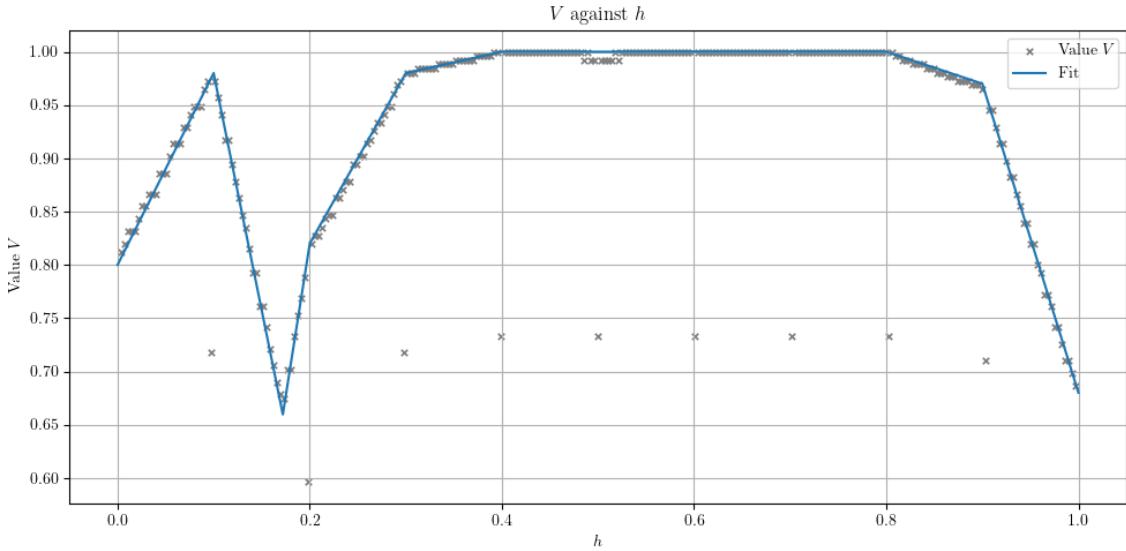


Figure 2.10: The fit result for $f_V : h \mapsto V$

Note that in this plot, V when $h = 0$ or $h = 1$ is excluded, since just like every $h = 0.1k$ for some $k \in \mathbb{N}$, they are anomalies created by the horizontal black line in the scale.

Finding f^{-1} To find $f^{-1} : \mathcal{C} \rightarrow [0, 1]$, we do not need necessarily to find an expression of h in terms of (H, V, S) . If we notice that f_H is one-to-one on $h \in [0, 0.9]$, and f_V is one-to-one on $h \in [0.9, 1]$, we can use f_H^{-1} to determine h from H only if H is non-zero, and use f_V^{-1} otherwise.

$$f^{-1}(H, S, V) = \begin{cases} f_H^{-1}(H), & H \neq 0, \\ f_V^{-1}(V), & H = 0. \end{cases}$$

Notice that for $h \in [0.1, 0.6]$, f_H is a cubic and is not easily invertible. However, it would be plausible to use a binary-search algorithm to find h based on H since it is monotonic, and it is within a reasonable amount of time, to relatively good precision. Otherwise, on the linear parts, it is fine to simply mathematically invert it.

Algorithm 1 describes the logic. Note that, this algorithm uses different V ranges from before (which is consistent with SkiaSharp library in C#), and the ranges is $V \in [0, 100]$. Notice that, $\epsilon(h)n$ and $\epsilon(H)$ are two constant values that determines the precision of such binary search, and they are chose to be 0.01 and 0.5 in the implementation.

Flowchart of data and sidenotes To summarise, we discussed the mapping from the colour space \mathcal{C} to the normalised height h , and back, and we also discussed how h is related with the measured intensity I , the PGA a , the PGV v , and the PGD x . They can be transformed forwards and backwards using simple mathematical explicit relations, and specifically for $f_H^{-1}(H)$ will use a binary search algorithm.

Figure 2.11 shows the data flow, Figure 2.12 shows the relation between abstract variables, and 2.13 shows the result of colour generated compared with the original.

It is worth noting that an existing NuGet Library, [ingen084/KyoshinMonitorLib](#) and introduced in [30] which is designated to manage intensities, as well as extracting intensities from the 'Kyoshin' monitor. This NEA did refer to this for some guidance but is not dependent on this library, and its necessary functionalities within the scope of this NEA is realised again using the author's own code. The developer of this library did also mention that it is quite purpose-built so might not be suitable for general use.

It is also worth noting that, technically, scraping the data from the 'Kyoshin' monitor page of NIED is not explicitly allowed, but not explicitly banned either. However, extracting and displaying numerical data in the application is strictly banned by the NIED, and therefore the numerical values will only serve as internal values of the application and will not be displayed to the users in any way.

This paragraph referred to [57]. The code used for this section is in Listing A.1.

Algorithm 1 Algorithm for f^{-1}

Require: $H \in [0, 360]$
Require: $S \in [0, 100]$
Require: $V \in [0, 100]$
Ensure: $h \in [0, 1]$

```

 $V \leftarrow V/100$   $\triangleright$  Normalise  $V$ 
if  $V$  is 0 then  $\triangleright$  Use  $V$ 
|   return  $(V - 3.50)/(-2.9)$ 
else  $\triangleright$  Use  $H$ 
|    $\triangleright$  Deal with out-of-range  $H$ s, and use inverse linear functions
|   if  $H \geq 222$  then
|   |   return  $(H - 237)/(-150)$ 
|   else if  $H \leq 51$  then
|   |   return  $(H - 153)/(-170)$ 
|   |    $\triangleright$  Inverse-Cubic by Binary Search, with set errors
|   else
|   |    $l \leftarrow 0.1$ 
|   |    $r \leftarrow 0.6$ 
|   |    $\triangleright$  Checks if the normalised height is already precise enough
|   |   while  $r - l \geq \epsilon(h)$  do
|   |   |    $m \leftarrow (l + r)/2$ 
|   |   |    $c \leftarrow \text{HEIGHT TO HUE}(m)$ 
|   |   |    $\triangleright$  Checks if the calculated hue is already precise enough
|   |   |   if  $|c - H| \leq \epsilon(H)$  then
|   |   |   |   return  $m$ 
|   |   |   else if  $c > H$  then
|   |   |   |    $l \leftarrow m$ 
|   |   |   else if  $c < H$  then
|   |   |   |    $r \leftarrow m$ 
|   |   |   end if
|   |   end while
|   |   return  $(l + r)/2$ 
|   end if
end if

```

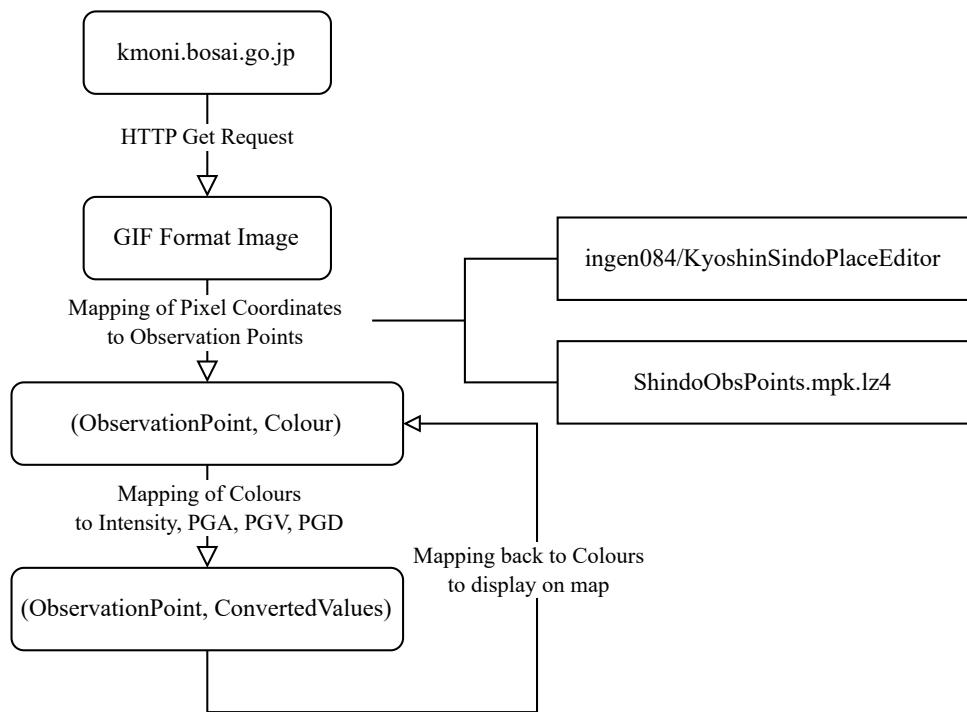


Figure 2.11: Flow of data in NIED data sources

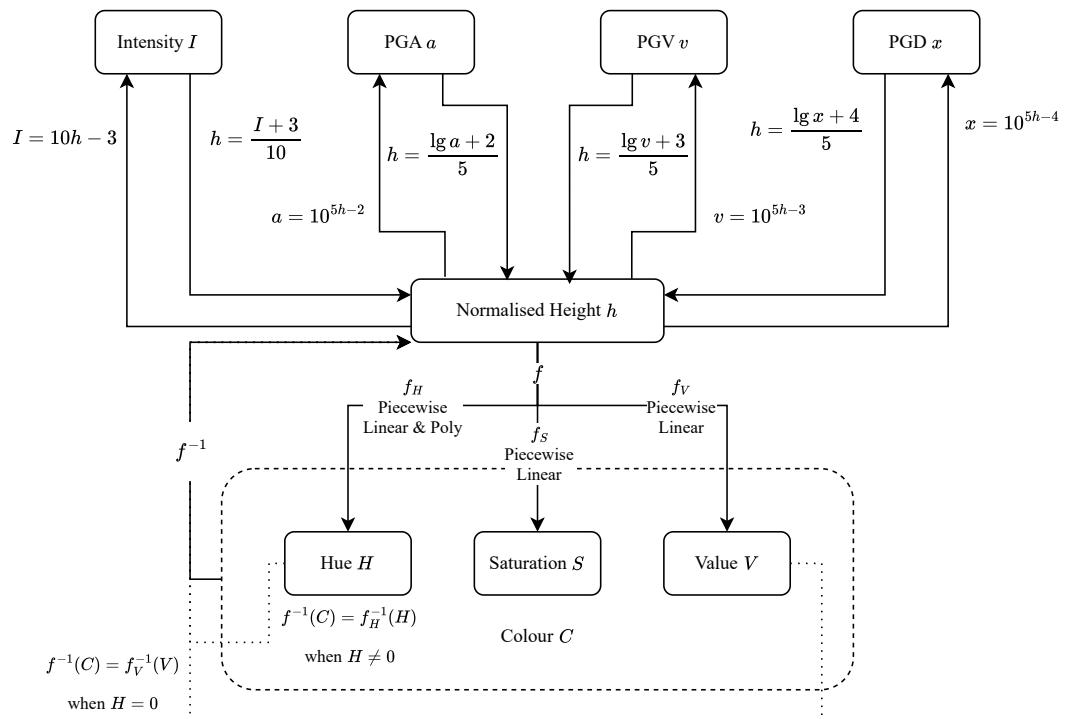


Figure 2.12: Relation between abstract variables




Figure 2.13: Colour generated using fitted functions

2.1.1.2 DM-D.S.S. Data Source

DM-D.S.S. is a well-structured official data source with low latency and reliable information and services. This is going to be the primary data source for most part of the application.

Their APIs are split into two types: HTTP based requests and WebSocket based connections. HTTP based requests are typically for more static information, while WebSocket connections are for live time-essential data feeds, such as the EEW warnings and latest earthquake information.

Authorisation There are two types of authorisation that DM-D.S.S. supports, API Keys and OAuth2 Access Tokens.

API Keys access tokens are extremely easy to program, since it simply uses Basic Authorisation in the header, and uses the key as the username (without a password). It uses the Basic Base64 Authorisation encoding. However, this introduces an extra layer of complexity for the users, since they would have to go to the settings of the DM-D.S.S. webpage and achieve an API Key to paste into the application, as shown in Figure 2.14.

The screenshot shows the DM-D.S.S. control panel interface. On the left, there is a sidebar with navigation links: ホーム, 契約状況, 利用状況, アカウント, お知らせ, サービスホームページ, APIキー・OAuth, チーム管理, 電文ビューア, and ドキュメント. The main area has two tables. The first table, titled "APIキー・OAuth", shows a single entry for "Test" with an API key value (redacted) and creation date 2024/09/03 22:41:43. The second table, titled "OAuthクライアント", shows a single entry for "Not name" with a client ID value (redacted) and creation date 2024/10/06 23:10:35.

Figure 2.14: Control panel for API Keys

As for OAuth2, it will be much simpler for the users, since it will provide the user with a login interface on the website, and ask them to give the program certain permissions, which is just a few simple clicks. Rather than the user sharing the credentials with the application, they are shared between the authorisation server (DM-D.S.S.) and the application directly, without the need for the user to deal with such human-unreadable codes.

How the OAuth2 works for DM-D.S.S. is outlined below:

To-Do: Outline OAuth 2

For the purposes of this NEA, we will primarily use the API Key way of accessing DM-D.S.S. since it will be easier to code and debug, and OAuth2 will introduce quite a lot of complexity to the program. However, the program should be designed to be able to modify to OAuth2 authentication without much modification, and if time permits OAuth2 will be implemented in the application.

HTTP Based Requests The base URL of all requests is <https://api.dmdata.jp/v2/> which will be indicated as `base://` from now on.

Table 2.6 shows the necessary permissions would be necessary for the application to function. How each of them functions will be discussed below.

Permission Code	Permission Details
<code>contract.list</code>	Get the list of subscriptions the user has.
<code>gd.earthquake</code>	Get list of past earthquakes.
<code>parameter.earthquake</code>	Get details of observation points for earthquake intensities.
<code>socket.start</code>	Start a new WebSocket connection.
<code>socket.list</code>	Get list of existing WebSocket connections.
<code>socket.close</code>	Close an existing WebSocket connection.
<code>telegram.list</code>	Get list of telegrams released by the JMA.
<code>telegram.data</code>	Get specific telegram released by the JMA.
<code>telegram.get.earthquake</code>	Allows program to access telegrams on earthquake information.
<code>eew.get.forecast</code>	Allows program to access telegrams on EEW forecasts (including warnings).

Table 2.6: Necessary access permissions for DM-D.S.S.

Standard Return Information and Errors There are two status that an API call could return: a successful `ok` status, or an unsuccessful `error` status.

Listing 2.1 shows the JSON for a successful `ok` response, and Listing 2.2 shows the JSON for a `error` response.

```
{
  "responseId": "66d23c0cede77d82",
  "responseTime": "2021-04-01T00:00:00.000Z",
  "status": "ok"
}
```

Listing 2.1: `ok` status for API

```
{
  "responseId": "66d23c0cede77d82",
  "responseTime": "2021-04-01T00:00:00.000Z",
  "status": "error",
  "error": {
    "message": "Authentication required.",
    "code": 401
  }
}
```

Listing 2.2: `error` status for API

In both responses, there is an attribute `responseId` which gives the unique ID for each response as a `string`, and an attribute `responseTime` which gives the date and time of response in `ISO8601Time` format.

The `status` attribute in `string` indicates whether it is a successful response (in which case it will be `"ok"`) and if it is an error response (in which case it will be `"error"` and gives the relevant HTTP error as well). The error will be indicated in the object `error` and will give the relevant message and code.

The list of standard errors together with their meanings is discussed in Table 2.7.

From here onwards, the `responseId`, `responseTime` and `status` will be removed from the sample response by default.

Error Code	Error Message
400	The query parameters are required.
400	The post parameters are required.
400	Unexpected data of search query <code>cursorToken</code> .
401	Authorisation required.
403	Insufficient scope for
403	Requests are not allowed.

Table 2.7: Standard errors for API.

Cursor Token For some API data calls, and specifically for `telegram.list` that we are going to use, there is too much data to be returned in one API call. Therefore, in a response, there will be a specified attribute named `nextToken` indicated with type `string`, sometimes as well as `nextPooling` and `nextPoolingInterval`, as shown in Listing 2.3 as an example call of

```
base://telegram?type=VXSE53.
```

```
{
  "responseId": "8359288359fc5bb9",
  "responseTime": "2021-04-01T00:00:00.000Z",
  "status": "ok",
  "items": [
    {},
    {},
    {}
  ],
  "nextToken": "bmV4dCAgICAgICAgNTc0MzI",
  "nextPooling": "cG9sbGluZyAgICAgNzM0MzE",
  "nextPoolingInterval": 1600
}
```

Listing 2.3: Cursor token sample JSON.

Specifically, the calls for `socket.list` and `gd.eew` will only return a `nextToken` for the next call, while for `telegram.list` and `gd.earthquake` it will return a `nextPooling` as well.

If one would like to do the next call to find the next few items of the list, the `cursorToken` parameter should be specified as the same as the `nextToken` or `nextPooling`, with all the rest of the parameters identical to the previous request, i.e.,

```
base://telegram?type=VXSE53&cursorToken=bmV4dCAgICAgNTc0MzI
```

if the `nextToken` is used, and

```
base://telegram?type=VXSE53&cursorToken=cG9sbGluZyAgICAgNzM0MzE
```

if `nextPooling` is used (which should be after `nextPoolingInterval` in milliseconds).

The document suggested that, due to performance issues, the `nextPooling` should be used wherever possible. Note that the `nextToken` and `nextPooling` will change for every single call of the API.

From here onwards, in the API sample results, `nextToken`, `nextPooling` and `nextPoolingInterval` will not be included.

Contract API There is only one contract-related API, which is `contract.list`. It is an HTTP GET request, on `base://contract` with no parameters.

It will return a list of contracts (subscriptions) of DM-D.S.S., whether or not the user has subscribed to it.

Listing 2.4 shows a sample return of this API call.

Here, `items` is the list of contracts (subscription plans), with each of its element being an object representing a plan. For each of them, there are the properties:

```
{
  "items": [
    {
      "id": 92,
      "planId": 1,
      "planName": "地震・津波関連",
      "classification": "telegram.earthquake",
      "price": {
        "day": 15,
        "month": 350
      },
      "start": "2021-01-01T01:01:00.000Z",
      "isValid": true,
      "connectionCounts": 1
    }
  ]
}
```

Listing 2.4: Contract list sample JSON.

- `id` (nullable) which stands for the subscription ID (could be `null` if the user is not subscribed);
- `planId` which stands for the subscription plan ID, which is unique for each plan;
- `planName` which stands for the name of the subscription plan;
- `classifications` which stands for the classification code of the subscription plan;
- `price.day` and `price.month` which stands for the price of the plan per day/per month;
- `start` (nullable) which stands for the start of the subscription;
- `isValid` which is a `boolean` to represent whether the plan is valid; and
- `connectionCounts` which stands for the number of extra WebSocket connections this subscription plan provides.

Note that how `id` and `start` can be `null` since it lists all the subscriptions, whether or not the user has been subscribed to it.

This API will be used to determine if the user has an appropriate subscription plan to use the application.

WebSocket APIs There are three WebSocket-Related APIs, specifically, `socket.start`, to start a socket, `socket.list` to list all sockets, and `socket.close`, to close a socket. They are all called on `base://socket`.

`socket.start` is a POST method which has a request body in JSON, as shown in Listing 2.5.

The attributes are:

- `classifications`, which is a list of classifications of the subscription plans (which include all the types below);
- `types` (optional), which is a list of telegram wished to be transmitted through the WebSocket;
- `test` (optional, default to "no"), which indicates whether test telegrams should be received ("including") or not ("no");
- `appName` (optional), which is the name of the application to be recorded with the WebSocket; and
- `formatMode` (optional, default to "raw"), which is either "json" or "raw" depending on the desired return type.

```
{
  "classifications": [
    "eew.forecast",
    "telegram.earthquake"
  ],
  "types": [
    "VXSE45",
    "VXSE51",
    "VXSE52",
    "VXSE53"
  ],
  "test": "including",
  "appName": "Application Test",
  "formatMode": "json"
}
```

Listing 2.5: Socket start sample request JSON.

```
{
  "ticket": "Tik....",
  "websocket": {
    "id": 0,
    "url": "wss://ws003.api.dmdata.jp/v2/websocket?ticket=Tik....",
    "protocol": [
      "dmdata.v2"
    ],
    "expiration": 300
  },
  "classifications": [
    "eew.forecast",
    "telegram.earthquake"
  ],
  "test": "including",
  "types": [
    "VXSE45",
    "VXSE51",
    "VXSE52",
    "VXSE53"
  ],
  "formats": [
    "xml",
    "a/n",
    "binary"
  ],
  "appName": "Application Test"
}
```

Listing 2.6: Socket start sample response JSON.

The detailed classifications and types will be discussed in the next section on WebSocket connections. When the **types** is excluded, the WebSocket will return all the telegrams included in the classification. It will have a response as in Listing 2.6.

Some attributes are exactly the same as the JSON sent has header, **classifications**, **types** (nullable), **test** and **appName**. The additional attributes are:

- **ticket**, which is a code in **string** for the connection. This is also included in the **websocket** object.
- **websocket**, which is the object containing details for the connections. Its attribute **id** is unique for each connection and **url** is the WebSocket (**wss://**) URL to use to connect to. **protocol** being a constant array containing "**dmdata.v2**" indicating that this is the 2nd version of the protocol. **expiration** is in seconds the time the connection will expire if no transmission handshakes are made (see below), and is always 300 as constant.
- **formats**, which is a list of formats used to encode the data transmitted in the WebSocket. This is a constant list including "**xml**", "**a/n**" and "**binary**" if **formatMode** is set to "**raw**", and a list with only "**json**" if set to "**json**" in the request JSON.

Apart from the standard errors, it will also output errors shown in Table 2.8

Error Code	Error Message
400	The body of the request is not JSON.
400	At least one element of classifications is required.
400	The types is not a string or has more than 30 elements.
400	The appName is up to 24 bytes.
400	You have entered a string that is not defined in formatMode .
402	No contract.
409	The maximum number of simultaneous connections is full.

Table 2.8: Errors for `socket.start`.

`socket.close` is a DELETE method, which specifies the ID of the WebSocket port to be closed in the URL parameter `:id`, e.g., `base://socket/30`. If the result is successful, the request will not return anything. If the status is error, it will return a standard error (detailed above), or a 404 error, which indicates that the specified WebSocket `id` is not found.

`socket.list` is a GET method which supports `cursorToken` (optional) as discussed above. There are other parameters in the query:

- **id** (optional), which stands for the ID of the WebSocket connection that details is wished to be retrieved;
- **status** (optional), a **string** indicating the status of the WebSocket, including **open** which stands for operating live, **waiting** which means idle, and **closed** standing for closed connections;
- **limit** (optional, default 20), of type **integer** with a maximum of 100, indicating the number of WebSockets listed in a single response.

Listing 2.7 shows a response from the call. The **items** is a list of objects, each representing a WebSocket, with the following properties:

- **id**, **ticket**, **classifications**, **test**, **types**, **formats**, **appName**, identical to described above;
- **start**, a **ISO0601Time** representing the time of the start of the connection;
- **end**, a nullable **ISO0601Time** representing the time of the end of the connection;
- **ping**, a nullable **ISO0601Time** representing the previous time of ping-pong;
- **ipAddress**, a nullable **string** representing the IP address of the source of connection;
- **server**, a nullable **string** representing the connected WebSocket server; and
- **status**, a **string** representing the connection status.

```
{
  "items": [
    {
      "id": 0,
      "ticket": "Tik....",
      "types": [
        "VXSE45",
        "VXSE51",
        "VXSE52",
        "VXSE53"
      ],
      "test": "including",
      "classifications": [
        "eew.forecast",
        "telegram.earthquake"
      ],
      "ipAddress": "192.168.0.0",
      "status": "open",
      "server": "websocket-03",
      "start": "2021-04-01T00:00:00.000Z",
      "end": null,
      "ping": "2021-04-01T00:00:00.000Z",
      "appName": "ApplicationTest"
    }
  ]
}
```

Listing 2.7: Socket list sample response JSON.

However, it is worth noting that even though the document claims that `ticket` is not `null`, it will only be not null when the WebSocket is waiting connection, and null otherwise. Furthermore, `formats` never appears in the result, even though the document claims that it should always appear.

These will be used to manage (open new, list existing and close) WebSockets in the application.

Parameter API The program would need to have a list of observation points of earthquakes to plot on the graph. Therefore, we would need to call `parameter.earthquake`, which is available at `base://parameter/earthquake/station`.

This is a GET request with no parameters to specify, and will return all stations in one go. Listing 2.8 shows a sample response.

The `changeTime` and `version` of this list of parameters is often the same for calls since the list is rarely updated, and they give the version of the list and the last time of the update.

For each object in `items`, they represent an earthquake observation point. The attributes are:

- `region` and `city`, both containing `code`, `name` and `kana` (Kana (カナ, 仮名) represents the pronunciation), which is unique for each region and city;
- `noCode`, the unique code, and `code`, the code used in XML (WebSocket data feeds);
- the `name` and `kana`, which are not necessarily unique for each observation point;
- `status` standing for whether the station is in use. " 現" (now) means the data hasn't changed in the update, " 変更" (change) means the data has been altered, " 新規" (new) stands for a new observation point, and " 廃止" (abolished) means the observation point has been discontinued;
- the `owner`, representing the owner of the observation point; and
- the `latitude` and `longitude`, which as the name suggests, represent the position of the observation point.

```
{
  "changeTime": "2024-07-18T12:00:00+09:00",
  "version": "20240718",
  "items": [
    {
      "region": {
        "code": "100",
        "name": "石狩地方北部",
        "kana": "イシカリチホウホクブ"
      },
      "city": {
        "code": "0123500",
        "name": "石狩市",
        "kana": "イシカリシ"
      },
      "noCode": "1000000",
      "code": "0123500",
      "name": "石狩市花川",
      "kana": "イシカリシハナカワ",
      "status": "現",
      "owner": "気象庁",
      "latitude": "43.1714",
      "longitude": "141.3156"
    }
  ]
}
```

Listing 2.8: Earthquake parameter sample response JSON.

Due to the nature of JSON being very long and barely updated (an email will be sent to users of DM-D.S.S. every time its updated in fact), it will be stored locally in the application's local storage, and updated automatically every day only. Upon program launch, the application will read the local data into the main memory.

Telegram API JMA release telegrams (mostly in XML format) through DM-D.S.S., and to achieve them, we can use the `telegram.list` GET request, which is available at `base://telegram`. It supports `cursorToken` with pooling.

Furthermore, the following query parameters are available:

- `type` (optional), which indicates the type of telegram wishing to retrieve. Note that there can be a maximum of 5 types of telegrams specified due to the need for a perfect match;
- `xmlReport` (optional, default `false`), which specifies whether some details of the XML report should be included in the JSON;
- `test` (optional, default `no`), which specifies whether test telegrams should be included. Options are `no`, `including` and `only`;
- `formatMode` (optional, default `raw`) indicates whether the XML reports should be converted to JSON;
- `limit` (optional, default 20) indicates the number of telegrams returned in one response.

Listing 2.9 gives a sample response of this API call.

In the `items` list, each object represents a telegram, with certain properties:

- `serial` stands for the serial ID of this transmission, while `id` is a unique ID for the telegram (non-serial);

```
{  
  "items": [  
    {  
      "serial": 0,  
      "classification": "telegram.weather",  
      "id": "123456789abcdef...",  
      "head": {  
        "type": "VPWW54",  
        "author": "JPTD",  
        "time": "2020-01-01T00:00:00.000Z",  
        "test": false  
      },  
      "receivedTime": "2020-01-01T00:00:02.000Z",  
      "xmlReport": {  
        "control": {  
          "title": "気象警報・注意報（H 2 7）",  
          "dateTime": "2020-02-27T00:00:00Z",  
          "status": "通常",  
          "editorialOffice": "気象庁本庁",  
          "publishingOffice": "気象庁予報部"  
        },  
        "head": {  
          "title": "東京都気象警報・注意報",  
          "reportDateTime": "2020-02-27T09:00:00+09:00",  
          "targetDateTime": "2020-02-27T09:00:00+09:00",  
          "eventId": null,  
          "serial": null,  
          "infoType": "発表",  
          "infoKind": "気象警報・注意報",  
          "infoKindVersion": "1.2_1",  
          "headline": "注意報を解除します。"  
        }  
      },  
      "format": "xml",  
      "url": "https://data.api.dmdata.jp/v1/123456789abcdef..."  
    }  
  ]  
}
```

Listing 2.9: Telegram list sample response JSON.

- `classification` gives the classification of this telegram. For the purpose of this application, all classification will be of type `telegram.earthquake`;
- `head` gives the head of this telegram, including the `type`, the `author`, the `time`, and whether it is `test`;
- `receivedTime` gives the time of this telegram being released,
- `xmlReport` details parts of information encoded in the XML, if the `xmlReport` option in the query is set to true;
- `url` gives the URL for the detailed information of this telegram (that can be retrieved using another GET request), and `format` gives its format.

Apart from standard errors, it might also return a 400 error with message 'You have entered a string that is not defined in `formatMode`'.

Past Earthquake API The API `gd.earthquake` allows us to use a GET request to obtain a series of earthquake on `base://gd/earthquake`, with the option to obtain a list, or to obtain only a certain event.

These APIs will be used to display a list of past earthquakes. For each object representing an earthquake, this includes:

- Its unique `id`, `eventId`, `originTime` (if it is not a report on the intensity), and `arrivalTime`;
- its `type` (which is `normal` for earthquakes in Japan, and `distant` for earthquake reported by other countries);
- its `hypocenter`, including the `code`, `name`, the `coordinate` and the `depth`;
- its `magnitude` (an object representing units and values); and
- its `maxInt`, the maximum intensity observed.

It might also include LPGM information, in `maxLgint` and `lgCategory`.

If the call `base://gd/earthquake/:eventId` is used, it will return the object representing the earthquake, as well as a list of telegram XML, which was detailed above in the `telegram.list` section. However, it is worth noting that all data here will be parsed into JSON using DM-D.S.S.'s JSON Schema.

This API will be called to obtain a list of past earthquakes when the program launches, and at regular intervals. This is because the WebSocket connection will feed in information on earthquakes as well, so there is no need to call this API every second.

WebSocket Connections WebSocket connections are essential to real-time applications, since it provides a real-time feed from the server to the client on latest data, without the need of the client to query (which consumes a lot of resources). DM-D.S.S. provides WebSockets to initiate real-time connection to the server to achieve the latest telegrams and earthquake warnings.

The URL of the WebSocket will be `wss://#{#1}.api.dmdata.jp/v2/websocket`, where the #1 part could be `ws001` to `ws004` (which will be assigned in the `socket.start` API call).

WebSocket Responses There are four types of responses that a WebSocket could return, indicated in the `type` attribute:

- a `start`. This only happens when the WebSocket is started, and this includes the exact same information in the `socket.start` call in Listing 2.6, with an additional `time` to indicate the time of the response;
- a (server-side initiated) `ping`. This will happen regularly, and the server will send a JSON in the format in Listing 2.11.

Upon receiving, the client should return a `pong` JSON in the same format, with the same `pingId`, as in Listing 2.12.

This is in place to ensure that there are no 'dead' WebSocket connections, and the server will close the WebSocket connection after 120s of no response in such ping-pong calls, to not take up the limited number of WebSocket connection slots;

```
{
  "items": [
    {
      "id": 1584,
      "type": "normal",
      "eventId": "20210808085414",
      "originTime": "2021-08-08T08:54:00+09:00",
      "arrivalTime": "2021-08-08T08:54:00+09:00",
      "hypocenter": {
        "code": "787",
        "name": "鹿児島湾",
        "coordinate": {
          "latitude": {
            "text": "31.3°N",
            "value": "31.3000"
          },
          "longitude": {
            "text": "130.6°E",
            "value": "130.6000"
          },
          "height": {
            "type": "高さ",
            "unit": "m",
            "value": "0"
          }
        },
        "geodeticSystem": "日本測地系"
      },
      "depth": {
        "type": "深さ",
        "unit": "km",
        "value": "0",
        "condition": "ごく浅い"
      },
      "magnitude": {
        "type": "マグニチュード",
        "unit": "Mj",
        "value": "2.6"
      },
      "maxInt": "2"
    }
  ]
}
```

Listing 2.10: Past earthquake list sample response JSON.

```
{
  "type": "ping",
  "pingId": "012345"
}
```

Listing 2.11: WebSocket Ping JSON.

```
{
  "type": "pong",
  "pingId": "012345"
}
```

Listing 2.12: WebSocket Pong JSON.

- a client-side initiated `ping` as in Listing 2.11, which the server will return a `pong` as in Listing 2.12. This works almost identically as before, apart from that such `pingId` is optional. This is in place to ensure that the application would be able to know if the connection is broken, for example due to unstable internet connections, and would be able to restart another WebSocket connection;
- a `error`, which will be the format in Listing 2.13. There will also be a boolean, `close`, to indicate whether the WebSocket connection is closed or not.

```
{
  "type": "error",
  "error": "Server error.",
  "code": 4503,
  "close": true
}
```

Listing 2.13: WebSocket Error JSON.

A table of possible WebSocket errors is included in 2.9, with the relevant WebSocket error codes.

Error Code	Error Details
4400	Compulsory parameters are not specified when starting WebSocket.
4404	Ticket is not specified when starting WebSocket.
4409	Number of connection limit is reached.
4503	Internal server error.
4640	<code>pingId</code> does not match for a server-initiated <code>ping</code> .
4641	Incorrect data (non-JSON) received from client.
4808	Client requested closure of WebSocket.
4807	Contracts are discontinued in connection.

Table 2.9: Errors for WebSocket connection.

The program should be designed to be able to handle these errors, and restart the connection if necessary;

- a `data`, an example shown in Listing 2.14. This will include a `classification`, a version `version`, and a unique `id`. An array named `passing` gives the `name` and `time` of each passing location of this data piece inside the server. Furthermore, the `head` gives some key information, and `xmlReport` gives certain details in the XML body. `format`, `compression` (`gzip`, `zip` or `null`) and `encoding` (`base64` or `utf-8`) gives information on how the body should be processed and interpreted.

This gives the key piece of information that will be passed between the data component of the software and the UI component of the software;

JSON v.s. XML Lots of data are serialised in JSON, but the JMA provides its data in XML format. DM-D.S.S. does also provide JSON formatted schemas for most of the XML data files which are also processed real time. However, there is a high chance of delay (up to 1 second) if the JSON format is used, not to say the potential of an error in processing which lead to undefined behaviour in the JSON format. Therefore, to control the delay and ensure that data is real-time, the WebSockets in this application will use the original format in XML and parse internally in the program.

XML Data Sources To-Do: Detail XML Data Sources where necessary

```
{  
    "type": "data",  
    "version": "2.0",  
    "classification": "telegram.weather",  
    "id": "123456789abcdef...",  
    "passing": [  
        {  
            "name": "websocket-01",  
            "time": "2020-01-01T00:00:00.120Z"  
        }  
    ],  
    "head": {  
        "type": "VPWW54",  
        "author": "JPTD",  
        "time": "2020-01-01T00:00:00.000Z",  
        "test": false,  
        "xml": true  
    },  
    "xmlReport": {  
        "control": {  
            "title": " 気象警報・注意報 (H 2 7) ",  
            "dateTime": "2020-02-27T00:00:00Z",  
            "status": " 通常",  
            "editorialOffice": " 気象庁本庁",  
            "publishingOffice": " 気象庁予報部"  
        },  
        "head": {  
            "title": " 東京都気象警報・注意報",  
            "reportDateTime": "2020-02-27T09:00:00+09:00",  
            "targetDateTime": "2020-02-27T09:00:00+09:00",  
            "eventId": null,  
            "serial": null,  
            "infoType": " 発表",  
            "infoKind": " 気象警報・注意報",  
            "infoKindVersion": "1.2_1",  
            "headline": " 注意報を解除します。"  
        }  
    },  
    "format": "xml",  
    "compression": "gzip",  
    "encoding": "base64",  
    "body": "H4sIAAAAAAAA..."  
}
```

Listing 2.14: WebSocket Data JSON.

Sidenotes It is worth noting that an existing NuGet Library, [Q ingen084/DmdataSharp](#) supports dealing with the DM-D.S.S. data flow and converting them to C# objects (and exceptions). However, for the purposes of this NEA, we will implement our own way to interact with the APIs and the correlated C# DTOs. The developer of this library did also mention that it is quite purpose-built so might not be suitable for general use.

This section referred to the official document for DM-D.S.S.

2.1.2 OOP Model

To-Do: Finish up class diagram with text explanation

The data achieved by the previous two data sources will be parsed into objects (classes, records) to transfer between different components of the program. Those objects will then be transferred to the GUI component and be displayed.

The data achieved using the NIED Kyoshin Monitor (observation points) will be converted into objects. The class diagram is shown in is shown in Figure 2.15.

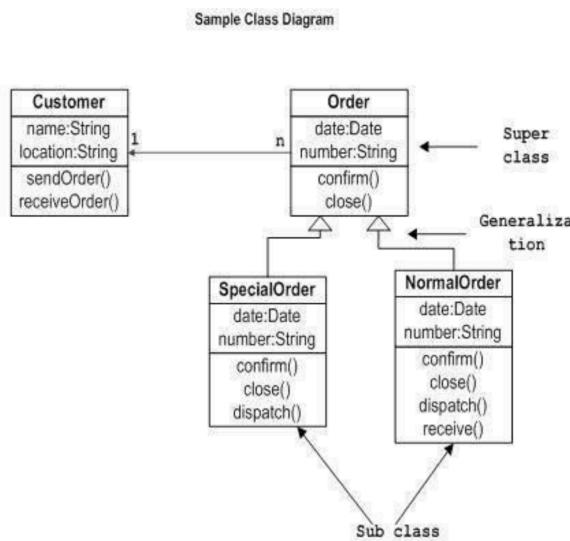


Figure 2.15: Class Diagram for Kyoshin Monitor data objects

The GIF images will be parsed with the built-in [SkiaSharp](#) module by mono, which could also be used to draw the map.

The class diagram following the UML convention for the HTTP-based API calls is shown in Figure 2.16. The JSON responses will be converted to C# objects using [System.Text.Json](#) modules.

This shows the use of composition and inheritance. The use of generics is also demonstrated.

The class diagram for the WebSocket based calls is shown in Figure 2.17.

The XML telegrams will be parsed with the built-in [System.Xml](#) modules.

2.1.3 Algorithms

There are two key 'algorithms' that this application will use: the first one used to calculate the position of the P/S wavefronts, and the other one used to detect shake on the real-time monitoring screen.

2.1.3.1 Wavefront Calculation

Earthquake waves do not travel at uniform rate as they spread out due to the decrease in energy, and so there is no uniform velocity that the seismic waves travel in. We cannot do a simple equation like $s = vt$ to calculate the distance of the wavefront of a seismic wave from the epicentre.

However, JMA provides tables for the time that seismic waves take to travel a certain distance in their data bank, together with the format definition. It will be possible for us to look up the table and plot the seismic waves at correct distance at a certain time.

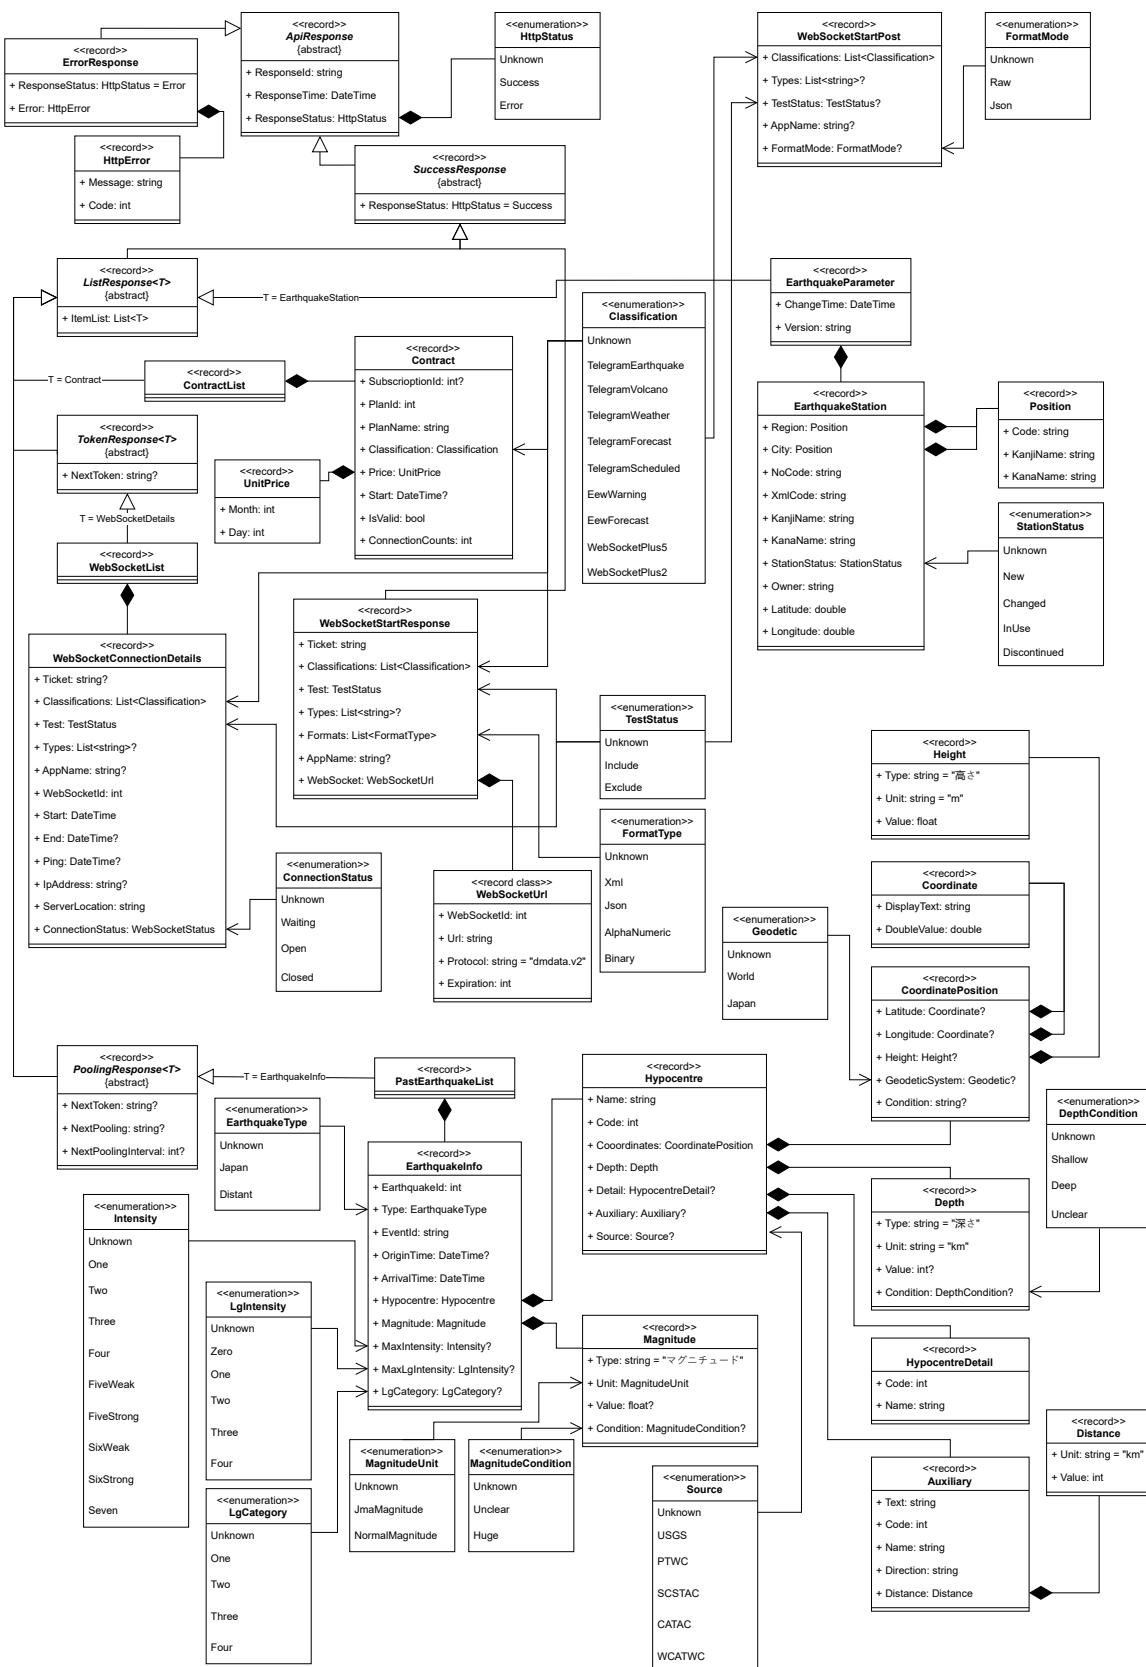


Figure 2.16: Class Diagram for HTTP data objects

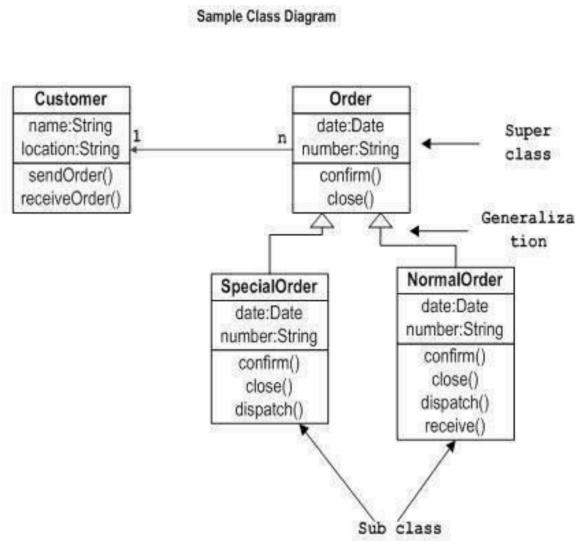


Figure 2.17: Class Diagram for WebSocket data objects

Comparing the different wave travel tables that JMA provides, the most suitable one for this application will be the **JMA 2001**, since it is designed for general purpose uses for both land-based and ocean-based earthquakes, and does not take into account the effect of the altitude of the observation points. Listing 2.15 provides a preview of the first 10 lines of this file.

P.....0.000	S.....0.000	0.....0.....0
P.....0.416	S.....0.703	0.....2
P.....0.831	S.....1.403	0.....4
P.....1.243	S.....2.099	0.....6
P.....1.650	S.....2.786	0.....8
P.....2.052	S.....3.465	0.....10
P.....2.448	S.....4.135	0.....12
P.....2.838	S.....4.794	0.....14
P.....3.221	S.....5.444	0.....16
P.....3.600	S.....6.084	0.....18

Listing 2.15: JMA 2001 Wave Travel Tables.

The table is a lookup table from horizontal distance to time in terms of the depth of the epicentre and the type of wave (P or S) to the time needed to travel such distance. Each row represents the P-Wave, time taken for the P-wave to travel (in seconds), S-wave, time taken for the S-wave to travel (in seconds), depth of epicentre (in kilometres), distance from epicentres (in kilometres).

The depth and the distance from epicentre is provided in the intervals specified in 2.10. They are provided for distances up to 2000 kilometres and depths up to 700 kilometres.

Distance	Interval for Depth	Interval for distance
0 ~ 50	2	2
50 ~ 200	5	5
200 ~ 700	10	10
700 ~ 2000	—	10

Table 2.10: Distance intervals in JMA 2001.

However, this does not provide us with the distance we would like, which is drawing a circle based on how long it has been since the earthquake has happened – the other way around. Luckily, for a fixed depth, the list is sorted since the distance is always increasing, so is the time. We can apply a binary

search on the list given a depth (by first pinpointing the start and the end rows for that depth, and this is trivial since there is a fixed number of rows for each depth), and find the neighbouring two times such that the current time elapsed from the earthquake happening is between them. After doing this, a linear interpolation will be done on the neighbouring time-distance (t, d) pairs to find the accurate distance (radius) corresponding with the time and the depth.

This file will be read by the program upon launch every time and stored in the active memory when the program is running.

2.1.3.2 Shake Detection

As discussed in the analysis section, one of the common features of applications with real-time intensity display map is the shake detecting feature. Specifically, if the measured intensities within a certain region shows an increasing tendency, the application will display a box around that area to indicate there is a chance that the earthquake will happen.

However, there is a chance that certain observation points will malfunction and suddenly show a big increase in intensity, which does not indicate an earthquake, and we would like to prevent this from happening. Furthermore, we wish to be able to distinguish between a big earthquake and a small earthquake on the display when such shake event has occurred.

It is worth thinking how human would see an earthquake from the real-time intensity map. First, we would notice a certain observation point has an increase in the intensity for a certain observation point. Then, we will naturally look at the observation points near it, and see whether they also have an increase, or if that was just an anomaly. If the points nearby also has increasing intensity, then we would think it is probably an event, and we will look at the observation points near that, etc. If after a certain time period, that the intensity is no longer increasing, then we may say that the shake event is over.

The algorithm used in KEVI used a similar idea, and this is the algorithm that we are going to implement in our solution. Specifically, it will create a list of observation points that are near each of the observation points (we will refer to them as neighbouring points) upon launch of the program. When there is a significant increase of the measured value of an observation point, the program will look at the neighbouring points, and if they show an increase (not necessarily significant), this will create a new event including the observation point and the neighbouring points. If, further, that the neighbouring points also observe a significant increase in intensity, then they will be added to the event, and their neighbouring points will be added to the list of neighbouring points as well.

An event could be represented by three things: the time it has happened, the observation point in the event, and the neighbouring points of those points. The neighbouring points will become observation points themselves if they have significant increase in intensity, and then their neighbouring points will become some new neighbouring points. If no such increase has been found, then after a certain time period of waiting, this event would end, and it could be seen that the primary motion of the earthquake is over.

Classification of the significance of an event is straightforward – it can be determined by the maximum intensity observed within the event. A suitable scale would be split at intensity 1 (which is which human can feel a shake), and at intensity 3 (which is when earthquake might actually cause damage), and it has to have minimum measured intensity 0.0. Most real-time measurements have negative measured intensity, so this should not lead to detection of anomalies.

Figure 2.18 shows the concept of an observation point and neighbouring points together with a flowchart of how the algorithm operates. The time constants of 10 seconds and 30 seconds are chosen to reflect the behaviour of common applications including JQuake and KEVI, but should be left to be adjustable in the code to ensure the maintainability.

This section referred to this blog article written by Ingen.

2.2 User Interface

The nature of this application decided that the UI will be a graphical interface. Comparing MAUI in .NET with Avalonia, due to the fact that MAUI is more suitable for a mobile touch-based platform (that also works on desktop), while Avalonia is designed to support the desktop paradigm, the latter will be used to implement the graphical interface.

As discussed in the previous sections, there are three main pages that the program will include: the page for real-time observations, the page for viewing past earthquakes, and the page for controls and settings.

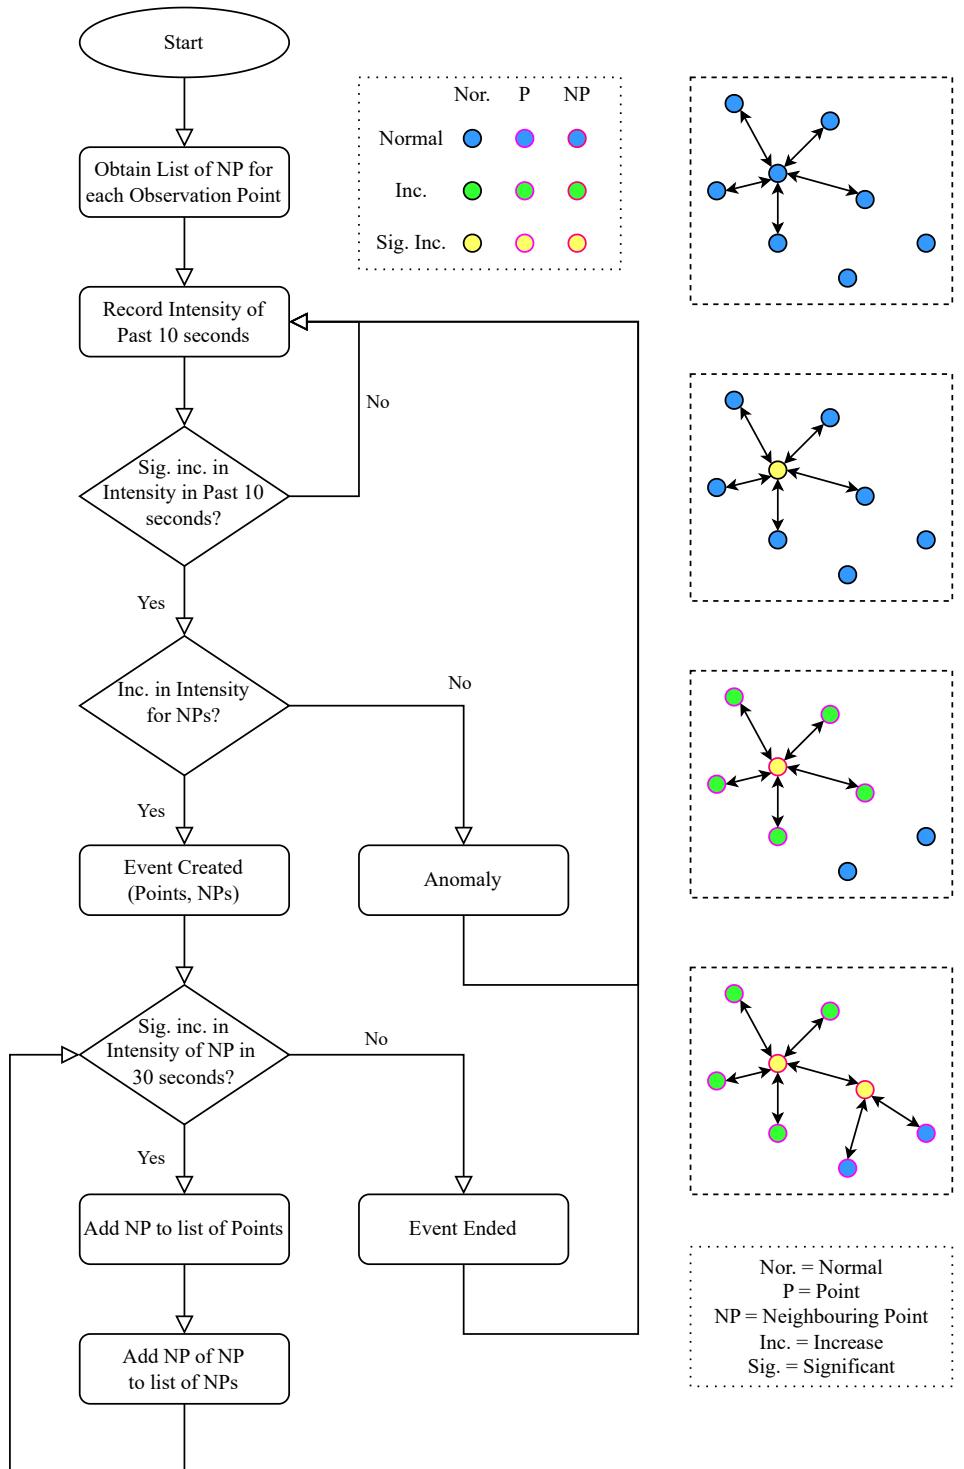


Figure 2.18: Shake detection flowchart and diagram.

A sidebar is used to switch between the three pages.

Note that the following mock-up images are for demonstration purposes only – it is not an actual earthquake.

2.2.1 Real-Time Monitoring Screen

The real-time monitoring screen holds the following three functionalities:

- real-time intensity display (including shake detection boxes);
- tsunami warning display; and
- EEW display (including predicted intensity colouring and real-time wavefront positions).

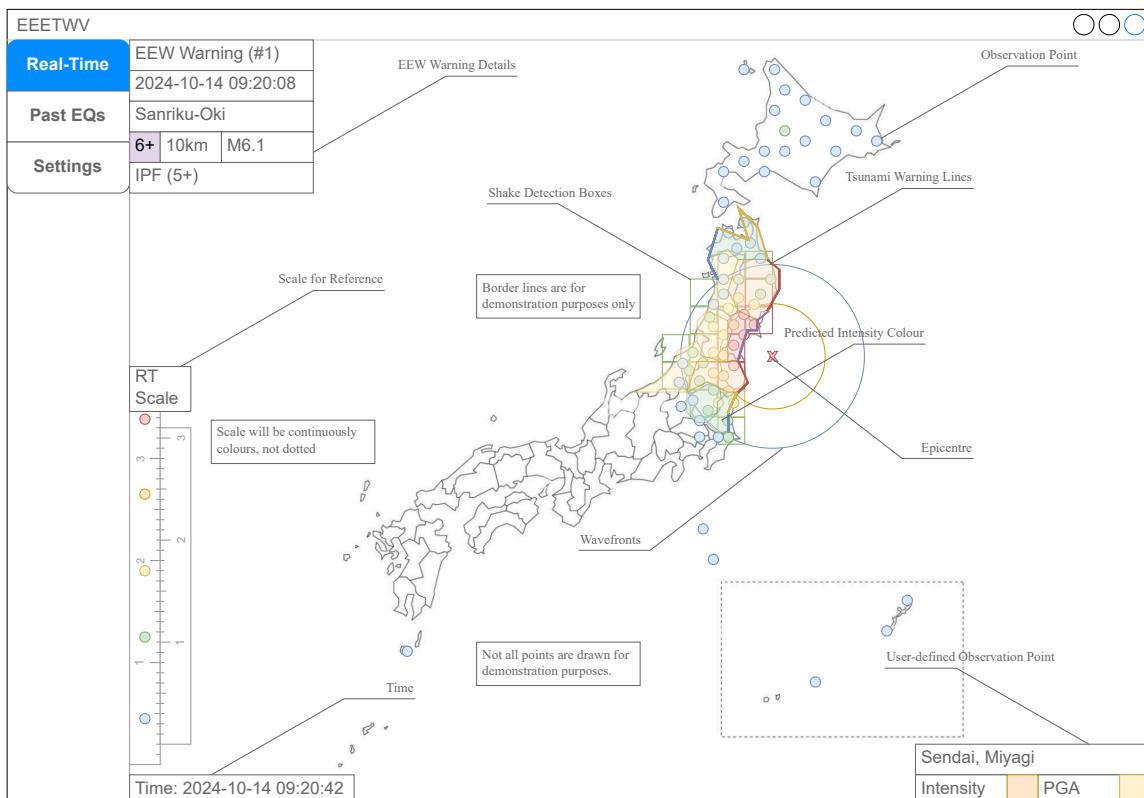


Figure 2.19: Design of GUI for Real-Time Page.

Figure 2.19 shows a design of this page that will be implemented. The real-time intensity colour points, the current time and the colour scale will be displayed at all times.

The shake detection boxes will only be displayed when there is shake detected as described in the algorithm section, and would be coloured into red, yellow or green in accordance to the intensity of the event.

The tsunami warning will be displayed only if it is released (or updated). It will consistently flash at 0.5 Hz to warn the users and to signify its presence.

The EEW warning display will only be present when an EEW is ongoing, until 1 minute after the final EEW warning. The top-left box will display key properties of the earthquake (including the predicted maximum intensity in the corresponding colour), with relatively smaller text displaying the details, such as the shake detection algorithm used (e.g. IPF/PLUM etc.). The map will be coloured in accordance to the predicted intensities released in the EEW.

There are no buttons or interactions for the user to interact with. However, this page will have a relatively high refresh rate to ensure that the data displayed is up-to-date.

2.2.2 Past Earthquakes

The past-earthquake screen regularly displays a sidebar to select the earthquake from, with by default the latest earthquake selected, with a map in the middle. Figure 2.20 shows a design of this page.

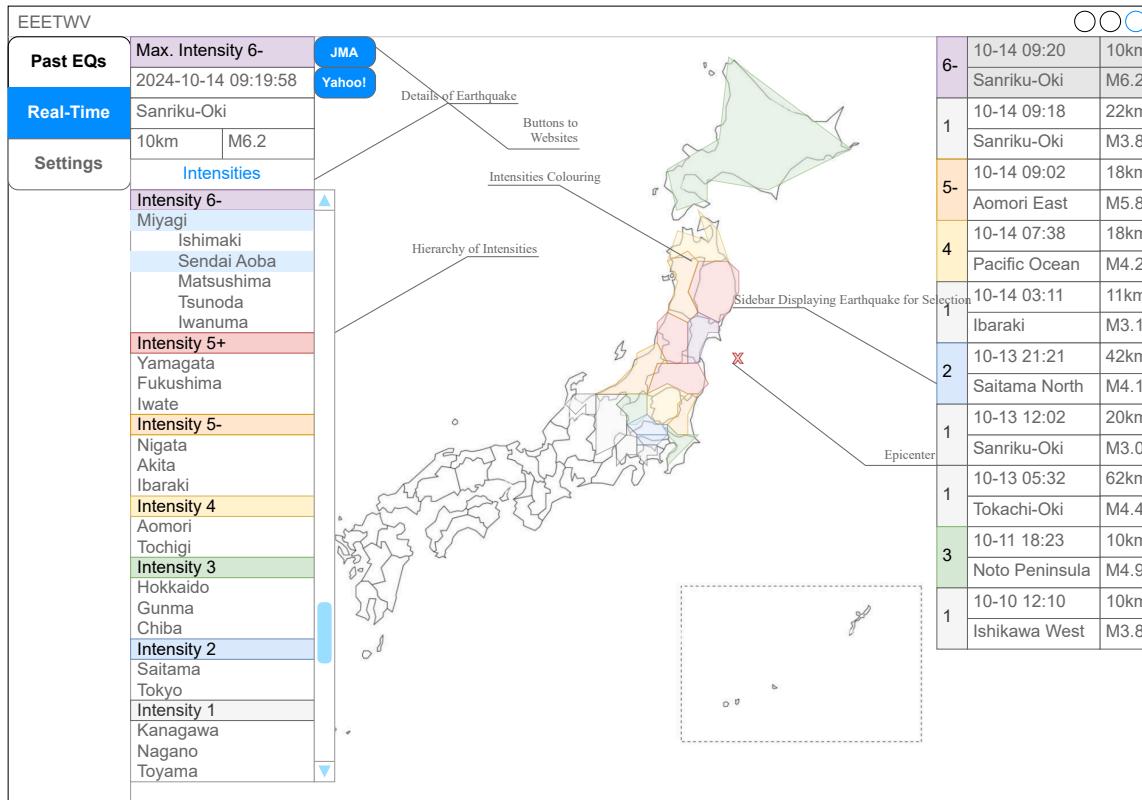


Figure 2.20: Design of GUI for Past Earthquakes Page.

For each earthquake, the sidebar should display the time of the earthquake, the epicentre of the earthquake (position and depth), the maximum intensity of the earthquake (in the correct corresponding colour), and its magnitude.

In the centre, there should be a map colouring the observed intensity of the earthquake, together with a cross to indicate the position of the epicentre.

On the left, there should be the details displayed in a bigger font, and an expandable sidebar to see the intensity of each observation point, in a hierarchy according to the province and the county. There should be two buttons, one corresponding to the JMA website to view the details, and another to jump to a weather service provider to view the details of the earthquake.

2.2.3 Customisation Page

In the customisation page, there should be a place to input an API Key from DM-D.S.S., and in the future this should be upgraded to a button to provide a login using OAuth 2 and the default browser.

There should also be a page to customise sound files for different events, a page to customise the intensity colour scheme, and to define a key point on the map to observe the intensity.

Figure 2.21 shows a mock-up of the design of the customisation page.

2.2.4 Joint Functionalities and Technicalities

There is a joint functionality between the real-time page and the past earthquakes page, that is, when a new EEW/Tsunami Warning is released, the application should automatically jump to the real-time page to display the latest earthquake information to the user.

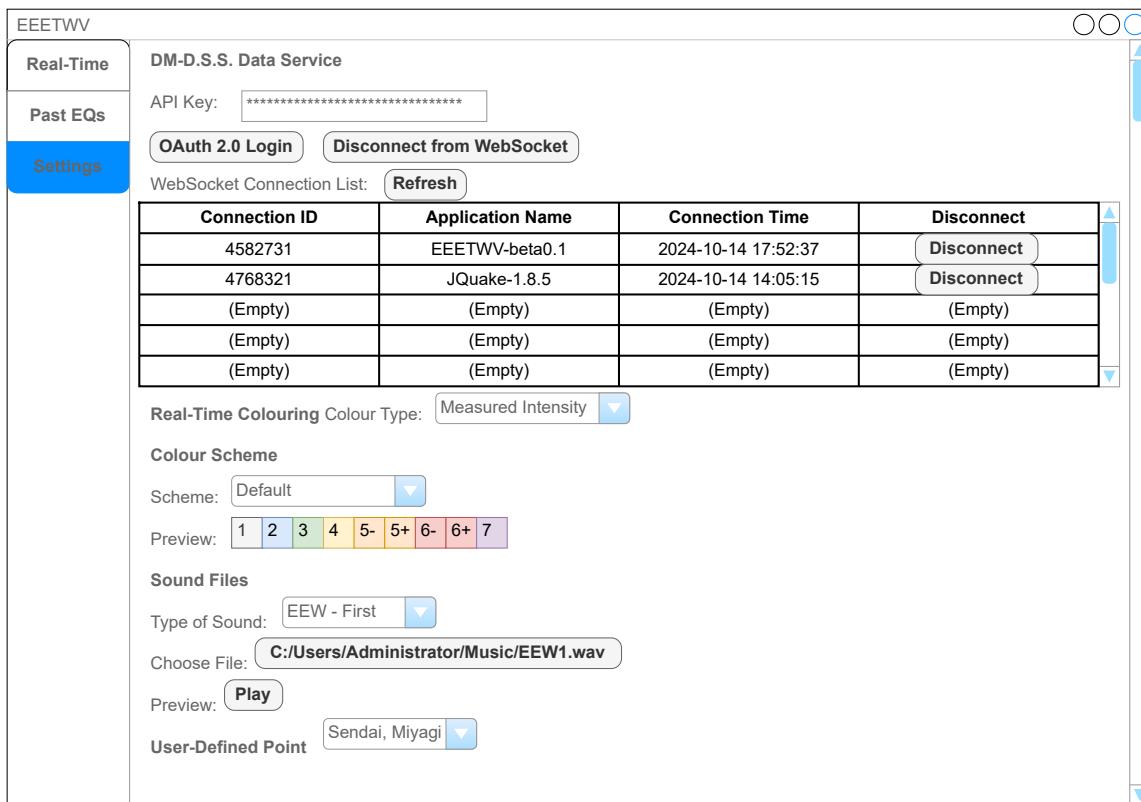


Figure 2.21: Design of GUI for Customisation Page.

Since this a GUI-based application, there will be a significant use of asynchronous programming and events. Specifically, EEWs should be treated as events for the GUI application to handle and display, and user inputs are also events that the program should respond to.

To-Do: Talk about events more

2.3 Hierarchy Chart

As discussed in the analysis section, the program consists of three parts: data-parsing from external data sources, GUI functionalities and joint functionalities, where the GUI part will be divided into two parts focusing on real-time monitoring and past-earthquake information, respectively. A detailed discussion into how different modules can be further split up while at the same time being interacted was discussed, and Figure 2.22 is a hierarchy diagram for the whole application. This shows how **decomposition** technique is applied to reduce a sophisticated problem into more attackable problems.

The whole application (apart from the polynomial fitting part which was done in Python) will be written in C# using the .NET Core Version 9.0, since the .NET Core is designed oriented around OOP techniques, and some JSON properties (e.g. the `JsonStringEnumMemberName` to customise the parsing of enums) will require the use of .NET 9.

The built-in .NET parsers for XML and JSON (`System.Text.Json`) will be used to convert into DTOs.

The GUI will be designed using Avalonia, which is designed to develop cross-platform applications in .NET.

2.4 Hardware & Software Requirements

Table 2.11 outlines basic hardware requirements for the application.

The amount of RAM is due to the amount of data that is processed (and considering other applications running as well). Storage space is not a substantial requirement of this application, while the CPU has

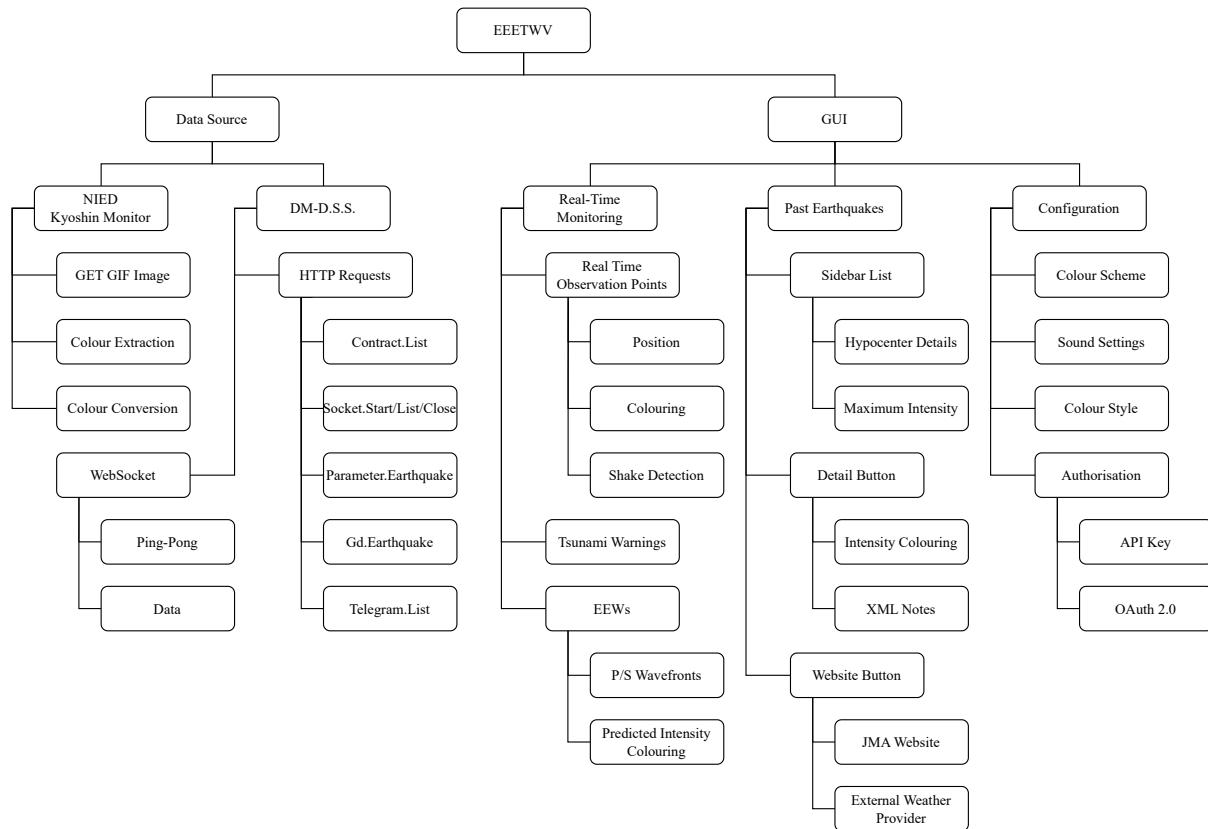


Figure 2.22: Hierarchy chart of the whole application

Type	Minimum	Recommended
RAM	4 GB	8 GB
Storage Space	1 GB	2 GB
CPU	Intel Core 8th Gen (or equiv.)	Intel Core 10th Gen (or equiv.)
Display Resolution	720p	1080p
Display Size	9"	12"

Table 2.11: Hardware Specification for App

to be of high standards to process all the data. To display the application properly (with appropriate size), a display of 1080p 12" is recommended.

It will be able to run on up-to-date Windows, macOS and Linux distributions (both x64 and ARM) due to the cross-platform nature of .NET, but x86 platforms will not be supported.

The author uses a macOS 15 (beta) machine with 2.5K 13" display, Intel Core i5-1038NG7 (with Intel Iris Plus Graphics) and 16 GB of RAM (MacBook Pro 2020, 4 Thunderbolt Ports) and a Windows 11 (beta) machine with 2.5K 15" display, AMD Ryzen 7 5800H and 32 GB of RAM (with RTX 3070 for Laptop) (Legion R9000K 2021) to test the application, and with 2.5K 24" external display as well. An Ubuntu 22.04 virtual machine will be used to test the compatibility for Linux systems.

The application will be self-contained (i.e. comes with .NET runtime) to prevent the user from unnecessary technical complications.

The device needs to have stable connection to the internet using Wi-Fi/Ethernet/other means, to establish connection with the relevant APIs.

Chapter 3

Technical Implementation

3.1 Key Code Segments

3.1.1 Data structures

Implementation of ADTs and OOP Classes to be demonstrated.

3.1.2 Modularity

Code should be created and tested in separate modules that are integrated later. Use subheadings for each module, define the purpose of the module, and show unit testing of the module.

3.1.3 Defensive Programming/Robustness

Exception handling

Chapter 4

Testing

Consider how you will test your project. You should devise a test strategy that encompasses a range of methods.

4.1 Test Strategy

- Unit testing (of individual functions)
- Integration testing (e.g. different modules/class files)
- Robustness (demonstrating defensive programming skills/exception handling)
- Requirements testing (against your initial requirements - a table with test number, description, test data, expected result, evidence (screenshot/video time link) would be suitable)
- Independent end user beta testing (this will assist with your evaluation)

4.2 Testing Video

- You can include a video to assist (but you will need to reference the time point at which relevant evidence appears)
- If you include a video you will need to have it publicly available.
- It is suggested that you include a QR code in your testing to give a link to the video (for the moderator) rather than just giving a long URL on its own.

4.3 System Tests (against original requirements' specification)

You need to give evidence in support of requirements that have been met e.g. reference to a relevant test/screenshot/relevant code.

Requirement №	Description	Success Criteria	Tests + Evidence

Table 4.1: Table of Tests.

Chapter 5

Evaluation

5.1 Requirements Specification Evaluation

Personal evaluation

- Copy and paste your original requirements from your project analysis
- You need to review each requirement and comment objectively on whether it was *fully met/partially met/not met*.

Requirement №	Description	Success Criteria	Fully/Partial/Not met (Reflective Comment)

Table 5.1: Table of Evaluation.

5.2 Independent End-User Feedback

End user/client evaluation

- there **must** be meaningful end user feedback
- You should hold a review meeting with your end user
- Write down any key feedback that they give you. E.g. Agreement that a particular requirement has been meet/comments as to aspects that they find suboptimal/comments as to additions they would like to see

Requirement №	Description	Acceptance Y/N	Additional Comments

Table 5.2: Table of Feedback.

5.3 Improvements

You need to give consideration to a number of potential future improvements that could be made. They may arise from either your experience or from feedback given to you by your end user. Ideally at least one should be in response to end user feedback.

- Write a paragraph for each potential improvement/change
- The improvements/changes could result from additional functionality that has been identified as being beneficial or could be as a result of required efficiencies if some processes are clunky or require faster run-times
- You should then comment on how the proposed change could be implemented moving forward. i.e. what would need to be changed/developed and how? You are not expected to actually make any changes; just comment on the possibilities.

Appendix A

Code Listing

```
# %% [markdown]
# # Polynomial fitting for  $f : [0, 1] \rightarrow \mathcal{C}$ 

# %%
from PIL import Image, PyAccess # for image reading
import matplotlib.pyplot as plt # to plot graphs
from scipy import optimize # to do fitting

plt.rcParams['text.usetex'] = True # LaTeX in plots
plt.rcParams['mathtext.fontset'] = 'stix'
plt.rcParams['font.family'] = 'STIXGeneral'

# %% [markdown]
# ## Plot  $C = (H, S, V)$ 

# %%
orig_img_path: str = 'jma-scale.png'
orig_img: Image.Image = Image.open(orig_img_path) # read original image

orig_img_hsv: Image.Image = orig_img.convert('HSV') # convert to HSV colour format

img_width: int
img_height: int
img_width, img_height = orig_img.size # get size of image

img_width, img_height

# %%
# read the  $(H, S, V)$  in a fixed column

column: int = 5
hsv_list: list[tuple[int, int, int]] = [(orig_img_hsv.getpixel((column, y))) for y
    in range(img_height)] # type: ignore

hsv_list

# %% [markdown]
# ### Plot  $f_H, f_S, f_V$  against  $r$ 

# %%
r_list: list[int] = list(range(img_height))

# split up list into separate lists
```

```

hsv_h_list: list[int] = [c[0] for c in hsv_list]
hsv_s_list: list[int] = [c[1] for c in hsv_list]
hsv_v_list: list[int] = [c[2] for c in hsv_list]

# %%
# setup options for plotting graphs

marker_size: int = 15
marker_char: str = 'x'
line_width: float = 0.3

fig_size: tuple[int, int] = (10, 5)

h_colour: str = 'turquoise'
s_colour: str = 'gold'
v_colour: str = 'gray'

h_label: str = 'Hue $H$'
s_label: str = 'Saturation $S$'
v_label: str = 'Value $V$'

# %%
def init_plt(xlabel: str, ylabel: str, title: str) -> None:
    plt.figure(figsize = fig_size)
    plt.xlabel(xlabel)
    plt.ylabel(ylabel)
    plt.title(title)
    plt.grid(True)
    plt.tight_layout()

# %%
# plot graph of (H, S, V) against r

init_plt('Row Number $r$', '$(H, S, V)$ Values', f'$(H, S, V)$ Values against Row
         Number $r$ along column {column}')
```

plt.scatter(r_list, hsv_h_list, label=h_label, color=h_colour, s=marker_size,
 marker=marker_char, linewidths=line_width)
plt.scatter(r_list, hsv_s_list, label=s_label, color=s_colour, s=marker_size,
 marker=marker_char, linewidths=line_width)
plt.scatter(r_list, hsv_v_list, label=v_label, color=v_colour, s=marker_size,
 marker=marker_char, linewidths=line_width)

plt.legend()

plt.savefig('hsv-against-row.png')

%%
plt.close()

%% [markdown]
Plot f_H, f_S, f_V against h

%%
setup the initial values for h and r

$h_0 = 18$
 $h_1 = 296 + 1$
 $r_{len} = h_1 - h_0$

```

def r_to_h(r: int) -> float:
    return 1 - ((r - h_0) / (r_len - 1))

h_list: list[float] = [r_to_h(r) for r in r_list] # convert list of r to list of h

h_r_list: list[float] = h_list[h_0:h_1] # extract the values of h within range

hsv_h_r_list: list[int] = hsv_h_list[h_0:h_1] # extract the values of (H, S, V)
    ← within range
hsv_s_r_list: list[int] = hsv_s_list[h_0:h_1]
hsv_v_r_list: list[int] = hsv_v_list[h_0:h_1]

h_r_list

# %%
# plot graph of (H, S, V) against h

init_plt('$h$', '$(H, S, V)$ Values', f'$$(H, S, V)$$ Values against $$h$$ along column
    → {column}')
```

plt.scatter(h_r_list, hsv_h_r_list, label=h_label, color=h_colour, s=marker_size,
 ← marker=marker_char, linewidth=line_width)
plt.scatter(h_r_list, hsv_s_r_list, label=s_label, color=s_colour, s=marker_size,
 ← marker=marker_char, linewidth=line_width)
plt.scatter(h_r_list, hsv_v_r_list, label=v_label, color=v_colour, s=marker_size,
 ← marker=marker_char, linewidth=line_width)

plt.legend()

plt.savefig('hsv-against-h.png')

%%
plt.close()

%% [markdown]
Regression

%% [markdown]
Prepare Lists to do Regression

%%
normalise values of h, s, v to our desired values

hsv_h_n_list: list[float] = [hsv_h_r_list[i] / 255 * 360 for i in range(279)]
hsv_s_n_list: list[float] = [hsv_s_r_list[i] / 255 * 1 for i in range(279)]
hsv_v_n_list: list[float] = [hsv_v_r_list[i] / 255 * 1 for i in range(279)]

%% [markdown]
Regression on f_H

%%
define f_H with unknown parameters y_1 , y_2 which operates on a list

```

def f_h_params(xl: list[float], y_1: float, y_2: float) -> list[float]:
    yl: list[float] = [0 for _ in xl]
    for i, x in enumerate(xl):
        if 0 <= x <= 0.1:
            yl[i] = -150 * x + 237

```

```

    elif 0.1 <= x <= 0.6:
        yl[i] = (
            ((222 * (x - 0.3) * (x - 0.4) * (x - 0.6)) / ((0.1 - 0.3) * (0.1 -
                → 0.4) * (0.1 - 0.6))) +
            ((y_1 * (x - 0.1) * (x - 0.4) * (x - 0.6)) / ((0.3 - 0.1) * (0.3 -
                → 0.4) * (0.3 - 0.6))) +
            ((y_2 * (x - 0.1) * (x - 0.3) * (x - 0.6)) / ((0.4 - 0.1) * (0.4 -
                → 0.3) * (0.4 - 0.6))) +
            ((51 * (x - 0.1) * (x - 0.3) * (x - 0.4)) / ((0.6 - 0.1) * (0.6 -
                → 0.3) * (0.6 - 0.4)))
        )
    elif 0.6 <= x <= 0.9:
        yl[i] = -170 * x + 153
    elif 0.9 <= x <= 1:
        yl[i] = 0
    else:
        yl[i] = 0
    return yl

# %%
h_init: list[int] = [0, 0] # initial guess to indicate number of parameters

h_params: list[int]

h_params, _ = optimize.curve_fit(f_h_params, h_r_list, hsv_h_n_list, p0=h_init) # 
    ← optimised parameters

h_params

# %%
def f_h(x) -> list[float]: # this is a partial function which gives in the fitted
    ← parameters
    return f_h_params(x, *h_params)

h_p_list: list[float] = [i / 1000 for i in range(0, 1001, 1)] # list to make sure
    ← the plotted graph looks quite smooth
hsv_h_fitted_list: list[float] = f_h(h_p_list) # fitted line

# %%
line_width = 1.25 # make the markers look a bit thicker

# %%
# plot result of fit

init_plt('$h$', h_label, '$H$ against $h$')

plt.scatter(h_r_list, hsv_h_n_list, label=h_label, color=h_colour, s=marker_size,
    ← marker=marker_char, linewidth=line_width)
plt.plot(h_p_list, hsv_h_fitted_list, label='Fit')

plt.legend()
plt.savefig('h-against-h.png')

# %%
plt.close()

# %% [markdown]
# ### Regression on  $f_S$ 

```

```

# %%
# define f_S

def f_s(xl: list[float]) -> list[float]:
    yl: list[float] = [0 for _ in xl]
    for i, x in enumerate(xl):
        if 0 <= x <= 0.2:
            yl[i] = 1
        elif 0.2 <= x <= 0.29:
            yl[i] = -2.611 * x + 1.522
        elif 0.29 <= x <= 0.4:
            yl[i] = 1.682 * x + 0.277
        elif 0.4 <= x <= 0.5:
            yl[i] = 0.5 * x + 0.75
        elif 0.5 <= x <= 1:
            yl[i] = 1
        else:
            yl[i] = 0
    return yl

hsv_s_fitted_list: list[float] = f_s(h_p_list) # fitted line

# %%
# plot result of fit

init_plt('$h$', s_label, '$S$ against $h$')

plt.scatter(h_r_list, hsv_s_n_list, label=s_label, color=s_colour, s=marker_size,
           marker=marker_char, linewidth=line_width)
plt.plot(h_p_list, hsv_s_fitted_list, label='Fit')

plt.legend()
plt.savefig('s-against-h.png')

# %% [markdown]
# ### Regression on  $f_V$ 

# %%
# define f_V

def f_v(xl: list[float]) -> list[float]:
    yl: list[float] = [0 for _ in xl]
    for i, x in enumerate(xl):
        if 0 <= x <= 0.1:
            yl[i] = 1.8 * x + 0.8
        elif 0.1 <= x <= 0.172:
            yl[i] = -4.444 * x + 1.424
        elif 0.172 <= x <= 0.2:
            yl[i] = 5.714 * x - 0.323
        elif 0.2 <= x <= 0.3:
            yl[i] = 1.6 * x + 0.5
        elif 0.3 <= x <= 0.4:
            yl[i] = 0.2 * x + 0.92
        elif 0.4 <= x <= 0.8:
            yl[i] = 1
        elif 0.8 <= x <= 0.9:
            yl[i] = -0.3 * x + 1.24
        elif 0.9 <= x <= 1:
            yl[i] = -2.9 * x + 3.58
    return yl

```

```

    else:
        yl[i] = 0
    return yl

hsv_v_fitted_list: list[float] = f_v(h_p_list) # fitted line

# %%
# plot result of fit

init_plt('$h$', v_label, '$V$ against $h$')

plt.scatter(h_r_list[1:r_len - 1], hsv_v_n_list[1:r_len - 1], label=v_label,
            color=v_colour, s=marker_size, marker=marker_char, linewidth=line_width) # the
            # first and last points are excluded from the plot
plt.plot(h_p_list, hsv_v_fitted_list, label='Fit')

plt.legend()
plt.savefig('v-against-h.png')

# %% [markdown]
# ## Back-Generate the image

# %%
# setup an HSV formatted image and get its pixels

image_generated: Image.Image = Image.new('HSV', (img_width, img_height))
generated_pixels: PyAccess.PyAccess = image_generated.load() # type: ignore

# returns a list of tuples of (H, S, V) for a column

def f(yl: list[int]) -> list[tuple[int, int, int]]:
    hl: list[float] = [r_to_h(y) for y in yl]

    hsv_h: list[float] = f_h(hl)
    hsv_s: list[float] = f_s(hl)
    hsv_v: list[float] = f_v(hl)

    hsv_h_i: list[int] = [int(h / 360 * 255) for h in hsv_h]
    hsv_s_i: list[int] = [int(s * 255) for s in hsv_s]
    hsv_v_i: list[int] = [int(v * 255) for v in hsv_v]

    return [(hsv_h_i[i], hsv_s_i[i], hsv_v_i[i]) for i in yl]

my_pixels: list[list[tuple[int, int, int]]] = [f(list(range(img_height))) for _ in
                                              range(img_width)]

# copy this into the generated_pixels reference

for x in range(img_width):
    for y in range(img_height):
        generated_pixels[x, y] = my_pixels[x][y]

# convert to RGB and output

image_generated_rgb: Image.Image = image_generated.convert('RGB')
image_generated_rgb.save('generated-colour.png')

```

Listing A.1: Code for Polynomial Fit of Colour

```

using System;
using System.Net.WebSockets;
using System.Text;
using System.Threading;
using System.Threading.Tasks;

class Program
{
    static async Task Main(string[] args)
    {
        using (ClientWebSocket webSocket = new ClientWebSocket())
        {
            Uri serverUri = new Uri("wss://example.com/socket"); // Replace with
            // your WebSocket server URI

            try
            {
                Console.WriteLine("Connecting to WebSocket...");
                await webSocket.ConnectAsync(serverUri, CancellationToken.None);
                Console.WriteLine("Connected!");

                // Sending a message
                string messageToSend = "Hello, WebSocket!";
                byte[] messageBytes = Encoding.UTF8.GetBytes(messageToSend);
                await webSocket.SendAsync(new ArraySegment<byte>(messageBytes),
                WebSocketMessageType.Text, true, CancellationToken.None);
                Console.WriteLine($"Sent: {messageToSend}");

                // Receiving a message
                byte[] buffer = new byte[1024];
                WebSocketReceiveResult result = await webSocket.ReceiveAsync(new
                ArraySegment<byte>(buffer), CancellationToken.None);
                string messageReceived = Encoding.UTF8.GetString(buffer, 0,
                result.Count);
                Console.WriteLine($"Received: {messageReceived}");

                // Closing the WebSocket
                Console.WriteLine("Closing WebSocket...");
                await webSocket.CloseAsync(WebSocketCloseStatus.NormalClosure,
                "Goodbye", CancellationToken.None);
                Console.WriteLine("WebSocket closed.");
            }
            catch (WebSocketException ex)
            {
                Console.WriteLine($"WebSocket error: {ex.Message}");
            }
            catch (Exception ex)
            {
                Console.WriteLine($"Unexpected error: {ex.Message}");
            }
        }
    }
}

```

Listing A.2: Code generated by ChatGPT in [58]

Appendix B

Use of AI

The detailed prompt of the use of ChatGPT 4o [58] is as in Figure B.1, Figure B.2 and Figure B.3. For the ease of reference, the code is also included in A.2.

Connecting to a WebSocket in C#

WebSocket connections in C# are typically handled using the `System.Net.WebSockets` namespace. Here's an example of how you can create a WebSocket connection in C#, send and receive messages.

Step-by-Step Guide

1. Add the Necessary Namespace

Ensure your project has access to the `System.Net.WebSockets` namespace. You might need to install the `System.Net.WebSockets.Client` package if you're targeting .NET Framework.

2. Create a WebSocket Connection

You use the `ClientWebSocket` class to create a client connection.

Figure B.1: Prompt to ChatGPT in [58], Part 1

This is used to outline a working example of `System.Net.WebSocket` class and the author made numerous edits and additions to eventually create commit `8f8f6e9` on the same day, and other references such as StackOverflow [19, 22] and the official Microsoft Documentation [48] has also been used to create the relevant code in WebSocket connections.

This code has eventually been refactored and removed in `60b660a`, still referencing the sources [19, 22].

Example Code <pre>csharp using System; using System.Net.WebSockets; using System.Text; using System.Threading; using System.Threading.Tasks; class Program { static async Task Main(string[] args) { using (ClientWebSocket webSocket = new ClientWebSocket()) { Uri serverUri = new Uri("wss://your-websocket-endpoint"); CancellationTokenSource cts = new CancellationTokenSource(); try { // Connect to the WebSocket server Console.WriteLine("Connecting to WebSocket server..."); await webSocket.ConnectAsync(serverUri, cts.Token); Console.WriteLine("Connected!"); // Send a message string message = "Hello, WebSocket!"; byte[] bytesToSend = Encoding.UTF8.GetBytes(message); await webSocket.SendAsync(new ArraySegment<byte>(bytesToSend), WebSocketMessageType.Text, true, cts.Token); Console.WriteLine(\$"Sent: {message}"); // Receive a message byte[] buffer = new byte[1024]; WebSocketReceiveResult result = await webSocket.ReceiveAsync(new ArraySegment<byte>(buffer), cts.Token); string receivedMessage = Encoding.UTF8.GetString(buffer, 0, result.Count); Console.WriteLine(\$"Received: {receivedMessage}"); // Close the connection await webSocket.CloseAsync(WebSocketCloseStatus.NormalClosure, "Connection closed."); Console.WriteLine("Connection closed."); } catch (WebSocketException e) { Console.WriteLine(\$"WebSocket error: {e.Message}"); } catch (Exception ex) { Console.WriteLine(\$"Error: {ex.Message}"); } } } }</pre>	Example Code <pre>csharp //Websocket() //socket-endpoint"; //ationTokenSource(); //socket server..."; //i, cts.Token); //getBytes(message); //egment<byte>(bytesToSend), WebSocketMessageType.Text, true, cts.Token); //; //: webSocket.ReceiveAsync(new ArraySegment<byte>(buffer), cts.Token); //8.GetString(buffer, 0, result.Count); //redMessage"); //closeStatus.NormalClosure, "Closing", cts.Token); //"); //{e.Message}); //{e.Message});</pre>
---	--

Figure B.2: Prompt to ChatGPT in [58], Part 2

Explanation of Key Parts

1. `ClientWebSocket` : This is the main class for handling WebSocket connections.
2. `ConnectAsync` : Establishes the WebSocket connection to the specified URI.
3. `SendAsync` : Sends data to the WebSocket server.
4. `ReceiveAsync` : Receives data from the WebSocket server.
5. `CloseAsync` : Closes the WebSocket connection gracefully.
6. **Buffer Management:** The buffer is a byte array used to store incoming data temporarily.

Notes

- Replace `"wss://your-websocket-endpoint"` with your actual WebSocket server URI.
- Ensure you handle exceptions like `WebSocketException` for scenarios where the connection might fail.
- Use proper cancellation tokens to handle task cancellation in production code.

This code provides a basic framework for working with WebSocket connections in C#. You can expand it based on your application's needs.



Figure B.3: Prompt to ChatGPT in [58], Part 3

Appendix C

Bibliography

- [1] E. Aparicio. *DemoMapsui*. 2024. URL: <https://github.com/dev-elian/DemoMapsui>.
- [2] E. Aparicio. *MVVM with Maosui / Maps with .NET*. 3rd July 2024. URL: https://www.youtube.com/watch?v=5zcDIxUsV_Y (visited on 10/03/2025).
- [3] Avalonia, ed. *Avalonia Docs*. URL: <https://docs.avaloniaui.net/docs/welcome> (visited on 10/03/2025).
- [4] Avalonia, ed. *Built-in Controls*. URL: <https://docs.avaloniaui.net/docs/reference/controls/> (visited on 10/03/2025).
- [5] Avalonia. *Fluent Icons for Avalonia*. URL: <https://avaloniaui.github.io/icons.html> (visited on 10/03/2025).
- [6] Avalonia, ed. *How to Create a Custom Data Binding Converter*. URL: <https://docs.avaloniaui.net/docs/guides/data-binding/how-to-create-a-custom-data-binding-converter> (visited on 10/03/2025).
- [7] Avalonia, ed. *How To Log Errors and Warnings*. URL: <https://docs.avaloniaui.net/docs/guides/implementation-guides/logging-errors-and-warnings> (visited on 10/03/2025).
- [8] Avalonia, ed. *How To Use Design-time Data*. URL: <https://docs.avaloniaui.net/docs/guides/implementation-guides/how-to-use-design-time-data> (visited on 10/03/2025).
- [9] Avalonia, ed. *How to use INotifyPropertyChanged*. URL: <https://docs.avaloniaui.net/docs/guides/data-binding/inotifypropertychanged> (visited on 10/03/2025).
- [10] Avalonia, ed. *Localizing using ResX*. URL: <https://docs.avaloniaui.net/docs/guides/implementation-guides/localizing> (visited on 10/03/2025).
- [11] BillWagner et al., eds. *Documentation comments*. 15th June 2023. URL: <https://learn.microsoft.com/en-us/dotnet/csharp/language-reference/xmldoc/> (visited on 10/12/2024).
- [12] M. Bloch. *mapshaper*. 2025. URL: <https://mapshaper.org/>.
- [13] dmdata.jp, ed. *API v2*. 1st Dec. 2024. URL: <https://dmdata.jp/docs/reference/api/v2/> (visited on 07/12/2024).
- [14] dmdata.jp, ed. *EEW*について. 7th Feb. 2025. URL: <https://dmdata.jp/docs/eew/> (visited on 10/03/2025).
- [15] dmdata.jp, ed. *JSON*化データについて. 7th Feb. 2025. URL: <https://dmdata.jp/docs/reference/conversion/json/> (visited on 10/03/2025).
- [16] dmdata.jp, ed. *OAuth 2 v1*. 1st Dec. 2024. URL: <https://dmdata.jp/docs/reference/oauth2/v1> (visited on 10/12/2024).
- [17] dmdata.jp, ed. *サンプル JavaScript*. 1st Dec. 2024. URL: <https://dmdata.jp/docs/sample/javascript> (visited on 10/12/2024).
- [18] dmdata.jp, ed. *電文データ配信データの区分*. 17th Feb. 2025. URL: <https://dmdata.jp/docs/telegrams/> (visited on 10/03/2025).
- [19] FloriUni. *Create a client websocket based console app*. 17th Jan. 2021. URL: <https://stackoverflow.com/a/65761228> (visited on 22/11/2024).

- [20] gewarren and BillWagner, eds. *JSON serialization and deserialization (marshalling and unmarshalling) in .NET*. 25th Oct. 2023. URL: <https://learn.microsoft.com/en-us/dotnet/standard/serialization/system-text-json/overview> (visited on 01/12/2024).
- [21] gewarren et al., eds. *Handling and throwing exceptions in .NET*. 15th Sept. 2021. URL: <https://learn.microsoft.com/en-us/dotnet/standard/exceptions/> (visited on 10/03/2025).
- [22] Harry. *Connecting to websocket using C# (I can connect using JavaScript, but C# gives Status code 200 error)*. Ed. by kevinarpe. 25th Aug. 2020. URL: <https://stackoverflow.com/a/63574016> (visited on 22/11/2024).
- [23] J. Hunter et al., eds. *Matplotlib 3.9.3 documentation*. 2002. URL: <https://matplotlib.org/stable/users/index.html> (visited on 07/10/2024).
- [24] N. Iarocci. *How to implement a PKCE code challenge in C#*. 17th Jan. 2024. URL: <https://nicolaiarocci.com/how-to-implement-pkce-code-challenge-in-csharp/> (visited on 01/01/2024).
- [25] IEvangelist et al., eds. *.NET dependency injection*. 18th July 2024. URL: <https://learn.microsoft.com/en-us/dotnet/core/extensions/dependency-injection> (visited on 10/03/2025).
- [26] IEvangelist et al., eds. *Configuration in .NET*. 9th Oct. 2024. URL: <https://learn.microsoft.com/en-us/dotnet/core/extensions/configuration> (visited on 09/03/2025).
- [27] IEvangelist et al., eds. *Handle and raise events*. 4th Oct. 2022. URL: <https://learn.microsoft.com/en-us/dotnet/standard/events/> (visited on 10/03/2024).
- [28] IEvangelist et al., eds. *Logging in C# and .NET*. 17th July 2024. URL: <https://learn.microsoft.com/en-us/dotnet/core/extensions/logging> (visited on 09/03/2025).
- [29] IEvangelist et al., eds. *Make HTTP requests with the HttpClient class*. 8th Mar. 2025. URL: <https://learn.microsoft.com/en-us/dotnet/fundamentals/networking/http/httpclient> (visited on 10/03/2025).
- [30] ingen084. 【初心者向け】*KyoshinMonitorLib* チュートリアル. 9th Dec. 2020. URL: <https://qiita.com/ingen084/items/b9961576d1af1b140f10>.
- [31] ingen084. *KyoshinShindoPlaceEditor*. Version 0.0.6.0. 2018. URL: <https://github.com/ingen084/KyoshinShindoPlaceEditor/>.
- [32] ingen084. *ShindoObsPoints.mpk.lz4*. 2024. URL: <https://github.com/ingen084/KyoshinEewViewerIngen/blob/develop/src/KyoshinEewViewer/Assets/ShindoObsPoints.mpk.lz4> (visited on 08/03/2025).
- [33] ingen084. 強震モニタの画像から揺れていることを検知する. 14th Dec. 2022. URL: <https://qiita.com/ingen084/items/82985e8d3227c97c608d> (visited on 13/10/2024).
- [34] ingen084. 強震モニタの画像から震度と地点を特定するまで. 2nd Dec. 2020. URL: <https://qiita.com/ingen084/items/7e91f8da2996972ac586#fnref2> (visited on 13/10/2024).
- [35] JGraph. *diagrams.net, draw.io*. Version 15.5.2. 2021. URL: <https://www.diagrams.net/>.
- [36] O. Kopp, C. C. Snethlage and C. Schwentker. ‘JabRef: BibTeX-based literature management software’. In: *TUGboat* 44.3 (138 2023), pp. 441–447. ISSN: 0896-3207. DOI: 10.47397/tb/44-3/tb138kopp-jabref.
- [37] F. Lundh, J. A. Clark and et al., eds. *Pillow (PIL Fork) 11.0.0 documentation*. 1995. URL: <https://pillow.readthedocs.io/en/stable/> (visited on 07/10/2024).
- [38] Mamma Mia Dev. *Avalonia UI - 03 - Sidebar Menu*. 3rd July 2024. URL: <https://www.youtube.com/watch?v=UDbKVheMBY8> (visited on 10/03/2025).
- [39] MammaMiaDev. *avalonia-the-series*. 2024. URL: <https://github.com/MammaMiaDev/avaloniaui-the-series>.
- [40] Mapsui, ed. *API*. URL: <https://mapsui.com/v5/api/Mapsui.html> (visited on 10/03/2025).
- [41] Mapsui, ed. *Logging*. URL: <https://mapsui.com/documentation/logging.html> (visited on 10/03/2025).
- [42] Mapsui. *Mapsui*. Version 5.0.0 Beta 9. 10th Mar. 2025. URL: <https://github.com/Mapsui/Mapsui>.
- [43] Mapsui, ed. *Mapsui Samples*. URL: <https://mapsui.com/samples/> (visited on 10/03/2025).
- [44] Mapsui, ed. *Mapsui Samples*. URL: <https://mapsui.com/v5/samples/> (visited on 10/03/2025).

- [45] Mapsui, ed. *Projections*. URL: <https://mapsui.com/documentation/projections.html> (visited on 10/03/2025).
- [46] Matthias247. *Choosing a buffer size for a WebSocket response*. Ed. by Johan. 29th Jan. 2017. URL: <https://stackoverflow.com/a/41926694> (visited on 22/11/2024).
- [47] Microsoft, ed. *BindingFlags Enum*. URL: <https://learn.microsoft.com/en-us/dotnet/api/system.reflection.bindingflags?view=net-9.0> (visited on 10/03/2025).
- [48] Microsoft, ed. *ClientWebSocket Class*. URL: <https://learn.microsoft.com/en-us/dotnet/api/system.net.websockets.clientwebsocket?view=net-9.0> (visited on 22/11/2024).
- [49] Microsoft, ed. *HttpClient Class*. URL: <https://learn.microsoft.com/en-us/dotnet/api/system.net.http.httpclient?view=net-9.0> (visited on 01/12/2024).
- [50] Microsoft, ed. *HttpListener Class*. URL: <https://learn.microsoft.com/en-us/dotnet/api/system.net.httplistener?view=net-9.0> (visited on 01/12/2024).
- [51] Microsoft, ed. *HttpRequest Class*. URL: <https://learn.microsoft.com/en-us/dotnet/api/system.net.http.httprequestmessage?view=net-9.0> (visited on 01/12/2024).
- [52] Microsoft, ed. *HttpRequestMessage Class*. URL: <https://learn.microsoft.com/en-us/dotnet/api/system.net.http.httprequestmessage?view=net-9.0> (visited on 01/12/2024).
- [53] Microsoft, ed. *MethodInfo Class*. URL: <https://learn.microsoft.com/en-us/dotnet/api/system.reflection.methodinfo?view=net-9.0> (visited on 10/03/2025).
- [54] Microsoft, ed. *Type.GetMethods Method*. URL: <https://learn.microsoft.com/en-us/dotnet/api/system.type.getmethods?view=net-9.0> (visited on 10/03/2025).
- [55] Microsoft, ed. *Uri Class*. URL: <https://learn.microsoft.com/en-us/dotnet/api/system.uri?view=net-9.0> (visited on 01/12/2024).
- [56] Microsoft, ed. *UriBuilder Class*. URL: <https://learn.microsoft.com/en-us/dotnet/api/system.uribuilder?view=net-9.0> (visited on 01/12/2024).
- [57] NoneType1 (フランソワ). 多項式補間を使用して強震モニタ画像から数値データを決定する. 22nd Dec. 2020. URL: <https://qiita.com/NoneType1/items/a4d2cf932e20b56ca444> (visited on 07/10/2024).
- [58] OpenAI ChatGPT-4o. *Response on Connecting to a WebSocket in C#*. 22nd Nov. 2024. URL: <https://openai.com/chatgpt> (visited on 22/11/2024).
- [59] Overleaf. *Bibliography management with biblatex*. URL: https://www.overleaf.com/learn/latex/Bibliography_management_with_biblatex (visited on 10/12/2024).
- [60] Overleaf. *Code Highlighting with minted*. URL: https://www.overleaf.com/learn/latex/Code_Highlighting_with_minted (visited on 14/10/2024).
- [61] SciPy community, ed. *SciPy documentation*. 2008. URL: <https://docs.scipy.org/doc/scipy/> (visited on 14/10/2024).
- [62] Sergio0694, niels9001 and michael-hawker, eds. *Introduction to the MVVM Toolkit*. 7th Nov. 2024. URL: <https://learn.microsoft.com/en-us/dotnet/communitytoolkit/mvvm/> (visited on 10/03/2025).
- [63] TheSeeker. *Find the next TCP port in .NET*. 29th Sept. 2008. URL: <https://stackoverflow.com/a/150974/> (visited on 03/12/2024).
- [64] YoryelNathan. *Process.Start(url) fails*. 4th Apr. 2020. URL: <https://stackoverflow.com/a/61035650/> (visited on 01/12/2024).
- [65] こんぼ. 地震情報アプリ界隈 Advent Calendar 2021. 2021. URL: <https://adventar.org/calendars/6729> (visited on 15/10/2024).
- [66] こんぼ. 地震界隈 Advent Calendar 2020. 2020. URL: <https://adventar.org/calendars/5903> (visited on 15/10/2024).
- [67] こんぼ. 防災アプリ Advent Calendar 2022. 2022. URL: <https://adventar.org/calendars/7488> (visited on 15/10/2024).
- [68] こんぼ. 防災アプリ開発 Advent Calendar 2023. 2023. URL: <https://adventar.org/calendars/9301> (visited on 15/10/2024).

- [69] こんぽ. 防災アプリ開発 *Advent Calendar 2024*. 2024. URL: <https://adventar.org/calendars/9939> (visited on 10/12/2024).
- [70] 気象庁 / Japan Meterological Agency. *JMA2001 走時表*. 2001. URL: https://www.data.jma.go.jp/svd/eqev/data/bulletin/catalog/appendix/trttime/trt_j.html (visited on 17/10/2024).
- [71] 気象庁 / Japan Meterological Agency, ed. 気象庁ホームページにおける気象情報の配色に関する設定指針. July 2020. URL: https://www.jma.go.jp/jma/kishou/info/colorguide/HPColordGuide_202007.pdf (visited on 10/03/2025).
- [72] 気象庁 / Japan Meterological Agency, ed. 気象庁防災情報 XML フォーマット 技術資料. 9th Dec. 2022. URL: https://xml.kishou.go.jp/tec_material.html (visited on 10/12/2024).
- [73] 気象庁 / Japan Meterological Agency, ed. 走時表フォーマット / Time Table Format. URL: https://www.data.jma.go.jp/svd/eqev/data/bulletin/catalog/appendix/trttime/tttfmt_j.html (visited on 17/10/2024).
- [74] 気象庁 / Japan Meterological Agency and dmdata.jp. Sample Data. URL: <https://sample.dmdata.jp/> (visited on 10/03/2025).
- [75] 防災科研 / National Research Institute for Earth Science and Disaster Resilience. *K-NET & KiK-net: 観測点一覧*. URL: <https://www.kyoshin.bosai.go.jp/kyoshin/db/index.html> (visited on 10/03/2025).
- [76] 防災科研 / National Research Institute for Earth Science and Disaster Resilience. *NIED F-net*. 29th Mar. 2019. DOI: <https://doi.org/10.17598/NIED.0005>. URL: <http://www.fnet.bosai.go.jp/auth/dataset/>.
- [77] 防災科研 / National Research Institute for Earth Science and Disaster Resilience. *NIED Hi-net*. 27th Feb. 2019. DOI: <https://doi.org/10.17598/NIED.0003>. URL: <https://hinetwww11.bosai.go.jp/auth/download/cont/>.
- [78] 防災科研 / National Research Institute for Earth Science and Disaster Resilience. *NIED K-NET, KiK-net*. 28th Mar. 2019. DOI: <https://doi.org/10.17598/nied.0004>. URL: <http://www.kyoshin.bosai.go.jp/kyoshin/>.
- [79] 防災科研 / National Research Institute for Earth Science and Disaster Resilience. *NIED MOWLAS (Monitoring of Waves on Land and Seafloor)*. 29th Mar. 2019. DOI: <https://doi.org/10.17598/NIED.0009>. URL: <http://www.mowlas.bosai.go.jp/mowlas/>.