TIMPTE

PREMIUM ALUMINUM
EQUIPMENT TRAILERS & CAR HAULERS

THUNDER ARMOR

TRUCK BED COVERS

MADE IN AMERICA

BUILT TO PROTECT

- MADE IN AMERICA
- REAR WINDOW VISIBILTY & FULL BED ACCESS
- WEATHER RESISTANCE
- INSTANT AVAILABILITY
- HEAVY-DUTY
- BEST IN CLASS LOW-PROFILE DESIGN
- QUICK & EASY INSTALLATION
- ENHANCED THEFT PROTECTION

TRUCK BED COVER FIT GUIDE

PART NO.	MAKE	MODEL	BED SIZE	START YEAR	END YEAR	NOTES/DESCRIPTION
184407	GMC/ Chevrolet	Sierra/Silverado 1500	5'-8"	2019	2026	Does not fit Carbon Pro Bed or GM Storage Boxes
184408	GMC/ Chevrolet	Sierra/Silverado 1500	6'-8"	2019	2026	
184583	GMC/ Chevrolet	Sierra/Silverado 2500/3500	6'-10"	2020	2026	Does not work with GM Storage Boxes
186057	GMC/ Chevrolet	Sierra/Silverado 2500/3500	8'-2"	2020	2026	
183899	Ford	F-150	5'-6"	2015	2026	Includes Lightning, Tremor, and Raptor
183900	Ford	F-150	6'-6"	2015	2026	Includes Tremor
184466	Ford	F-250/F-350	6'-8"	2017	2026	Includes Tremor
184467	Ford	F-250/F-350	8'	2017	2026	
184410	RAM	1500	5'-7"	2019	2026	Excludes RAM Box and Classic Models, TRX Roll Bar must be removed if present
184411	RAM	1500	6'-5"	2019	2026	Excludes RAM Box and Classic Models
184533	RAM	2500/3500	6'-5"	2010	2026	Excludes RAM Box
184534	RAM	2500/3500	8'	2009	2026	

THUNDER ARMOR TRUCK BED COVERS DO NOT WORK WITH DROP IN BED LINERS

SCAN THE QR CODE TO EXPERIENCE THE LAUNCH VIDEO

SCAN THE QR CODE FOR THE TRUCK BED COVER QUICK INSTALLATION GUIDE

THUNDER ARMOR

MADE IN AMERICA

THUNDERARMORUSA.COM

FOLLOW US ON SOCIAL MEDIA

@ThunderArmorUSA

MOTORSPORTS SERIES

TIMPTE MOTORSPORTS

Model	GVW	Usable Deck Size	Empty Weight
720	7,000	19' 6" x 82.5"	Est. 1,980 lbs.

7K SERIES

POWERED EZ LOAD DECK SYSTEM

STANDARD SPECIFICATIONS	720
Overall Width	102"
Overall Length	24' 5"
Payload Capacity	5,020 lbs.
Tongue Length	61"
Deck Height	22.5"
Loading Angle	<4°
Wheel Size	14"
Tire Size	ST205/75R14D - 8 ply
Number of Lug Bolts	5 per wheel (20)
Axle/Suspension	3,500 lbs. Rubber Torsion
Brakes	Electric Self-Adjusting
Coupler	2-5/16" Ball
Coupler Position	Adjustable
Jack Style	Top Crank
Jack Rating	2,000 lbs.
Tie-Downs	(4) D-Rings *(24) Mounting Locations - (10) per side, (4) in front*
Lighting	LED

TIMPTE MOTORSPORTS

10K SERIES

POWERED EZ LOAD DECK SYSTEM

Model	GVW	Usable Deck Size	Empty Weight
1020	10,000	19' 6" x 81"	Est. 2,420 lbs.
1026	10,000	26' x 81"	Est. 2,640 lbs.

STANDARD SPECIFICATIONS	1020	1026
Overall Width	102"	102"
Overall Length	24' 6"	31' 2"
Payload Capacity	7,580 lbs.	7,360 lbs.
Tongue Length	61"	58.5"
Deck Height	24"	24"
Loading Angle	<4°	<4°
Wheel Size	15"	15"
Tire Size	ST225/75R15E - 10 ply	ST225/75R15E - 10 ply
Number of Lug Bolts	6 per wheel (24)	6 per wheel (24)
Axle/Suspension	5,000 lbs. Rubber Torsion	5,000 lbs. Rubber Torsion
Brakes	Electric Self-Adjusting	Electric Self-Adjusting
Coupler	2-5/16" Ball	2-5/16" Ball
Coupler Position	Adjustable	Adjustable
Jack Style	Side Crank	Side Crank
Jack Rating	2,000 lbs.	2,000 lbs.
Tie-Downs	Standard with (4) movable D-Rings and an integrated L-Track on the front and on both sides of the deck.	Standard with (4) movable D-Rings and an integrated L-Track on the front and on both sides of the deck.
Stake Pockets	4	8
Lighting	LED	LED

POWERHOUSE MODELS

SPLIT TILT DECK SYSTEM

Deck is able to be raised and lowered by optimizing an adjustable hydraulic cylinder system to allow for ease of use and safety when loading and unloading equipment without requiring ramps, and gives more control to the operator. Each trailer features a stationary deck for the ability of loading attachments or other forms of equipment.

DECK OVER SYSTEM

Deck is constructed over the wheels, offering optimal load surface and strength. Each trailer features manual spring assist ramps that fold and can be locked in vertical or horizontal position, and concealable sidestep.

GOOSENECK SYSTEM

Our gooseneck trailers are engineered for heavy-duty hauling, featuring a hitch that connects to a ball in the bed of a pickup truck. This design offers exceptional stability, balance, and weight distribution compared to standard bumper-pull trailers.

DUMP SYSTEM

Our aluminum dump trailer delivers unmatched durability without the added weight of steel. Built for strength, corrosion resistance, and long-term performance, it's designed to haul more while towing easier.

TL519
Bobcat

GMC

Landscape Rake 66
MPTE
POWERHOUSE 162H

DEERE
320G

TIMPTE
1620HD
FX4

POWERHOUSE MODELS

TIMPTE POWERHOUSE

Model	GVW	Usable Deck Size	Empty Weight
1420	14,000	16' + 4' x 82-3/8"	Est. 2,680 lbs.
1424	14,000	18' + 6' x 82- 3/8"	Est. 3,000 lbs.

14K SERIES

SPLIT TILT DECK SYSTEM

STANDARD SPECIFICATIONS	1420	1424
Overall Width	102"	102"
Overall Length	24' 6"	28' 6"
Payload Capacity	11,320 lbs.	11,000 lbs.
Stationary Deck Length	4'	6'
Tilt Deck Length	16'	18'
Tongue Length	56"	56"
Deck Height	22"	22"
Loading Angle	12°	11.5°
Wheel Size	16"	16"
Tires	ST235/80R16E - 10 ply	ST235/80R16E - 10 ply
Number of Lug Bolts	8 per wheel (32)	8 per wheel (32)
Axle/Suspension	7,000 lbs. Rubber Torsion	7,000 lbs. Rubber Torsion
Brakes	Electric Self-Adjusting	Electric Self-Adjusting
Coupler	2-5/16" Ball	2-5/16" Ball
Coupler Position	Adjustable	Adjustable
Jack Style	Side Crank	Side Crank
Jack Rating	12,000 lbs.	12,000 lbs.
Stake Pockets	18	18
Lighting	LED	LED

TIMPTE POWERHOUSE

Model	GVW	Usable Deck Size	Empty Weight
1624	16,000	18' + 6' x 82-3/8"	Est. 3,200 lbs.

16K SERIES

SPLIT TILT DECK SYSTEM

STANDARD SPECIFICATIONS	1624
Overall Width	102"
Overall Length	29' 1"
Payload Capacity	12,800 lbs.
Tongue Length	56"
Stationary Deck	6'
Tilt Deck	18'
Deck Height	22"
Loading Angle	12˚
Wheel Size	16"
Tires	ST235/80R16G - 14 ply
Number of Lug Bolts	8 per wheel (32)
Axle/Suspension	8,000 lbs. Rubber Torsion
Brakes	Electric Self-Adjusting
Coupler	2-5/16" Ball
Coupler Position	Adjustable
Jack Style	Side Crank
Jack Rating	12,000 lbs.
Stake Pockets	18
Lighting	LED

POWERHOUSE MODELS

TIMPTE POWERHOUSE

Model	GVW	Usable Deck Size	Empty Weight
1420	14,000	20' x 98.25"	Est. 2,680 lbs.
1426	14,000	25'-4" x 98.25"	Est. 3,000 lbs.

THK SERIES

DECK OVER SYSTEMS

STANDARD SPECIFICATIONS	1420 DO	1426 DO
Overall Width	102"	102"
Overall Length	25'-8"	31'-8"
Payload Capacity	11,320 lbs.	11,000 lbs.
Ramp Length	Approx. 4'	Approx. 4'
Tongue Length	68"	68"
Deck Height	35"	35"
Loading Angle	14°	14°
Overall Deck Length	20'	25-4'
Dovetail Length	60"	60"
Wheel Size	16"	16"
Tires	ST235/80R16E - 10 ply	ST235/80R16E - 10 ply
Number of Lug Bolts	8 per wheel (32)	8 per wheel (32)
Axle/Suspension	7,000 lbs. Rubber Torsion	7,000 lbs. Rubber Torsion
Brakes	Electric Self-Adjusting	Electric Self-Adjusting
Coupler	2-5/16" Ball	2-5/16" Ball
Coupler Position	Adjustable	Adjustable
Jack Style	Side Crank	Side Crank
Jack Rating	12,000 lbs.	12,000 lbs.
Stake Pockets	12 per side (24 total)	14 per side (28 total)
Lighting	LED	LED

TIMPTE POWERHOUSE

Model	GVW	Usable Deck Size	Empty Weight
1620	16,000	20' x 98.25"	Est. 3,060 lbs.
1626	16,000	25'-4" x 98.25"	Est. 3,380 lbs.

16K SERIES

DECK OVER SYSTEMS

STANDARD SPECIFICATIONS	1620 DO	1626 DO
Overall Width	102"	102"
Overall Length	25'-8"	31'-8"
Payload Capacity	12,940 lbs.	12,620 lbs.
Ramp Length	Approx. 4'	Approx. 4'
Tongue Length	68"	68"
Deck Height	35"	35"
Loading Angle	14˚	14˚
Overall Deck Length	20'	25-4'
Dovetail Length	60"	60"
Wheel Size	16"	16"
Tires	ST235/80R16G - 14 ply	ST235/80R16G - 14 ply
Number of Lug Bolts	8 per wheel (32)	8 per wheel (32)
Axle/Suspension	8,000 lbs. Rubber Torsion	8,000 lbs. Rubber Torsion
Brakes	Electric Self-Adjusting	Electric Self-Adjusting
Coupler	2-5/16" Ball	2-5/16" Ball
Coupler Position	Adjustable	Adjustable
Jack Style	Side Crank	Side Crank
Jack Rating	12,000 lbs.	12,000 lbs.
Stake Pockets	12 per side (24 total)	14 per side (28 total)
Lighting	LED	LED

POWERHOUSE MODELS

TIMPTE POWERHOUSE

16K SERIES

GOOSENECK SYSTEM

Standard Features
Toolbox with Chain Rack
Chain Tray
Spare Tire
Spare Tire Mount
Front Bump Rail

Model	GVW	Usable Deck Size	Empty Weight
1620 GN DO	16,000	20' x 98.25"	Est. 3,460 lbs.
1626 GN DO	16,000	25'-4" x 98.25"	Est. 3,780 lbs.

STANDARD SPECIFICATIONS	1620 GN DO	1626 GN DO
Overall Width	102"	102"
Overall Length	28'-7"	34'-7"
Payload Capacity	12,480 lbs.	12,220 lbs.
Ramp Length	Approx. 4'	Approx. 4'
Tongue Length	96"	96"
Deck Height	35"	35"
Loading Angle	14°	14°
Overall Deck Length	20'	25'-4"
Dovetail Length	60"	60"
Wheel Size	16"	16"
Tires	ST235/80R16E - 10 ply	ST235/80R16E - 10 ply
Number of Lug Bolts	8 per wheel (32)	8 per wheel (32)
Axle/Suspension	7,000 lbs. Rubber Torsion	7,000 lbs. Rubber Torsion
Brakes	Electric Self-Adjusting	Electric Self-Adjusting
Coupler	2-5/16" Ball	2-5/16" Ball
Coupler Position	Adjustable	Adjustable
Jack Style	Dual 12K Jacks	Dual 12K Jacks
Jack Rating	12,000 lbs. each (24,000 lbs. total)	12,000 lbs. each (24,000 lbs. total)
Stake Pockets	12 per side (24 total)	14 per side (28 total)
Lighting	LED	LED

TIMPTE POWERHOUSE

16K

HEAVY DUTY SERIES

BUILT WITH TRUE 8K AXLES

GOOSENECK SYSTEM

Standard Features
Toolbox with Chain Rack
Chain Tray
Spare Tire
Spare Tire Mount
Front Bump Rail

Model	GVW	Usable Deck Size	Empty Weight
1620 GN DO HD	16,000	20' x 98.25"	Est. 3,530 lbs.
1626 GN DO HD	16,000	25'-4" x 98.25"	Est. 3,860 lbs.

STANDARD SPECIFICATIONS	1620 GN DO HD	1626 GN DO HD
Overall Width	102"	102"
Overall Length	28'-7"	34'-7"
Payload Capacity	12,540 lbs.	12,140 lbs.
Ramp Length	Approx. 4'	Approx. 4'
Tongue Length	96"	96"
Deck Height	35"	35"
Loading Angle	14°	14°
Overall Deck Length	20'	25'-4"
Dovetail Length	60"	60"
Wheel Size	16"	16"
Tires	ST235/80R16G - 14 ply	ST235/80R16G - 14 ply
Number of Lug Bolts	8 per wheel (32)	8 per wheel (32)
Axle/Suspension	8,000 lbs. Rubber Torsion	8,000 lbs. Rubber Torsion
Brakes	Electric Self-Adjusting	Electric Self-Adjusting
Coupler	2-5/16" Ball	2-5/16" Ball
Coupler Position	Adjustable	Adjustable
Jack Style	Dual 12K Jacks	Dual 12K Jacks
Jack Rating	12,000 lbs. each (24,000 lbs. total)	12,000 lbs. each (24,000 lbs. total)
Stake Pockets	12 per side (24 total)	14 per side (28 total)
Lighting	LED	LED

POWERHOUSE MODELS

TIMPTE POWERHOUSE

H4K SERIES

Industry-Leading Standard Features

- Aluminum Construction with No Structural Welds
- Thunderstone Mesh Tarp
- (4) Box Mounted D-Rings
- Dual Function Rear Gate (Barn Door/Spreader Combo)
- Large Capacity A-Frame Toolbox
- Spare Tire & Mount
- Rear Stabilizers
- Tarp Tie-Downs
- Safety Bar/Lock
- Serviceable Box Floor

Available Accessories

- 1' Add-Ons for Additional Side Wall Height (3' and 4' Options)
- Dimensional Lumber/Extrusion Holders for Top of Box
- Hydraulic Jack (Easy Swap)
- UHMW Liner
- Solar Panel Charger
- Additional Box Mounted D-Rings
- Additional Removable Stake Pocket D-Rings

STANDARD SPECIFICATIONS	1414 Dump	1416 Dump
GVWR	14,000 lbs.	14,000 lbs.
Empty Weight	Est. 3,460 lbs.	Est. 3,640 lbs.
Payload Capacity	10,540 lbs.	10,360 lbs.
Box Length	14'	16'
Box Inside Width	82"	82"
Overall Width	102"	102"
Box Floor Construction	Fully-Boxed Extrusion with 3/16" Top & 1/8" Bottom	Fully-Boxed Extrusion with 3/16" Top & 1/8" Bottom
Box Side Height	24"	24"
Hoist Type	Dexter Scissor	Dexter Scissor
Rear Gate	Barn door/Spreader Combo	Barn door/Spreader Combo
Tarp	Full-Length Mesh Tarp	Full-Length Mesh Tarp
Wheel Size	16"	16"
Tires	ST235/80R16E - 10 ply	ST235/80R16E - 10 ply
Number of Lug Bolts	8 per wheel (32)	8 per wheel (32)
Axle/Suspension	7,000 lbs. Rubber Torsion	7,000 lbs. Rubber Torsion
Brakes	Electric Self-Adjusting	Electric Self-Adjusting
Coupler	2-5/16" Ball	2-5/16" Ball
Coupler Position	Adjustable	Adjustable
Jack Style	Jost Spring Extended Landing Leg	Jost Spring Extended Landing Leg
Jack Rating	12,000 lbs.	12,000 lbs.
Stake Pockets	4 per side (8 total)	4 per side (8 total)
Lighting	LED	LED

Industry-Leading Standard Features

- Aluminum Construction with No Structural Welds
- Thunderstone Mesh Tarp
- (4) Box Mounted D-Rings
- Dual Function Rear Gate (Barn Door/Spreader Combo)
- Large Capacity A-Frame Toolbox
- Spare Tire & Mount
- Rear Stabilizers
- Tarp Tie-Downs
- Safety Bar/Lock
- Serviceable Box Floor

Available Accessories

- 1' Add-Ons for Additional Side Wall Height (3' and 4' Options)
- Dimensional Lumber/Extrusion Holders for Top of Box
- Hydraulic Jack (Easy Swap)
- UHMW Liner
- Solar Panel Charger
- Additional Box Mounted D-Rings
- Additional Removable Stake Pocket D-Rings

STANDARD SPECIFICATIONS	1614 Dump	1616 Dump
GVWR	16,000 lbs.	16,000 lbs.
Empty Weight	Est. 3,600 lbs.	Est. 3,790 lbs.
Payload Capacity	12,400 lbs.	12,210 lbs.
Box Length	14'	16'
Box Inside Width	82"	82"
Overall Width	102"	102"
Box Floor Thickness	Fully-Boxed Extrusion with 3/16" Top & 1/8" Bottom	Fully-Boxed Extrusion with 3/16" Top & 1/8" Bottom
Box Side Height	24"	24"
Hoist Type	Dexter Scissor	Dexter Scissor
Rear Gate	Barn door/Spreader Combo	Barn door/Spreader Combo
Tarp	Full-Length Mesh Tarp	Full-Length Mesh Tarp
Wheel Size	16"	16"
Tires	ST235/80R16R - 14 ply	ST235/80R16R - 14 ply
Number of Lug Bolts	8 per wheel (32)	8 per wheel (32)
Axle/Suspension	8,000 lbs. Rubber Torsion	8,000 lbs. Rubber Torsion
Brakes	Electric Self-Adjusting	Electric Self-Adjusting
Coupler	2-5/16" Ball	2-5/16" Ball
Coupler Position	Adjustable	Adjustable
Jack Style	Jost Spring Extended Landing Leg	Jost Spring Extended Landing Leg
Jack Rating	12,000 lbs.	12,000 lbs.
Stake Pockets	4 per side (8 total)	4 per side (8 total)
Lighting	LED	LED

ACCESSORIES

TIRE RACK

PART NO.	DESCRIPTION	UNIT
577-303030	7K & 10K Torsion - Gun Metal Gray	EA
577-303173	7K & 10K Torsion	EA
577-303044	Leaf Spring & 5K Torsion - Gun Metal Gray	EA
577-302132	Leaf Spring & 5K Torsion	EA

*Must be purchased with new rock guard

ROCK GUARD

PART NO.	DESCRIPTION	UNIT
577-303025	7K & 10K Torsion - Gun Metal Gray	EA
577-303168	7K & 10K Torsion	EA
577-303041	Leaf Spring & 5K Torsion - Gun Metal Gray	EA
577-302023	Leaf Spring & 5K Torsion	EA

*Hardware Included

SPARE TIRE - TRINITY STYLE

PART NO.	DESCRIPTION	UNIT
150134	5K & 10K Tire Option	EA
150133	7K EZ Load Tire Option	EA
150132	7K Ramped Tire Option	EA
150135	14K Tire Option	EA
150138	16K Tire Option	EA

SPARE TIRE MOUNT (INCLUDES HARDWARE)

PART NO.	DESCRIPTION	UNIT
577-300387	5K, 7K, 10K Spare Tire Mount	EA
577-301625	Universal Stake Pocket Tire Mount	EA

5K, 7K, 10K Mount

Universal Mount

WHEEL RATCHET STRAP

PART NO.	DESCRIPTION	UNIT
035-300569	Wheel Ratchet Strap	EA

*Logistics track required

TOOLBOX EXTENSION

PART NO.	DESCRIPTION	UNIT
186832	Toolbox Extension (Gun Metal Gray)	EA

All pricing for options are for the part only. Install not included.

SOLAR PANEL

PART NO.	DESCRIPTION	UNIT
575-300504	Solar Panel - EZ Load	EA
187068	Solar Panel - Dump Trailers	EA

LOADING WINCH KIT

PART NO.	DESCRIPTION	UNIT
575-303112	EZ Load Loading Winch Kit - 4,500 lbs.	EA
183674	Gooseneck Loading Winch Kit - 12,500 lbs.	EA

STAKE POCKETS

PART NO.	DESCRIPTION	UNIT
577-300562	Leaf Spring & 5K Torsion	One Pair
577-303174	7K & 10K Torsion	One Pair

Leaf Spring & 5K Torsion

7K & 10K Torsion

*Hardware Included

14K & 16K TOOLBOX

PART NO.	DESCRIPTION	UNIT
710-301825	14K & 16K Toolbox	EA

STAKE POCKET D-RING

PART NO.	DESCRIPTION	UNIT
182985	14K & 16K Stake Pocket D-Ring	EA



EZ LOAD ON-BOARD BATTERY CHARGER

PART NO.	DESCRIPTION	UNIT
300437	On-Board Battery Charger Kit (EZ Load)	EA



TIE-DOWNS

PART NO.	DESCRIPTION	UNIT
035-301453	L-Track D-Ring Tie Down	EA

*1,725lb rating

All pricing for options are for the part only. Install not included.

ACCESSORIES

BOARD HOLDER

PART NO.	DESCRIPTION	UNIT
186847	14K & 16K Dump Trailer Board Holder	EA



HYDRAULIC JACK

PART NO.	DESCRIPTION	UNIT
301594	14K & 16K Dump Trailer Hydraulic Jack	EA

BOX MOUNTED D-RING

PART NO.	DESCRIPTION	UNIT
186817	14K & 16K Dump Trailer Box Mounted D-Ring	EA



1' BOX EXTENSIONS

PART NO.	DESCRIPTION	UNIT
187094	14' Dump Trailer 1' Box Extension Kit	EA
187105	16' Dump Trailer 1' Box Extension Kit	EA

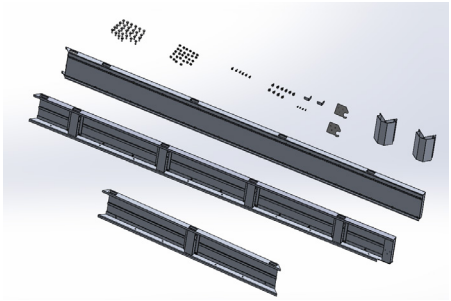

BOX LINER

PART NO.	DESCRIPTION	UNIT
187066	14' Dump Trailer Box Liner	EA
187065	16' Dump Trailer Box Liner	EA

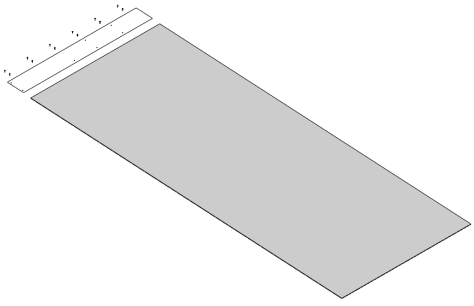

WIRELESS HYDRAULIC REMOTE

PART NO.	DESCRIPTION	UNIT
300010	Dump Trailer Wireless Hydraulic Remote Kit	EA

All pricing for options are for the part only. Install not included.

THE ADVANTAGES OF OWNING A TIMPTE ALUMINUM TRAILER

MECHANICALLY FASTENED JOINTS

Timpte is committed to building the highest quality trailer in the market. By building our trailers using mechanically fastened joints we can achieve maximum strength, durability, and longevity out of the aluminum. Other aluminum trailer manufacturers rely on welding to assemble their trailers. Welding is a cheap and easy construction method, but ultimately reduces the structural integrity of an aluminum trailer by up to 40%.

Benefits of Mechanically Fastened Joints

Structural Integrity
By using mechanically fastened joints instead of structural welds the trailer integrity is never weakened.

Maintenance & Repairs
Fastened joints can be easily inspected, adjusted, or replaced when needed. Welds are more difficult and expensive to repair.

Avoid Fatigue Cracking & Failure
Structural welds are more prone to cracking and fatigue than mechanical fasteners. If a weld flexes the failure can be catastrophic.

Meticulous Craftsmanship
Building a trailer using mechanical fasteners requires meticulous craftsmanship and attention to detail. Each component must be consistent.

LIGHTWEIGHT MATERIAL

Aluminum is a lightweight and durable material. At roughly 1/3 the density of steel, aluminum's low profile can provide benefits that its steel counterparts cannot.

Increased Fuel Economy

- An extra 100 lbs. in your vehicle could reduce your MPG by up to 2% (U.S. Dept. of Energy).
- Here's an example: the Timpte 1414 Dump Trailer weighs approximately 750-1,000 lbs. less than comparable steel dump trailers, which could result in the following fuel savings:

Fuel Economy Benefit:	⊕ 15-20%
Fuel Cost Savings (Per gallon):	⊕ $0.60 - $0.80

Easier on You & Your Vehicle

- Experience less toll on the towing vehicle.
  - Less engine strain
  - Improved tire longevity
- It's easier to maneuver a trailer that weighs less, whether it's loaded or unloaded.

Higher Strength-to-Weight Ratio

- Allows you to maximize your loads and carry a higher load capacity than steel trailers with the same GVWR.

DURABILITY

Part of what makes aluminum so durable is its resistance to corrosion. Durability plays an important role in aluminum trailers holding their value over time. Aluminum trailers can stay looking and performing like new.

Resistance to Corrosion

- Aluminum alloy extrusions generally do not rust because aluminum forms a protective oxide layer when exposed to air, preventing corrosion.
  - Even after being exposed to harsh weather conditions.
  - Avoid costly repairs from rust related issues.

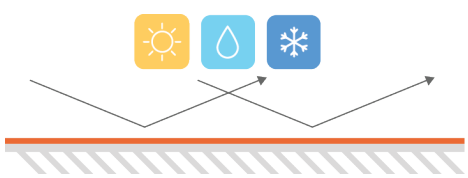

Minimal Maintenance & Repairs

- Only routine maintenance is required.
- Less likely to sustain costly damage over time.
- Easily restore the exterior of your trailer with an acid wash to keep that shiny new look.

Higher Resale Value

- The durability of an aluminum trailer helps to preserve its value over time. It's simple, a used trailer in good condition is worth more than one that is damaged or starting to rust.

TIMPTE

TIMPTE IS A PROUD MEMBER OF THE FOLLOWING INDUSTRY ASSOCIATIONS:

NATIONAL ASSOCIATION OF TRAILER MANUFACTURERS

NATDA #1 RESOURCE FOR TRAILER DEALERS

TIMPTE IS PLEASED TO OFFER OUR DISTRIBUTION PARTNERS AND VALUED END-CUSTOMERS FINANCIAL SERVICES FROM THE FOLLOWING RESPECTED COMPANIES:

RED OAK Inventory Finance

NORTHPOINT COMMERCIAL FINANCE

NORTHLAND CAPITAL EQUIPMENT FINANCE

SHEFFIELD Financial — Personal service...It's that simple. A Division of BB&T Financial, FSB

082526