Chaserr™
千寻电气







QIANXUN

THERMOSTAT PRODUCTS

智能温控器专业制造商

QIAN XUN ELECTRICAL

温州千寻电气科技有限公司
WENZHOU CHASERR ELECTRICAL TECHNOLOGY CO.,LTD

公司简介
Company Profile

温州千寻电气科技有限公司位于浙江省乐清市天成工业区，自2014年起就专注于温控器领域。我们以“成为温控器行业知名的创新者和制造商”为价值观，锐意进取，现已成为行业佼佼者。作为国内可靠的温控器制造商，千寻电气与国内外多家企业合作，致力于为客户提供专业的温控器设计、研发、生产和销售服务。

我们致力于设计简单、可持续且创新技术的水壶温控器，为我们的合作伙伴和消费者创造价值，专注于从设计到制造的整个开发过程。正是这样，我们才能持续提供稳定优质的质量和安全性，同时助力实现更加可持续的未来。

作为客户信赖的供应商，温州千寻电气科技有限公司对其产品的制造过程实施非常严格的控制，同时还能够为客户定制非标产品，用于更为严苛的环境，并为这些产品获得CQC、CB、TUV、ISO、ETL、CCC等认证。

利用自身的技术实力解决客户问题，是千寻电气不懈的追求。

千寻电气产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE



四大核心优势

01/ 创新
我们不断突破创新的界限，以先进的设计理念打造产品。

02/ 成本
我们拥有自己的制造工厂，能够实现直接销售，确保为客户提供有竞争力的价格。

03/ 质量
工厂配备全面的测试设备，因而我们能保证产品质量始终可靠。

04/ 服务
我们提供广泛的安全且易于使用的产品，旨在提升您的日常健康和福祉。

温州千寻电气科技有限公司
WENZHOU CHASERR ELECTRICAL TECHNOLOGY CO.,LTD


目录
Catalogue

- 蒸汽开关系列 01/
- QX158B（对标U8系列） 02-04/
- QX158B（可调温控系列） 05/
- QX168B-2（可调温控系列） 06/
- QX158C（防水两件套系列） 07-08/
- QX158B-2（对标U9系列） 09-10/
- QX168B-2（对标系列） 11-12/
- QX168C-2（防水大温控器系列） 13/
- QX168B-2（对标U7系列） 14/
- QX168A（正压温控器系列） 15-16/
- QX168B（正压温控器系列） 17-18/
- QX168C（防水温控器系列） 19/
- QX168A（正压温控器B系列） 21-22/
- QX778B（煮茶器系列） 23-24/
- QX128A（三环无干烧系列） 25-28/
- QX198A-3（三环上水系列） 29-30/
- QX198A（四环上水系列） 31-32/
- QX198A（四环加高上水系列） 33/
- QX198A（四环带安装板上水系列） 34/
- QX198（五环上水系列） 35-36/
- QX198A-6（六改五环上水系列） 37-38/
- QX198A-6（六环上水系列） 39-40/
- QX198A-6（六环上水B系列） 41-42/
- QX198A-6（六环带安装板上水系列） 43-44/
- QX568E（五环温控器A系列） 45-46/
- QX568E（五环温控器B系列） 47-52/
- QX588E（五环无干烧系列） 53-54/
- QX588E-6（六环无干烧系列） 55/
- QX518I（对标U68系列） 57-58/
- QX558E（对标U67系列） 59-60/
- QX567G-R（小五环系列） 61-62/
- QX567G-1（小五环无干烧系列） 63/
- QX568D-R（六环侧壁接触系列） 64/
- QX668H（六环正压系列） 65/

千寻电气·产品图册 QIANXUN ELECTRICAL PRODUCT CATALOGUE






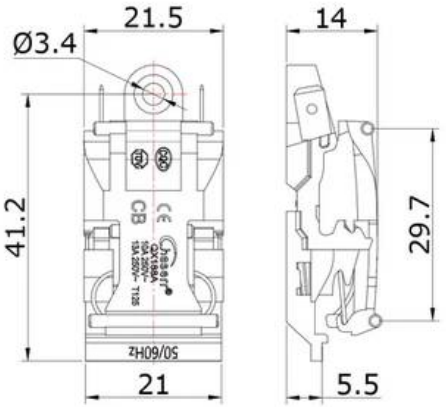

◆ QX188A(1-1)





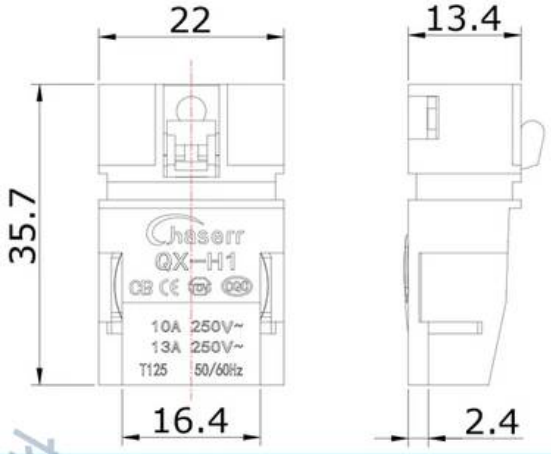


◆ QX-H1(2-1)

千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE


项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	蒸汽动作温度 Steam Operating Temperature	85°C



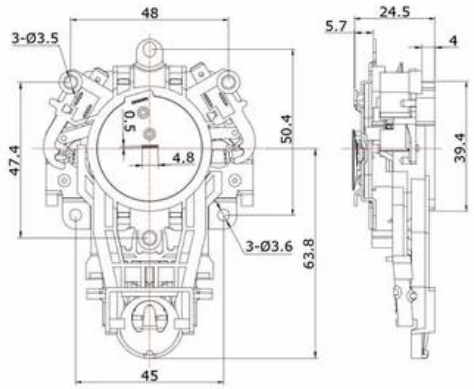



◆ QX158B(39-1)



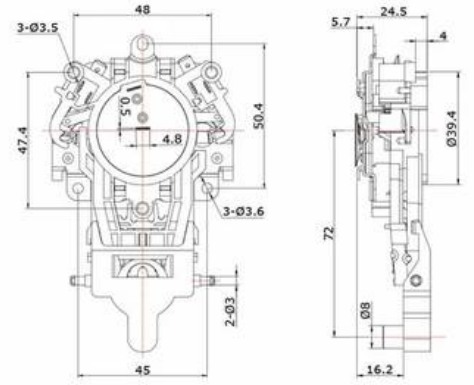

◆ QX158B(39-2)

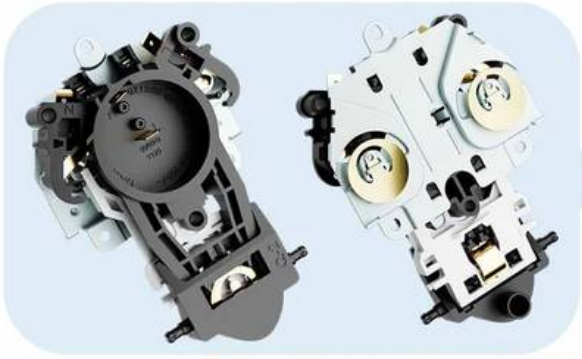

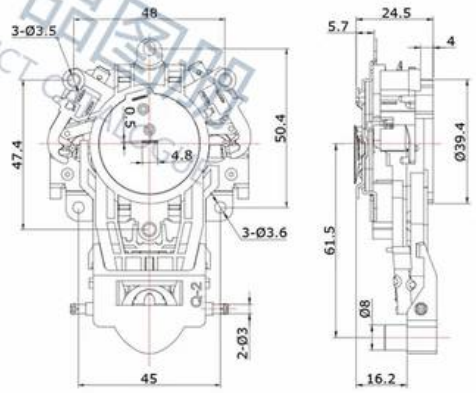


◆ QX158B(39-3)

项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	蒸汽动作温度/干烧保护 Steam Temperature / Dry Firing Protection	85°C/手动复位型 85°C / Auto-reset Type


千寻电气·产品图册 QIANXUN ELECTRICAL · PRODUCT CATALOG



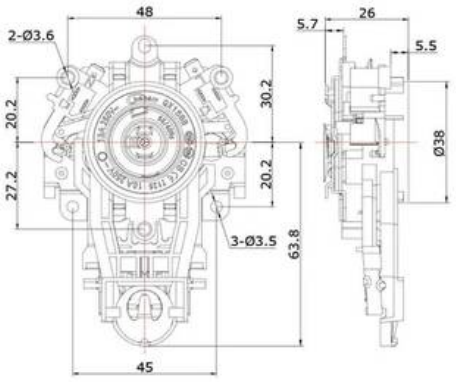


◆ QX158B(38-2)



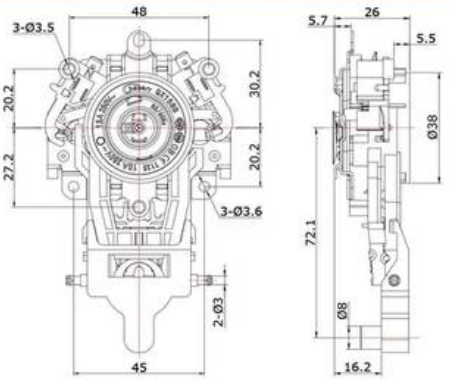


◆ QX158B(38-6)



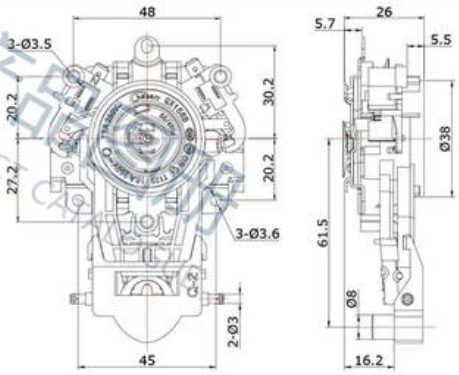

◆ QX158B(38-8)




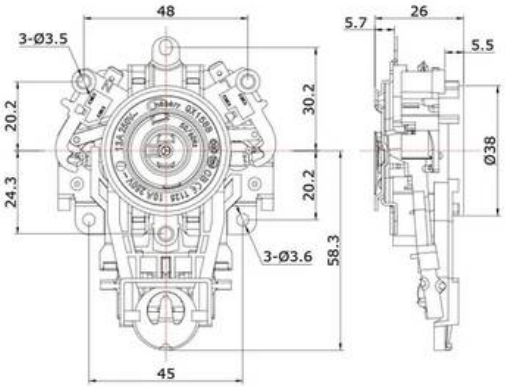

◆ QX158B(F1-1)


项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz



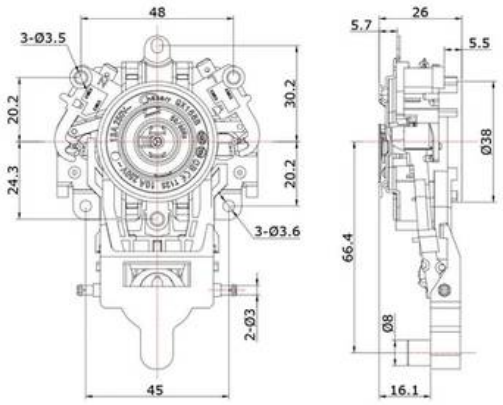


◆ QX158B(F1-2)



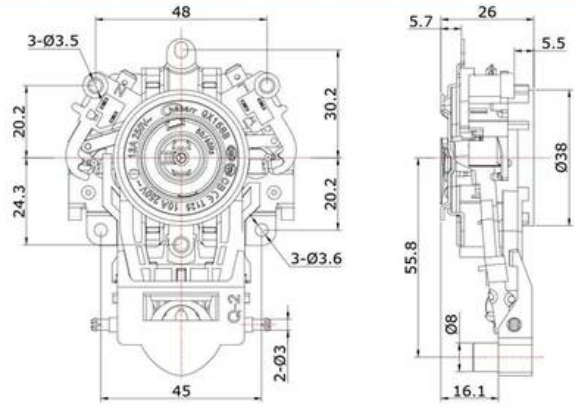


◆ QX158B(F1-3)



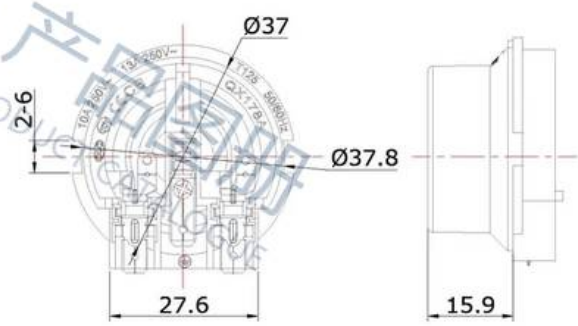

◆ QX178A(3-8)



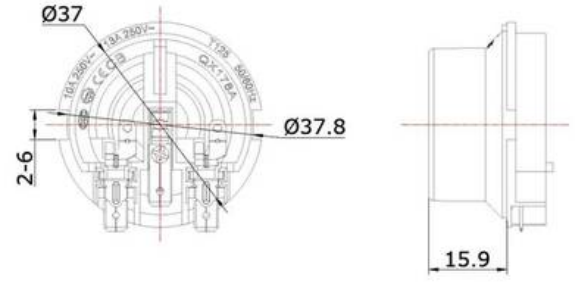


◆ QX178A(3-9)


项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	蒸汽动作温度/干烧保护 Steam Temperature / Dry Firing Protection	85°C/手动复位型 85°C / Auto-reset Type


千寻电气·产品图册 QIANXUN ELECTRICAL · PRODUCT CATALOGUE



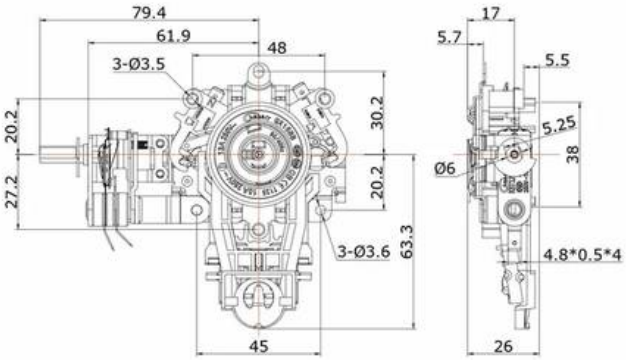


◆ QX158B+KST-128A

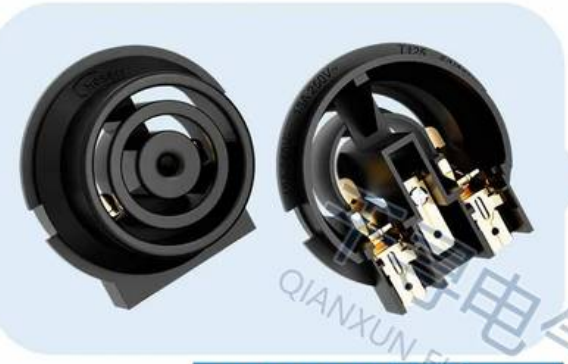

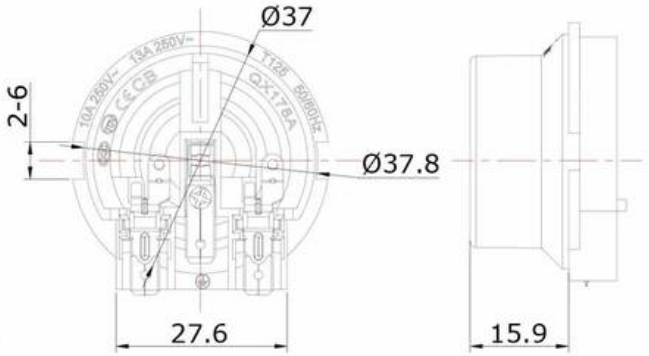

◆ QX178A(3-7)



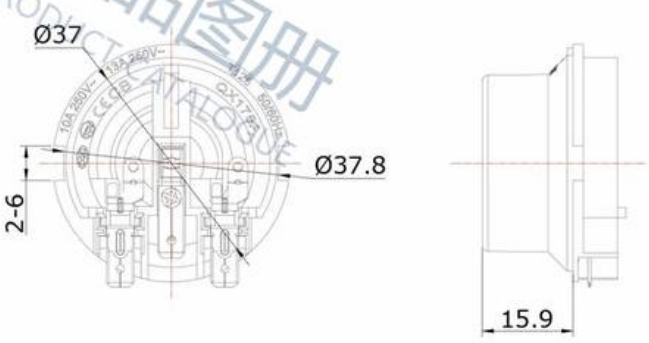


◆ QX178A(3-9)


项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	蒸汽动作温度/干烧保护 Steam Temperature / Dry Firing Protection	85°C/手动复位型 85°C / Auto-reset Type


千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE



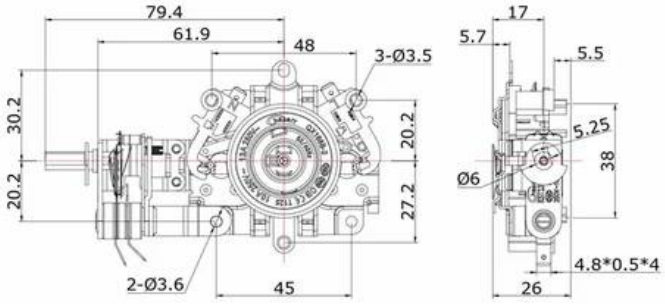


◆ QX168B-2+KST-128A

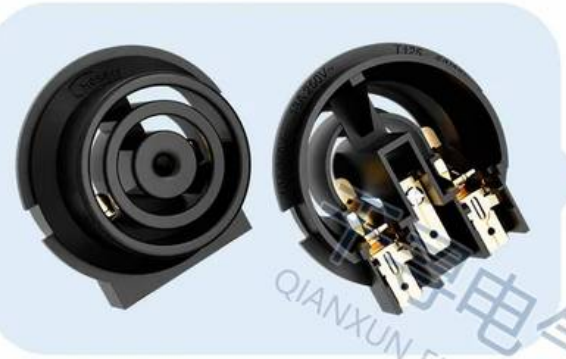

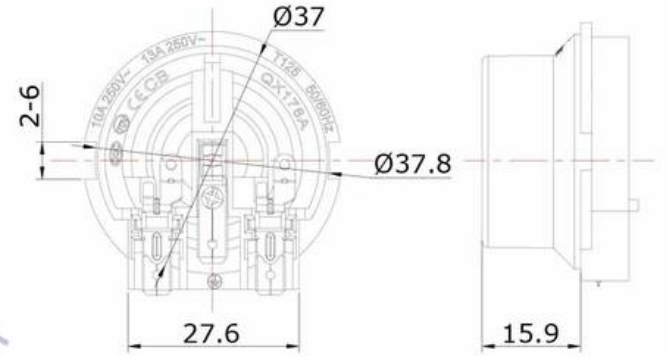

◆ QX178A(3-7)



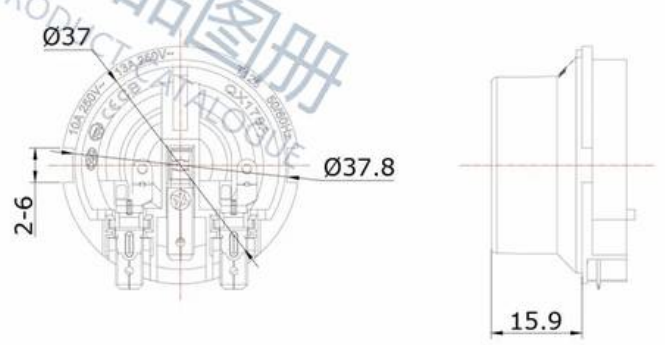


◆ QX178A(3-9)

千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE


项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	蒸汽动作温度/干烧保护 Steam Temperature / Dry Firing Protection	85°C/手动复位型 85°C / Auto-reset Type



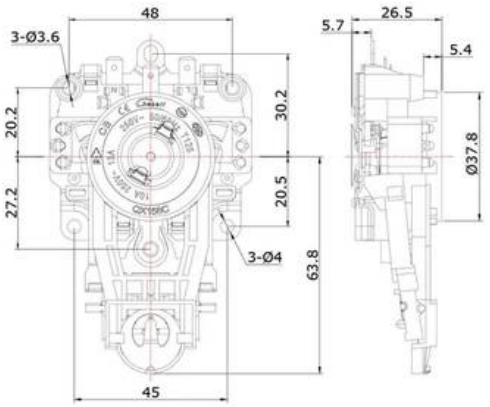



◆ QX158C(36-1)



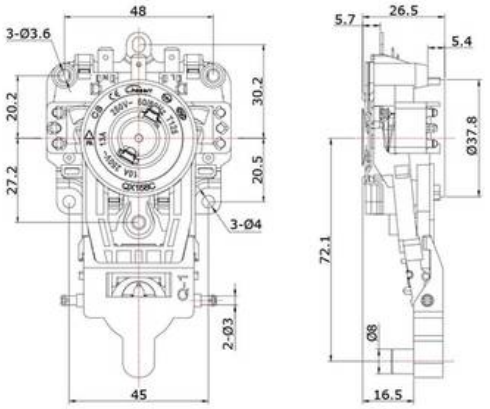

◆ QX-158C(36-2)

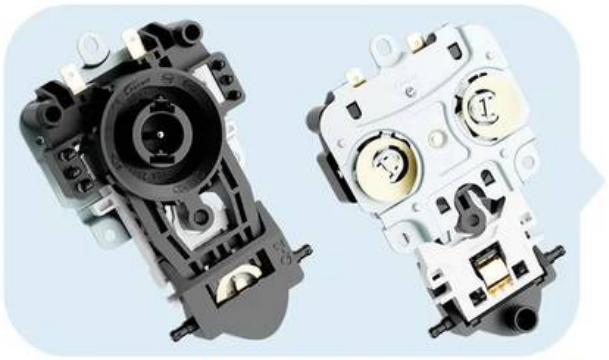

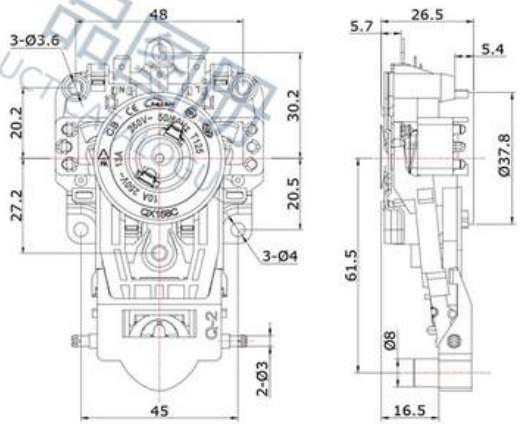



◆ QX158C(36-3)

千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT MANUAL





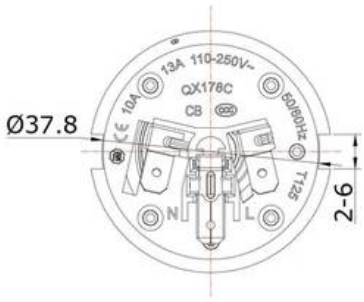




◆ QX-178C(14-1)

千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE


项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	蒸汽动作温度/干烧保护 Steam Temperature / Dry Firing Protection	85°C/手动复位型 85°C / Auto-reset Type



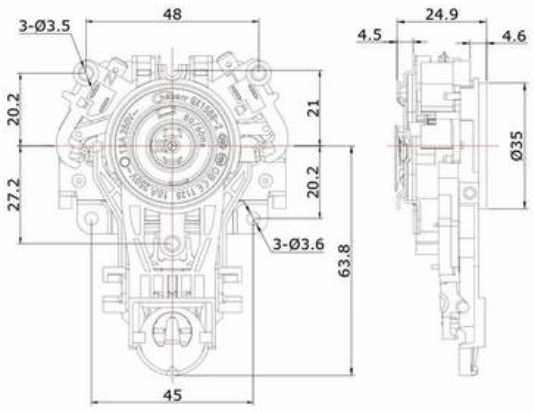


◆ QX158B-2(40-1)



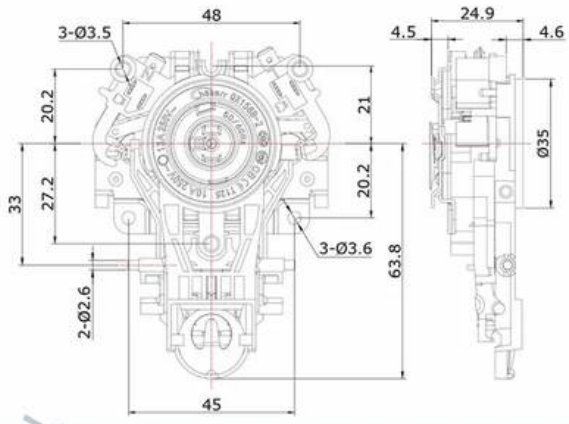

◆ QX158B-2(40-5)




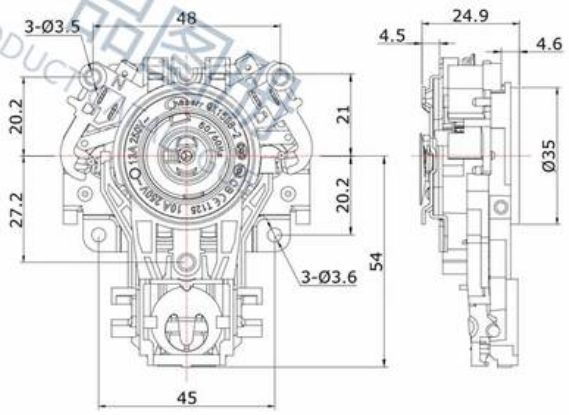

◆ QX158B-2(40-9)


千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT



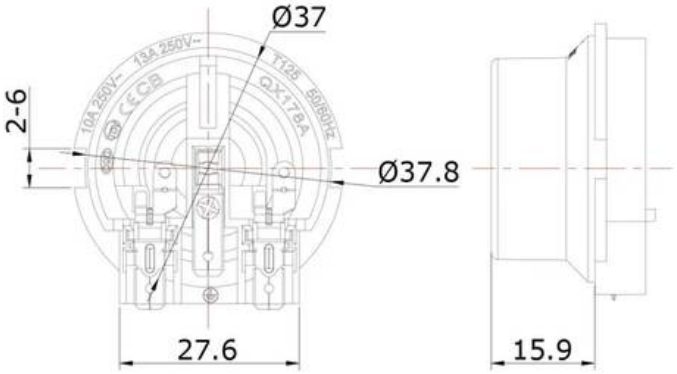

◆ QX178A(3-7)



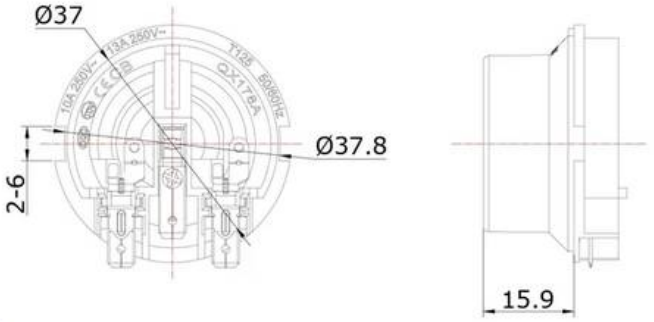


◆ QX178A(3-9)

千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE

项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	蒸汽动作温度/干烧保护 Steam Temperature / Dry Firing Protection	85°C/手动复位型 85°C / Auto-reset Type





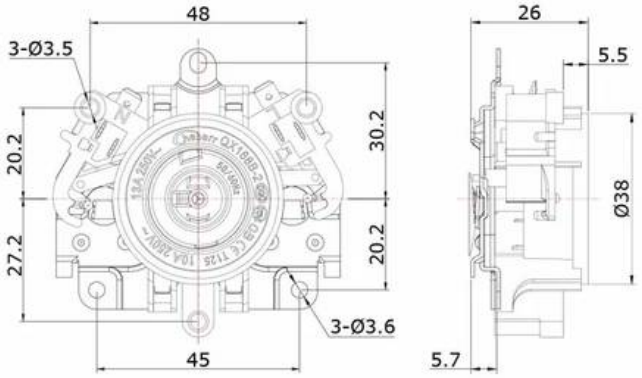


◆ QX168B-2(34-1)

千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE


项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	干烧保护 Dry Firing Protection	自动复位型 Auto-reset Type



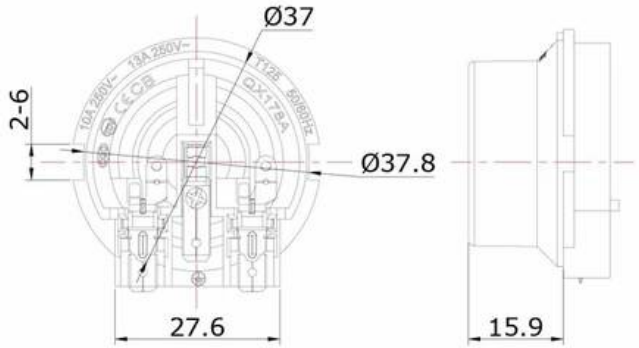

◆ QX178A(3-8)




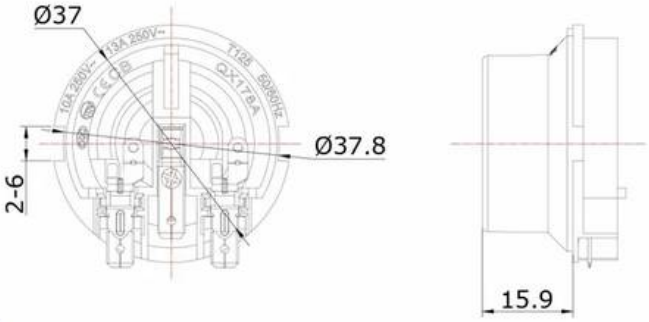

◆ QX178A(3-9)


千寻电气·产品图册 QIANXUN ELECTRICAL · PRODUCT



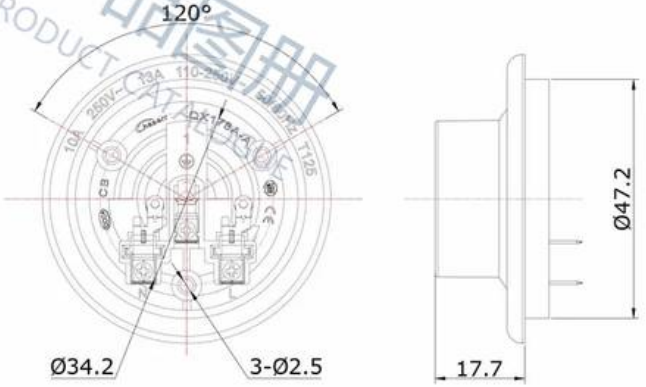


◆ QX178A-A(3-10)



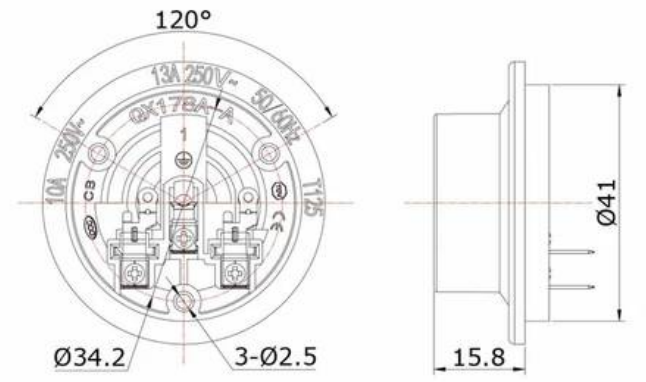


◆ QX178A-A(3-11)



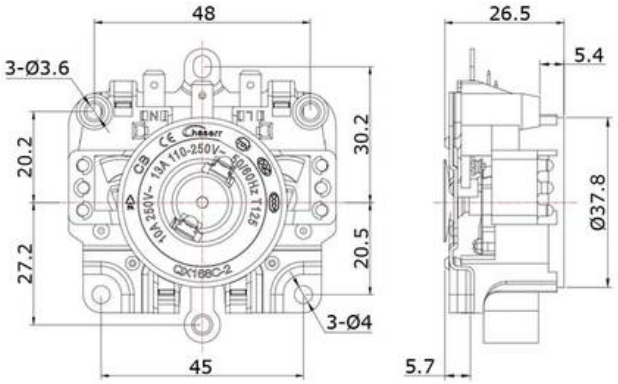

◆ QX168C-2(35-1)



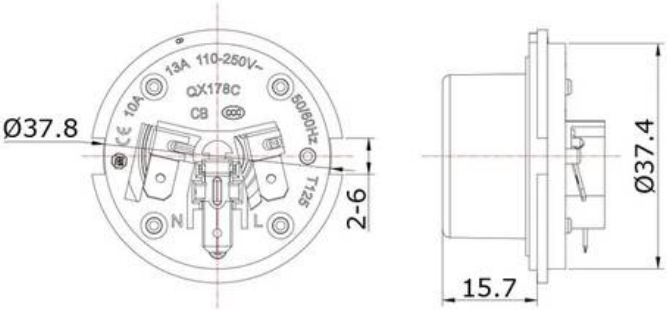


◆ QX178C(14-1)


千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE


项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	干烧保护 Dry Firing Protection	自动复位型 Auto-reset Type



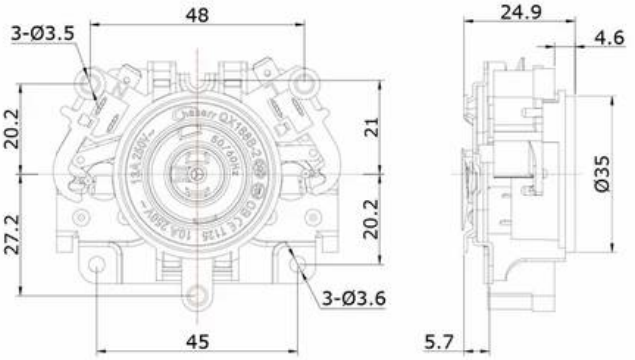


◆ QX168B-2(33-1)

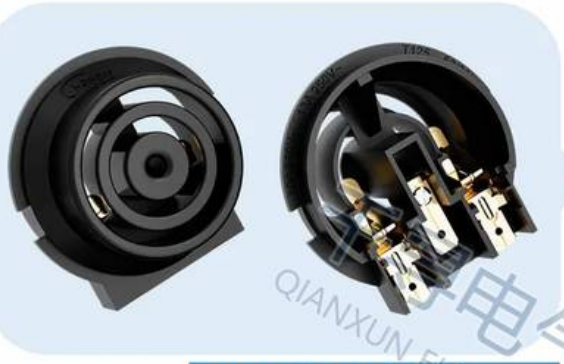

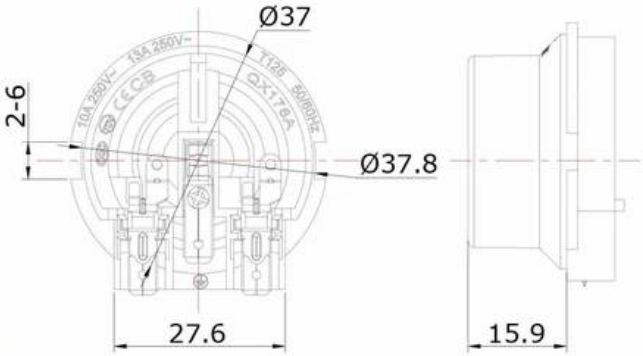

◆ QX178A(3-7)



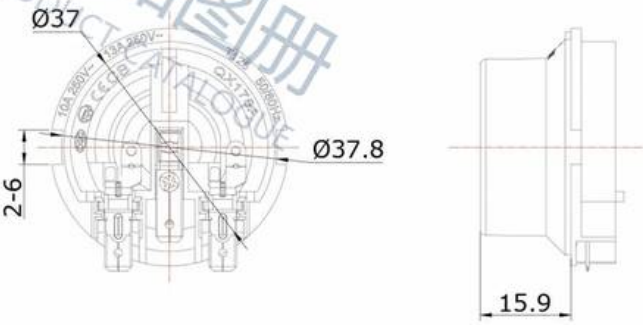


◆ QX178A(3-9)

千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE


项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	干烧保护 Dry Firing Protection	自动复位型 Auto-reset Type



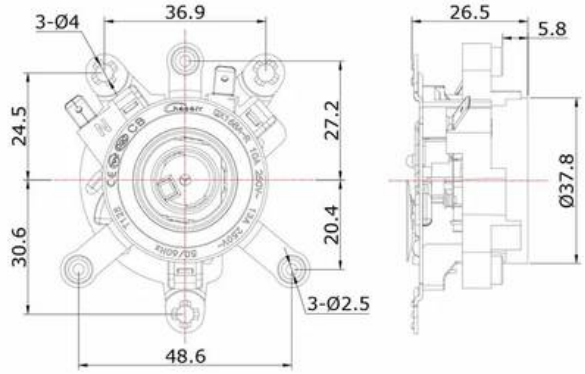


◆ QX168A-R(25-3)



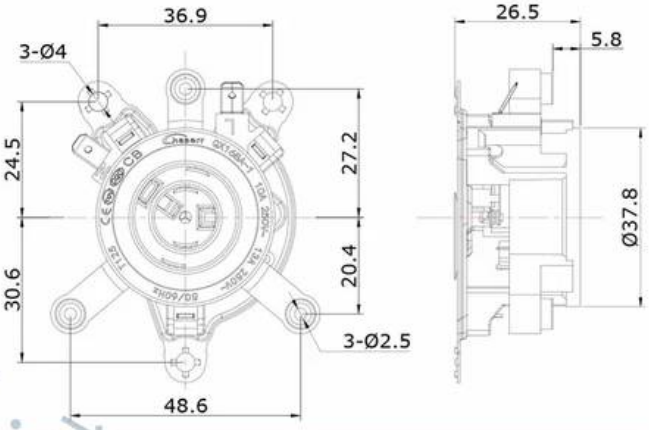

◆ QX168A-1(25-4)




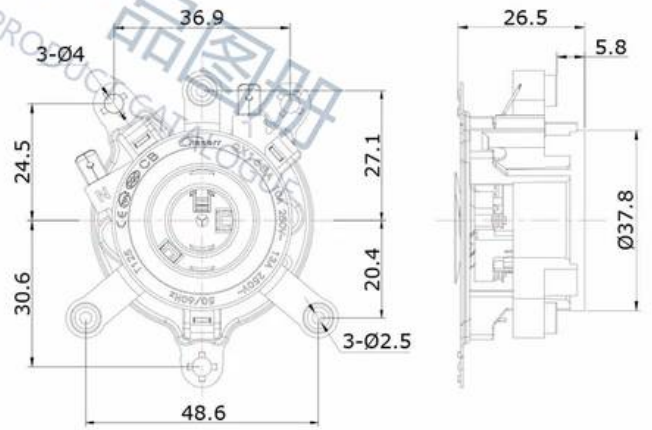

◆ QX168A(25-5)


千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE



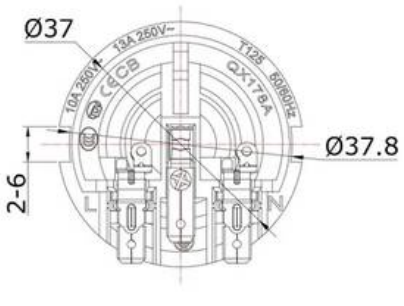

◆ QX178A(4-3)



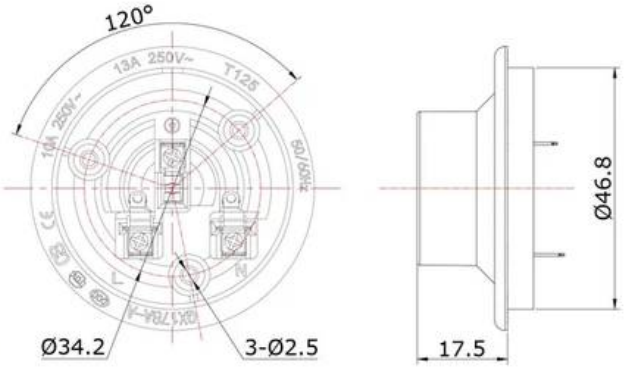


◆ QX178A-A(4-1)

千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE

项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	干烧保护 Dry Firing Protection	自动复位型/一次性熔断 Auto-reset Type / One-Time Fuse



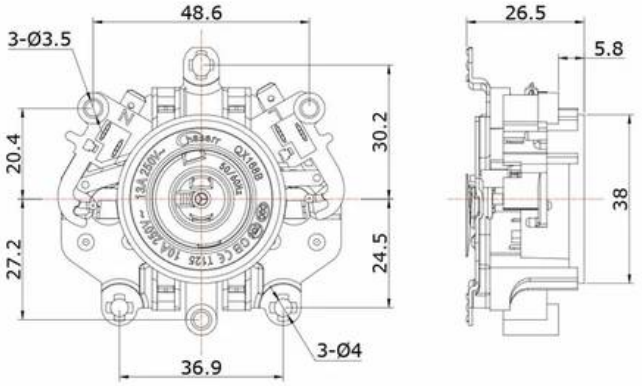


◆ QX168B(31-2)

千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE


项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	干烧保护 Dry Firing Protection	自动复位型 Auto-reset Type



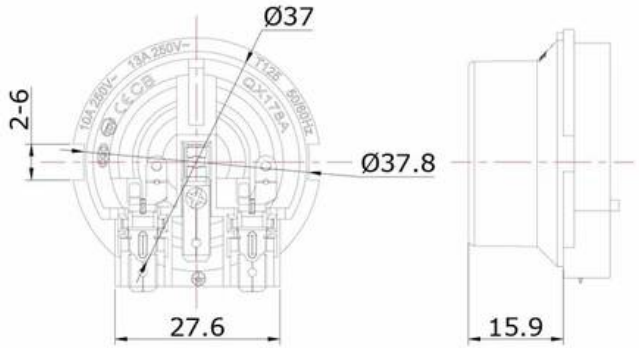

◆ QX178A(3-8)




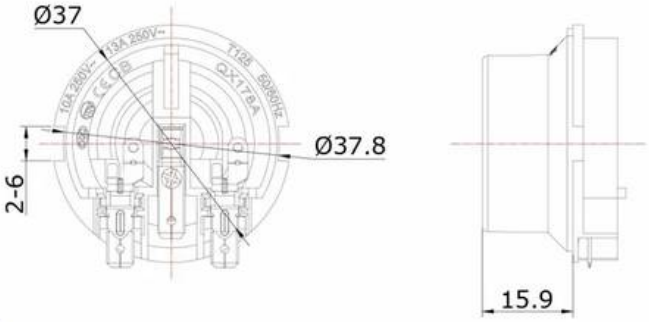

◆ QX178A(3-9)


千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT



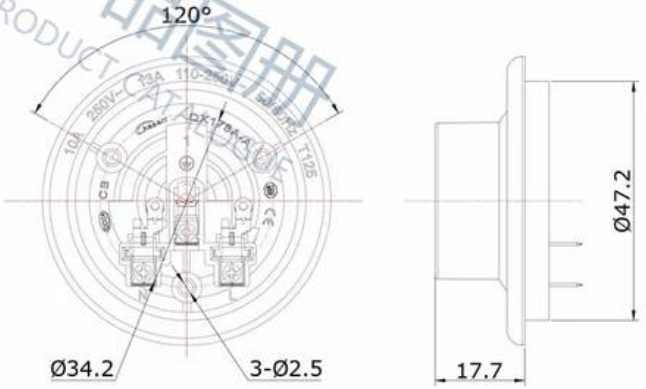


◆ QX178A-A(3-10)



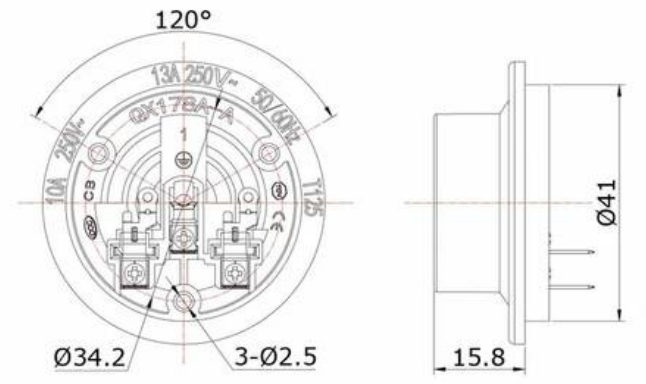


◆ QX178A-A(3-11)



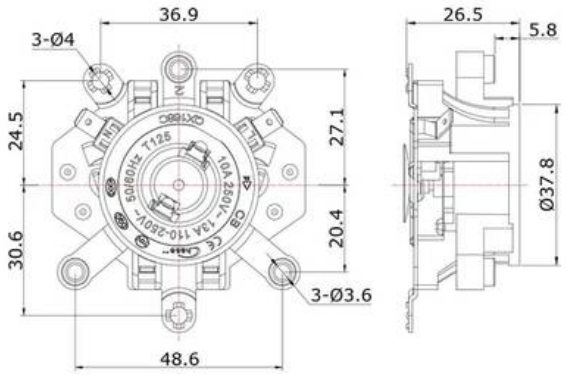

◆ QX168C(32-1)



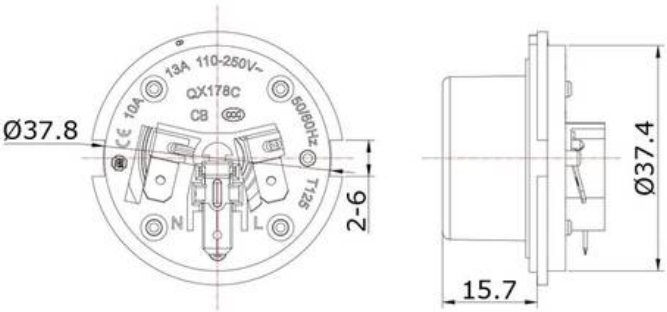


◆ QX178C(14-1)

千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE

项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	干烧保护 Dry Firing Protection	自动复位型 Auto-reset Type


千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE



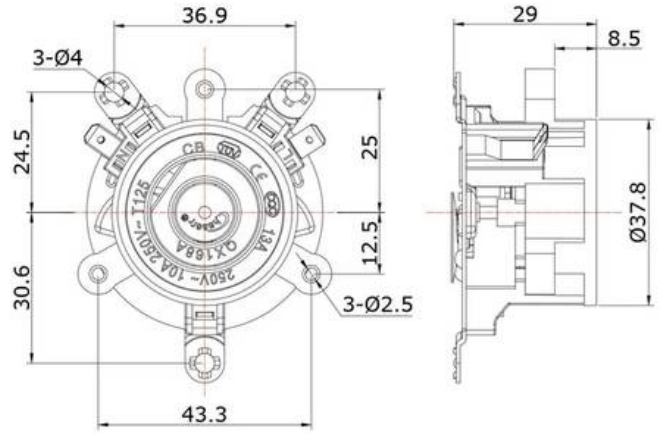

◆ QX168A-1(23-1)



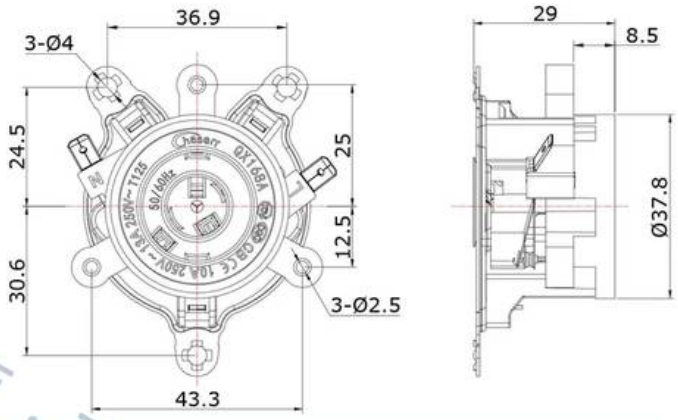


◆ QX168A(23-3)

千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE


项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	干烧保护 Dry Firing Protection	自动复位型 Auto-reset Type



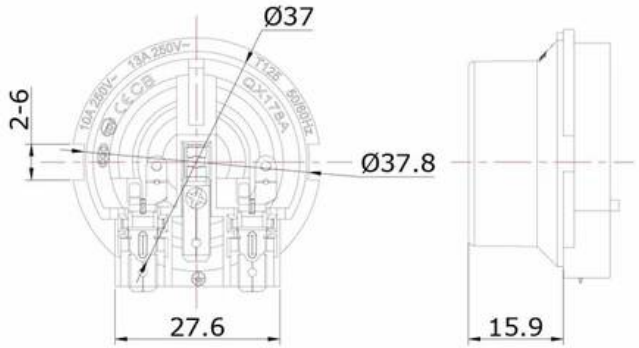

◆ QX178A(3-8)




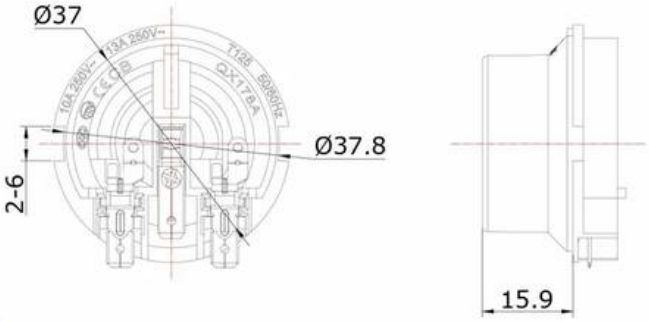

◆ QX178A(3-9)


千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT



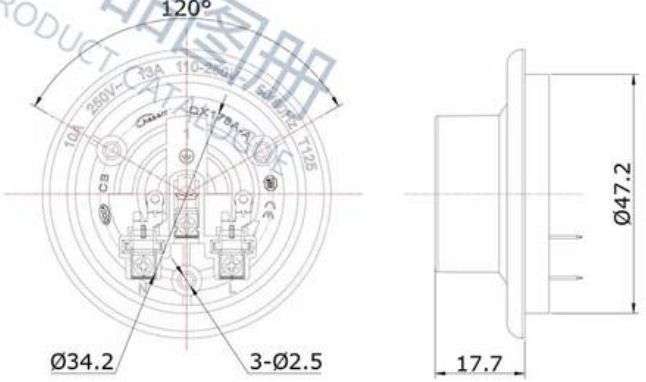


◆ QX178A-A(3-10)



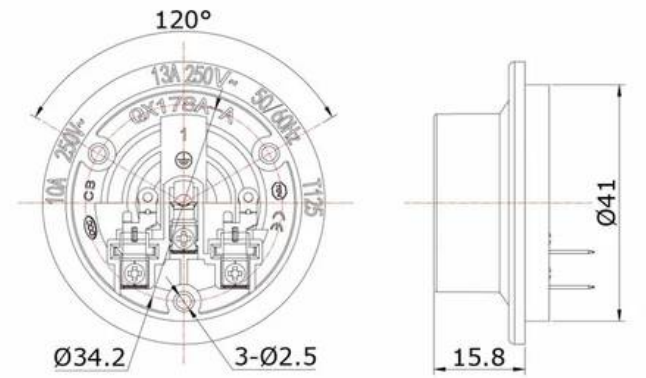


◆ QX178A-A(3-11)



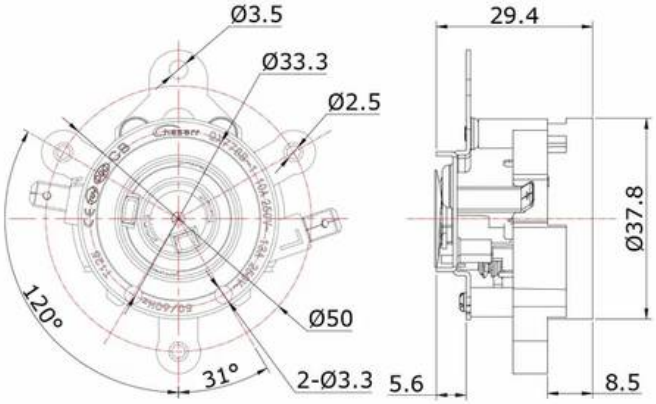


◆ QX778B-1(26-1)



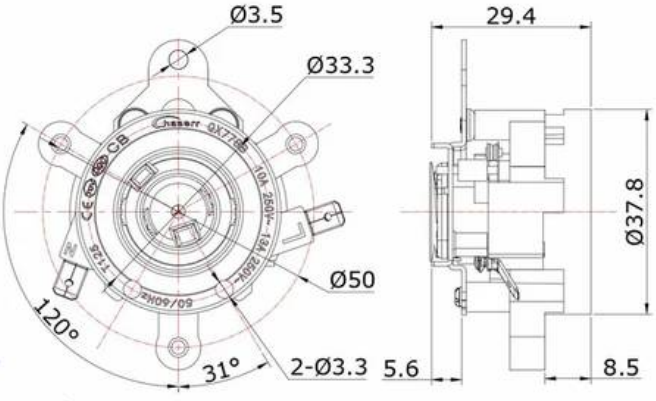

◆ QX778B(26-2)




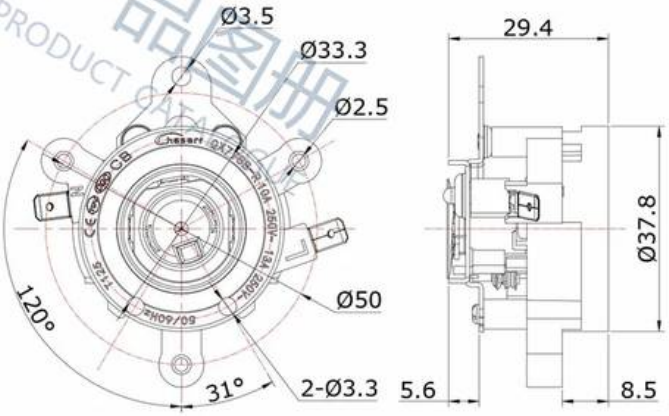

◆ QX778B-R(26-3)


千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOG



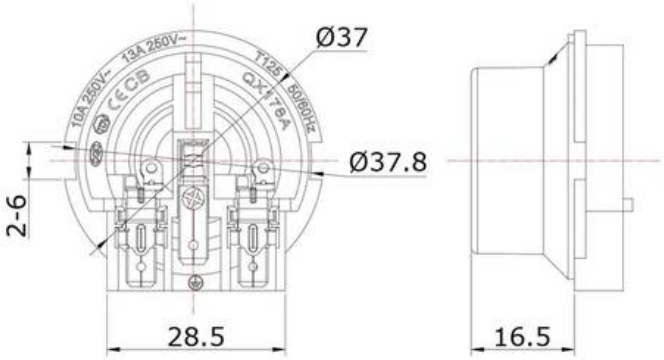


◆ QX178A(4-2)



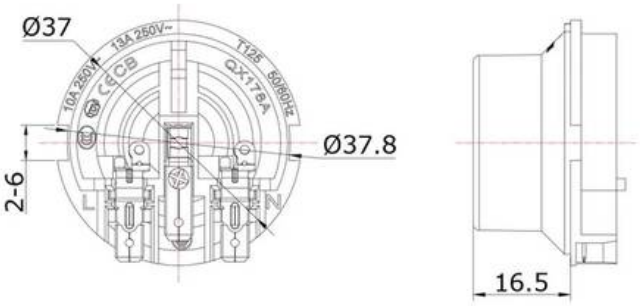

◆ QX178A(4-3)



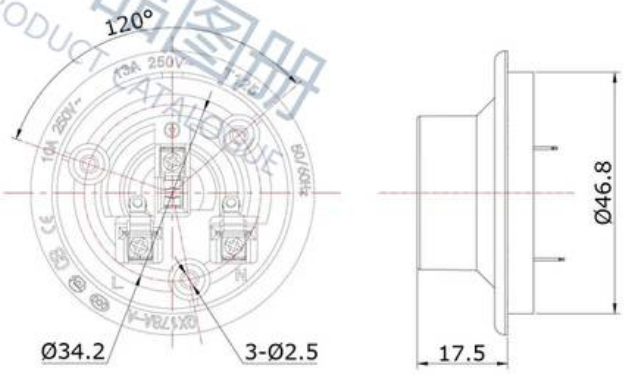


◆ QX178A-A(4-1)

项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	干烧保护 Dry Firing Protection	自动复位型/一次性熔断 Auto-reset Type / One-Time Fuse

千寻电气·产品图册 QIANXUN ELECTRICAL · PRODUCT CATALOGUE



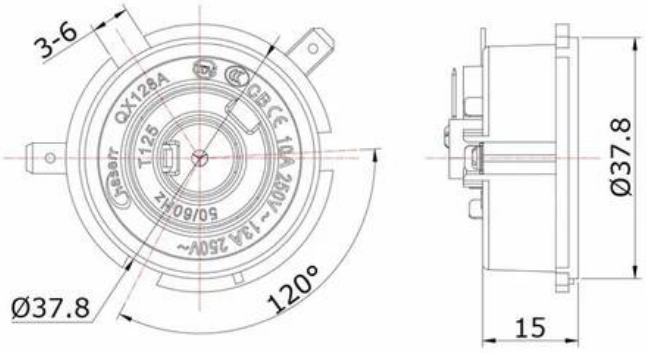


◆ QX128A(28-2)

千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE


项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	干烧保护 Dry Firing Protection	——



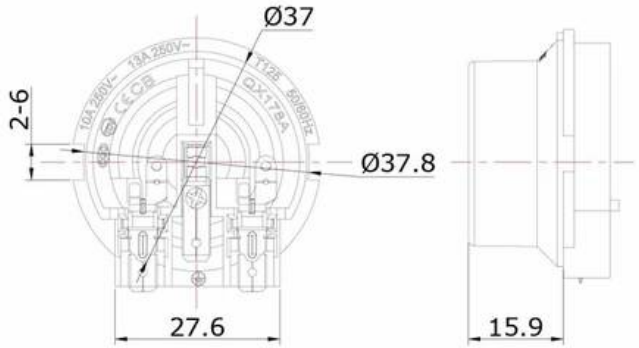

◆ QX178A(3-8)




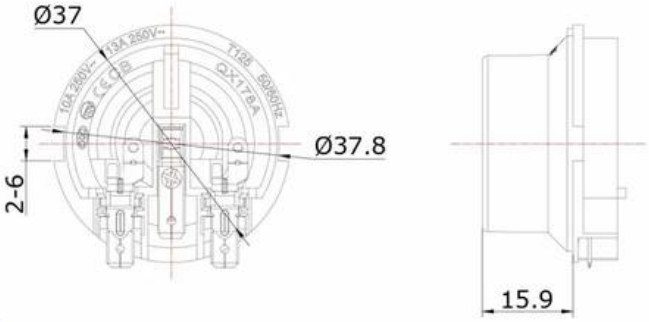

◆ QX178A(3-9)


千寻电气·产品图册 QIANXUN ELECTRICAL · PRODUCT CATALOGUE



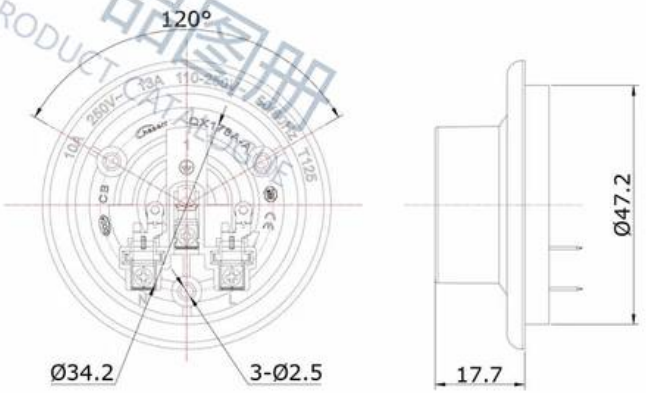


◆ QX178A-A(3-10)



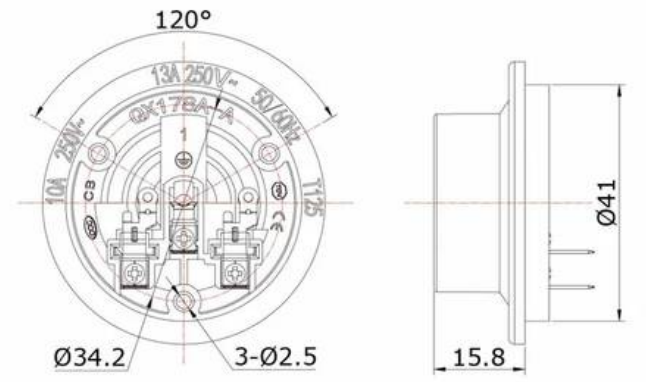

◆ QX178A-A(3-11)




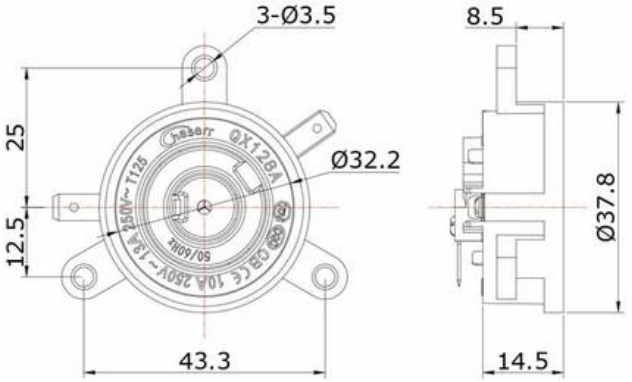

◆ QX128A(29-1)


千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE



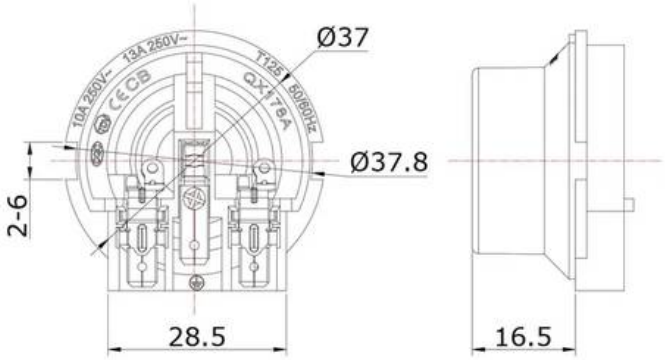


◆ QX178A(4-2)



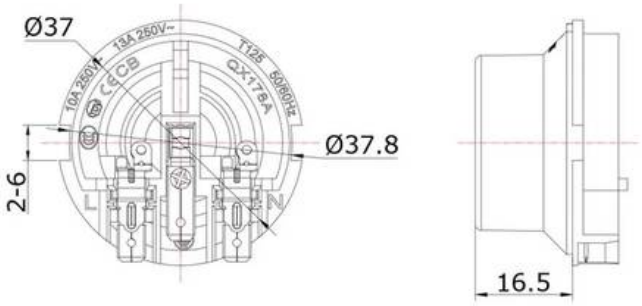

◆ QX178A(4-3)



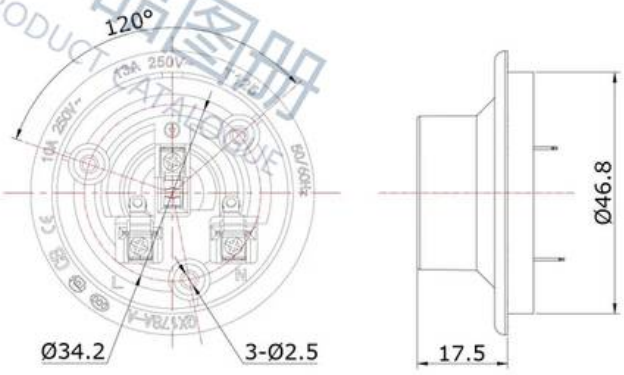


◆ QX178A-A(4-1)

项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	干烧保护 Dry Firing Protection	————


千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE



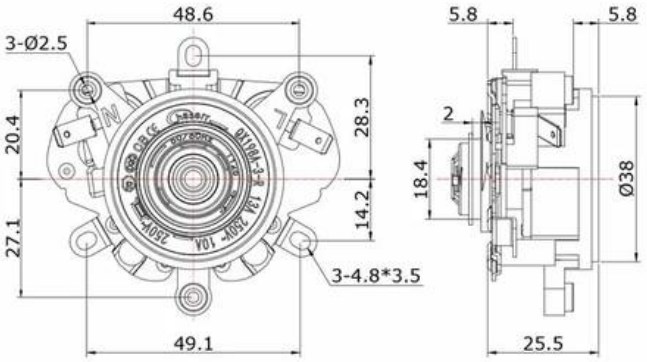


◆QX198A-3-R(47-1)



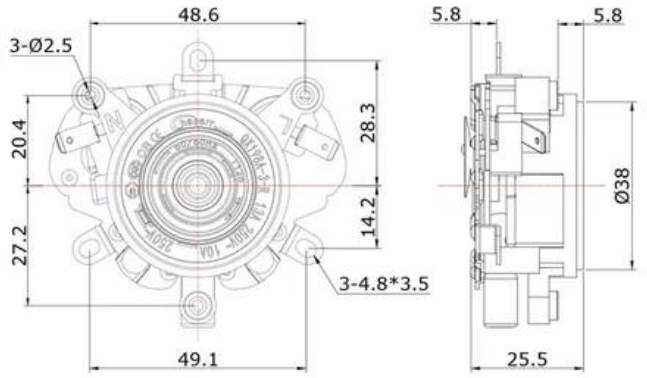


◆QX198A-3-R(47-2)



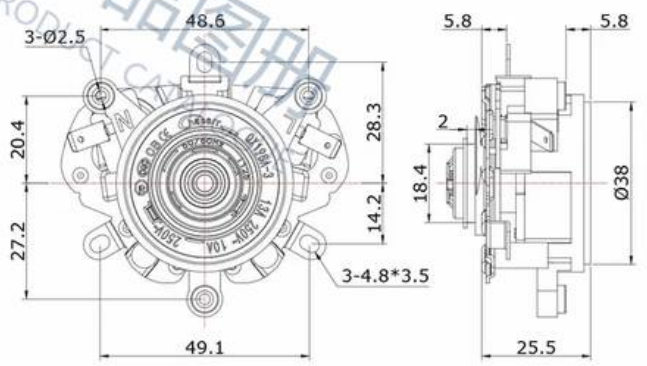

◆ QX198A-3(47-3)



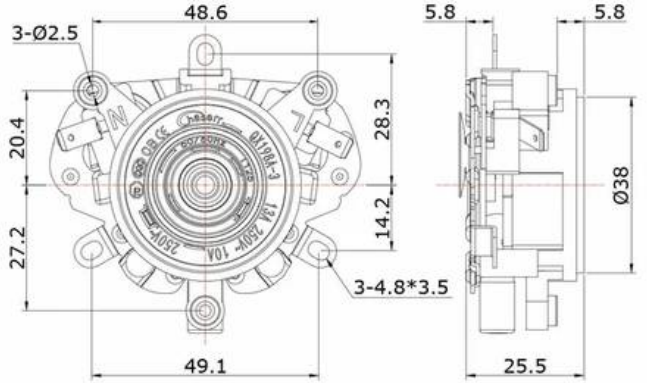


◆QX198A-3(47-4)

千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOG








◆QX189A-3(12-1)








◆ QX189A-3(12-2)

千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE


项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	干烧保护 Dry Firing Protection	自动复位型/一次性熔断 Auto-reset Type / One-Time Fuse



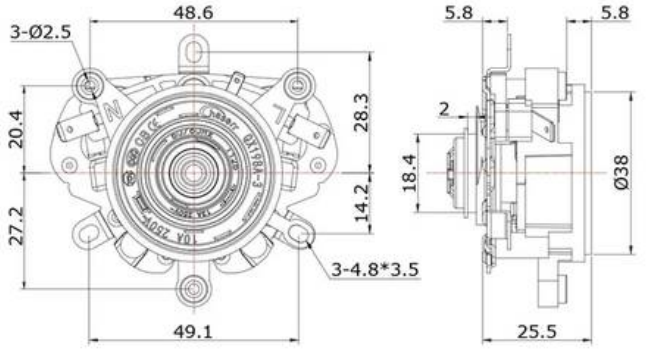

◆ QX198A-4(48-1)




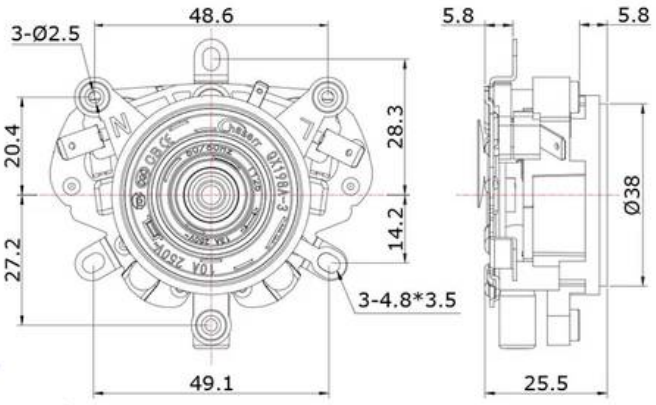

◆ QX198A-4(48-2)


千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE



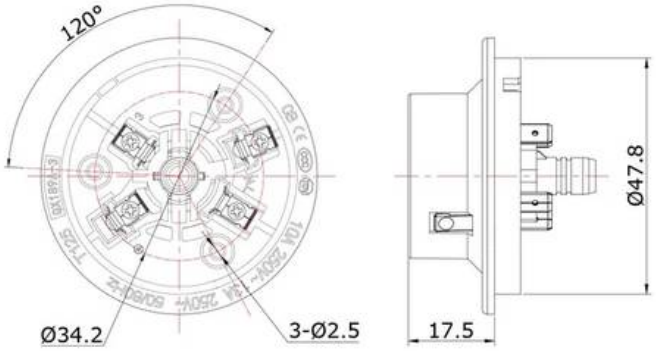

◆ QX189A-4(13-1)



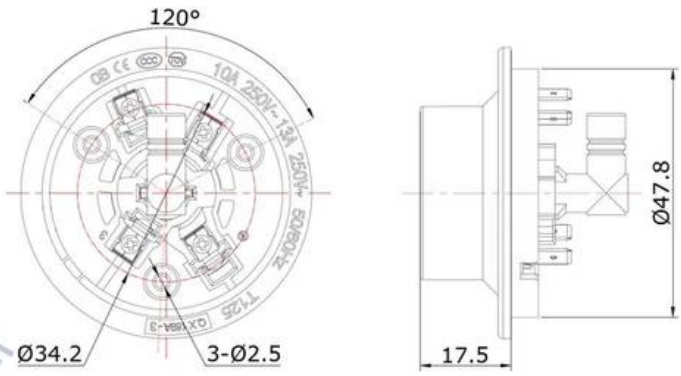


◆ QX189A-4(13-2)

千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE


项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	干烧保护 Dry Firing Protection	自动复位型 Auto-reset Type



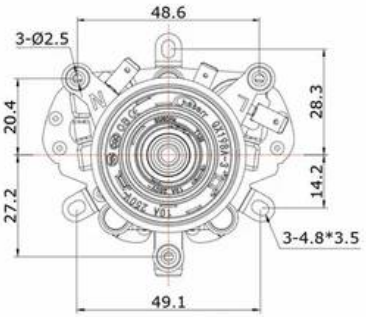

◆ QX198A-4(51-1)



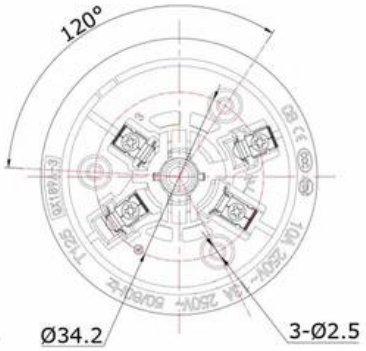

◆ QX189A-4(13-1)






◆ QX189A-4(13-2)

千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE


项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	干烧保护 Dry Firing Protection	自动复位型 Auto-reset Type



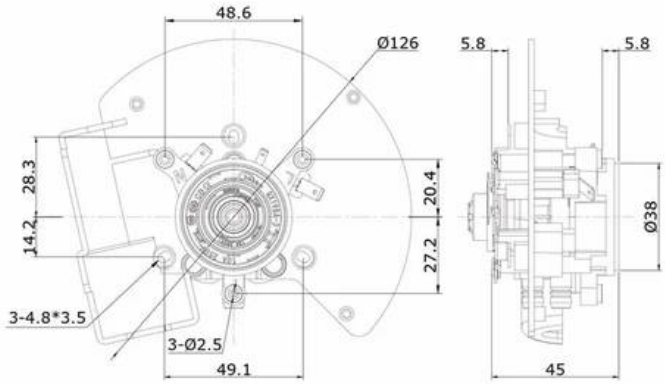


◆ QX198A-4(50-1)



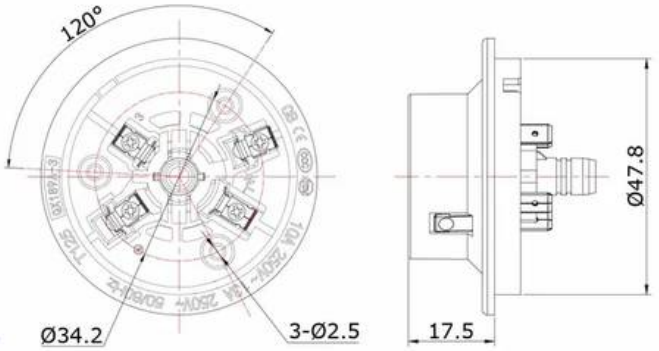

◆ QX189A-4(13-1)



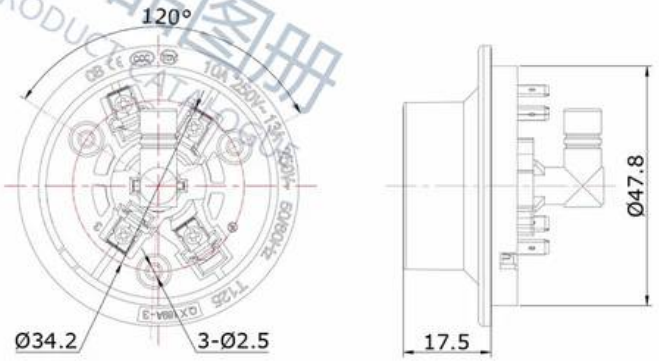


◆ QX189A-4(13-2)

千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE


项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	干烧保护 Dry Firing Protection	自动复位型 Auto-reset Type



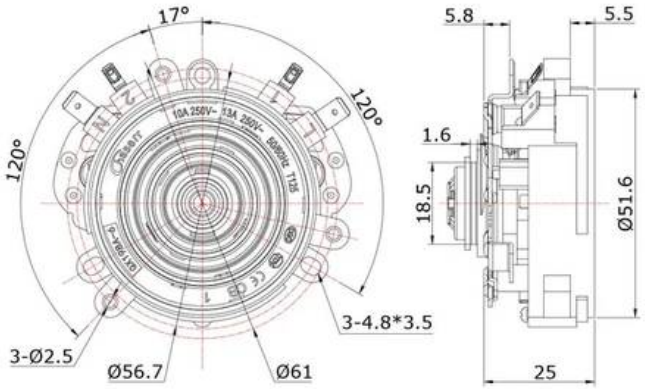


◆ QX198A(44-4)



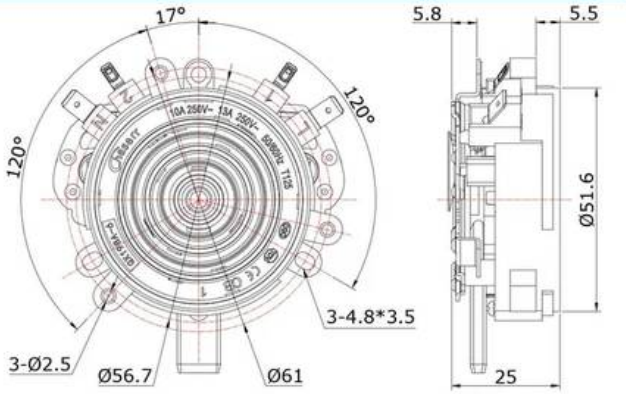


◆ QX198A(44-5)



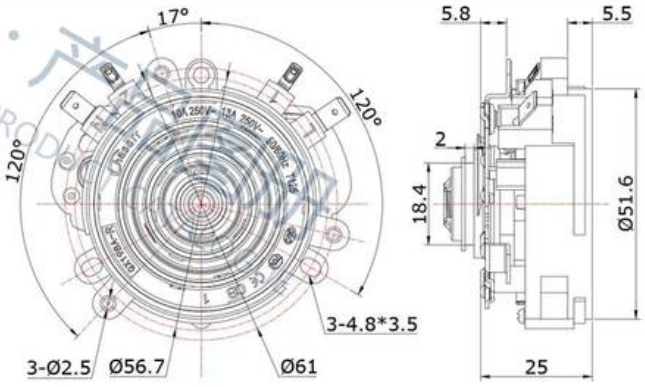

◆ QX198A-R(45-3)



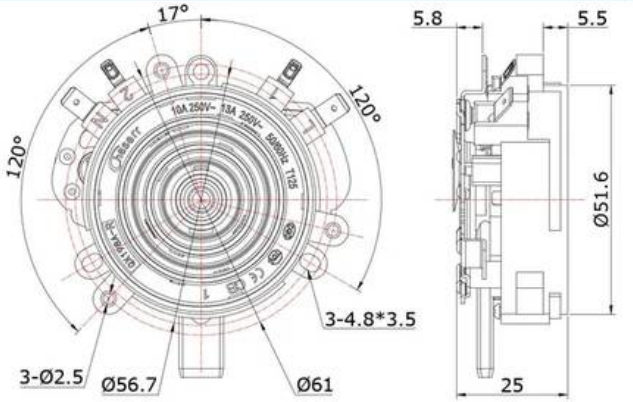


◆ QX198A-R(45-4)

项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz


千寻电气 · 产品资料
QIANXUN ELECTRICAL · PRODUCT DATA



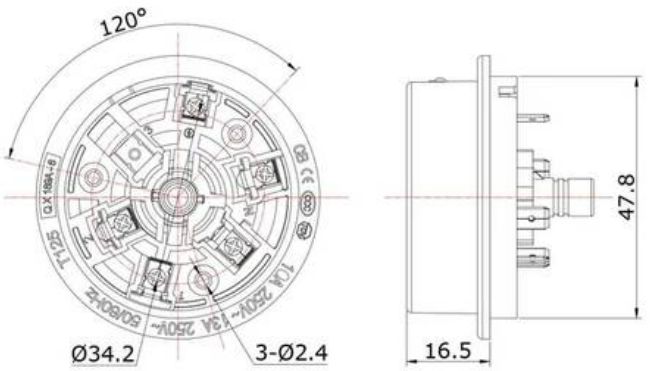


◆ QX189A(8-3)



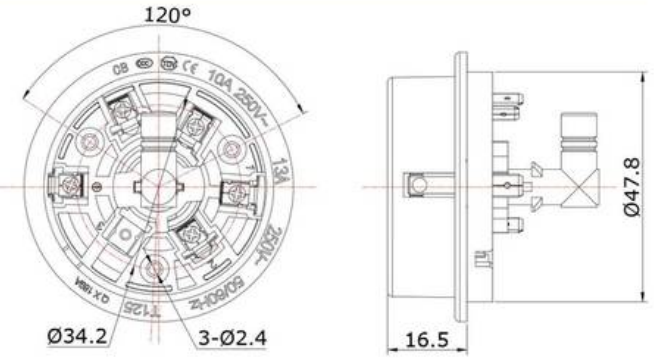


◆ QX189A(8-4)



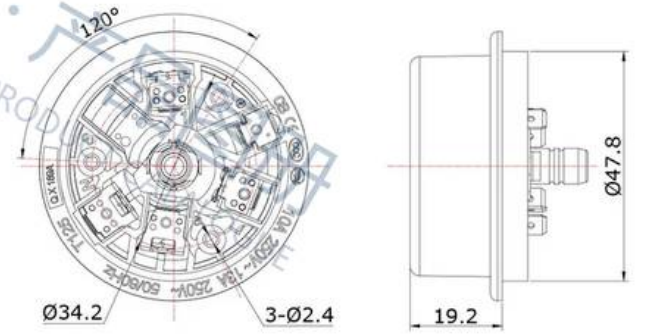

◆ QX189A(10-3)




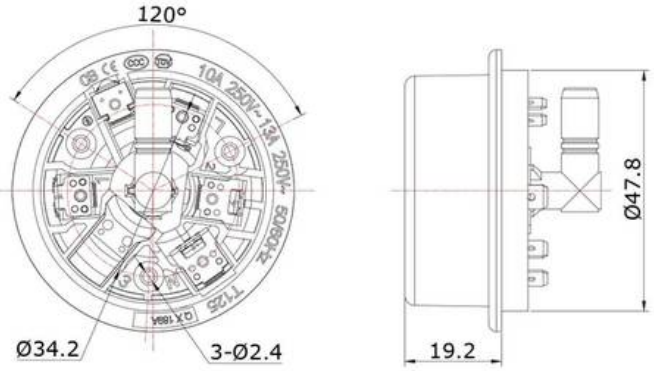

◆ QX189A(10-4)


项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	干烧保护 Dry Firing Protection	自动复位型/一次性熔断 Auto-reset Type / One-Time Fuse



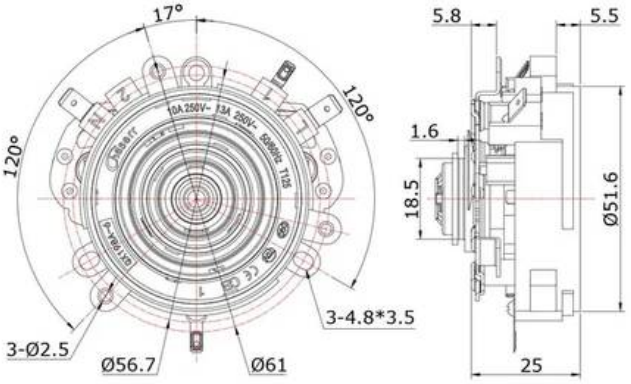


◆ QX198A-6(44-6)



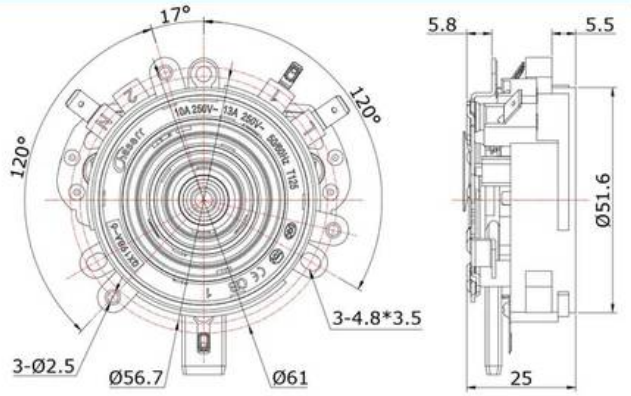


◆ QX198A-6(44-7)



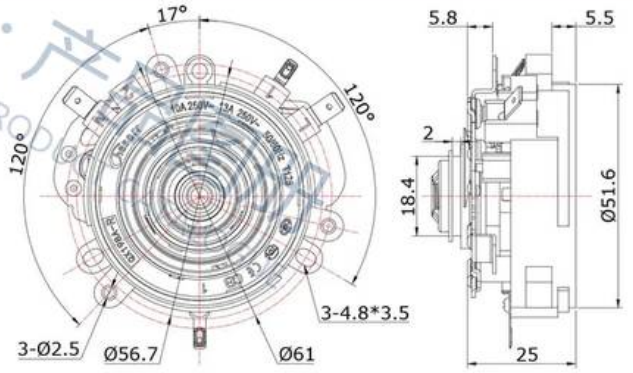

◆ QX198A-R(45-5)




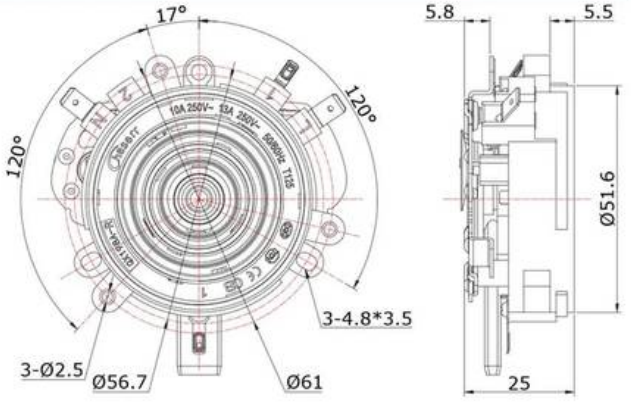

◆ QX198A-R(45-6)


项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz



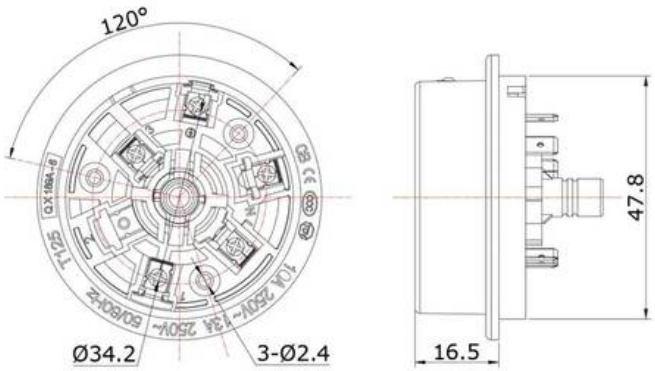


◆ QX189A-6(8-5)



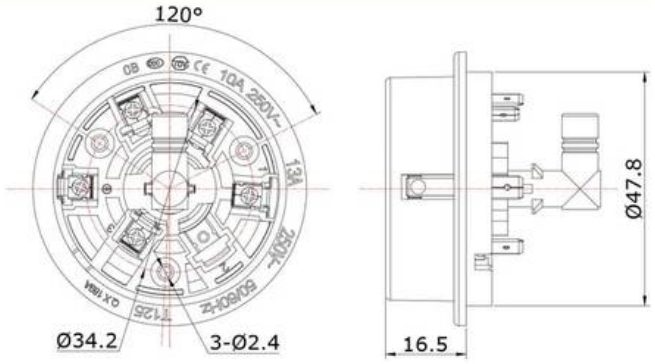


◆ QX189A-6(8-6)



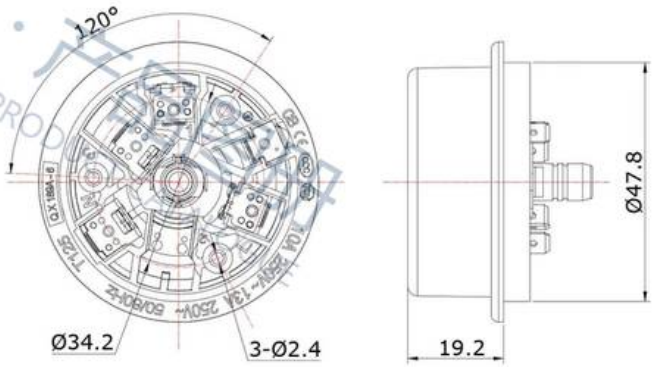

◆ QX189A-6(10-5)




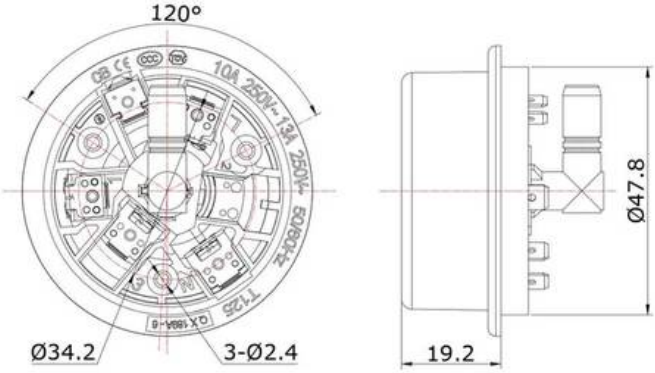


◆ QX189A-6(10-6)


项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	干烧保护 Dry Firing Protection	自动复位型/一次性熔断 Auto-reset Type / One-Time Fuse



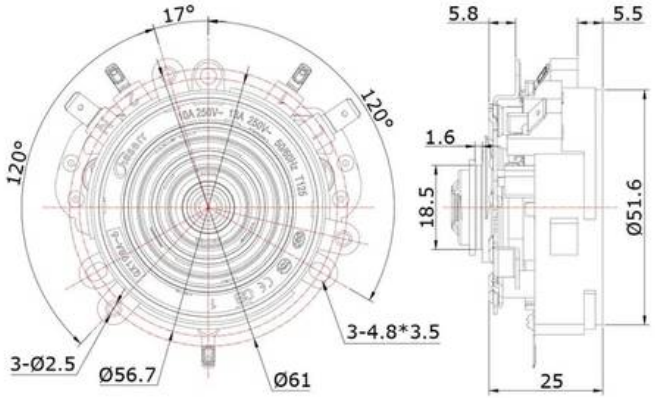


◆ QX198A-6(44-1)

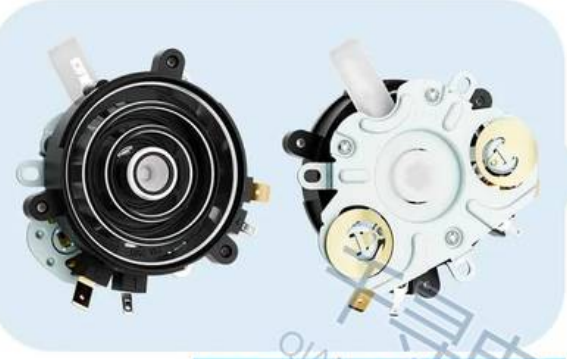

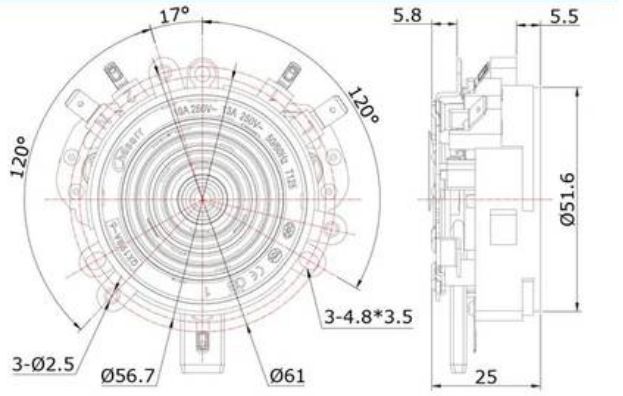


◆ QX198A-6(44-3)



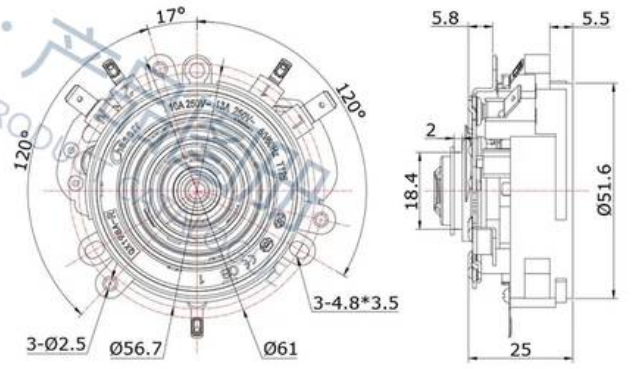

◆ QX198A-R(45-1)




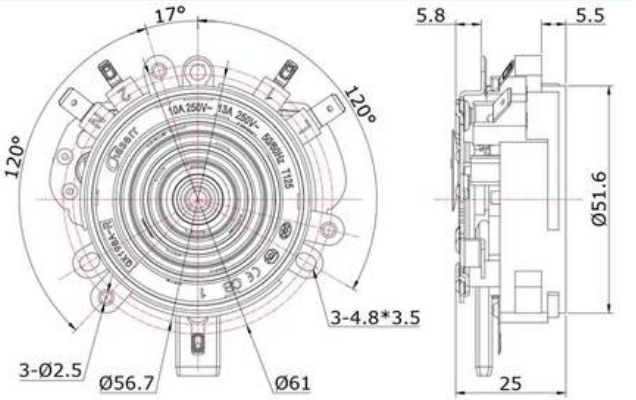

◆ QX198A-R(45-2)


项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz



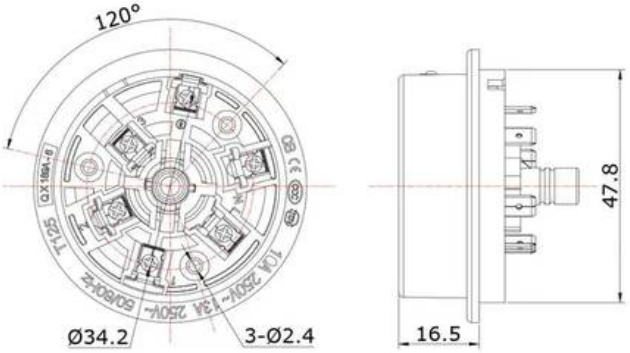


◆ QX189A-6(8-1)



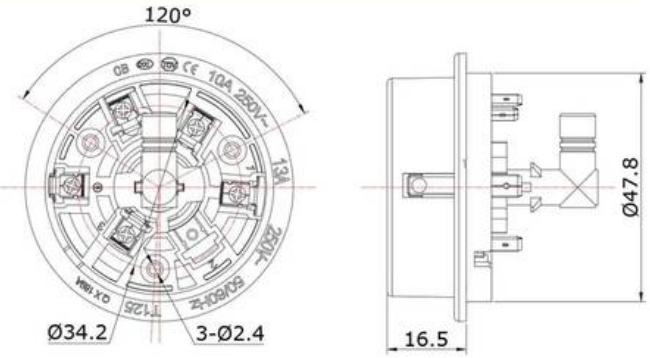


◆ QX189A-6(8-2)



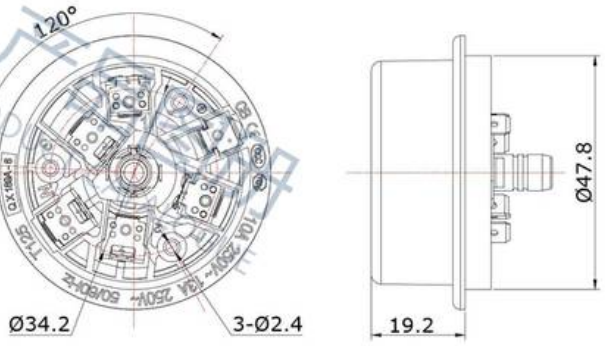

◆ QX189A-6(10-1)




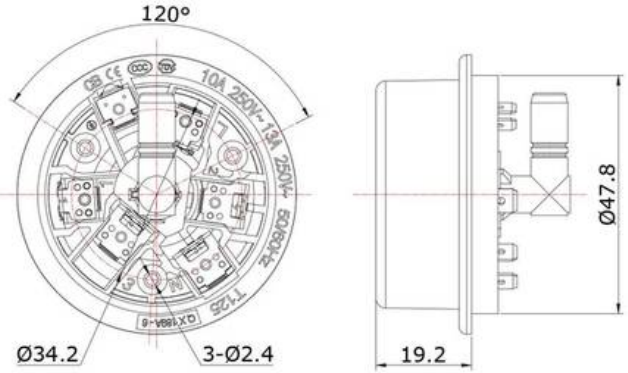

◆ QX189A-6(10-2)


项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	干烧保护 Dry Firing Protection	自动复位型/一次性熔断 Auto-reset Type / One-Time Fuse



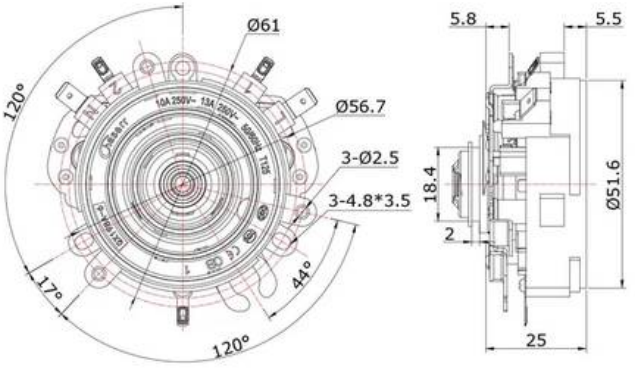

◆ QX198A-6(46-2)



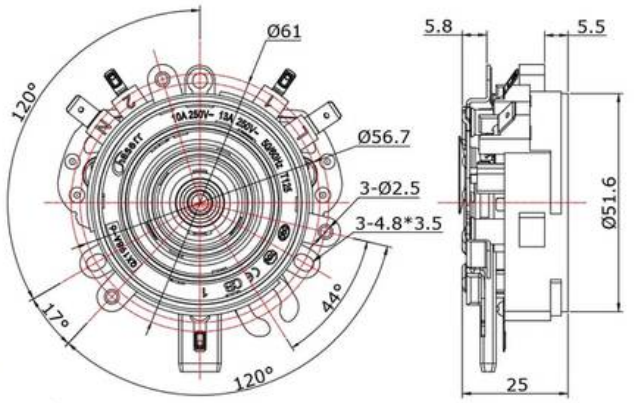


◆ QX198A-6(46-3)

千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE


项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	干烧保护 Dry Firing Protection	自动复位型 Auto-reset Type



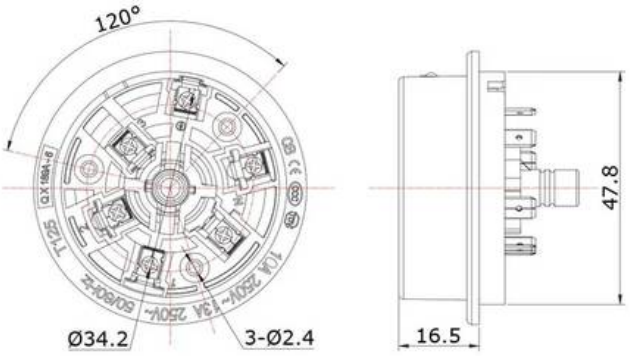


◆ QX189A-6(8-1)



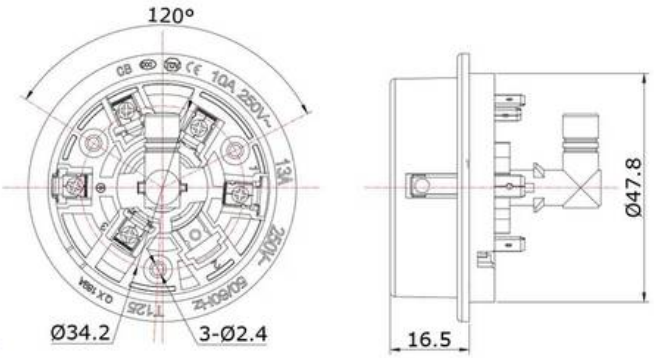


◆ QX189A-6(8-2)



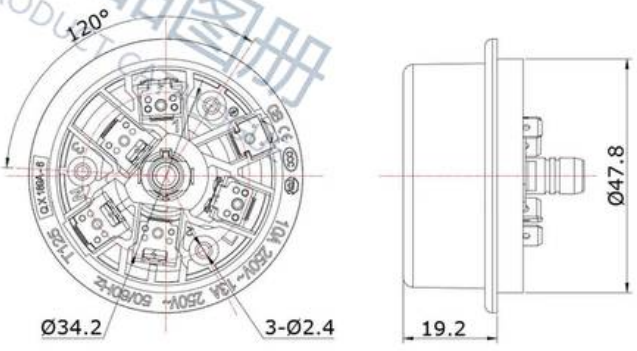

◆ QX189A-6(10-1)




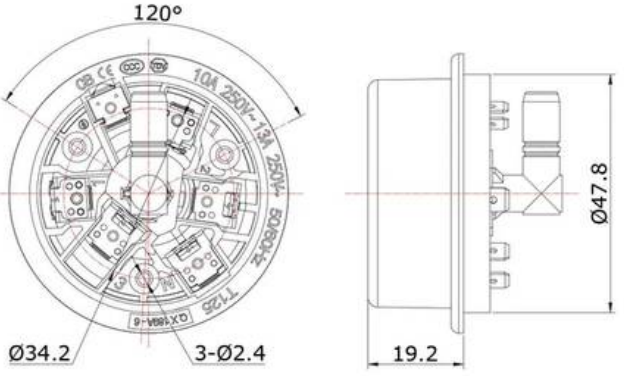

◆ QX189A-6(10-2)

千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT



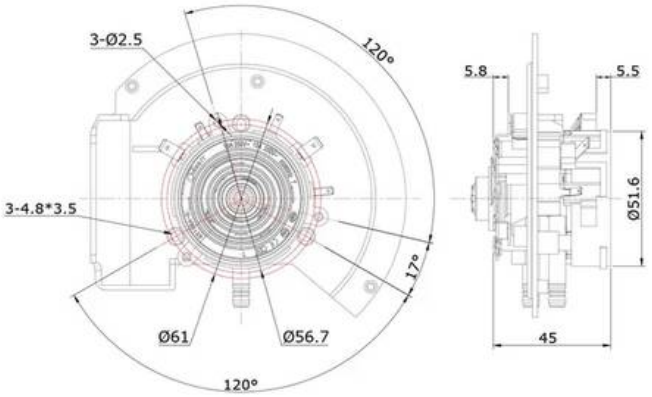


◆ QX198A-6(49-1)

千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE


项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	干烧保护 Dry Firing Protection	自动复位型 Auto-reset Type



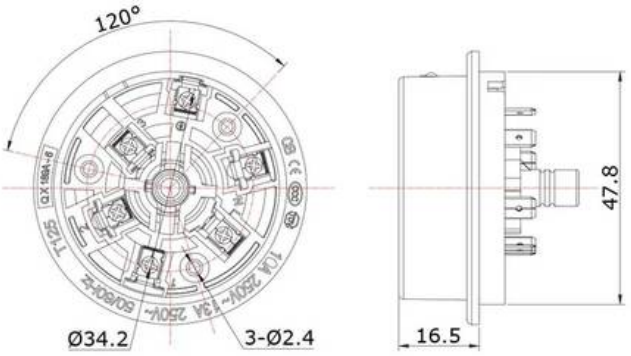


◆ QX189A-6(8-1)



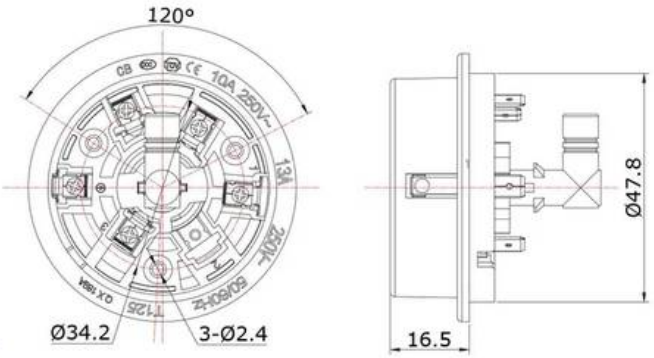


◆ QX189A-6(8-2)



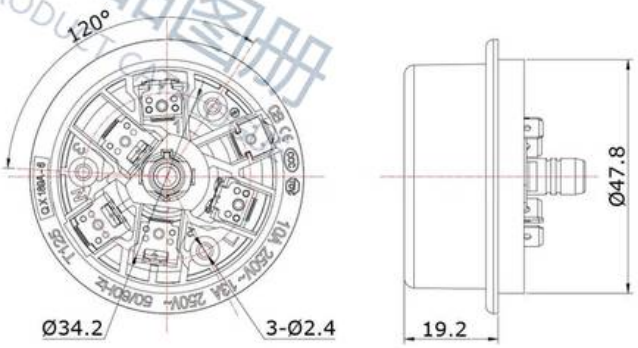

◆ QX189A-6(10-1)




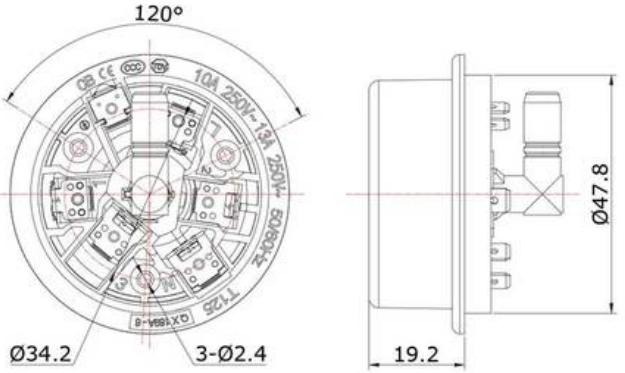

◆ QX189A-6(10-2)


千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOG



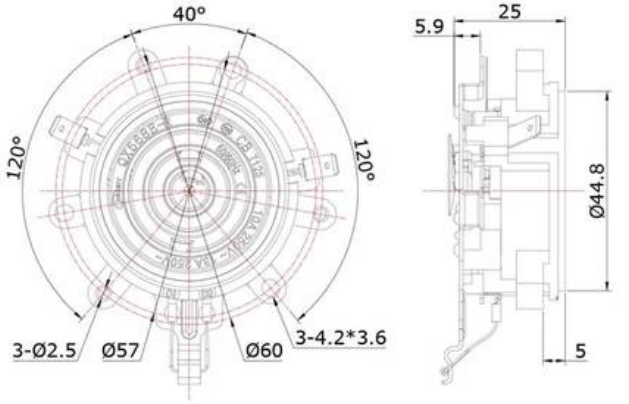

◆ QX568E-R(56-1)



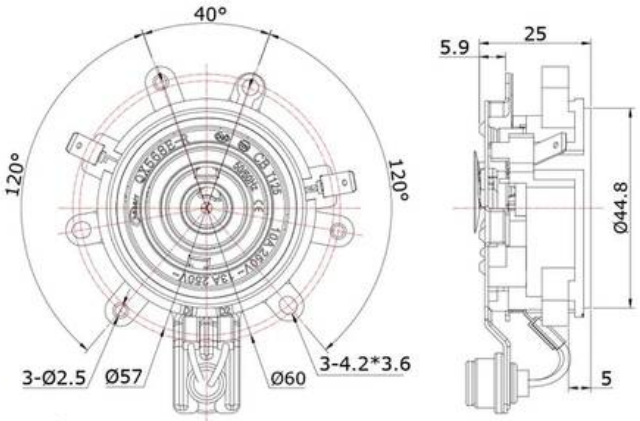


◆ QX568E-R(56-2)

千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE


项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	干烧保护 Dry Firing Protection	自动复位型/一次性熔断 Auto-reset Type / One-Time Fuse



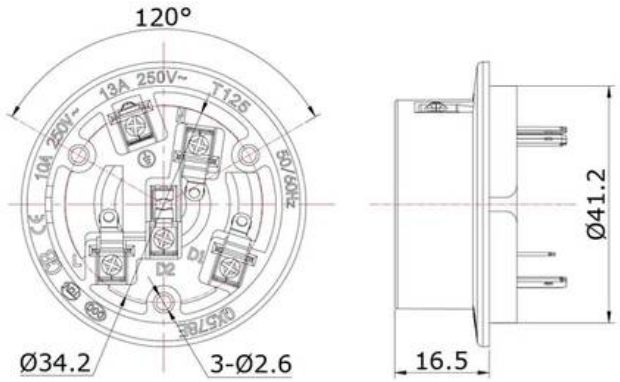

◆ QX578E(15-4)




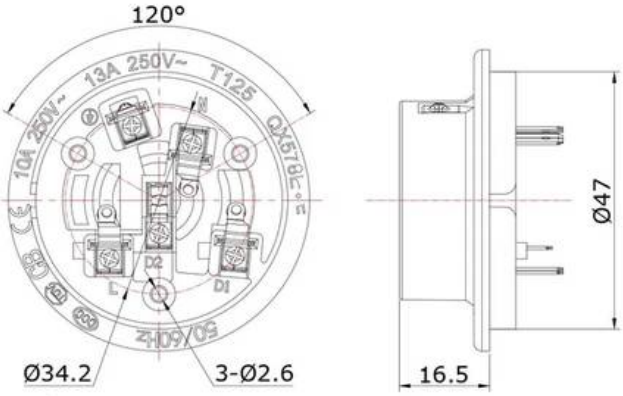

◆ QX578E(15-5)


千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE



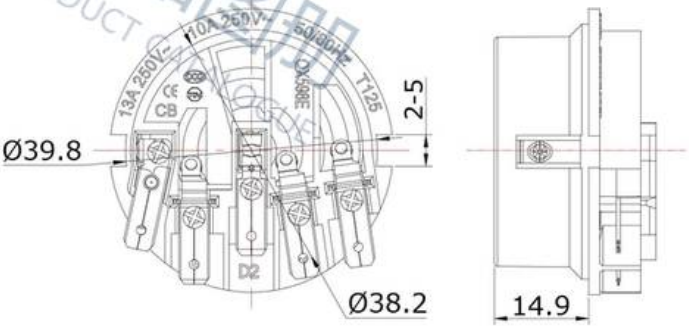


◆ QX598E(15-6)




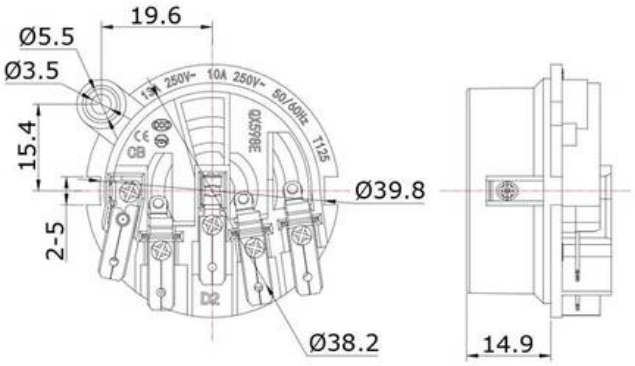

◆ QX598E(15-7)




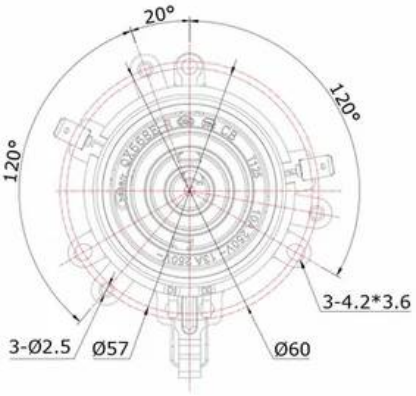


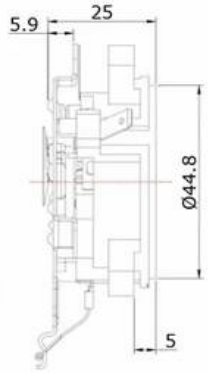

◆ QX568E-R(57-1)



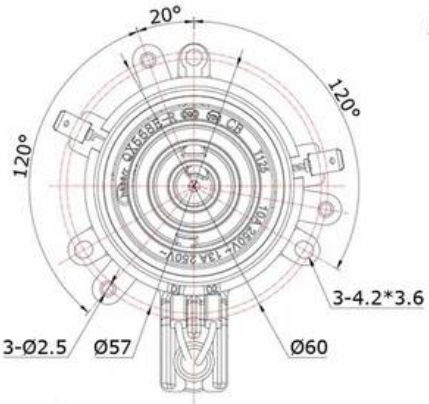

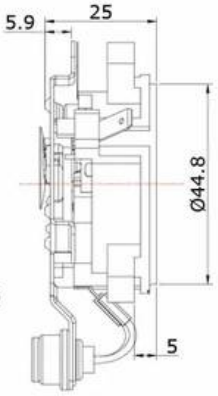


◆ QX568E-R(57-2)

千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE


项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	干烧保护 Dry Firing Protection	自动复位型/一次性熔断 Auto-reset Type / One-Time Fuse



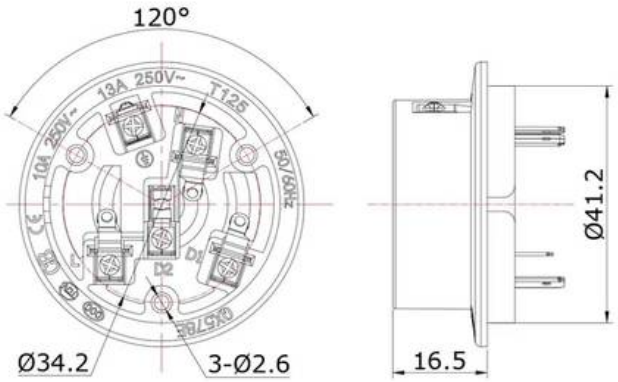

◆ QX578E(15-4)




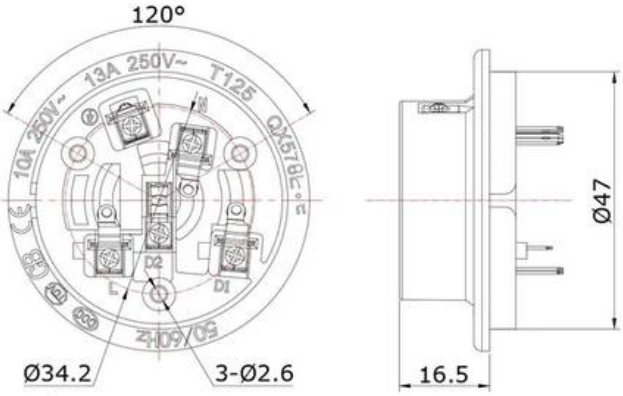

◆ QX578E(15-5)


千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE



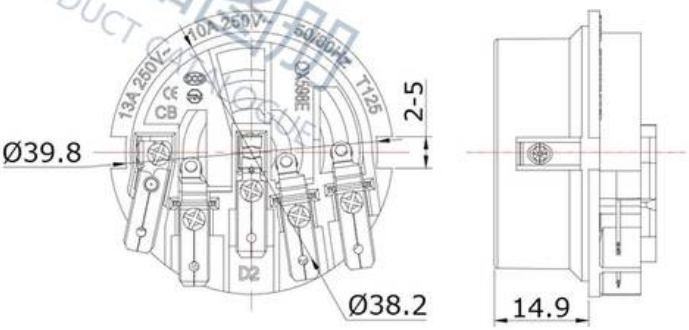


◆ QX598E(15-6)



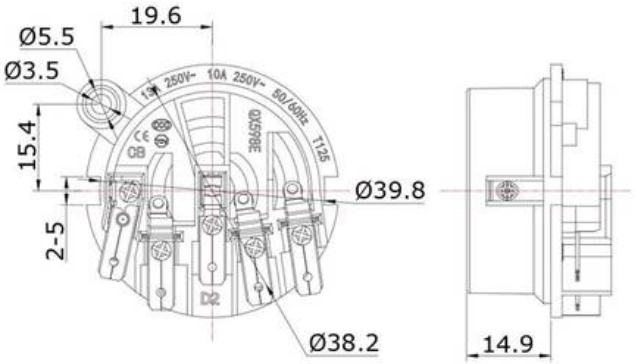


◆ QX598E(15-7)



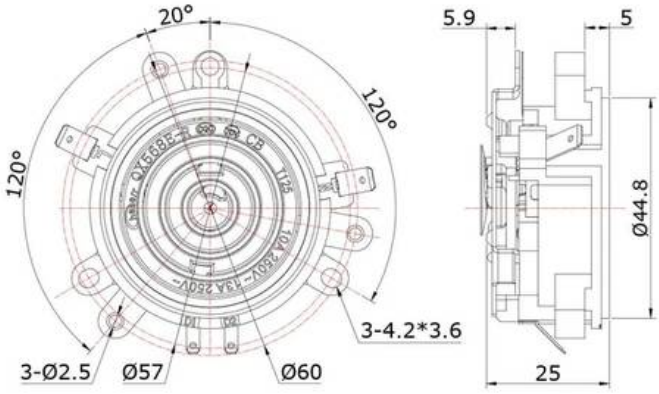


◆ QX568E-R(57-3)



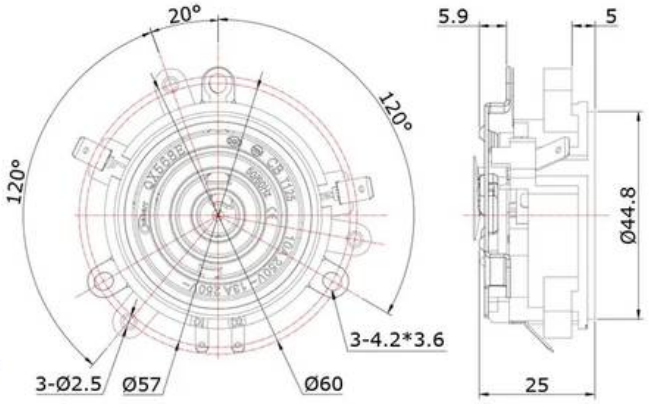

◆ QX568E-1(57-4)



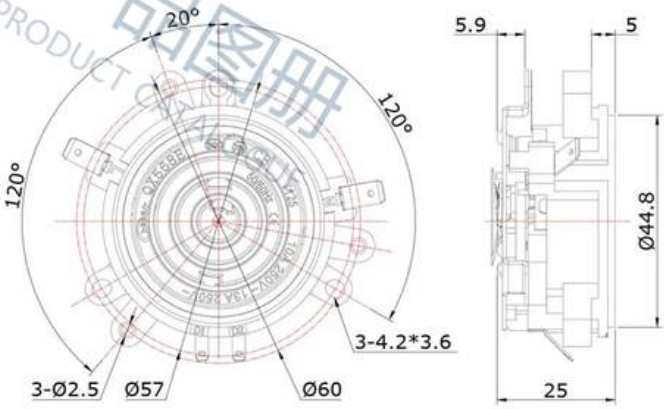


◆ QX568E(57-5)

千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE

项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~
额定电流 Rated Current	10A / 13A
接地电阻 Grounding Resistance	≤50mΩ
绝缘电阻 Insulation Resistance	≥100mΩ


项 目 Subject	技术参数 Technical Specifications
环境温度 Environmental Stability	125°C
额定频率 Rated Frequency	50Hz / 60Hz
耐 压 Pressure Resistance	AC2500V 1分钟不击穿
干烧保护 Dry Firing Protection	自动复位型/一次性熔断 Auto-reset Type / One-Time Fuse



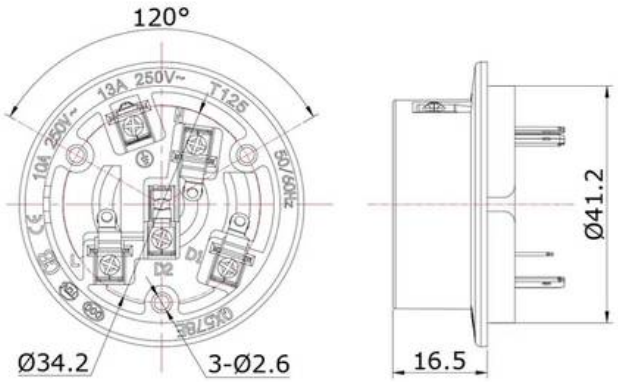

◆ QX578E(15-4)




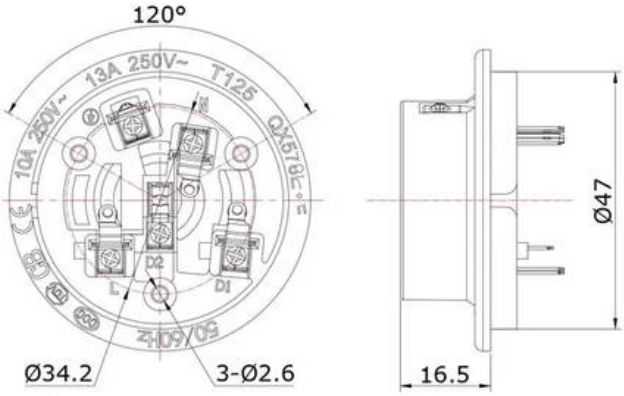

◆ QX578E(15-5)


千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE



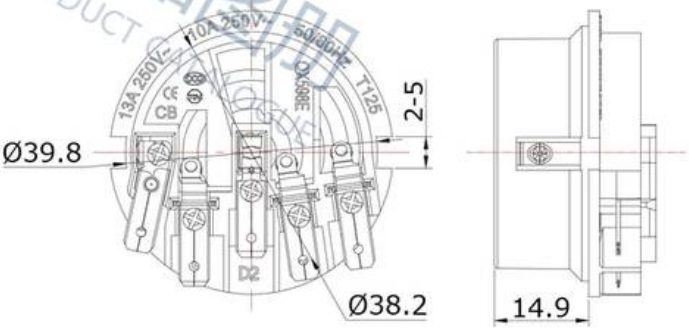


◆ QX598E(15-6)



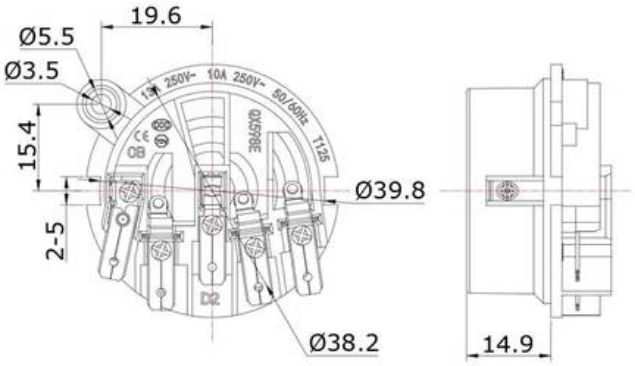


◆ QX598E(15-7)



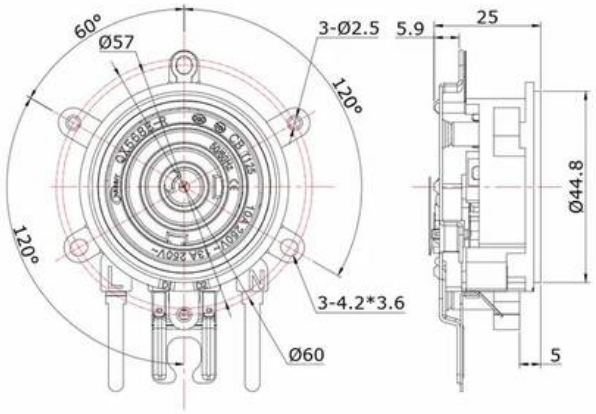

◆ QX568E-R(58-1)



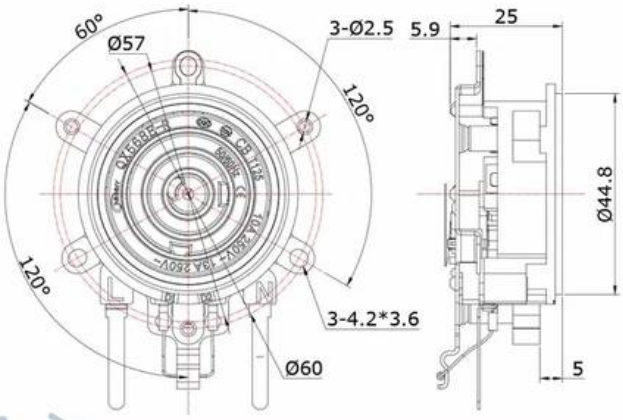

◆ QX568E-R(58-2)


千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE

项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~
额定电流 Rated Current	10A / 13A
接地电阻 Grounding Resistance	≤50mΩ
绝缘电阻 Insulation Resistance	≥100mΩ

项 目 Subject	技术参数 Technical Specifications
环境温度 Environmental Stability	125°C
额定频率 Rated Frequency	50Hz / 60Hz
耐 压 Pressure Resistance	AC2500V 1分钟不击穿
干烧保护 Dry Firing Protection	自动复位型/一次性熔断 Auto-reset Type / One-Time Fuse








◆ QX578E(15-4)






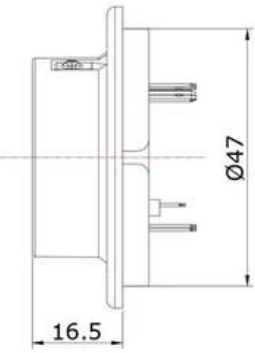


◆ QX578E(15-5)

千寻电气·产品图册 QIANXUN ELECTRICAL · PRODUCT CATALOGUE




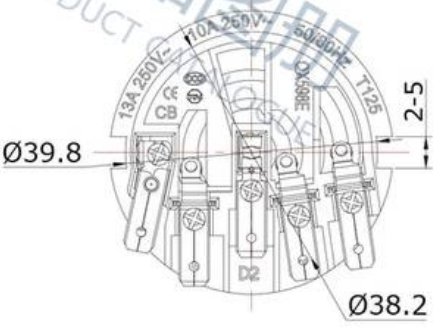




◆ QX598E(15-6)




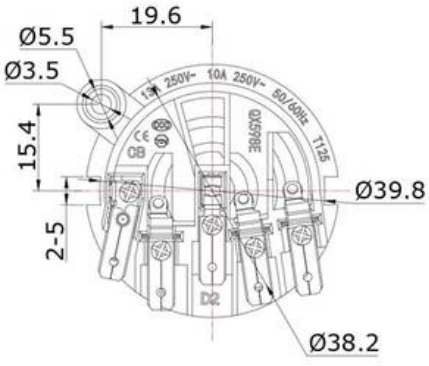



◆ QX598E(15-7)



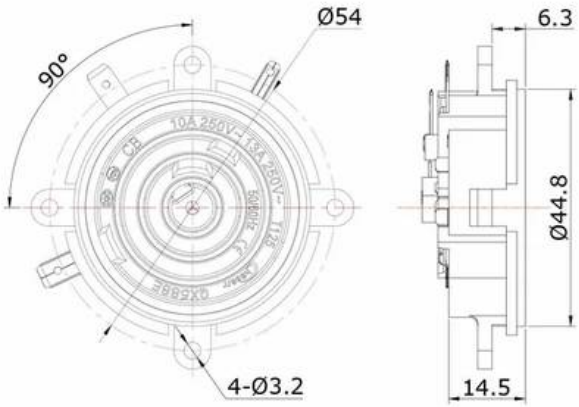


◆ QX588E(59-1)

千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE


项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	干烧保护 Dry Firing Protection	——



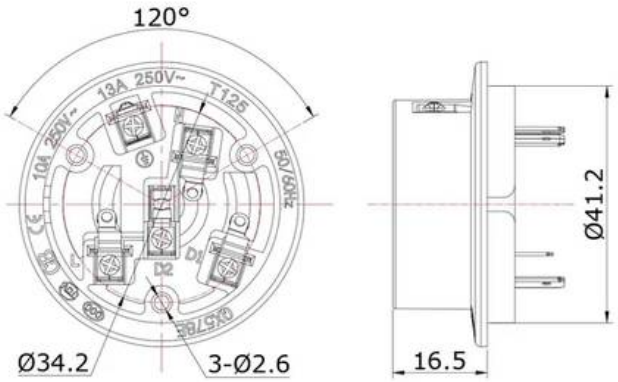

◆ QX578E(15-4)




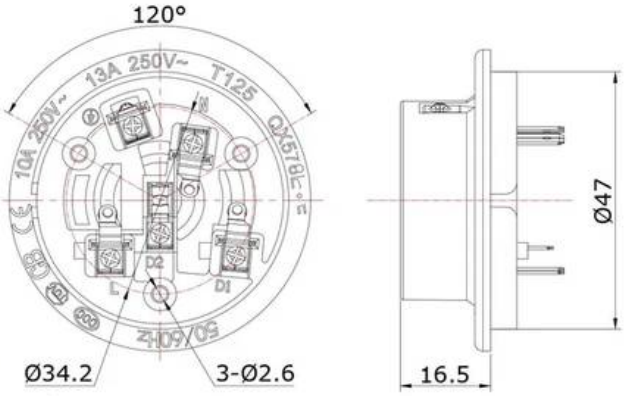

◆ QX578E(15-5)


千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE



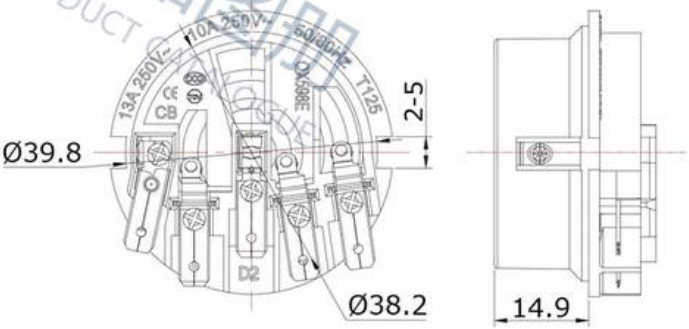


◆ QX598E(15-6)



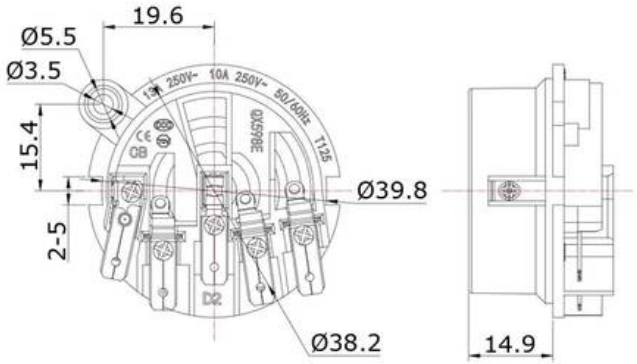


◆ QX598E(15-7)



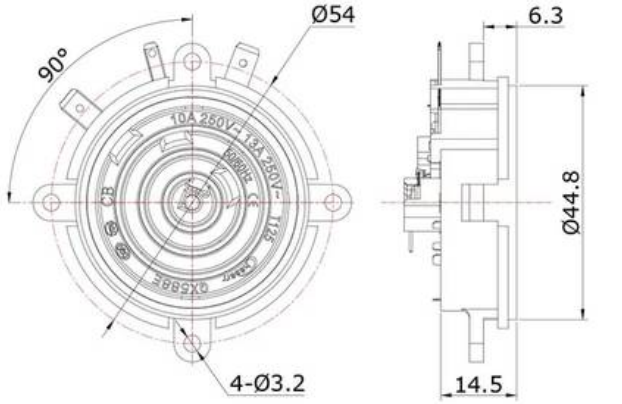

◆ QX588E(60-1)



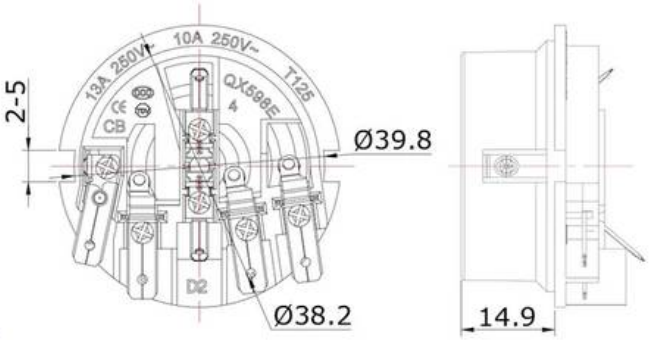


◆ QX598E(16-1)

千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE

项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	干烧保护 Dry Firing Protection	——


千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE



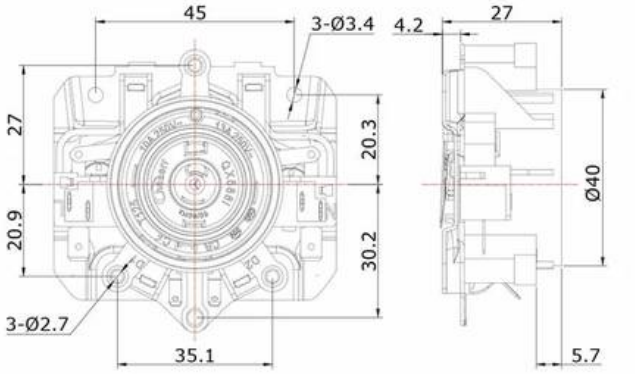


◆ QX518I (55-1)



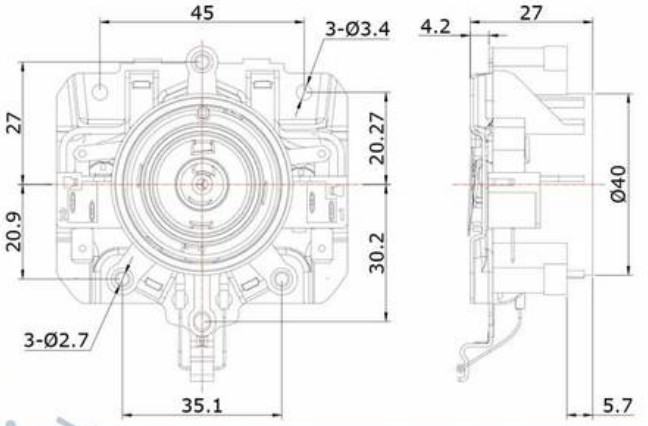

◆ QX518I (55-2)




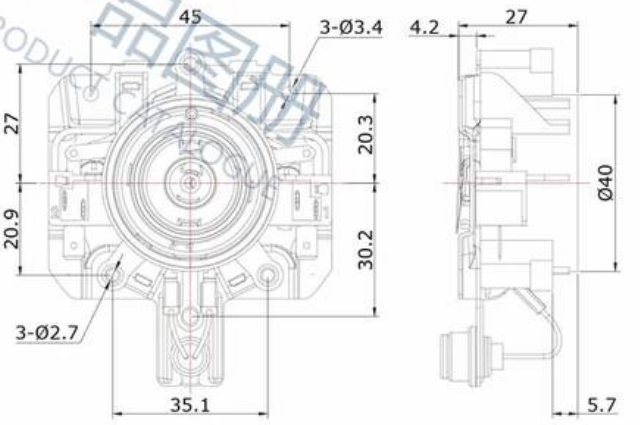

◆ QX518I (55-3)


千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOG



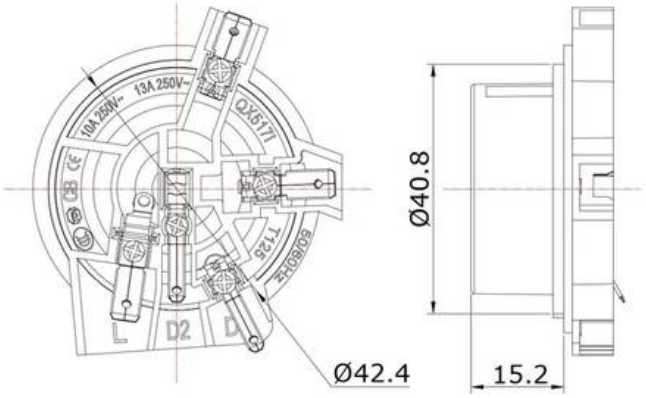

◆ QX517I (20-1)



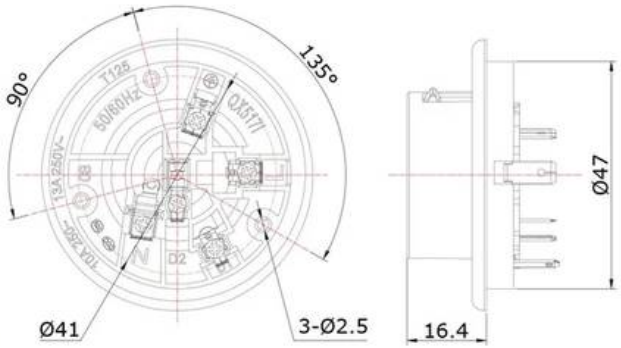


◆ QX517I-1(20-2)

千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE


项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	干烧保护 Dry Firing Protection	自动复位型 Auto-reset Type



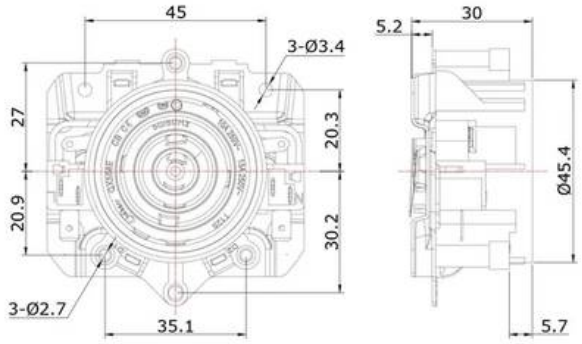


◆ QX558E(54-1)



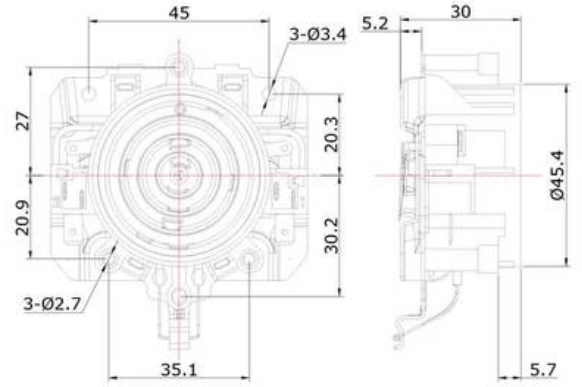

◆ QX558E(54-2)




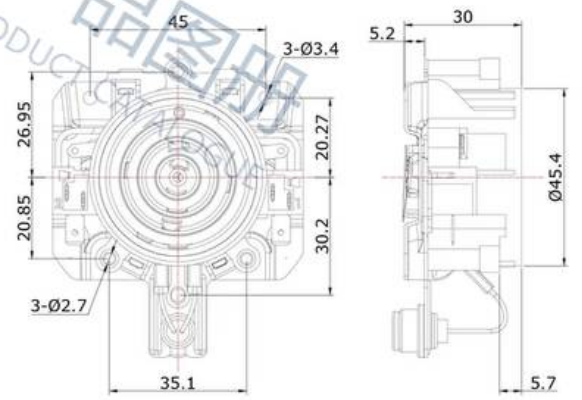

◆ QX558E(54-3)

千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE



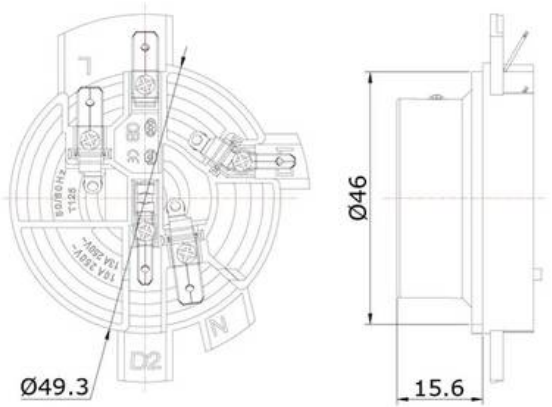


◆ QX557E(19-1)

千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE


项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	干烧保护 Dry Firing Protection	自动复位型 Auto-reset Type



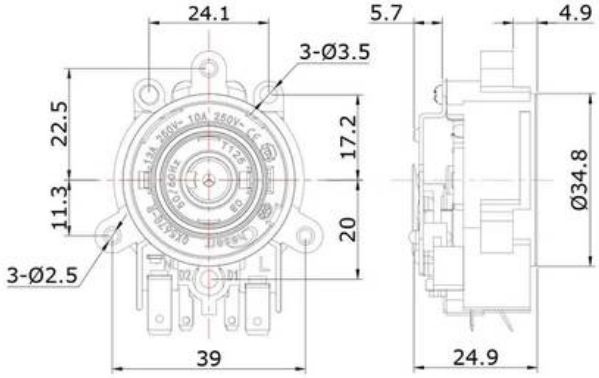


◆ QX567G-R(61-1)



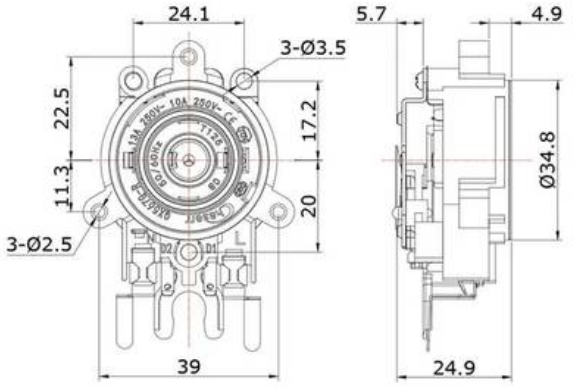


◆ QX567G-R(61-2)



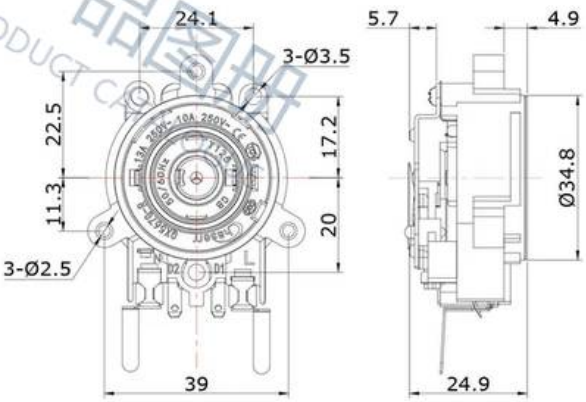

◆ QX567G-R(61-3)




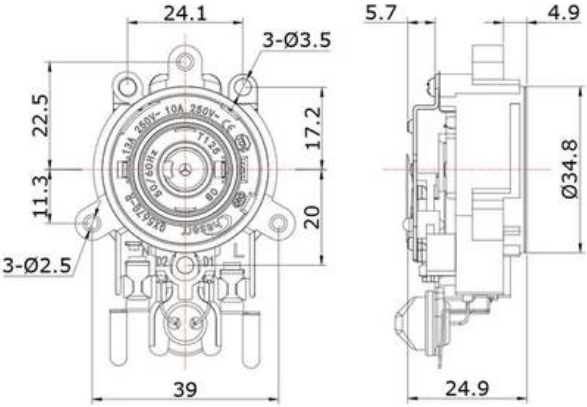

◆ QX567G-R(61-4)


千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOG



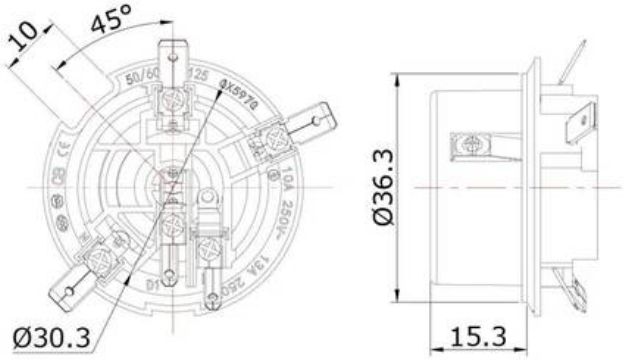

◆ QX597G(18-1)



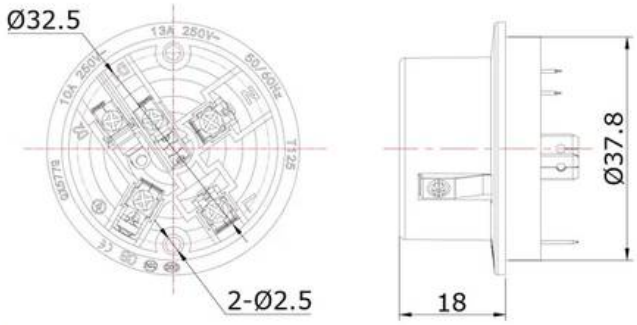

◆ QX577G(18-2)

千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE

项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	干烧保护 Dry Firing Protection	自动复位型/一次性熔断 Auto-reset Type / One-Time Fuse








◆ QX567G-1(61-5)








◆ QX597G(18-1)








◆ QX577G(18-2)

项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	干烧保护 Dry Firing Protection	———


千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE



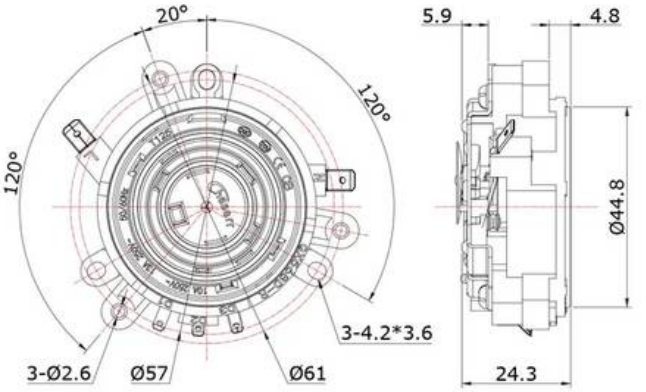

◆ QX568D-R(52-1)



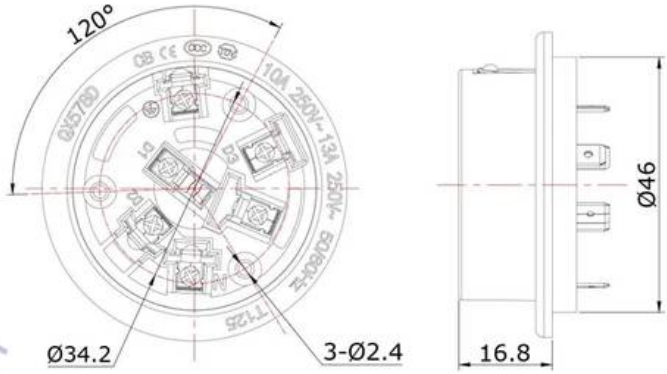


◆ QX578D(21-1)

千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE


项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	干烧保护 Dry Firing Protection	自动复位型/一次性熔断 Auto-reset Type / One-Time Fuse



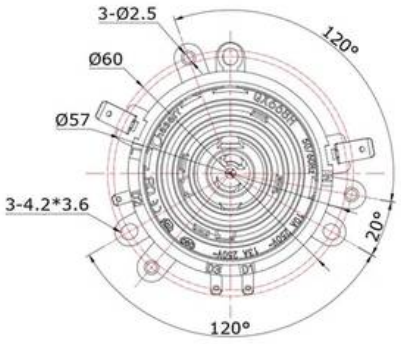

◆ QX668H(53-1)



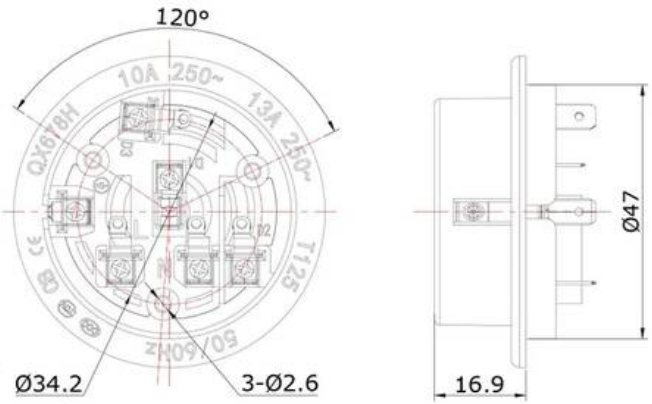

◆ QX678H(22-1)

千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE

项 目 Subject	技术参数 Technical Specifications	项 目 Subject	技术参数 Technical Specifications
额定电压 Rated Voltage	250V~	环境温度 Environmental Stability	125°C
额定电流 Rated Current	10A / 13A	额定频率 Rated Frequency	50Hz / 60Hz
接地电阻 Grounding Resistance	≤50mΩ	耐 压 Pressure Resistance	AC2500V 1分钟不击穿
绝缘电阻 Insulation Resistance	≥100mΩ	干烧保护 Dry Firing Protection	自动复位型 Auto-reset Type

千寻电气·产品图册
QIANXUN ELECTRICAL · PRODUCT CATALOGUE

千思万虑 追寻卓越

A Myriad of Thoughts and Considerations
Pursuit of Excellence

千寻电气产品图册
QIANXUN ELECTRICAL PRODUCT CATALOGUE

温州千寻电气科技有限公司
WENZHOU CHASERR ELECTRICAL TECHNOLOGY CO.,LTD

浙江温州乐清市天成街道天成工业区宁康东路2892号

135 8779 8177

Una@chaserr.cc

https://cn.qianxunele.com