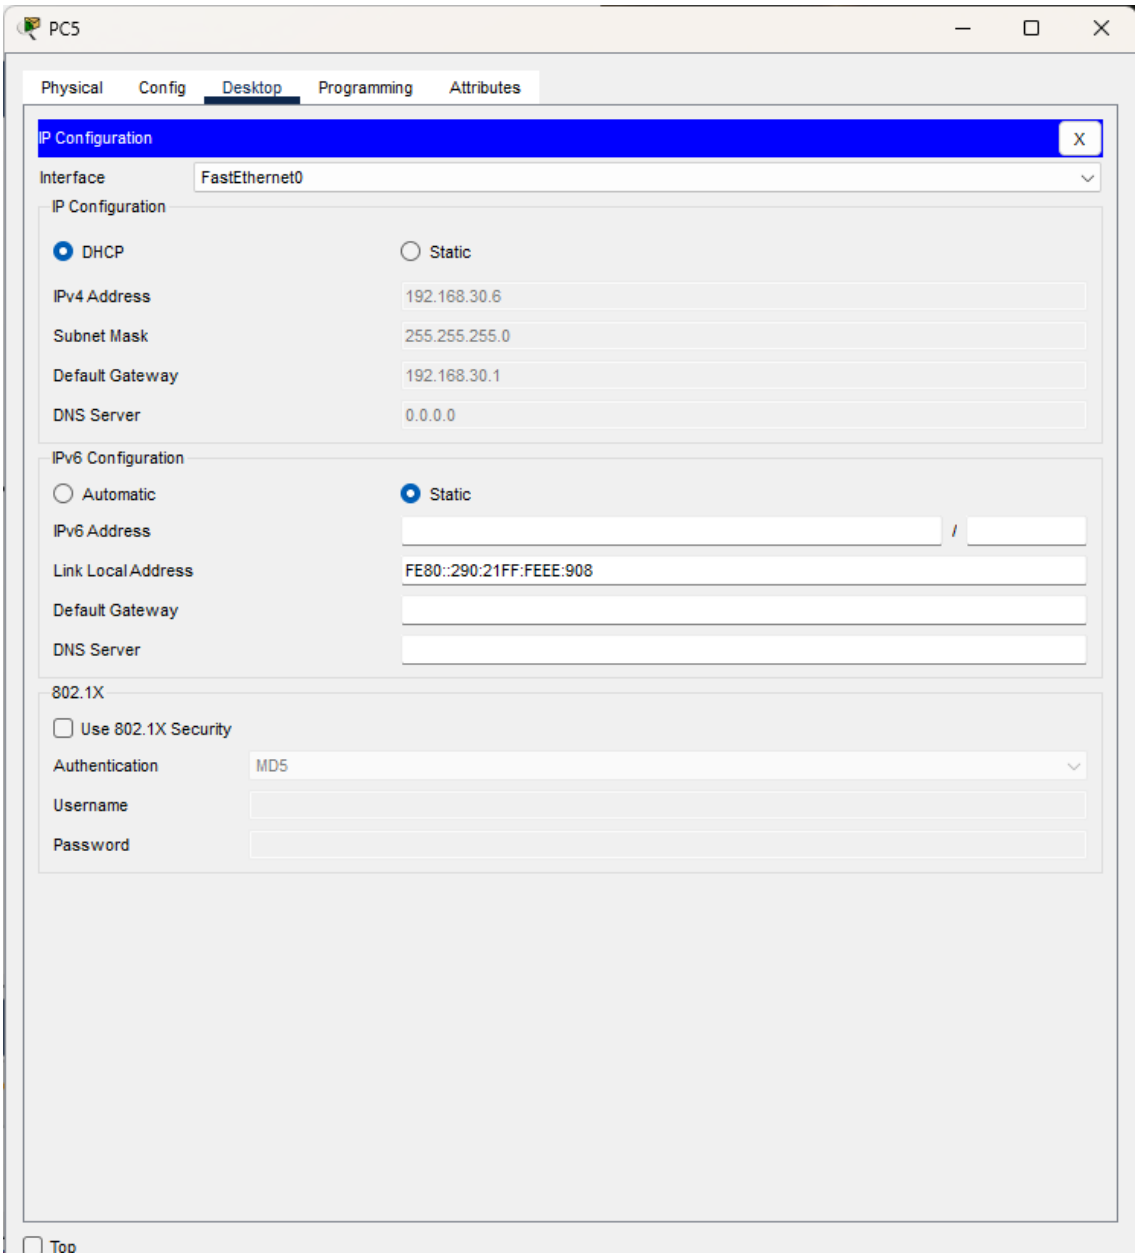
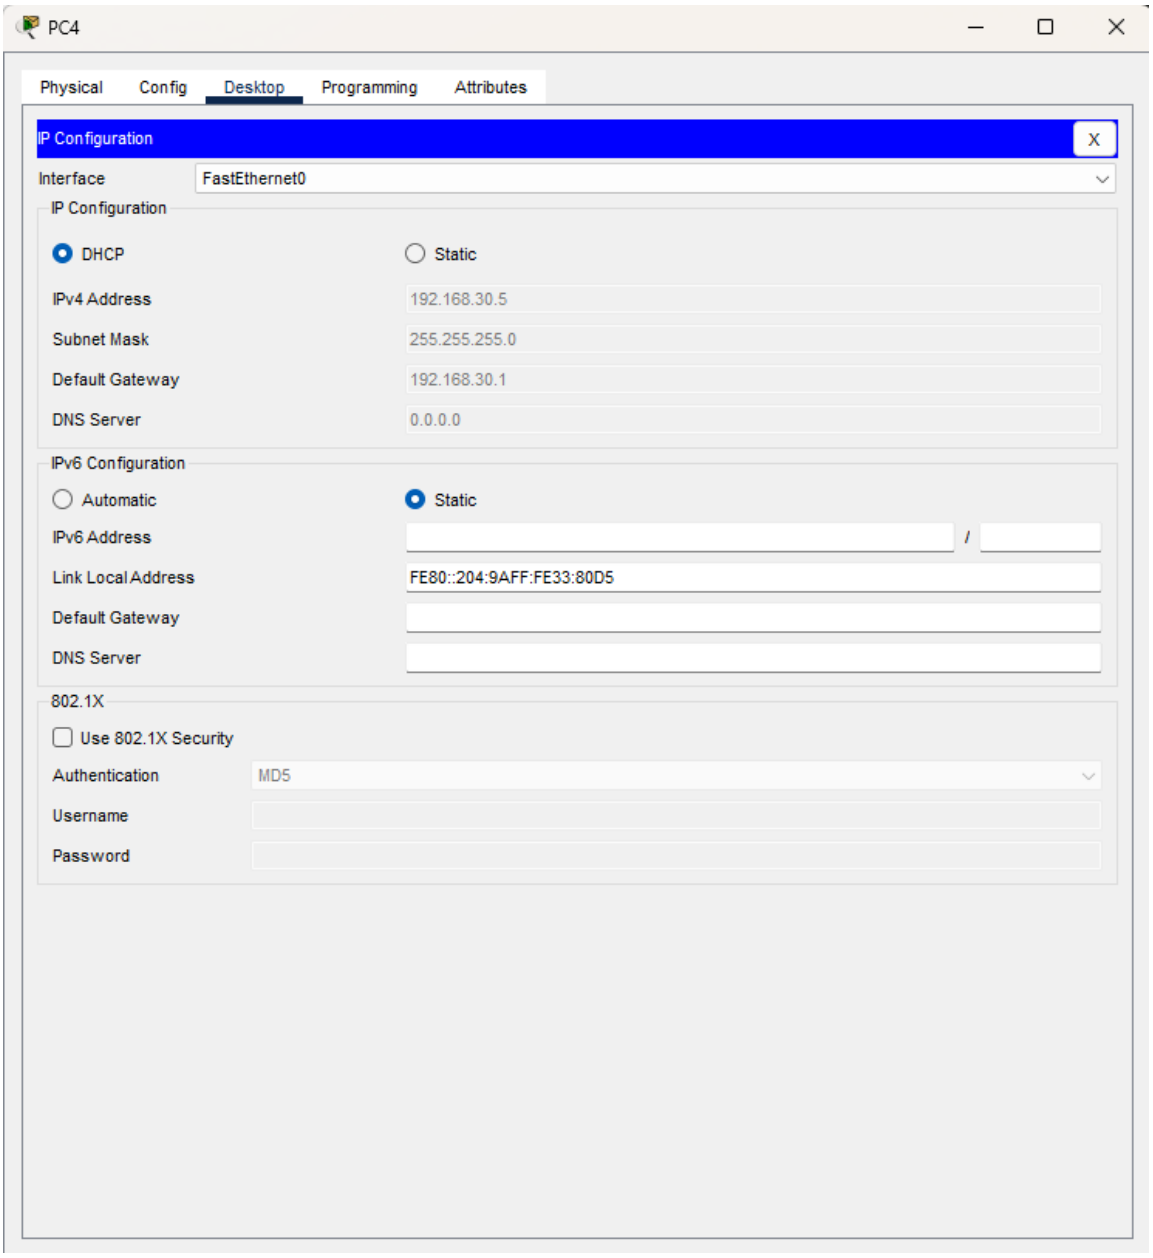
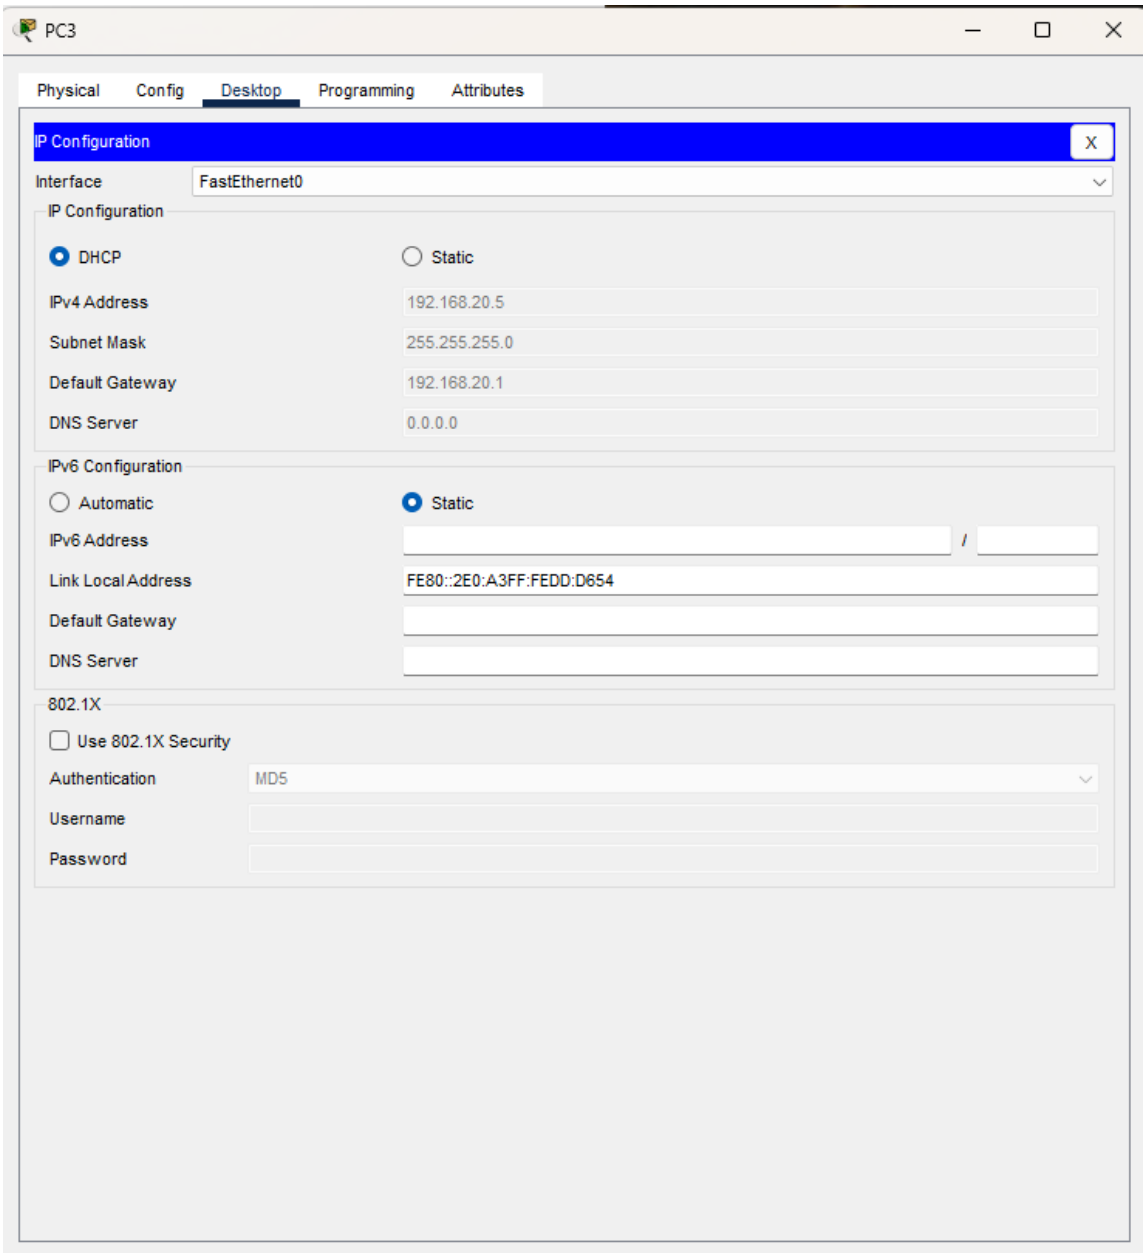
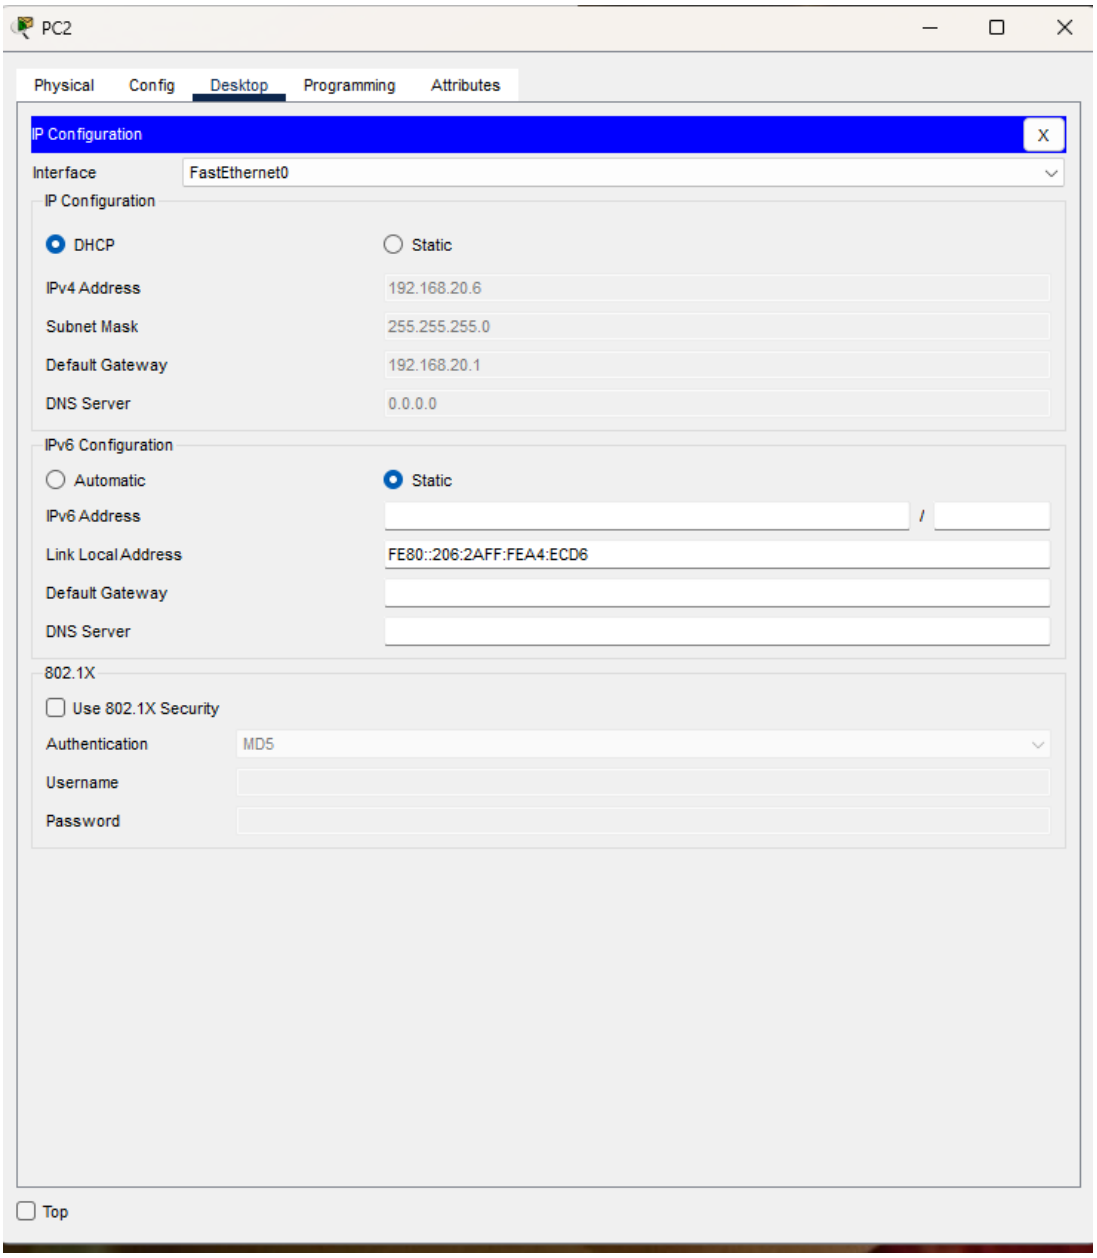
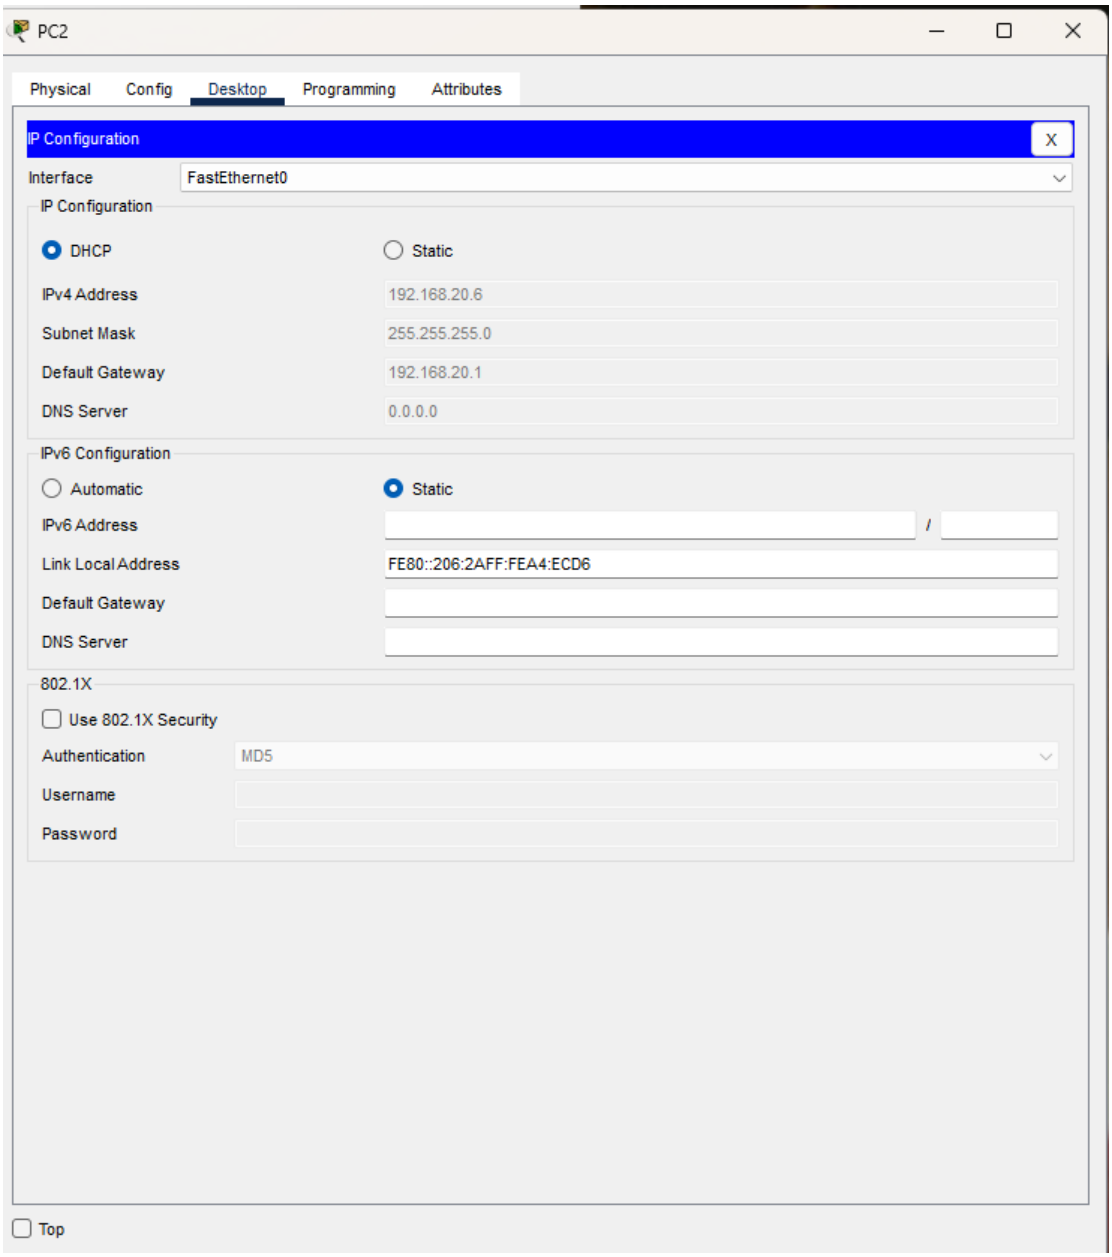
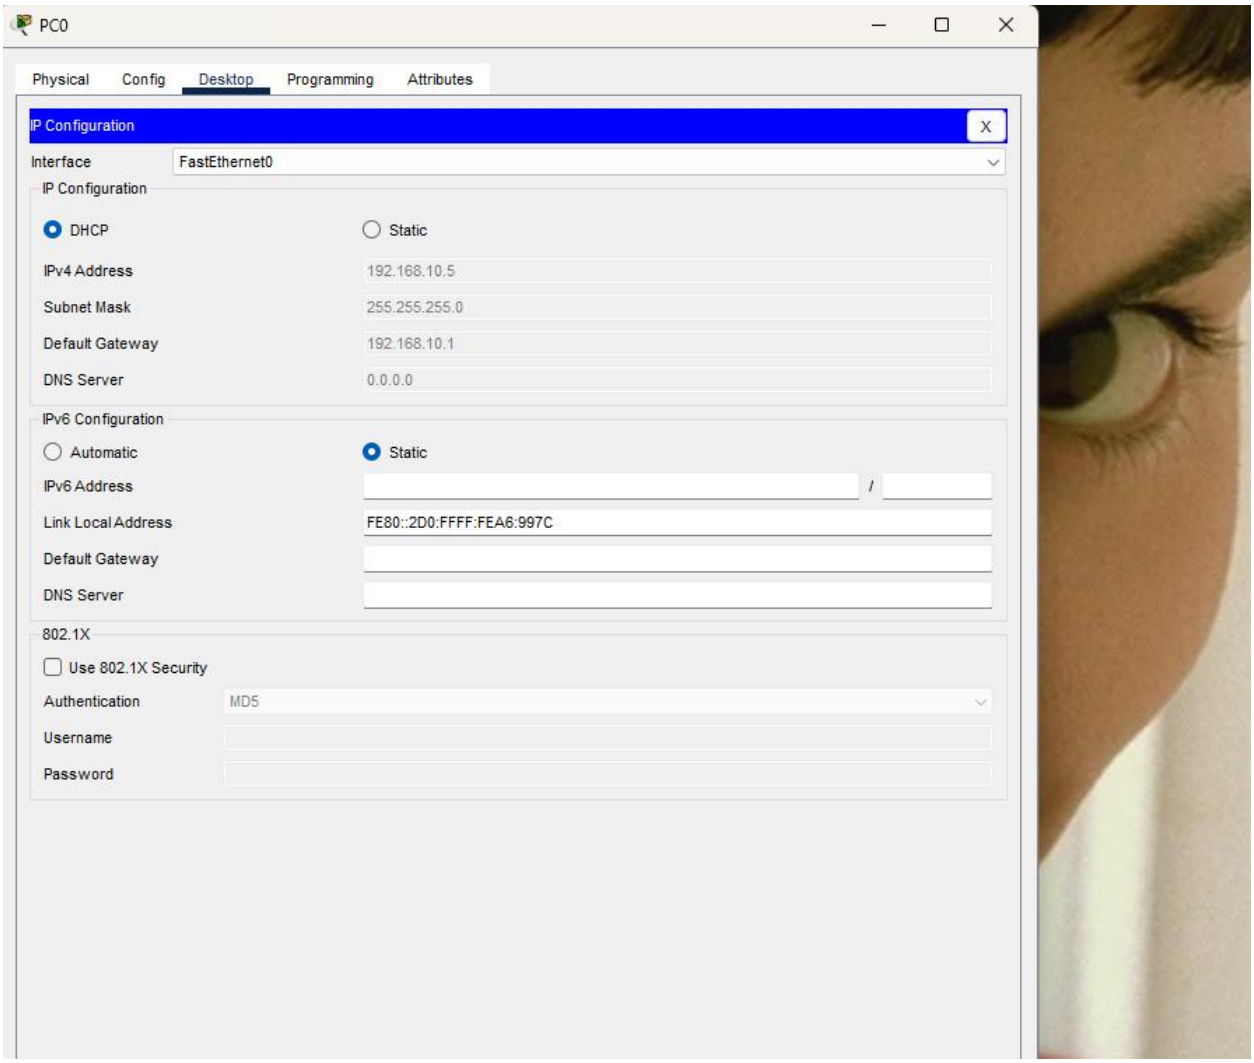

PC5
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.30.6
Subnet Mask
255.255.255.0
Default Gateway
192.168.30.1
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::290:21FF:FEEE:908
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

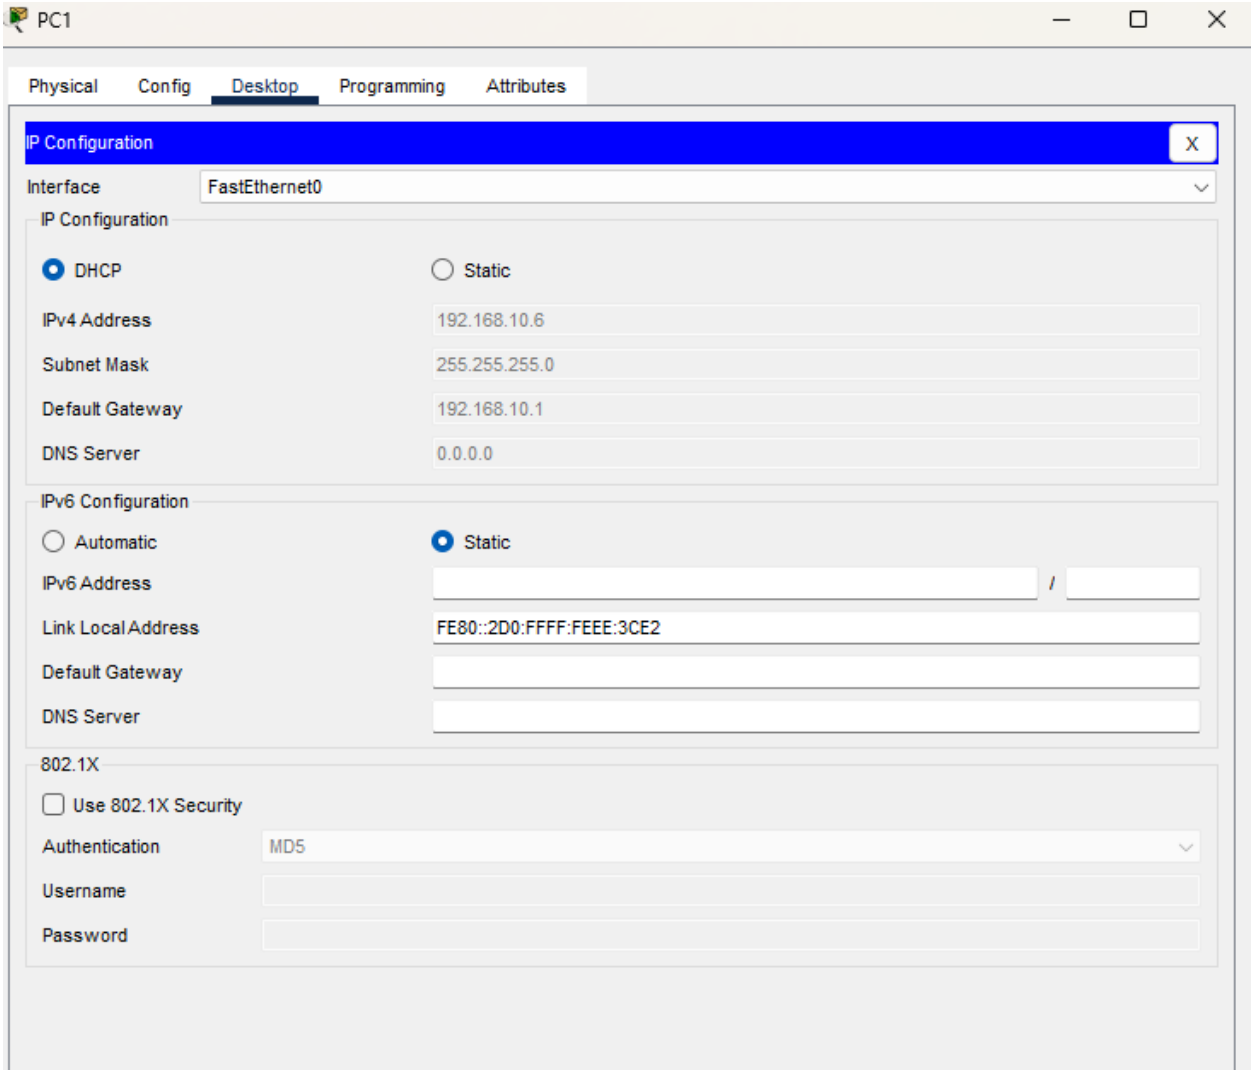

PC4
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.30.5
Subnet Mask
255.255.255.0
Default Gateway
192.168.30.1
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::204:9AFF:FE33:80D5
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password

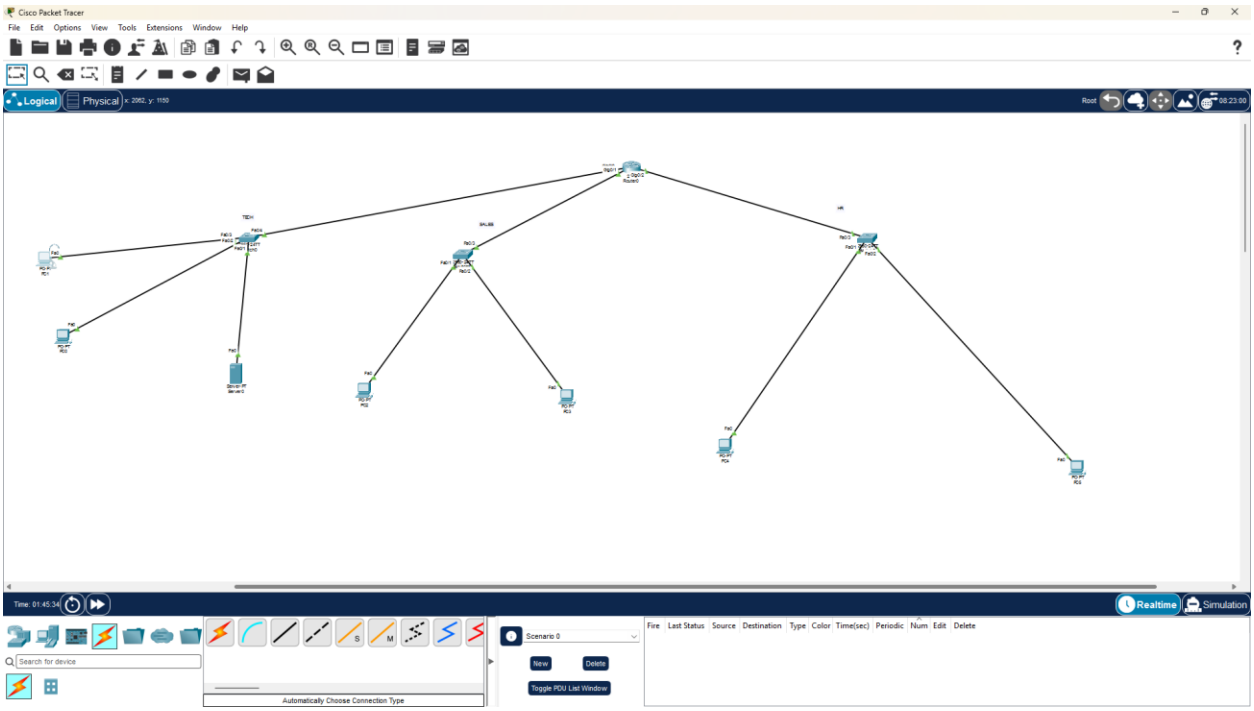

PC3
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.20.5
Subnet Mask
255.255.255.0
Default Gateway
192.168.20.1
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::2E0:A3FF:FEDD:D654
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password

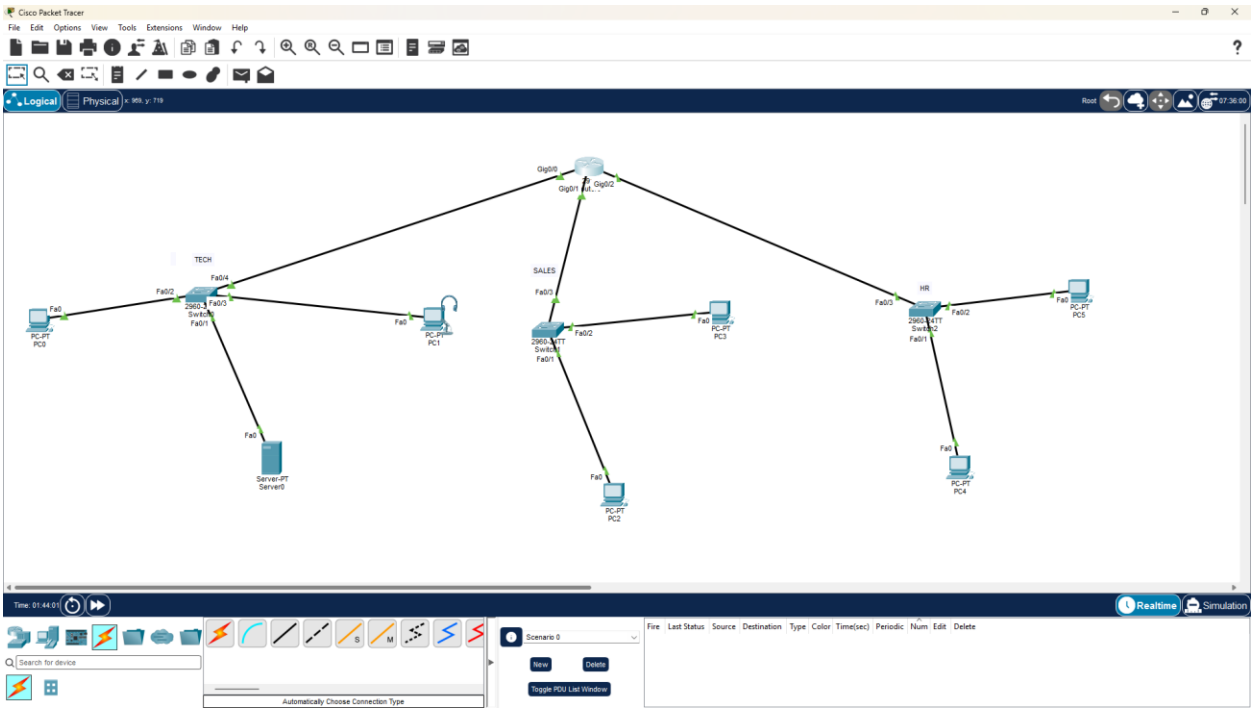

PC2
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.20.6
Subnet Mask
255.255.255.0
Default Gateway
192.168.20.1
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::206:2AFF:FEA4:ECD6
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

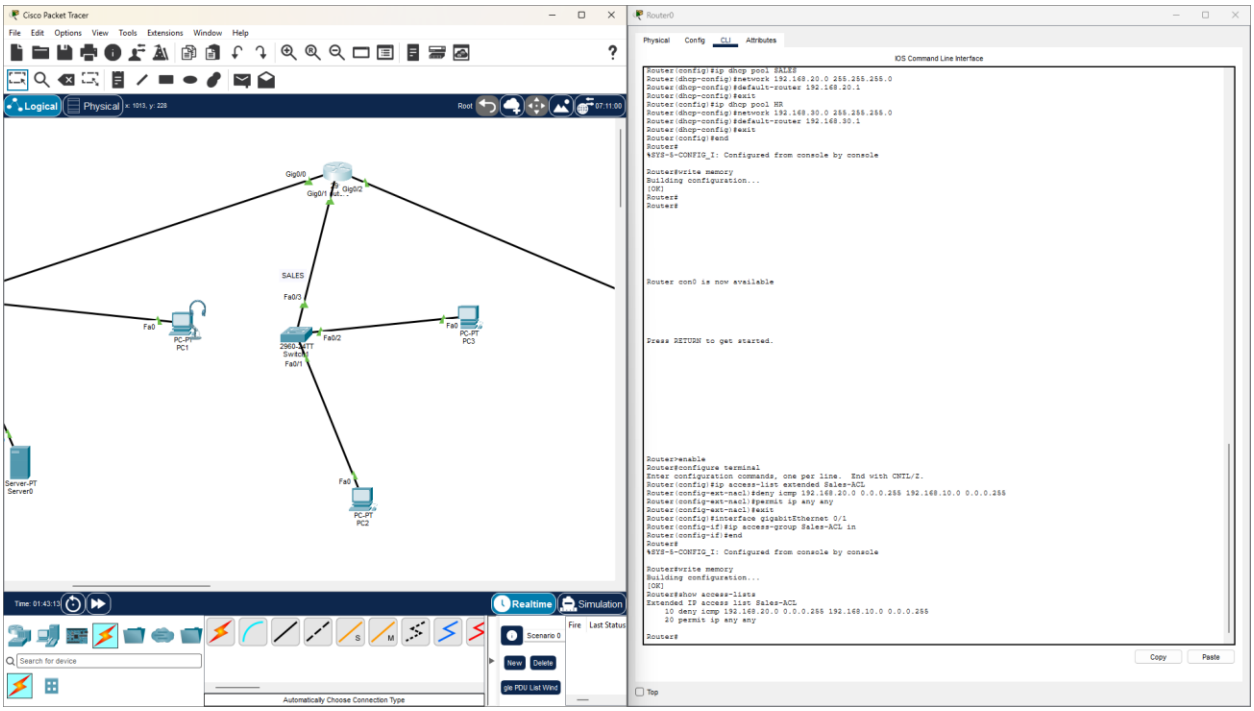

PC2
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.20.6
Subnet Mask
255.255.255.0
Default Gateway
192.168.20.1
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::206:2AFF:FEA4:ECD6
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

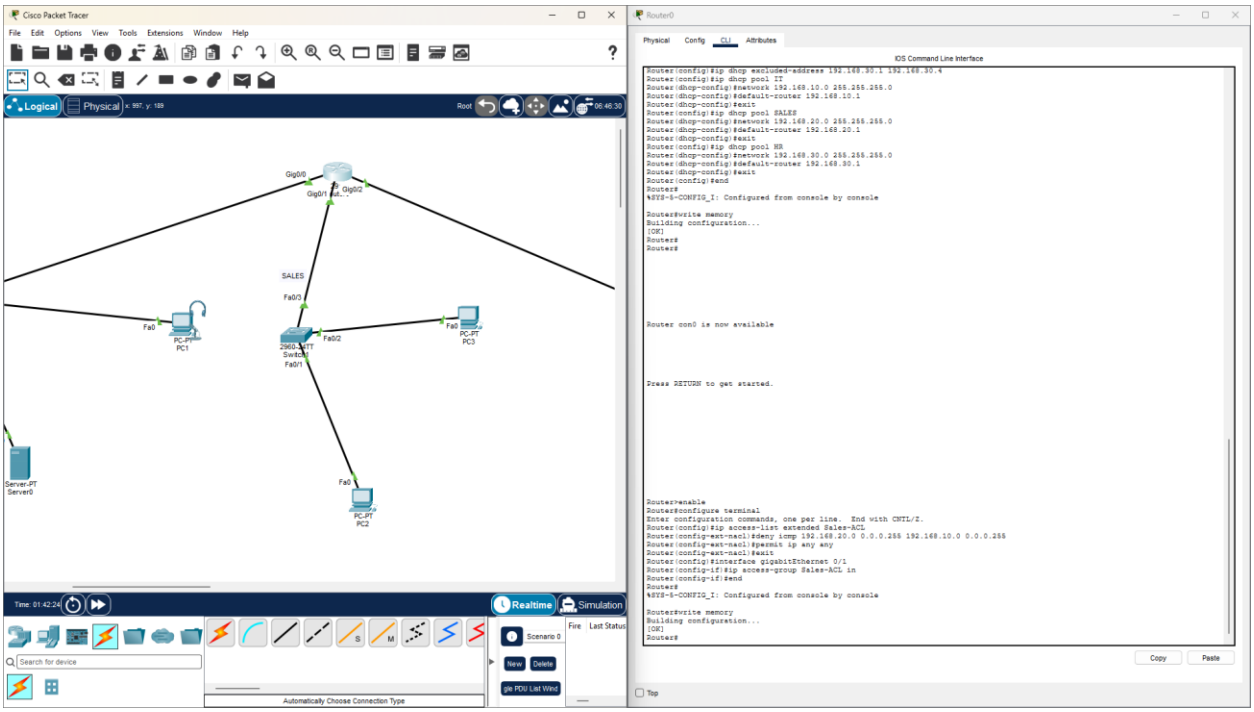

PC0
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.10.5
Subnet Mask
255.255.255.0
Default Gateway
192.168.10.1
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::2D0:FFFF:FEA6:997C
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password

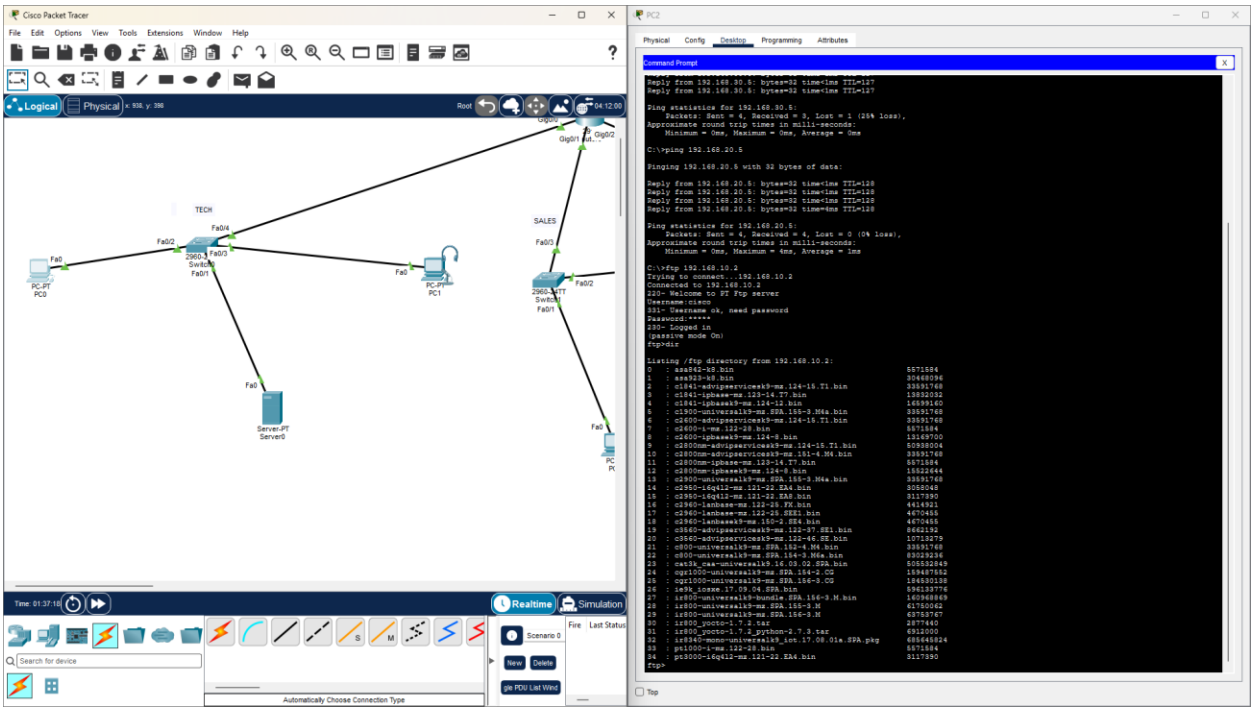

PC1
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.10.6
Subnet Mask
255.255.255.0
Default Gateway
192.168.10.1
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::2D0:FFFF:FEEE:3CE2
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password

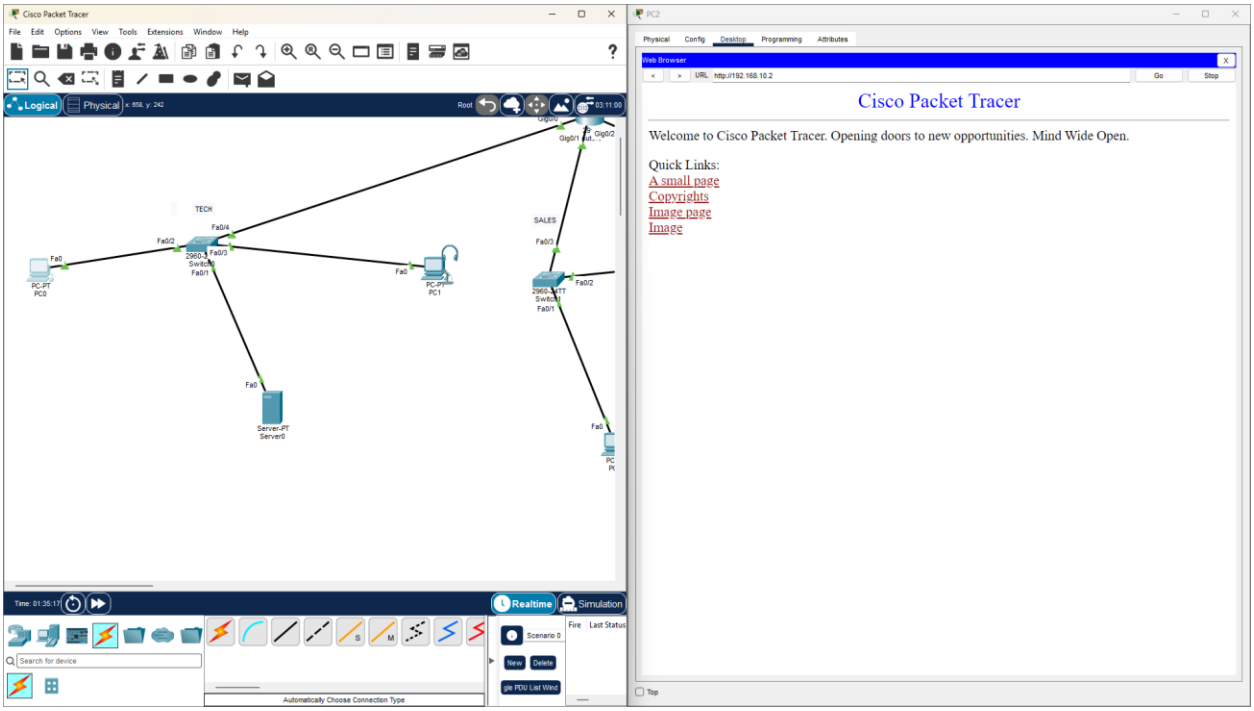

Cisco Packet Tracer
Logical
Physical
Realtime
Simulation


Cisco Packet Tracer
Logical
Physical
TECH
SALES
HR
Realtime
Simulation

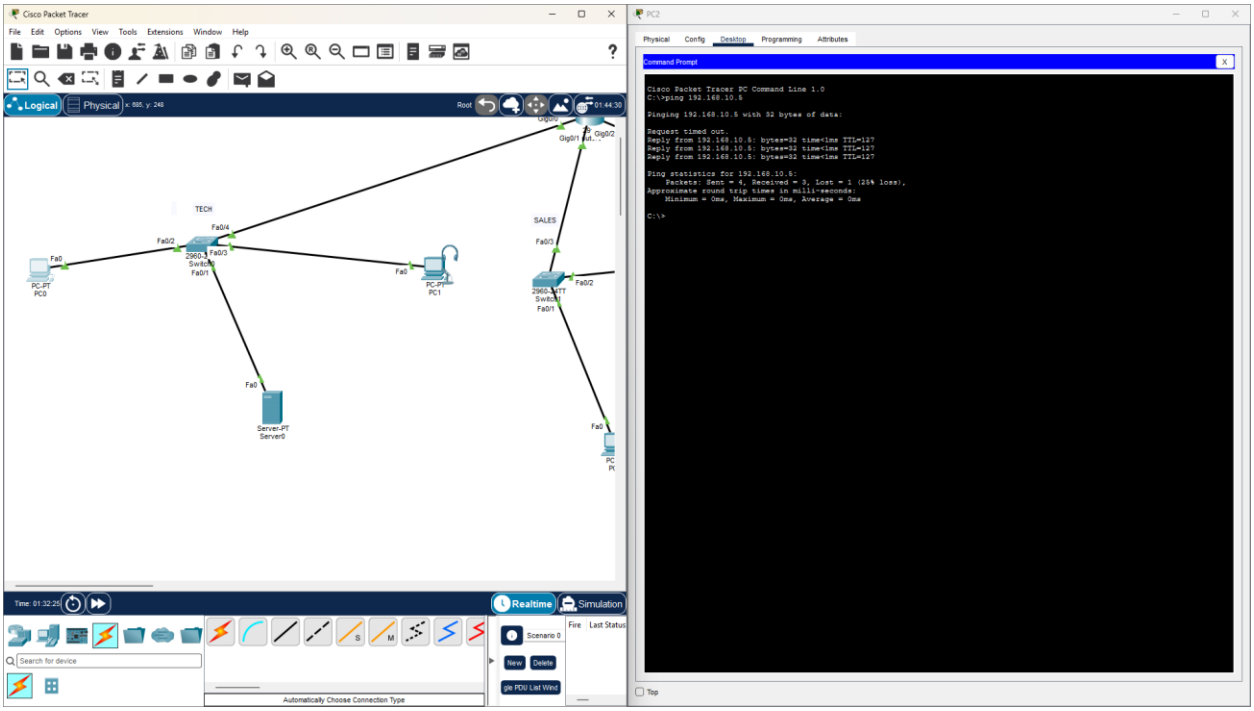

Cisco Packet Tracer
Router0
Physical
Config
CLI
Attributes
IOS Command Line Interface
Router(config)#ip dhcp pool SALES
Router(dhcp-config)#network 192.168.20.0 255.255.255.0
Router(dhcp-config)#default-router 192.168.20.1
Router(dhcp-config)#exit
Router(config)#ip dhcp pool HR
Router(dhcp-config)#network 192.168.30.0 255.255.255.0
Router(dhcp-config)#default-router 192.168.30.1
Router(dhcp-config)#exit
Router(config)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console
Router#write memory
Building configuration...
[OK]
Router#
Router#
Router con0 is now available
Press RETURN to get started.
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip access-list extended Sales-ACL
Router(config-ext-nacl)#deny icmp 192.168.20.0 0.0.0.255 192.168.10.0 0.0.0.255
Router(config-ext-nacl)#permit ip any any
Router(config-ext-nacl)#exit
Router(config)#interface gigabitEthernet 0/1
Router(config-if)#ip access-group Sales-ACL in
Router(config-if)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console
Router#write memory
Building configuration...
[OK]
Router#show access-lists
Extended IP access list Sales-ACL
10 deny icmp 192.168.20.0 0.0.0.255 192.168.10.0 0.0.0.255
20 permit ip any any
Router#
Copy
Paste
Top
Logical
Physical
Root
Realtime
Simulation
Scenario 0
New
Delete
Fire
Last Status
Search for device
Automatically Choose Connection Type
SALES
Gig0/0
Gig0/1
Gig0/2
Fa0/3
Fa0/2
Fa0/1
Fa0
PC-PT PC1
PC-PT PC3
PC-PT PC2
Server-PT Server0

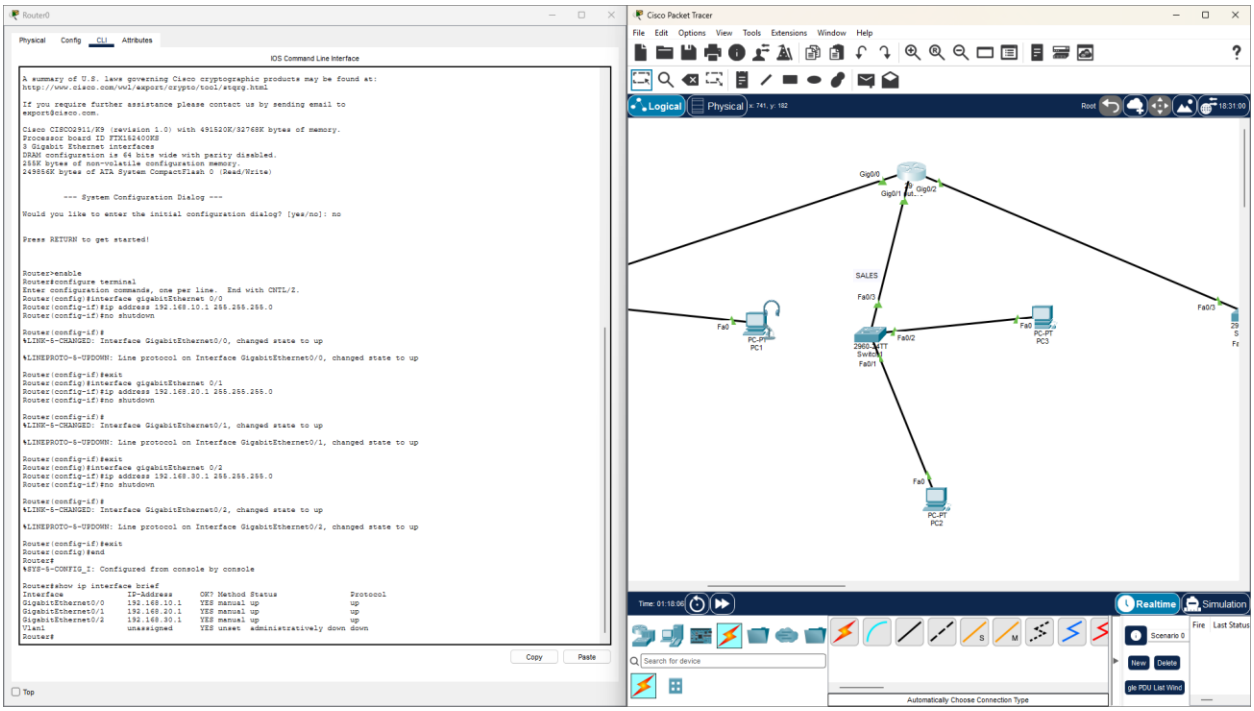

Cisco Packet Tracer
Router0
Physical
Config
CLI
Attributes
IOS Command Line Interface
Router(config)#ip dhcp excluded-address 192.168.30.1 192.168.30.4
Router(config)#ip dhcp pool IT
Router(dhcp-config)#network 192.168.10.0 255.255.255.0
Router(dhcp-config)#default-router 192.168.10.1
Router(dhcp-config)#exit
Router(config)#ip dhcp pool SALES
Router(dhcp-config)#network 192.168.20.0 255.255.255.0
Router(dhcp-config)#default-router 192.168.20.1
Router(dhcp-config)#exit
Router(config)#ip dhcp pool HR
Router(dhcp-config)#network 192.168.30.0 255.255.255.0
Router(dhcp-config)#default-router 192.168.30.1
Router(dhcp-config)#exit
Router(config)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console
Router#write memory
Building configuration...
[OK]
Router#
Router#
Router con0 is now available
Press RETURN to get started.
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip access-list extended Sales-ACL
Router(config-ext-nacl)#deny icmp 192.168.20.0 0.0.0.255 192.168.10.0 0.0.0.255
Router(config-ext-nacl)#permit ip any any
Router(config-ext-nacl)#exit
Router(config)#interface gigabitEthernet 0/1
Router(config-if)#ip access-group Sales-ACL in
Router(config-if)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console
Router#write memory
Building configuration...
[OK]
Router#
Copy
Paste
Top
Logical
Physical
Root
Realtime
Simulation
Scenario 0
New
Delete
Fire
Last Status
Search for device
Automatically Choose Connection Type
SALES
Gig0/0
Gig0/1
Gig0/2
Fa0/3
Fa0/2
Fa0/1
Fa0
PC-PT PC1
PC-PT PC3
PC-PT PC2
Server-PT Server0


Cisco Packet Tracer
Logical
Physical
Realtime
Simulation
Command Prompt
PC2
Desktop
Physical
Config
Programming
Attributes


Cisco Packet Tracer
Logical
Physical
Realtime
Simulation
Web Browser
Cisco Packet Tracer
Welcome to Cisco Packet Tracer. Opening doors to new opportunities. Mind Wide Open.
Quick Links:
A small page
Copyrights
Image page
Image


PC2
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.10.5
Pinging 192.168.10.5 with 32 bytes of data:
Request timed out.
Reply from 192.168.10.5: bytes=32 time<1ms TTL=127
Reply from 192.168.10.5: bytes=32 time<1ms TTL=127
Reply from 192.168.10.5: bytes=32 time<1ms TTL=127
Ping statistics for 192.168.10.5:
Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>ping 192.168.30.5
Pinging 192.168.30.5 with 32 bytes of data:
Request timed out.
Reply from 192.168.30.5: bytes=32 time<1ms TTL=127
Reply from 192.168.30.5: bytes=32 time<1ms TTL=127
Reply from 192.168.30.5: bytes=32 time<1ms TTL=127
Ping statistics for 192.168.30.5:
Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>ping 192.168.20.5
Pinging 192.168.20.5 with 32 bytes of data:
Reply from 192.168.20.5: bytes=32 time<1ms TTL=128
Reply from 192.168.20.5: bytes=32 time<1ms TTL=128
Reply from 192.168.20.5: bytes=32 time<1ms TTL=128
Reply from 192.168.20.5: bytes=32 time=4ms TTL=128
Ping statistics for 192.168.20.5:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 4ms, Average = 1ms
C:\>
Top


Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical
Physical
Root
TECH
SALES
Fa0/4
Fa0/2
Fa0/3
Fa0/1
Fa0
PC-PT PC0
PC-PT PC1
Server-PT Server0
Gig0/1
Gig0/2
Realtime
Simulation
Time: 01:32:25
Search for device
Automatically Choose Connection Type
Scenario 0
New
Delete
Fire
Last Status
PC2
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.10.5
Pinging 192.168.10.5 with 32 bytes of data:
Request timed out.
Reply from 192.168.10.5: bytes=32 time<1ms TTL=127
Reply from 192.168.10.5: bytes=32 time<1ms TTL=127
Reply from 192.168.10.5: bytes=32 time<1ms TTL=127
Ping statistics for 192.168.10.5:
Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>
Top


Router0
Physical
Config
CLI
Attributes
IOS Command Line Interface
A summary of U.S. laws governing Cisco cryptographic products may be found at:
http://www.cisco.com/wwl/export/crypto/tool/stqrg.html
If you require further assistance please contact us by sending email to
export@cisco.com.
Cisco CISCO2911/K9 (revision 1.0) with 491520K/32768K bytes of memory.
Processor board ID FTX1824X0K8
3 Gigabit Ethernet interfaces
DRAM configuration is 64 bits wide with parity disabled.
255K bytes of non-volatile configuration memory.
249856K bytes of ATA System CompactFlash 0 (Read/Write)
--- System Configuration Dialog ---
Would you like to enter the initial configuration dialog? [yes/no]: no
Press RETURN to get started!
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface gigabitEthernet 0/0
Router(config-if)#ip address 192.168.10.1 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up
Router(config-if)#exit
Router(config)#interface gigabitEthernet 0/1
Router(config-if)#ip address 192.168.20.1 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up
Router(config-if)#exit
Router(config)#interface gigabitEthernet 0/2
Router(config-if)#ip address 192.168.30.1 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/2, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/2, changed state to up
Router(config-if)#exit
Router(config)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console
Router#show ip interface brief
Interface IP-Address OK? Method Status Protocol
GigabitEthernet0/0 192.168.10.1 YES manual up up
GigabitEthernet0/1 192.168.20.1 YES manual up up
GigabitEthernet0/2 192.168.30.1 YES manual up up
Vlan1 unassigned YES unset administratively down down
Router#
Copy
Paste
Top
Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical
Physical
Root
Gig0/0
Gig0/1
Gig0/2
SALES
Fa0/3
Fa0/2
Fa0/1
Fa0
PC-PT
PC1
PC-PT
PC3
PC-PT
PC2
Realtime
Simulation
Search for device
Automatically Choose Connection Type
Scenario 0
New
Delete