






JST XHP-4
SXH-001T-P0.6

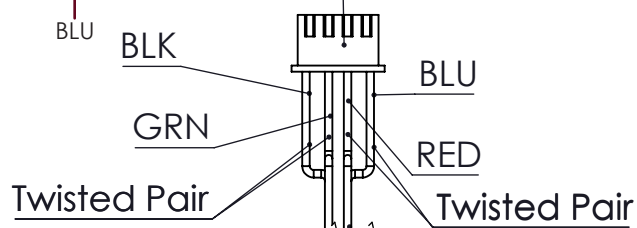

M3 ∇ 4.5 (4X)

26 AWG

0 ∇ 5.0 ∇ -0.012

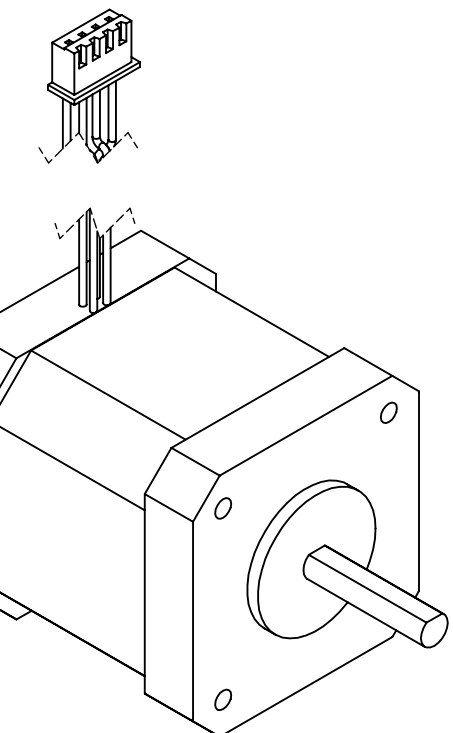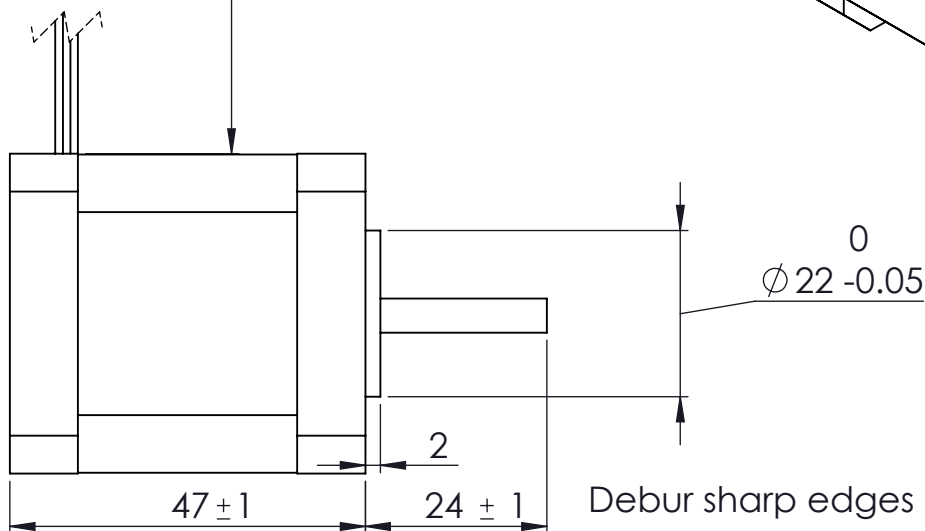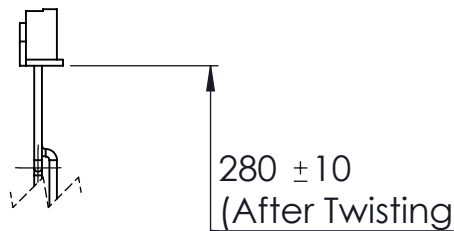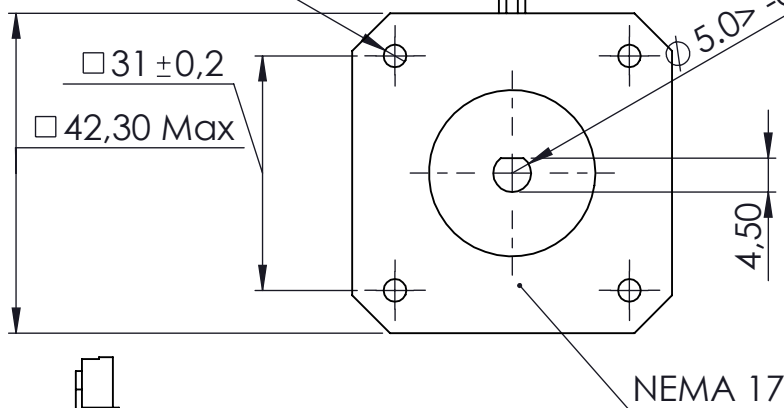

Step angle (°)	0.9
Temp. Rise (°C)	80 max
Amb. Temp (°C)	-20 tot 50°C
Nr. of Phase	2
Insulation Res. (M Ohm)	100 min. (500 VDC)
Insulation Class	Class B
Max Rad Force (N)	28 (20mm from flange)
Max Axial Force (N)	10
Rated Voltage (V)	2.8
Rated Current (A)	1.68
Res. / Phase ($\pm 10\%$ Ohm)	1.65 (25°C)
Inductance / Phase ($\pm 20\%$ mH)	4.1
Holding Torque (N.cm)	44

Tolerances acc. ISO 2768-f

0.5 to 3	± 0.05
3 to 6	± 0.05
6 to 30	± 0.1
30 to 120	± 0.15
120 to 400	± 0.2
400 to 1000	± 0.3
1000 to 2000	± 0.5

Ultimaker



Burgemeester R. vd Venlaan
4191PL Geldermalsen
The Netherlands
T: +31 (0)345 712 017


Part Nr.:
1742

Revision:
B

Drawn: I. Kraaijevanger

Checked by: D. Braam

Description:
Feeder Motor



Scale: 1:1 (A4)

Approved by: S. Wijnia

Units: mm.

Norm: ISO 2768-f




Date:
24-12-2014

Material:
Diverse

Released for prototyping: Yes

Released for null-series: Yes

Released for production: Yes

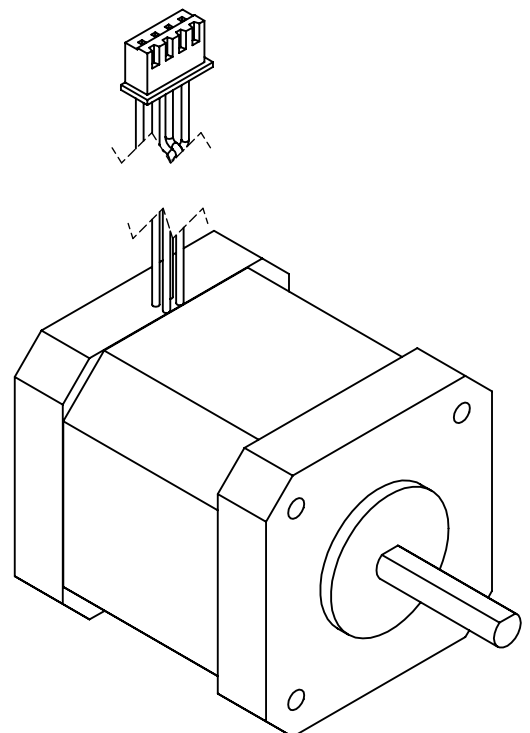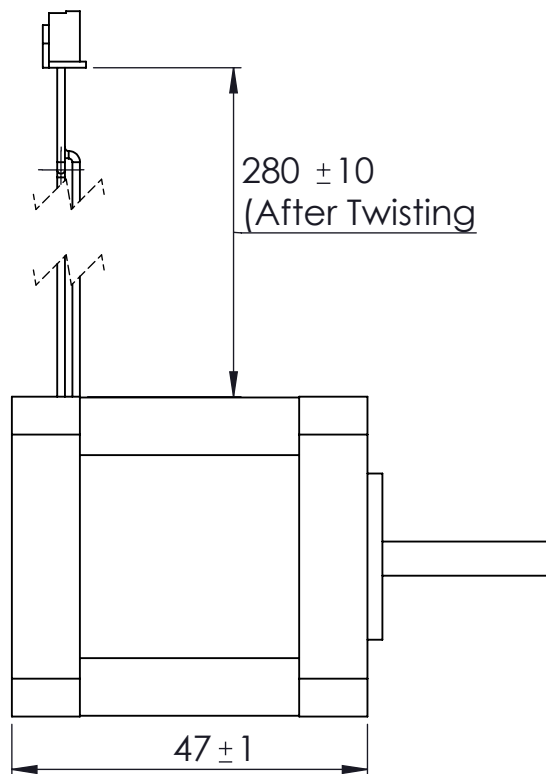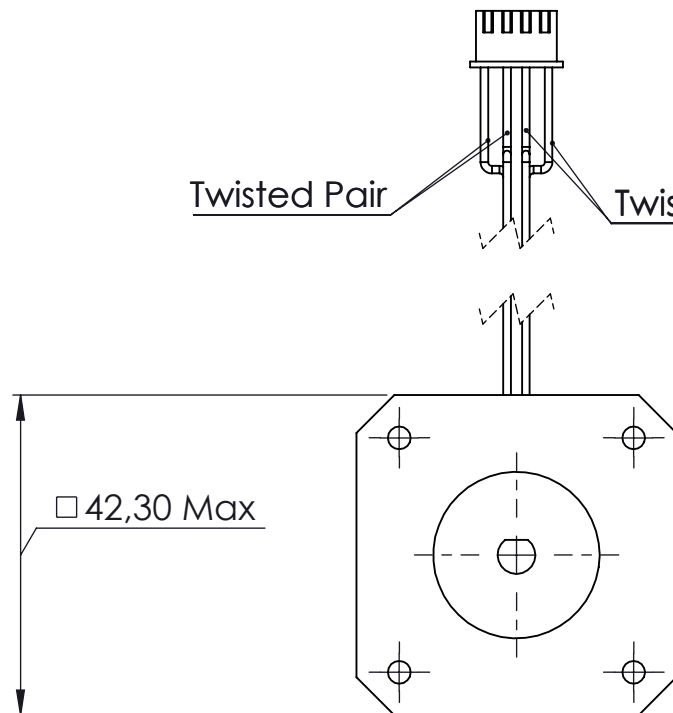

Ultimaker



Burgemeester R. vd Venlaan
4191PL Geldermalsen
The Netherlands
T: +31 (0)345 712 017


Part Nr.:
1742

Revision:
B

Drawn: I. Kraaijevanger

Checked by: D. Braam

Description:
Feeder Motor



Scale: 1:1 (A4)

Approved by: S. Wijnia

Units: mm.

Norm: ISO 2768-f

Released for prototyping: Yes

Date:
24-12-2014

Material:
Diverse

Released for null-series: Yes

Released for production: Yes