


Customer Approved
(客户确认回签)


版本	更改内容	拟定	日期
V0	新版发行	Jason	2019-03-23

PIN SYMBOL


1	VLED-
2	VLED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	PCLK
31	DISP
32	HSYNC
33	VSYSNC
34	DE
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

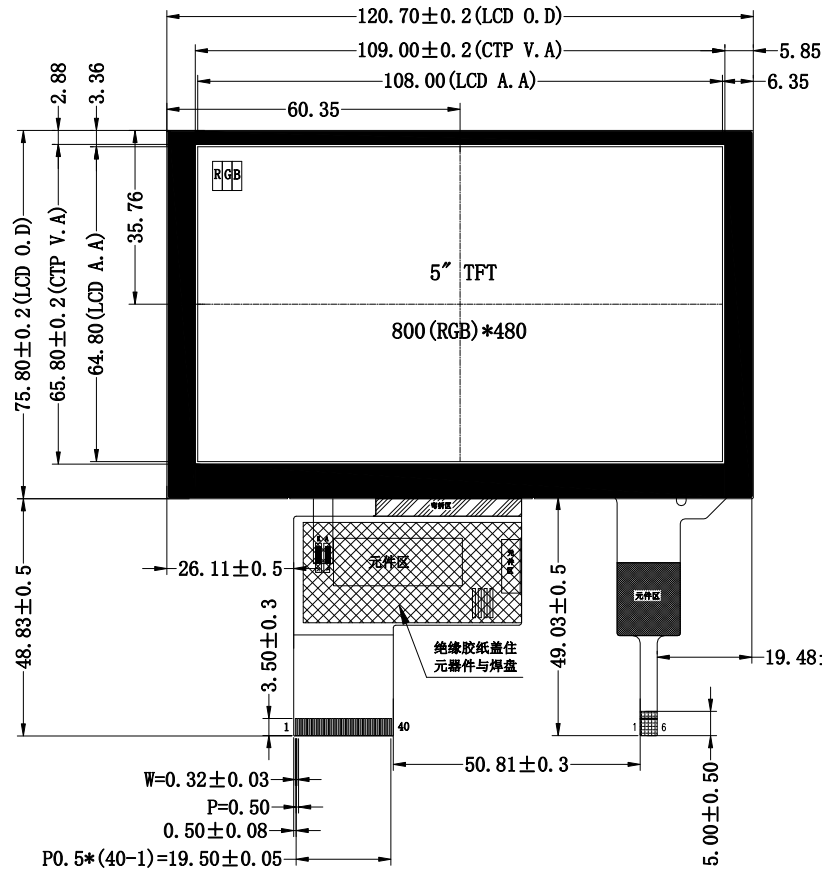

Backlight Circuit:

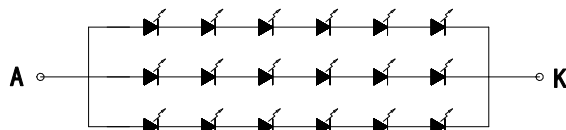


VF=18.6V±1.2V; IF=60mA

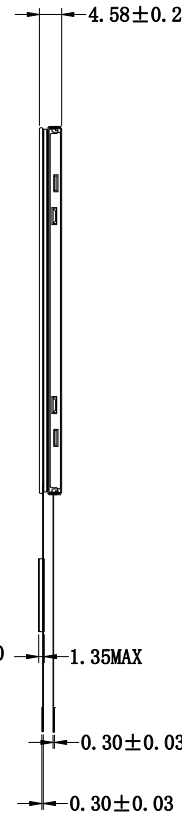


CTP INTERFACE

1	RST
2	VDD
3	GND
4	INT
5	SDA
6	SCL

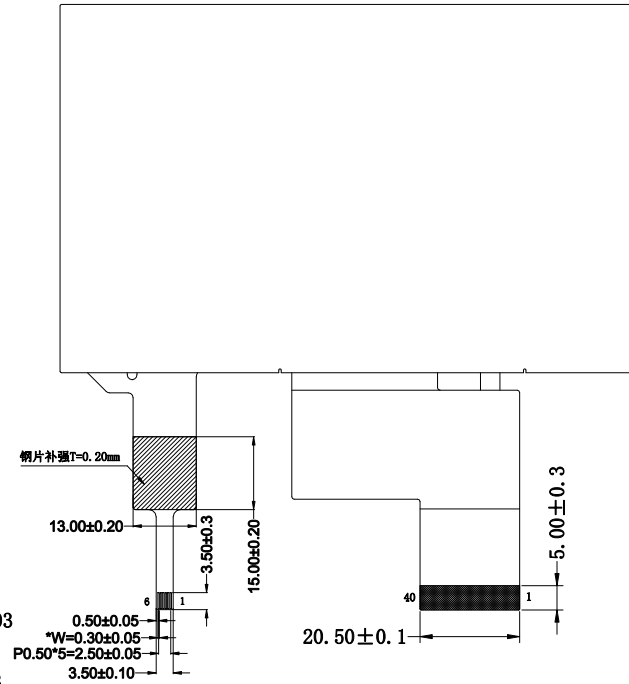

WKS 慧勤智远科技有限公司

第三视角:



DISPLAY TYPE:	5.0''TFT	DISPLAY DRIVER:	ILI6122&ILI5960	PIXEL PITCH:	0.135 X 0.135 mm	产品型号:	WKS50077				
DISPLAY MODE:	NORMALLY WHITE	OPERATING TEMP:	-20° C TO +70° C	BRIGHTNESS:	450cd/m2 (Type)	部品型号:	LCM外形图			确认:	Henry
GRAY-SCALE INVERSION:	6 O'CLOCK	STORAGE TEMP:	-30° C TO +80° C	BACK LIGHT:	LED WHITE (6x3=18)	版本:	V0	单位:	mm	审核:	Eric
Dot matrix:	800 (RGB) X480 DOTS	STRUCTURE:	LCD+IC+FPC+BL+CTP	MATERIAL NOTE	ROHS REQUEST	日期:	2019-03-23	比例:	1:1	设计:	Jason
THIS DRAWING IS PROPERTY OF WKS CO. LTD, IT CANNOT BE REPRODUCED WITHOUT PERMISSION.						Unmarked Tolerance:			±0.20 mm	页码:	1 OF 1