

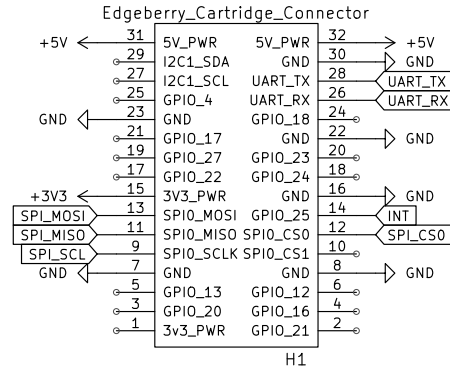



Edgeberry Hardware Cartridge connector

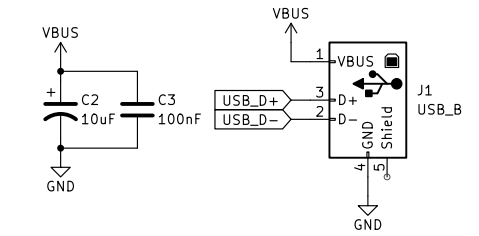


UART to USB

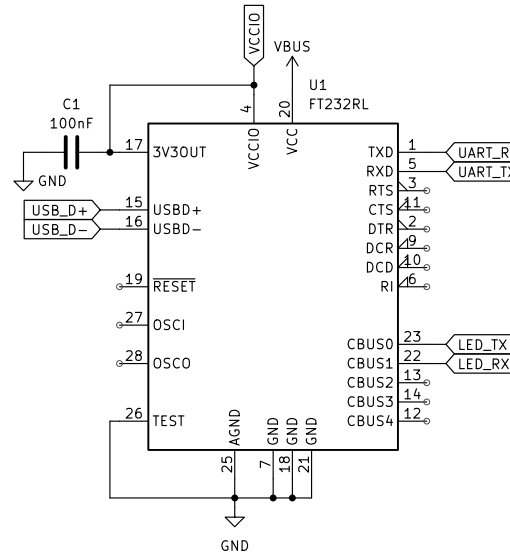

Console settings
Speed: 115200 baud
Bits: 8
Parity: None
Stop Bits: 1
Flow Control: None

CAN-bus interface

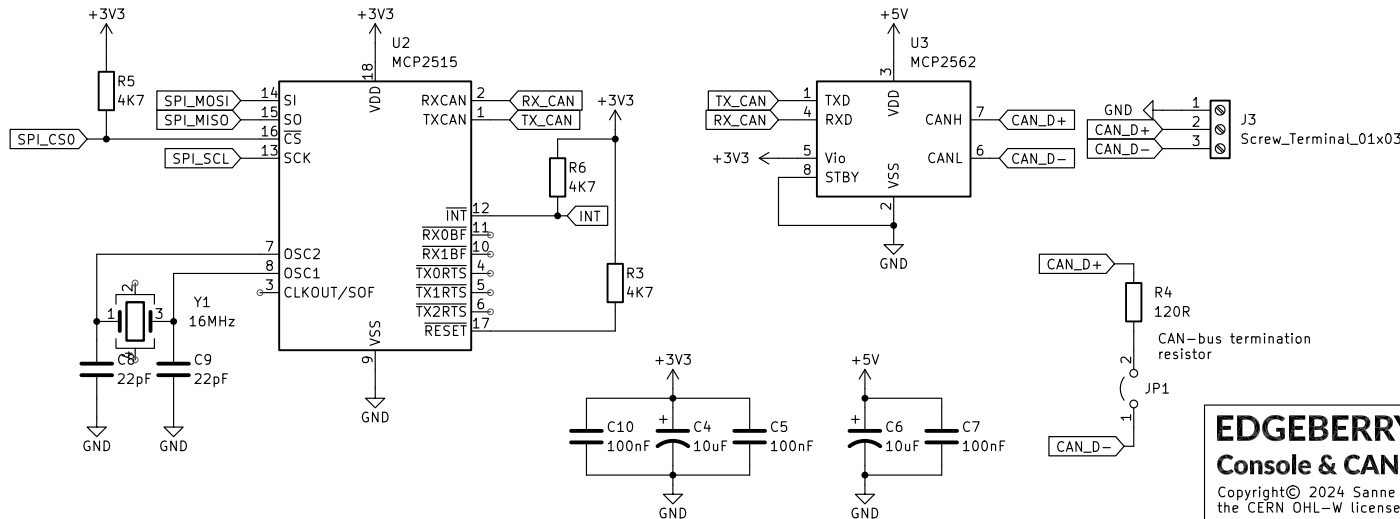

EDGEBERRY HARDWARE CARTRIDGE

Console & CAN interface, Rev.: 1.5, mid 2024

Copyright© 2024 Sanne 'SpuQ' Santens. This design is released under the CERN OHL-W license on GitHub.

Sheet: /

File: Edgeberry_console_cartridge.kicad_sch

Title:

Size: A4

Date:

Rev:

KiCad E.D.A. 8.0.7

Id: 1/1