

P/N:2270520450

NOTES:

1.MATERIAL:

HOUSING:PA9T,UL94V-0
CONTACT:PHOSPHOR BRONZE
SHELL:BRASS

2.FINISH:

CONTACT:30u" GOLD PLATED ON CONTACT AREA
TIN PLATED ON SOLDER TAILS
NICKEL UNDERPLATED
SHELL:NICKEL PLATED

3.SPECIFICATIONS:

ELECTRICAL:



CURRENT RATING:1.0 AMPS
VOLTAGE RATING:30V AC
DIELECTRIC WITHSTANDING VOLTAGE:100VAC MIN
INSULATION RESISTANCE:100MΩ MIN
CONTACT RESISTANCE:50mΩ MAX

PHYSICAL:



SOLDER ABILITY:245±5°C,95% COVERAGE
REFLOW SOLDER CAPABLE TO 260±5°C,10SEC

ENVIRONMENTAL:

OPERATING TEMPERATURE:-55°C~+85°C

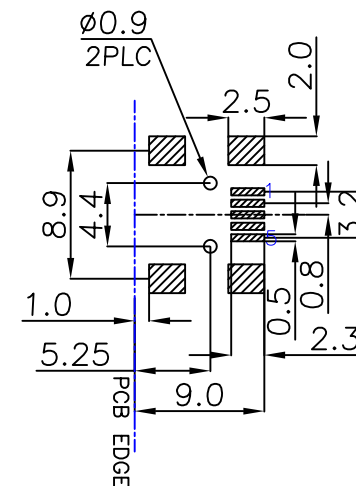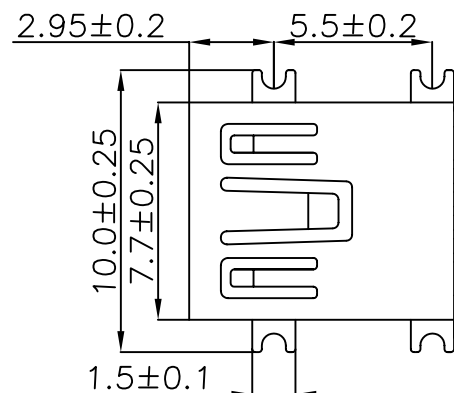

RECOMMENDED PCB LAYOUT
TOLERANCE=±0.10
(PCB THICKNESS:0.8±0.1)

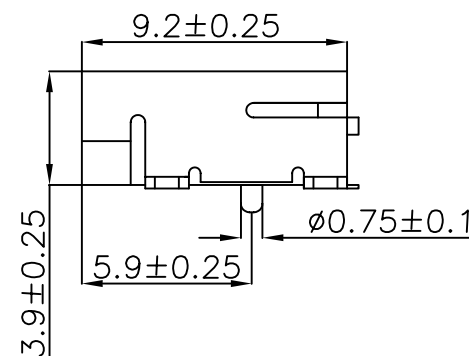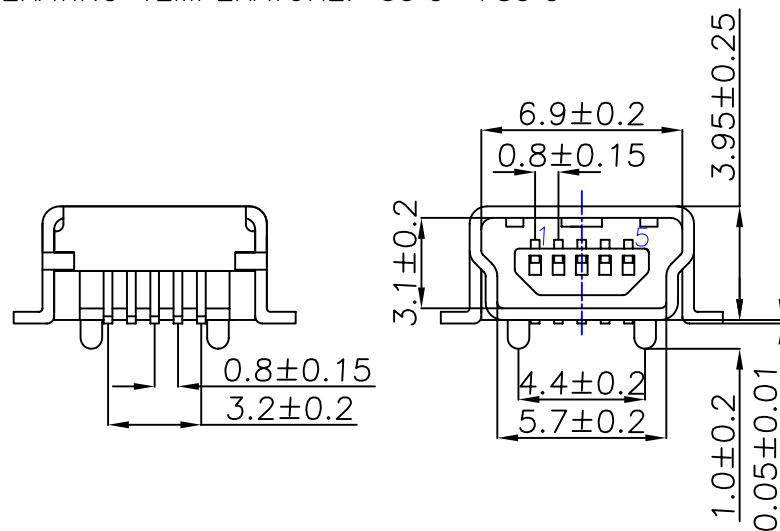


RoHS COMPLIANT



Long Shoung Co.,Ltd.

DRAWN	REBEKAH TSAI	UNIT	mm
CHKD	WAYNE LI	SCALE	1:1
APPD	RICKY LIN	DATE	2006. 05. 04

TOLERANCES:
1 PLC ±0.38
2 PLC ±0.20
3 PLC ±0.130
ANGLES ±3°



NAME:
mini USB 5P R/A SMT

DRAWING NO.	LS-USB-05-22	REVISION	A
-------------	--------------	----------	---