
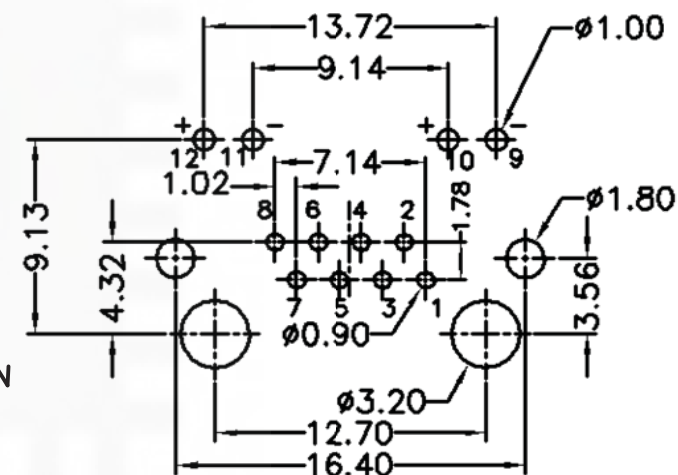
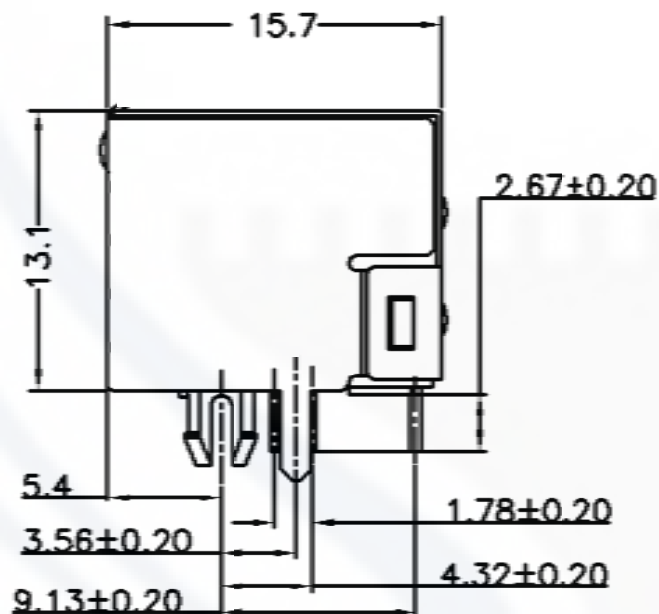


P/N:4628824256

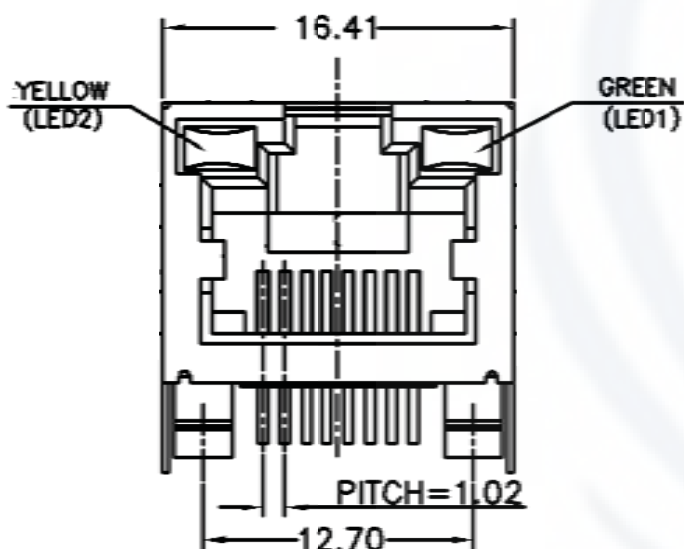

NOTES:

1.MATERIAL:

HOUSING:PA9T,UL94V-0
CONTACT:PHOSPHOR BRONZE
SHELL:COPPER ALLOY
LED SIZE:7*3.05*1.85,PITCH=2.29

2.FINISH:

CONTACT:AU PLATED ON CONTACT AREA
TIN PLATED ON SOLDER TAILS
NICKEL UNDERPLATED
SHELL:NICKEL PLATED

3.SPECIFICATIONS:

ELECTRICAL:

CURRENT RATING:1.5AMPS
VOLTAGE RATING:125VAC
DIELECTRIC WITHSTANDING VOLTAGE:1000VAC /1MIN
INSULATION RESISTANCE:1000MΩ MIN
CONTACT RESISTANCE:30mΩ MAX

PHYSICAL:

SOLDER ABILITY:245±5°C,95% COVERAGE
RESISTANCE TO WAVE SOLDERING HEAT:260±5°C,10SEC
ENVIRONMENTAL:
OPERATING TEMPERATURE:-40°C~+85°C

RECOMMENDED PCB LAYOUT
TOLERANCE=±0.05
COMPONENT VIEW

RoHS COMPLIANT



Long Shoung Co.,Ltd.

DRAWN	REBEKAH TSAI	UNIT	mm
CHKD	WAYNE LI	SCALE	1:1
APPD	RICKY LIN	DATE	2008.09.22

TOLERANCES:
1 PLC ± 0.30
2 PLC ± 0.20
3 PLC ± 0.13
ANGLES $\pm 3^\circ$



NAME:	RJ45 8P8C w/LED
	R/A

DRAWING NO.	LS-RJ-088-08	REVISION	0
-------------	--------------	----------	---