

2A Switch-Mode Li-Ion Battery Charger

General Description



The FP8205 is a highly integrated switch-mode Li-Ion Battery Charger. With few external components, FP8205 is well suited for a wide range of portable applications. Charging current can be programmed by an external current sensing resistor. With 600KHz switching frequency, FP8205 can use of small external components. Other features include UVLO, automatic recharge, charge status indicators and battery temperature monitor.


Features

- Up to 2A Programmable Charge Current
- No external MOSFET, Sense Resistor, or Blocking Diode Required
- Switch-model Charger for single cell Li-Ion Batteries
- Preset Charge Voltage with $\pm 1\%$ Accuracy
- Automatic Recharge
- 2.9V Trickle Charge Voltage
- C/10 Charge Termination
- Thermal Protection
- Charge Status Indicators for No Battery and Charge Failure Display


Applications

- Portable Information Appliances
- Charging Docks & Cradles
- Cellular Phones & PDAs
- Handheld Computers

Typical Application Circuit

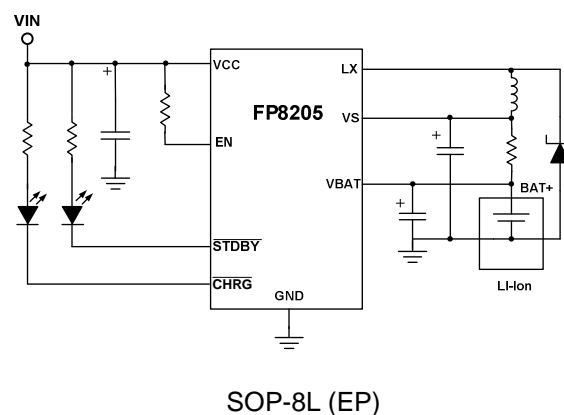

Function Block Diagram

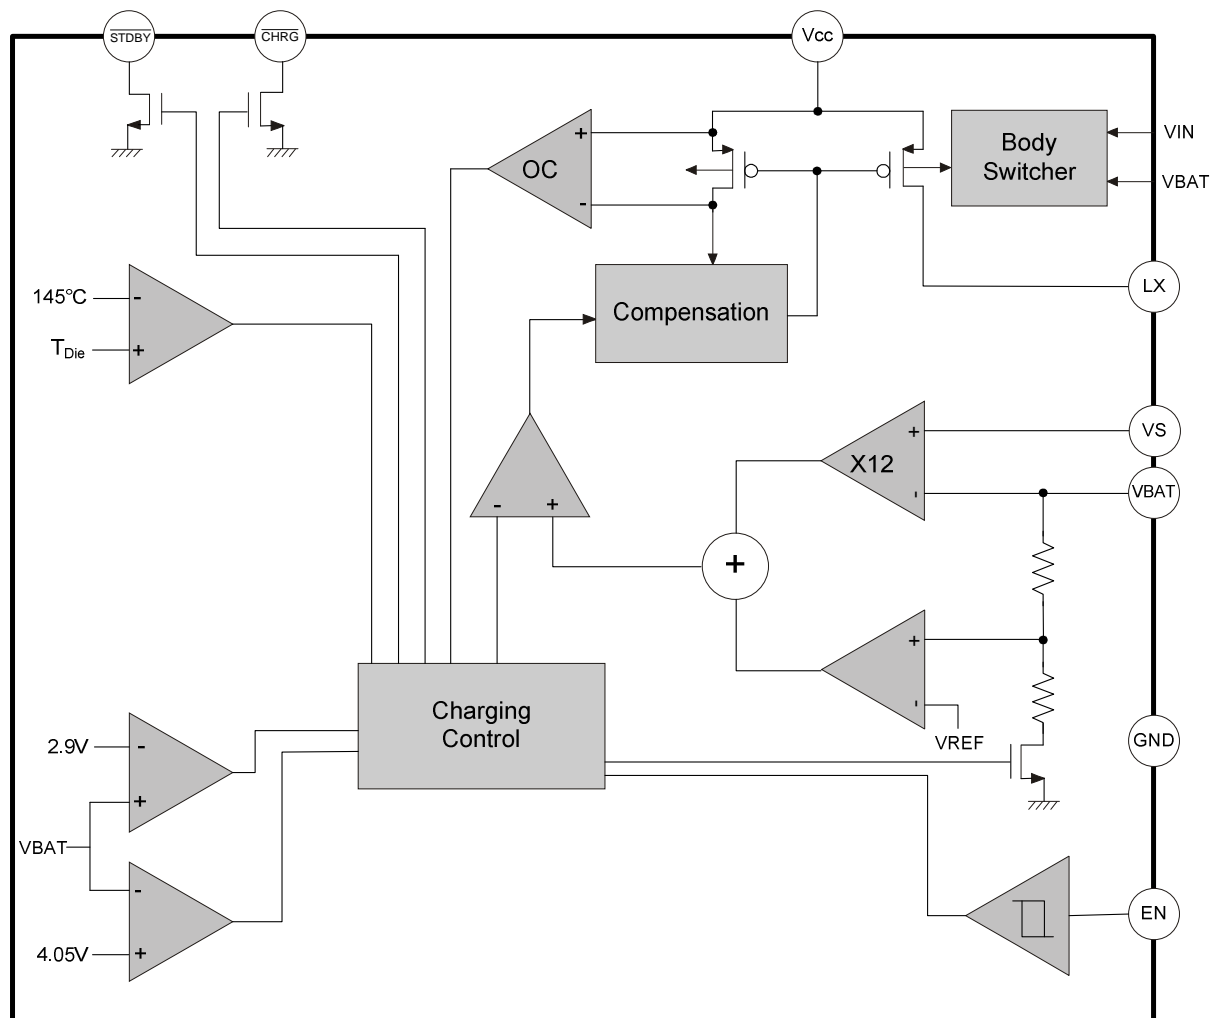


Charge Status Indicators

Charge Status	CHRG (Red)	STDBY (Green)
In Charging	ON	OFF
Charge Termination	OFF	ON
UVLO, OverT, UnderT, NoBat(with TEMP used)	OFF	OFF


This datasheet contains new product information. Feeling Technology reserves the rights to modify the product specification without notice. No liability is assumed as a result of the use of this product. No rights under any patent accompany the sales of the product.

State Diagram

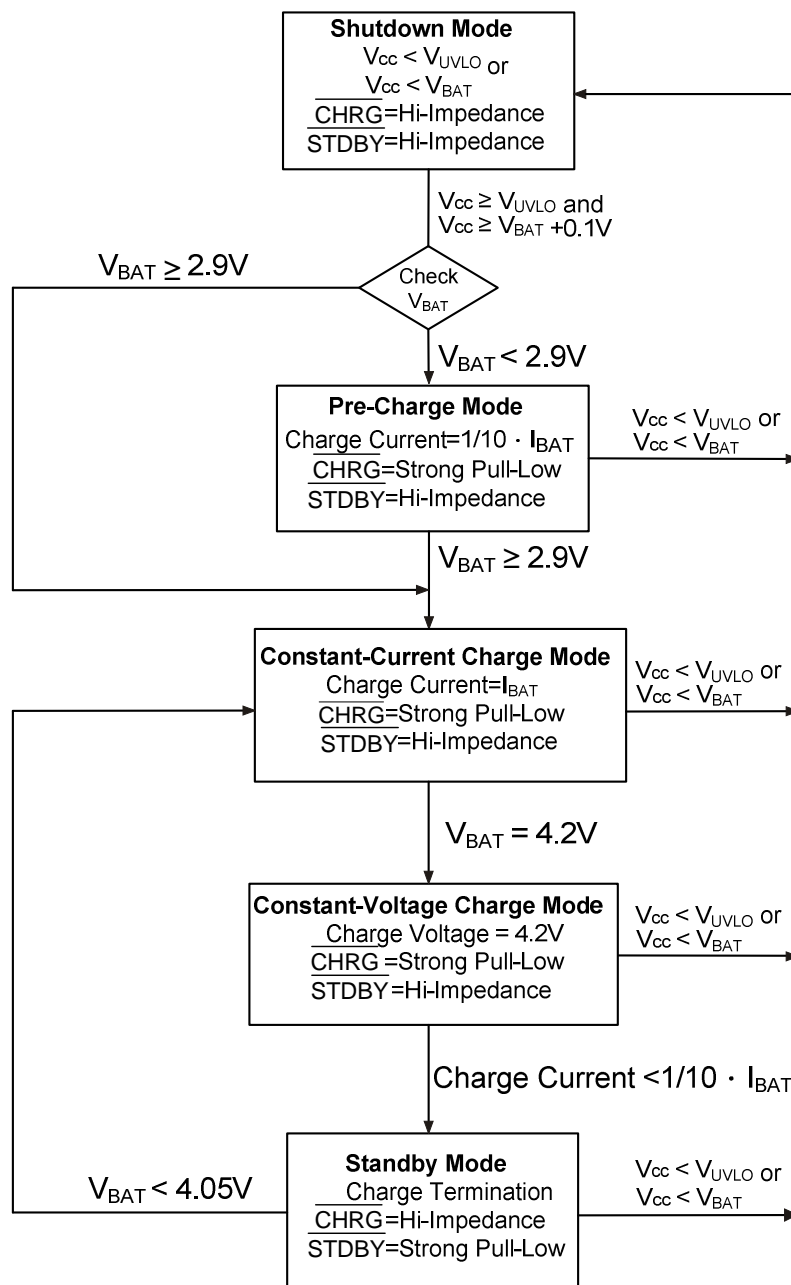

Pin Descriptions


SOP-8L (EP)

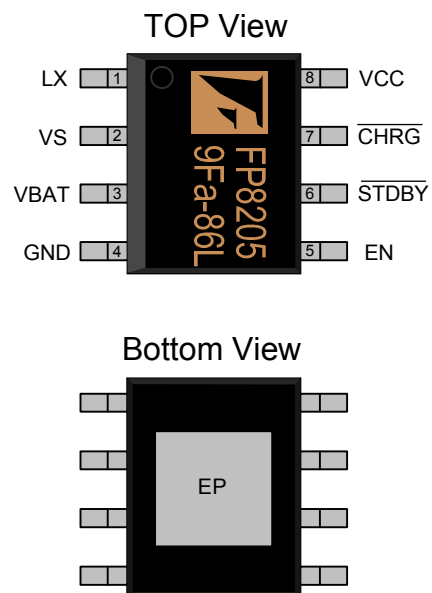

Name	No.	I / O	Description
LX	1	I	Switch node and inductor connection pin
VS	2	I	Charge current-sense input
VBAT	3	P	Battery Voltage
GND	4	P	IC Ground
EN	5	I	Enable Control
STDBY	6	O	Charge State Indicator2
CHRG	7	O	Charge State Indicator1
VCC	8	P	Supply Voltage
EP	9	P	Exposed PAD-Must connect to Ground

Marking Information

SOP-8L (EP)



Halogen Free: Halogen free product indicator

Lot Number: Wafer lot number's last two digits

For Example: 132386TB → 86

Internal ID: Internal Identification Code

Per-Half Month: Production period indicated in half month time unit

For Example: January → A (Front Half Month), B (Last Half Month)

February → C (Front Half Month), D (Last Half Month)

Year: Production year's last digit


Ordering Information

Part Number	Operating Temperature	Package	MOQ	Description
FP8205XR-G1	-40°C ~ +85°C	SOP-8L(EP)	2500EA	Tape & Reel

Absolute Maximum Ratings

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Supply Voltage	V _{CC}		-0.3		6	V
All Other Pins			-0.3		6	V
BAT pin Current	I _{BAT}				1.2	A
PROG pin Current	I _{PROG}				1.2	mA
Junction Temperature	T _J				+150	°C
Storage Temperature	T _S		-65		+150	°C
Thermal Resistance (Junction to Ambient)	θ _{JA}	SOP-8L			50	°C / W
Thermal Resistance (Junction to Case)	θ _{JC}	SOP-8L			10	°C / W
Operating Temperature			-40		+85	°C
Lead Temperature (soldering, 10 sec)					+260	°C

Suggested IR Re-flow Soldering Curve

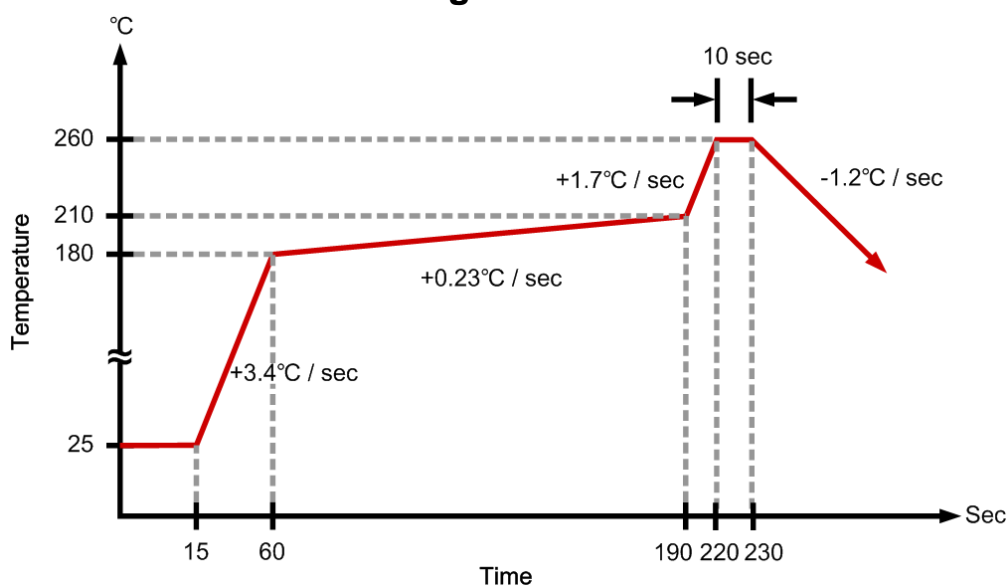

This datasheet contains new product information. Feeling Technology reserves the rights to modify the product specification without notice. No liability is assumed as a result of the use of this product. No rights under any patent accompany the sales of the product.

Recommended Operating Conditions

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Supply Voltage	V _{CC}		4.35		5.5	V
Operating Temperature		Ambient Temperature	-40		85	°C

DC Electrical Characteristics (V_{CC}=5V, T_A= 25°C, unless otherwise noted)

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Standby Current	I _{SB}	Charge Termination		55	100	μA
Shutdown Supply Current	I _{ST}	V _{CC} < V _{BAT} , V _{CC} < V _{UVLO} R _{PROG} not connect		55	100	μA
CV Output (Float) Voltage	V _{FLOAT}	0°C < T _A < 85°C	4.158	4.2	4.242	V
BAT pin Current	I _{BAT}	R _{Sense} =0.05Ω	1800	2000	2200	mA
		R _{Sense} =0.1Ω	900	1000	1100	mA
		R _{Sense} =0.2Ω	450	500	550	mA
		Standby-Mode, V _{BAT} =4.2V	0	-2.5	-6	μA
		Shutdown-Mode,		±4	±6	μA
		Sleep-Mode, V _{CC} =0V		-4	-6	μA
Trickle Charge Current	I _{TRIKL}	V _{BAT} < V _{TRIKL} , R _{Sense} =0.05Ω		200		mA
Trickle Charge Threshold Voltage	V _{TRIKL}	R _{Sense} =0.1Ω, V _{BAT} Rising	2.8	2.9	3.0	V
Trickle Charge Hysteresis Voltage	V _{TRKHYS}	R _{Sense} =0.1Ω		200		mV
V _{CC} Under Voltage Lockout Threshold	V _{UV}	V _{CC} Rising	3.5	3.7	3.9	V
V _{CC} Under Voltage Lockout Threshold Hysteresis	V _{UVHYS}			500		mV
V _{CC} -V _{BAT} Lockout Threshold	V _{ASD}	V _{CC} Rising		250		mV
		V _{CC} Falling		100		mV
PMOSFET On Resistance	R _{ON}			260		mΩ
C/10 Termination Current Threshold	I _{TERM}	R _{Sense} =0.1Ω		100		mA
		R _{Sense} =0.05Ω		200		mA
Switching Frequency	F _{SW}		500	600	700	KHz
Max. Duty	D _{MAX}			100		%
Min. Duty	D _{MIN}		0			%
CHRGB pin Output Low Voltage	V _{CHRG}	I _{CHRG} =5mA		0.3	0.6	V
STDBYB pin Output Low Voltage	V _{STDBY}	I _{STDBY} =5mA		0.3	0.6	V
Battery Recharge Threshold Voltage	V _{RECHRG}	V _{FLOAT} -V _{RECHRG}		150		mV
Thermal Shutdown	T _{LIM}			145		°C
TEMP pin High Threshold Voltage	V _{TEMP-H}			80		%
TEMP pin Low Threshold Voltage	V _{TEMP-L}			45		%
Soft-Start Time	T _{SS}	I _{BAT} =0 to I _{BAT} =0.1V/R _S		20		μs
Recharge Comparator Filter Time	T _{RECHRG}	V _{BAT} High to Low	0.8	1.8	4	mS
C/10Termination Comparator Filter Time	T _{TERM}	I _{BAT} Falling below I _{TERM}	0.8	1.8	4	mS

This datasheet contains new product information. Feeling Technology reserves the rights to modify the product specification without notice. No liability is assumed as a result of the use of this product. No rights under any patent accompany the sales of the product.

Function Description

Operation

The FP8205 is a switch-mode battery charger designed primarily for charging single cell lithium-ion batteries. The charger uses a constant-current/constant-voltage charge algorithm with programmable current. Charging current can be programmed externally with a single current sensing resistor between the VS pin and the BAT pin. The final battery float voltage is internally set to 4.2V.

Normal Charge Cycle

A charge cycle begins when the voltage at the VCC pin rises above the UVLO threshold. If the BAT pin voltage is smaller than 2.9V, the charger enters trickle charge mode. In this mode, the FP8205 supplies approximately 1/10 the programmed charging current to bring the battery voltage up to a safe level for full current charging. When the BAT pin voltage rises above 2.9V, the charger enters constant-current mode, where the full programmed charge current is supplied to the battery. When the BAT pin voltage approaches 4V, the FP8205 enters the constant-voltage mode and the charge current begins to decrease. When the charge current drops to 1/10 of the programmed value, the charge cycle ends.

Programming Charge Current

When the battery voltage exceeds the trickle charge threshold, the charger goes into the full scale constant current charge mode. In constant current mode, the charge current is set by the external sense resistor R_{SENSE} and an internal 100mV reference. The required resistor value can be calculated from the charge current with the following equation:

$$R_{sense} = \frac{100mV}{I_{CHG}}$$

Charge Termination

A charge cycle is terminated when the charge current falls to 1/10 the programmed value after the final float voltage is reached. This condition is detected by using an internal filtered comparator to monitor the sense voltage. When the voltage between the VS pin and the BAT pin falls below 10mV for longer than T_{TERM} (1.8ms), charging is terminated. The charge current is latched off and the FP8205 enters standby mode, where the input supply current drops to 55uA. The FP8205 draws no current from the battery in standby mode. This feature reduces the charge and discharge cycles on the battery, further prolonging the battery life.

This datasheet contains new product information. Feeling Technology reserves the rights to modify the product specification without notice. No liability is assumed as a result of the use of this product. No rights under any patent accompany the sales of the product.

Thermal Protection

FP8205 will shutdown automatically when the internal junction temperature reaches 140°C to protect both the part and the system.

Under Voltage Lockout (UVLO)

An internal under voltage lockout circuit monitors the input voltage and keeps the charger in shutdown mode until Vcc rises above the under voltage lockout threshold. The UVLO circuit has a built-in hysteresis of 500mV. Furthermore, to protect against reverse current in the power MOSFET, the UVLO circuit keeps the charge in shutdown mode if Vcc falls to within 100mV of the battery voltage. If the UVLO comparator is tripped, the charger will not come out of shutdown mode until Vcc rises 250mV above the battery voltage.

Manual shutdown

At any point in the charge cycle, the FP8205 can be put into shutdown mode when put the EN pin to the low-level voltage. This reduces the battery drain current to about to 2uA and the supply current to less than 55uA.

Automatic Recharge

Once the charge cycle is terminated, the FP8205 continuously monitors the voltage on the BAT pin using a comparator with a 1.8ms filter time (T_{RECHARGE}). A charge cycle restarts when the battery voltage falls below 4.05V (which corresponds to approximately 80% to 90% battery capacity). This ensures that the battery is kept at or near a fully charged condition and eliminated the need for periodic charge cycle initiations. $\overline{\text{CHRG}}$ output enters a strong pull-down state during recharge cycles.

Application Information

Inductor Selection

Inductance value is decided based on different condition. 3.3uH to 4.7uH inductance value is recommended for general application circuit. There are three important inductor specifications, DC resistance, saturation current and core loss. Low DC resistance has better power efficiency.

Capacitor Selection


Use Low ESR capacitors are preferred to reduce the input inrush voltage, Ceramic capacitor of X5R and X7R are recommended, which have low equivalent series resistance (ESR) and wider operation temperature range.

Diode Selection

Schottky diodes with fast recovery times and low forward voltages are recommended. Ensure the diode average and peak current rating exceed the average output current and peak inductor current. In addition, the diode's reverse breakdown voltage must exceed the Vcc voltage.


Layout Considerations

1. The power traces, consisting of the GND trace, the LX trace and the battery trace should be kept short, direct and wide.
2. Layout switching node LX, inductor and diode connection traces wide and short to reduce EMI.
3. Place C_{IN} nearby V_{CC} pin as closely as possible to maintain input voltage steady and filter out the pulsing input current.
4. The GND of the C_{IN} and Schottky should be connected close together and directly to a ground plane.
5. Place R_{SENSE} nearby BAT pin and VS pin.

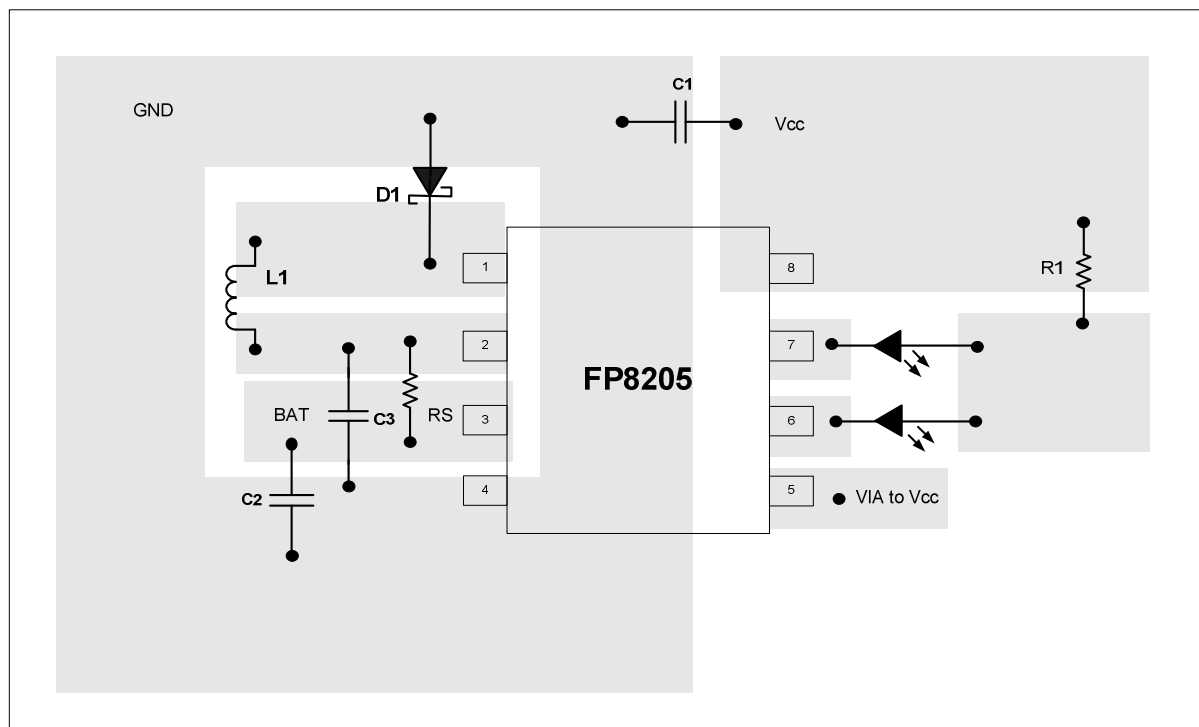

SOP-8L (EP) Suggested Layout


Typical Application

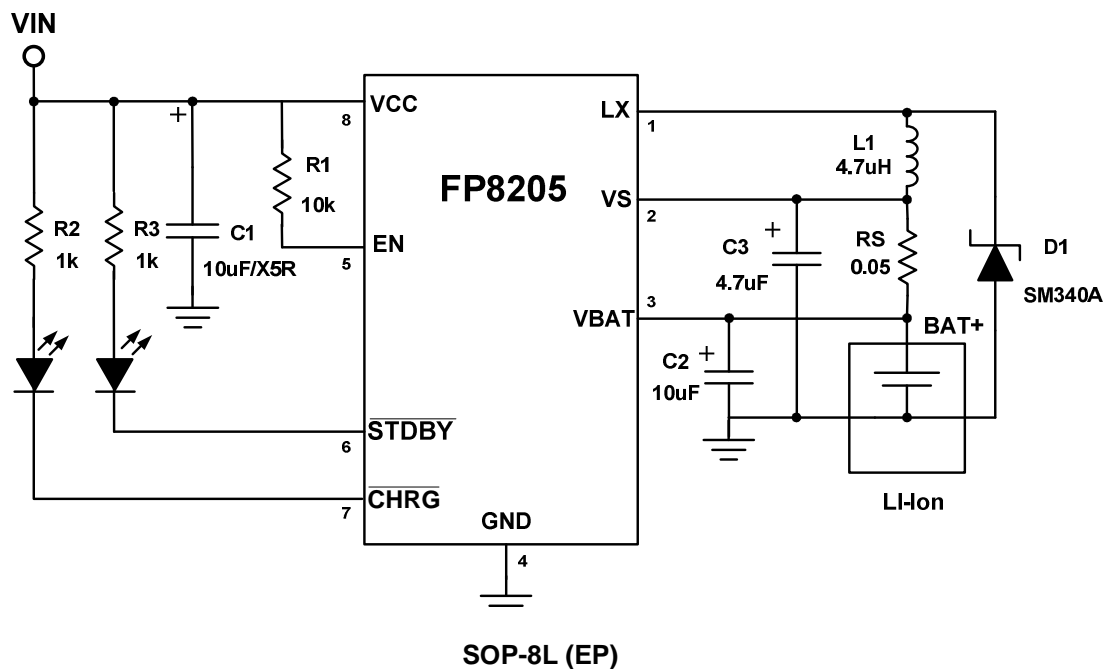

This datasheet contains new product information. Feeling Technology reserves the rights to modify the product specification without notice. No liability is assumed as a result of the use of this product. No rights under any patent accompany the sales of the product.

Package Outline

SOP-8L

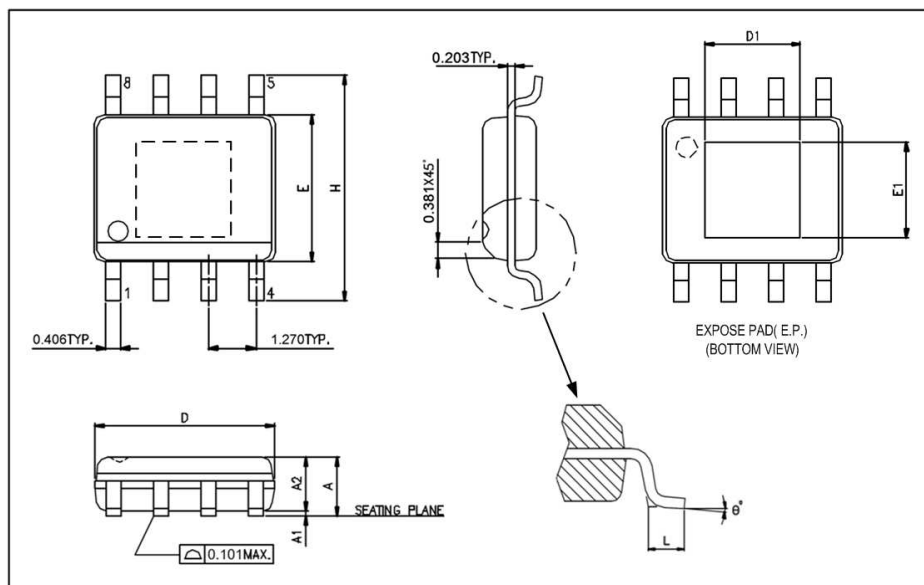

Unit: mm

Symbols	Min. (mm)	Max. (mm)
A	1.346	1.752
A1	0.101	0.254
A2		1.498
B	1.27 BSC.	
C	0.4064 BSC.	
D	4.800	4.978
E	3.810	3.987
F	0.2032 BSC.	
G	0.381x45°BSC.	
H	5.791	6.197
L	0.406	1.270
θ°	0	8

Note:

1. JEDEC Outline :N/A
2. Dimensions "D" does not include mold flash, protrusions or gate burrs mold flash
3. Protrusions and gate burrs shall not exceed .15mm (.006in) per side.
Dimensions "E" does not include inter-lead flash or protrusions inter-lead flash and protrusions
4. Shall not exceed 25mm (.010in) per side.

This datasheet contains new product information. Feeling Technology reserves the rights to modify the product specification without notice. No liability is assumed as a result of the use of this product. No rights under any patent accompany the sales of the product.