

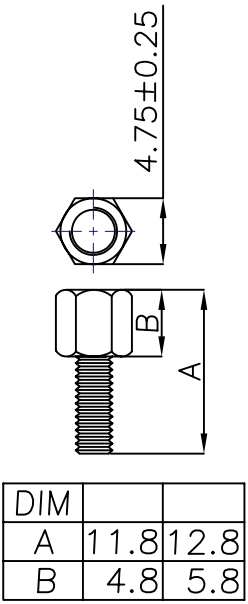
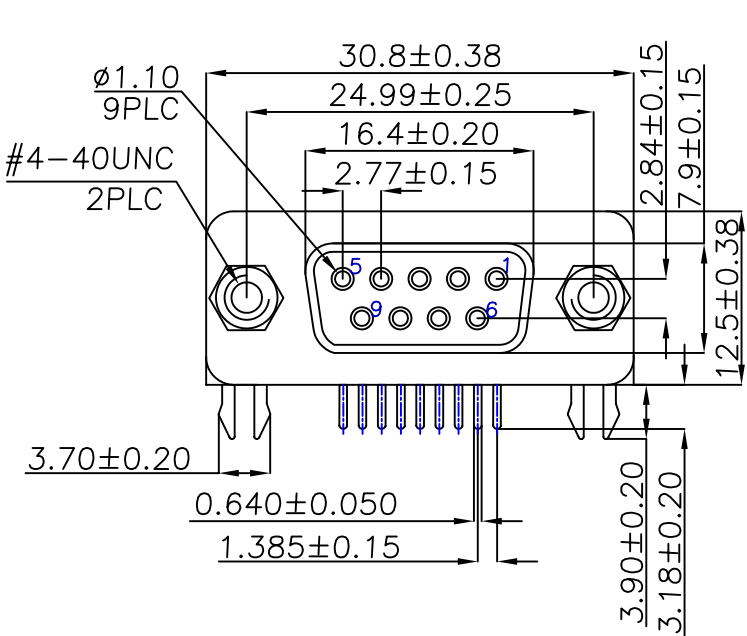
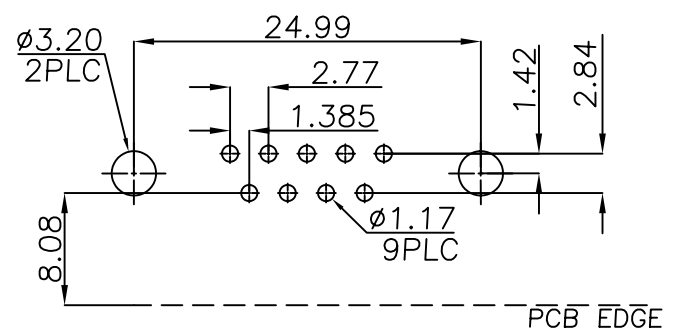


P/N:3000920060

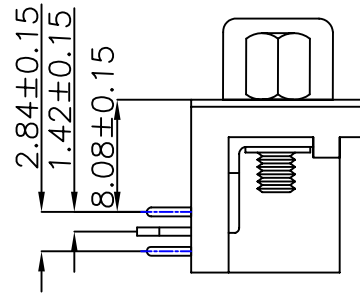

DIM		
A	11.8	12.8
B	4.8	5.8

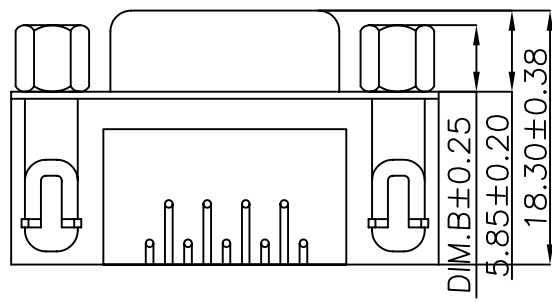

RECOMMENDED PCB LAYOUT
TOLERANCE=±0.10

NOTES:
1.MATERIAL:
HOUSING:PBT,UL94V-0,COLOR:BLACK
CONTACT:BRASS
SHELL:STEEL
BOARDLOCK:BRASS
INSERTED RIVET:BRASS
HEX-SCREW:BRASS
2.FINISH:
CONTACT:GOLD FLASH ON CONTACT AREA
TIN PLATED ON SOLDERTAILS
NICKEL UNDERPLATED
SHELL:NICKEL PLATED
BOARDLOCK:TIN ON SOLDERTAILS,NICKEL BASE
INSERT RIVET & HEX-SCREW:TIN PLATED
3.SPECIFICATIONS:
ELECTRICAL:
CONTACT CURRENT RATING:5.0 AMPS
DIELECTRIC WITHSTANDING VOLTAGE:1000VAC MIN
INSULATION RESISTANCE:5000MΩ MIN
CONTACT RESISTANCE:30mΩ MAX
PHYSICAL:
SOLDER ABILITY:245±5°C,95% COVERAGE
RESISTANCE TO WAVE SOLDERING HEAT:245±5°C,5SEC
ENVIRONMENTAL:
OPERATING TEMPERATURE:-55°C~+105°C
4.UL FILE E321548


RoHS COMPLIANT



Long Shoung Co.,Ltd.

DRAWN	REBEKAH TSAI	UNIT	mm
CHKD	WAYNE LI	SCALE	1:1
APPD	RICKY LIN	DATE	2008.11.20

TOLERANCES:
1 PLC ±0.30
2 PLC ±0.20
3 PLC ±0.130
ANGLES ±3°



NAME:	DB9P RECEPTACLE W/SCREW LOCKED
DRAWING NO.	LS-DB-09F-01
REVISION	A