
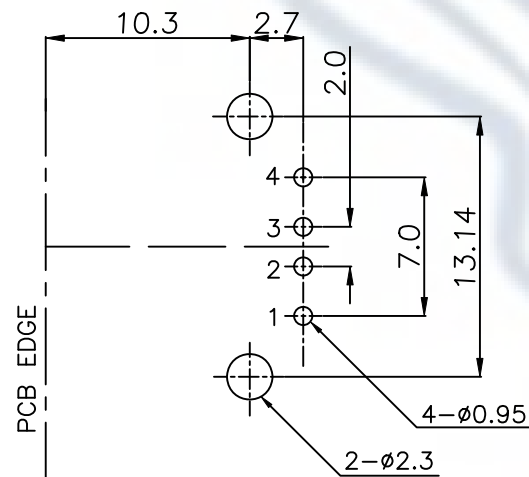


P/N:2210403150---WHITE
2210423050---BLACK

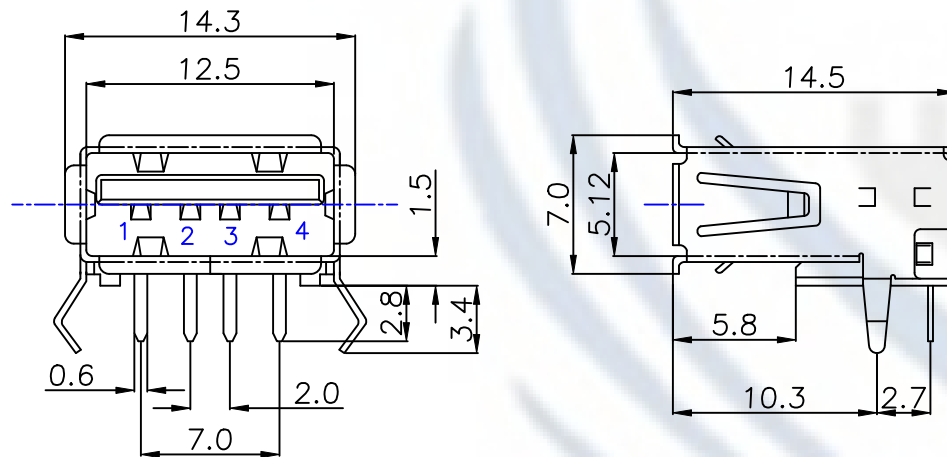

RECOMMENDED PCB LAYOUT
TOLERANCE=±0.05
(BOTTOM VIEW)

NOTES:

1. MATERIAL:

HOUSING:PBT,UL94V-0
CONTACT:PHOSPHOR BRONZE
SHELL:BRASS
BACKSHELL:SPCC

2. FINISH:

CONTACT:GOLD FLASH ON CONTACT AREA
TIN PLATED ON SOLDER TAILS
NICKEL UNDERPLATED

SHELL:NICKEL PLATED
BACKSHELL:NICKEL PLATED

3. SPECIFICATIONS:

ELECTRICAL:

CURRENT RATING:1.5AMPS
DIELECTRIC WITHSTANDING VOLTAGE:750VAC/1MIN
INSULATION RESISTANCE:1000MΩ MIN
CONTACT RESISTANCE:30mΩ MAX

PHYSICAL:

SOLDER ABILITY:245±5°C,95% COVERAGE
RESISTANCE TO WAVE SOLDERING HEAT:245±5°C,5SEC

ENVIRONMENTAL:

OPERATING TEMPERATURE:-40°C~+85°C


RoHS COMPLIANT



Long Shoung Co.,Ltd.

DRAWN	REBEKAH TSAI	UNIT	mm
CHKD	WAYNE LI	SCALE	1:1
APPD	RICKY LIN	DATE	2010.06.25

TOLERANCES:
1 PLC ±0.3
2 PLC ±0.20
3 PLC ±0.050
ANGLES ±3°



NAME:

USB 4P A-TYPE R/A DIP

DRAWING NO.	LS-USBLF-A04-01	REVISION	B
-------------	-----------------	----------	---