





POWER

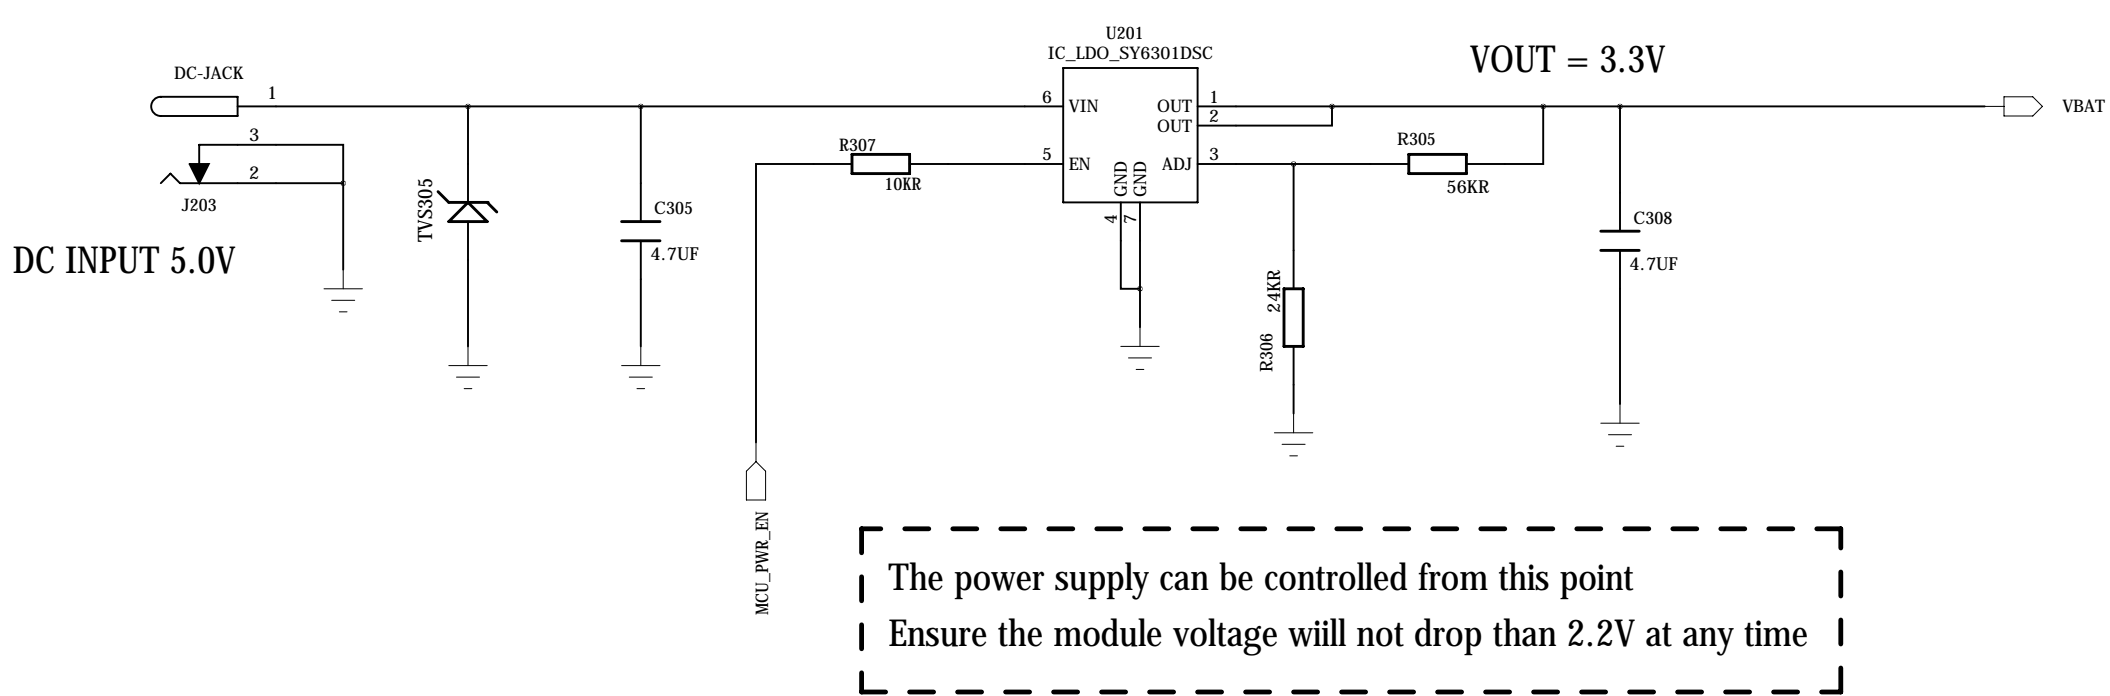


The power supply can be controlled from this point  
Ensure the module voltage will not drop than 2.2V at any time

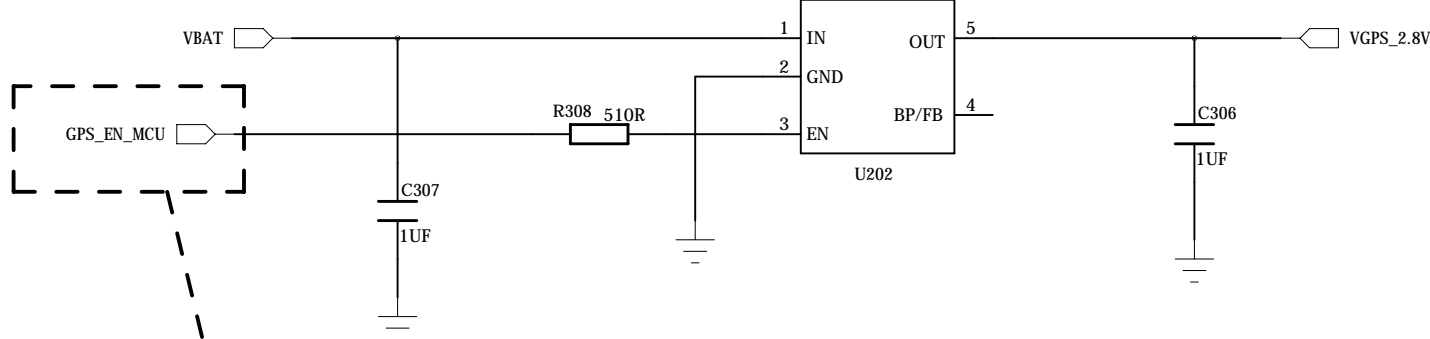

Controlled by MCU  
when GPS is not work,it should be ouput low  
to shut down the power VGPS\_2.8V

SIM CARD

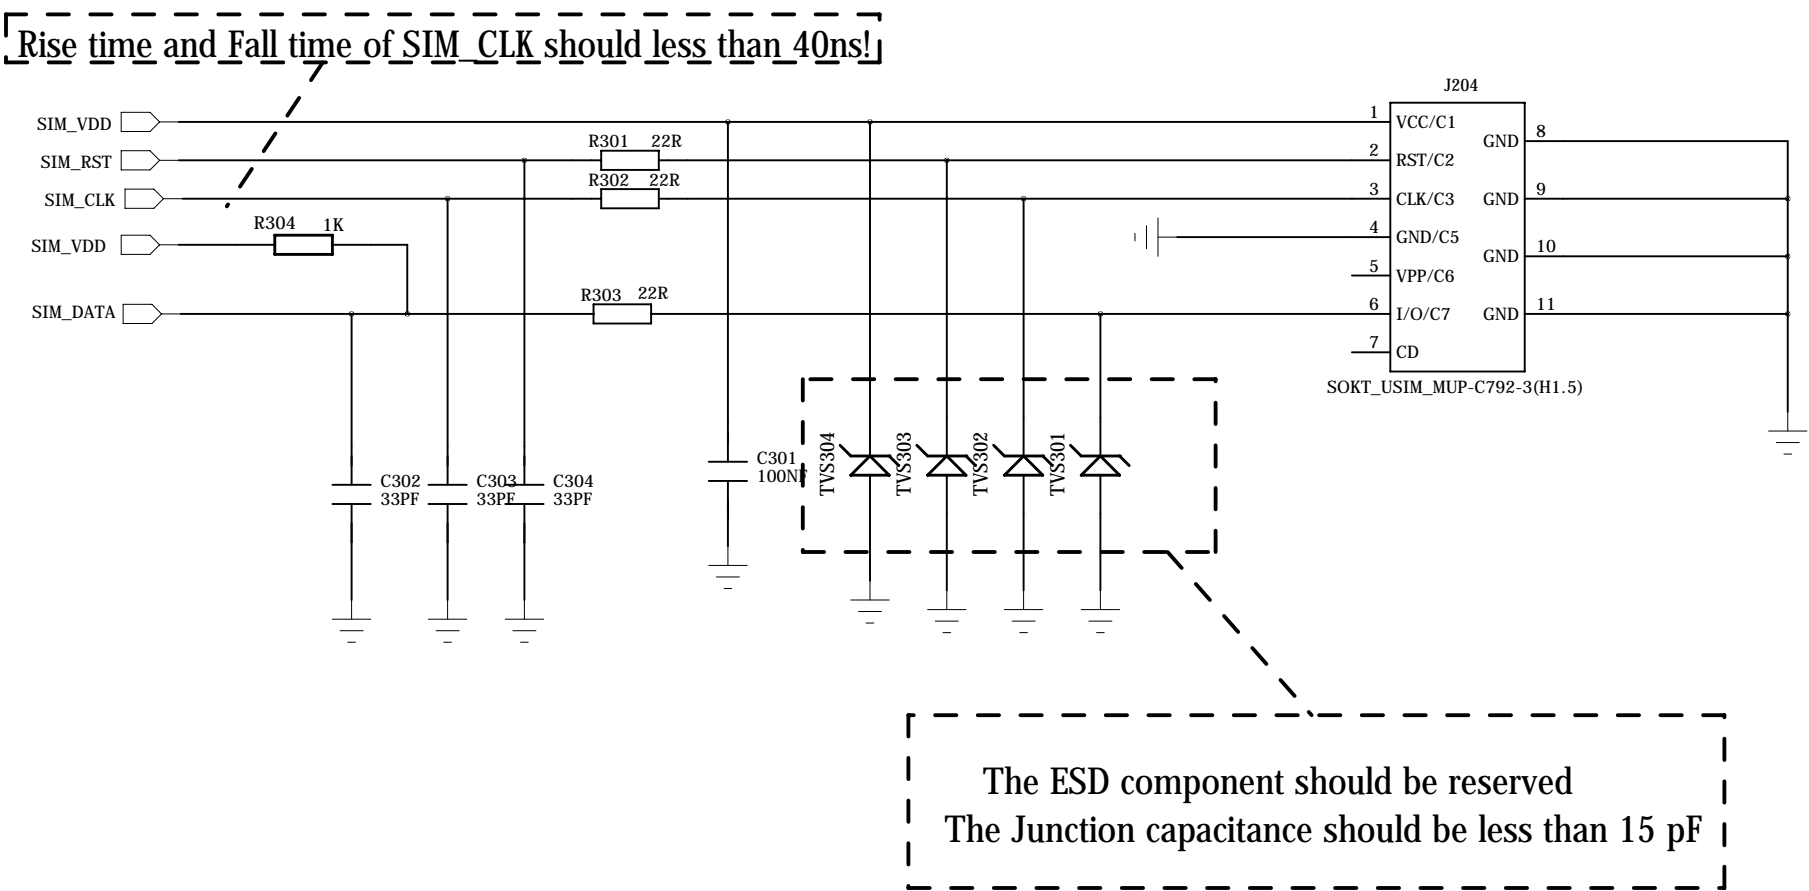

The ESD component should be reserved  
The Junction capacitance should be less than 15 pF