



AppoTech
卓荣集成

CW6631A

Bluetooth Audio Player Microcontroller

User Manual

[CW6631A-UM-EN]

Versions: 1.0.0

Release Date: 2015-6-18

Table of content

Table of content	II
1 Product Overview	1
1.1 Outline.....	1
1.2 Features.....	1
1.3 System Architecture	2
2 Pin Definitions	3
2.1 CW6631A.....	3
2.1.1 Package.....	3
2.1.2 Pin Assignment	3
2.1.3 Pin Description	3
3 CPU Core Information	6
3.1 Architecture	6
3.2 Instruction Set.....	6
3.3 Memory Mapping	9
3.3.1 Program Memory Mapping	9
3.3.2 External Data Memory Mapping	10
3.3.3 Internal Data Memory Mapping.....	10
3.4 Interrupt Processing.....	11
3.4.1 Interrupt sources	11
3.4.2 Interrupt Priority.....	13
3.5 Special Function Register Mapping (SFR).....	13
3.6 Extend Special Function Registers Mapping (XSFR)	14
3.7 CPU and Memory related SFR Description	15
4 Reset Generation.....	25
4.1 Power-on Reset (POR).....	25
4.2 System Reset	25
4.2.1 LVD.....	26
4.2.2 RTCC Reset.....	27

4.2.3	Watchdog Reset	27
4.2.4	Port Wakeup Reset	28
4.3	Clock System	28
4.3.1	Clock Control	28
4.3.2	Clock Gating.....	33
4.3.3	Phase Lock Loop (PLL).....	33
5	Low Power Management	38
5.1	Power Saving Mode	38
5.1.1	Sleep Mode.....	38
5.1.2	Hold Mode.....	38
5.1.3	Idle Mode.....	38
5.1.4	Power Down Mode.....	39
5.2	Power Supply.....	39
6	General Purpose Input/Output (GPIO).....	43
6.1	Overview	43
6.2	Features.....	43
6.3	Function multiplexing.....	43
6.4	Port interrupt and wakeup.....	45
6.5	GPIO Special Function Registers	45
6.5.1	wakeup registers	59
6.6	Operation Guide.....	60
7	Timers.....	61
7.1	Timer0	61
7.1.1	Timer0 Features.....	61
7.1.2	Timer0 Special Function Registers.....	61
7.2	Timer1	62
7.2.1	Timer1 Features.....	62
7.2.2	Timer1 Special Function Registers.....	63
7.3	Timer2	64

7.3.1	Timer2 Features.....	65
7.3.2	Timer2 Special Function Registers.....	65
7.4	Timer3	67
7.4.1	Timer3 Features.....	67
7.4.2	Timer3 Special Function Registers.....	67
7.5	Watchdog Timer (WDT)	68
7.5.1	Watchdog Wake up	68
7.5.2	Watchdog SFR.....	69
8	Universal Asynchronous Receiver/Transmitter (UART)	70
8.1	UART0.....	70
8.1.1	Overview.....	70
8.1.2	UART0 Special Function Registers	70
8.2	UART1.....	72
8.2.1	Overview.....	72
8.2.2	UART1 Special Function Registers	72
8.3	Operation Guide.....	76
8.4	BT Control Register	78
9	SPI	79
9.1	SPI0.....	79
9.1.1	SPI0 Special Function Registers	80
9.1.2	SPI0 Operation Guide	81
9.2	SPI1.....	82
9.2.1	SPI1 Special Function Registers	83
9.2.2	SPI1 Operation Guide	85
10	External Memory Interface (EMI).....	86
10.1	EMI Control Registers.....	86
11	SD Card Host Controller (SDC).....	89
11.1	Features.....	89
11.2	IO Mapping.....	89

11.3	SDC Special Function Registers	89
11.4	SDC Operation Guide	92
11.4.1	command Operation	92
11.4.2	data Operation	93
12	Audio Terminal (DAC)	94
12.1	Features.....	94
12.2	DAC Special Function Registers.....	94
12.2.1	DAC Register Mapping.....	94
12.2.2	Function of DAC Control Registers	95
12.3	Operation Guide.....	99
12.3.1	BDAC Operation Guide	99
13	SARADC.....	100
13.1	Features.....	100
13.2	ADC Pin Mapping.....	100
13.3	SARADC Special Function Registers.....	100
14	CRC16 /LFSR16/LFSR32	103
14.1	CRC16	103
14.1.1	Features.....	103
14.1.2	CRC16 Special Function Registers.....	103
14.2	LFSR16	104
14.2.1	Features.....	104
14.2.2	LFSR16 Special Function Register	104
14.3	LFSR32	105
14.3.1	Features.....	105
14.3.2	LFSR32 Special Function Registers.....	105
15	Characteristics	106
15.1	PMU Parameters	106
15.2	CORE PLL Parameters.....	106
15.3	General purpose I/O Parameters	106

15.4	Audio ADDA Parameters	107
15.5	USB PHY Parameters	107
15.6	RF Analog Blocks	107
16	Package Outline Dimensions	109
16.1	SSOP28	109
Revision History		i

1 Product Overview

1.1 Outline

CW6631A is an MCS-51™ Compatible high performance mixed signal microcontroller. It integrates advanced digital and analog peripherals to suit for BT audio playback and BT Communicate applications.

1.2 Features

- CPU Compatible with MCS-51™ instruction set;
- Compliant to Bluetooth 3.0 + EDR, backward-compatible with BT1.2, 2.0 and 2.1
- Support SCMS-T content protection method;
- Support HFP v1.6, HSP v1.2, A2DP 1.3, AVCTP 1.4, AVDTP 1.3 and AVRCP 1.5;
- Class 2 power level, RF Performance: Tx:0dBm, Rx: -80dBm;
- Support simple pairing and auto reconnection function;
- Support MP3/SBC decoder;
- Support two pairs of AUX;
- Six Channels 10-bit SARADC;
- support 16bit Mono DAC with >90dB SNR, embedded with four class A/B headphone amplifier
- 16bit Mono ADC with >90dB DR
- Support Audio record function to MIC ADPCM;
- Support Audio playback from SD/USB
- Two 8-bit timers, support Capture and PWM mode;
- Two 16-bit timers, support Capture and PWM mode;
- Watchdog Timer with on-chip RC oscillator;
- Support full-duplex UART, SPI, SD interface;
- Support IIC interface for FM function;
- 2 channels 16 levels Low Voltage Detector;
- Power on Reset
- Support Full speed USB 2.0 PHY;
- Full speed USB 2.0 HOST/DEVICE controller;
- Internal crystal oscillator support 26M crystal
- Internal LDO regulator:1.35V to 1.2V, 4.2V to 3.3V
- Built-in buck converter,DC-DC: 4.2V to 1.35V

1.3 System Architecture

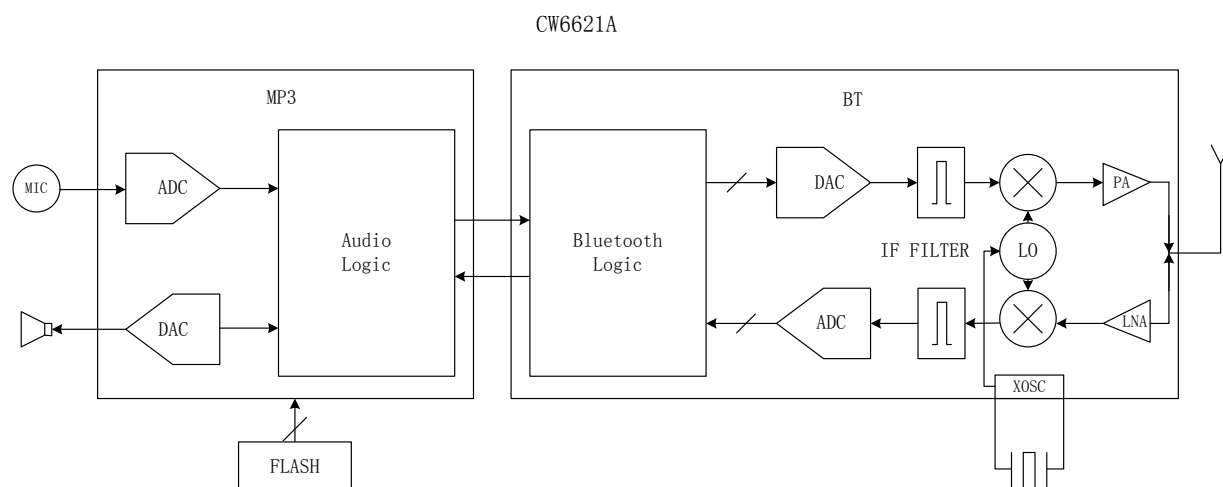


Figure 1-1 CW6631A system architecture

2 Pin Definitions

2.1 CW6631A

2.1.1 Package

SSOP28

2.1.2 Pin Assignment

Figure 2-1 shows the pin assignments of SSOP28 package.

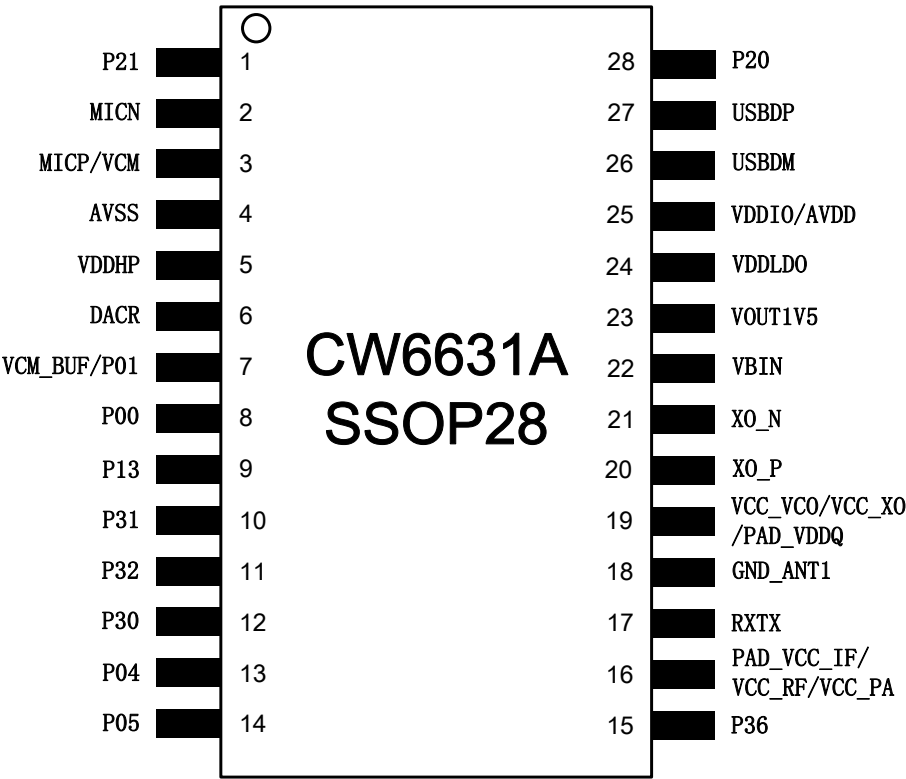


Figure 2-1 Pin Assignment of CW6631A

2.1.3 Pin Description

Table 2-1 shows the pin description of CW6631A.

Table 2-1 Pin Description of CW6631A

Pin No.SSOP28	Name	Type	Function
1	P21	I/O	GPIO AUXR2 ADC1 SDCLK

Pin No.SSOP28	Name	Type	Function
			EMIDAT1 LCD_D1
2	MICN	A	MIC Negative input
3	MICP/VCM	A	MIC Positive input DAC VCM output
4	AVSS	GND	Analog GND
5	VDDHP	PWR	Headphone power
6	DACR	A	DAC right output GPIO input
7	P01/VCM_BUF	I/O	GPIO AUXR0 UARTTX1 PORT INT/WKUP0 SDDAT2 DAC VCM buffer
8	P00	I/O	GPIO AUXL0 UARTRX1 SDDAT1 SPI0DIN2
9	P13	I/O	GPIO ADC5
10	P31	I/O	GPIO SDCMD SPI0DIN3
11	P32	I/O	GPIO SDDAT0 SPI0DOUT3/DIN3
12	P30	I/O	GPIO ADC4 SDCLK SPI0CLK3
13	P04	I/O	GPIO SPI1DOUT/DIN1
14	P05	I/O	GPIO SPI1CLK
15	P36	I/O	GPIO
16	PAD_VCC_IF VCC_RF VCC_PA	PWR	Power VCC RF/PA Power VCC
17	RXTX	A	RF Rx and Tx pin
18	GND_ANT1	GND	RF GND

Pin No.SSOP28	Name	Type	Function
19	VCC_VCO VCC_XO/ PAD_VDDQ	PWR	Power VCC Power VCC/VDDQ
20	XO_P	A	BT 26MHz XOSC Positive Pin
21	XO_N	A	BT 26MHz XOSC Negative Pin
22	BVIN	PWR	PMU Power input Pin 4.2V(typ)
23	VOOUT1V5	PWR	VOOUT 1.5V
24	VDDLDO	PWR	LDO power input 4.2V(typ)
25	VDDIO/AVDD	PWR	Power output VDDIO 3.3V
26	USBDM	I/O	USB Negative Input/output
27	USBDP	I/O	USB Positive Input/output
28	P20	I/O	GPIO

3 CPU Core Information

3.1 Architecture

The AXC51-CORE of CW6631A is fully compatible with the MCS-51™ instruction set.

The AXC51-CORE employs a pipelined architecture that greatly increases its instruction throughput over the standard 8051 architecture. In a standard 8051, all instructions except for MUL and DIV take 12 or 24 system clock cycles to execute, and usually have a maximum system clock of 12MHz. By contrast, the AXC51-CORE executes most of its instructions in 1 system clock cycle. With system clock running at 48 MHz, it has a peak throughput of 48 MIPS running in on-chip SRAM area.

3.2 Instruction Set

The instruction set of the AXC51-CORE is fully compatible with the standard MCS-51™ instruction set; standard 8051 development tools can be used to develop software for the AXC51-CORE. All instructions of AXC51-CORE are the binary and functional equivalent of their MCS-51™ counterparts, including op-codes, addressing modes and effect on PSW flags. However, instruction timing is different than that of the standard 8051. [Table 3-1](#) shows AXC51-CORE Instruction Set Summary

Table 3-1 AXC51-CORE Instruction Set Summary

Number of Bytes	Mnemonic	Operands	Clock Cycles (running in IRAM)
1	NOP		1
2	AJMP	code addr	3
3	LJMP	code addr	3
1	RR	A	1
1	INC	A	1
1	INC	data addr	1
1	INC	@Ri	1
1	INC	Rn	1
3	JBC	bit addr, code addr	1 or 3
2	ACALL	code addr	3
3	LCALL	code addr	3
1	RRC	A	1
1	DEC	A	1
2	DEC	data addr	1
1	DEC	@Ri	1
1	DEC	Rn	1
3	JB	bit addr, code addr	1 or 3
1	RET		4
1	RL	A	1
2	ADD	A, #data	1

Number of Bytes	Mnemonic	Operands	Clock Cycles (running in IRAM)
2	ADD	A, data addr	1
1	ADD	A, @Ri	1
1	ADD	A, Rn	1
3	JNB	bit addr, code addr	1 or 3
1	RETI		4
1	RLC	A	1
2	ADDC	A, #data	1
2	ADDC	A, data addr	1
1	ADDC	A, @Ri	1
1	ADDC	A, Rn	1
2	JC	code addr	1 or 3
2	ORL	data addr, A	1
3	ORL	data addr, #data	1
2	ORL	A, #data	1
2	ORL	A, data addr	1
1	ORL	A, @Ri	1
1	ORL	A, Rn	1
2	JNC	code addr	1 or 3
2	ANL	data addr, A	1
2	ANL	data addr, #data	1
1	ANL	A, @Ri	1
1	ANL	A, Rn	1
2	JZ	code addr	1 or 3
2	XRL	data addr, A	1
3	XRL	data addr, #data	1
2	XRL	A, #data	1
2	XRL	A, data addr	1
1	XRL	A, @Ri	1
1	XRL	A, Rn	1
2	JNZ	code addr	1 or 3
2	ORL	C, bit addr	1
1	JMP	@A+DPTR	3
2	MOV	A, #data	1
3	MOV	data addr, #data	1
2	MOV	@Ri, #data	1
2	MOV	Rn, #data	1
2	SJMP	code addr	3
2	ANL	C, bit addr	1
1	MOVC*	A, @A+PC	1
1	DIV	AB	1
3	MOV	data addr, data addr	1

Number of Bytes	Mnemonic	Operands	Clock Cycles (running in IRAM)
2	MOV	data addr, @Ri	1
2	MOV	data addr, Rn	1
3	MOV	DPTR, #data	1
2	MOV	bit addr, C	1
1	MOVC*	A, @A+DPTR	2
2	SUBB	A, #data	1
2	SUBB	A, data addr	1
1	SUBB	A, @Ri	1
1	SUBB	A, Rn	1
2	ORL	C, bit addr	1
2	MOV	C, bit addr	1
1	INC	DPTR	1
1	MUL	AB	1
2	MOV	@Ri, data addr	1
2	MOV	Rn, data addr	1
2	ANL	C, bit addr	1
2	CPL	bit addr	1
2	CPL	C	1
3	CJNE	A, #data, code addr	1 or 3
3	CJNE	A, data addr, code addr	1 or 3
3	CJNE	@Ri, #data, code addr	1 or 3
3	CJNE	Rn, #data, code addr	1 or 3
2	PUSH	data addr	1
2	CLR	bit addr	1
1	CLR	C	1
1	SWAP	A	1
2	XCH	A, data addr	1
1	XCH	A, @Ri	1
1	XCH	A, Rn	1
2	POP	data addr	1
2	SETB	bit addr	1
1	SETB	C	1
1	DA	A	1
3	DJNZ	data addr, code addr	1 or 3
1	XCHD	A, @Ri	1
2	DJNZ	Rn, code addr	1 or 3
1	MOVB	A, @DPTR	2
1	MOVB	A, @Ri	2
1	CLR	A	1
2	MOV	A, data addr	1
1	MOV	A, @Ri	1

Number of Bytes	Mnemonic	Operands	Clock Cycles (running in IRAM)
1	MOV	A, Rn	1
1	MOVX	@DPTR, A	1
1	MOVX	@Ri, A	1
1	CPL	A	1
2	MOV	data addr, A	1
1	MOV	@Ri, A	1
1	MOV	Rn, A	1

3.3 Memory Mapping

3.3.1 Program Memory Mapping

As illustrated in CW6631A program space is divided into 3 regions: SRAM1, SRAM2, and IROM.

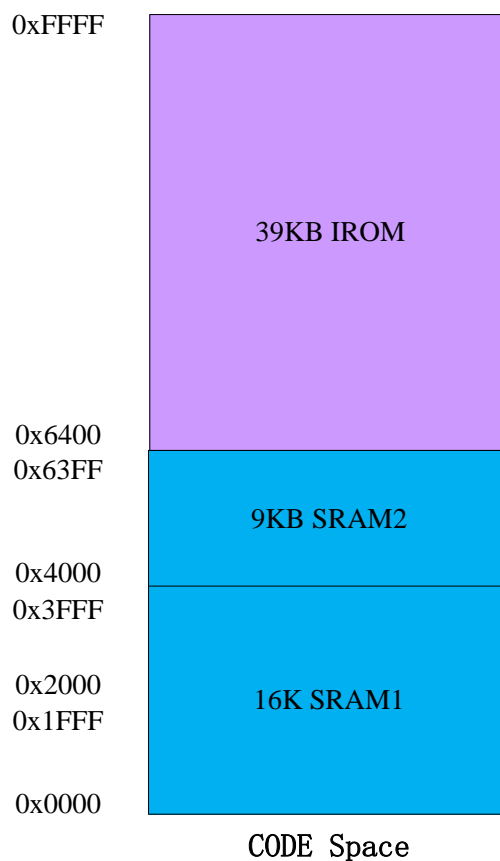


Figure 3-1 Program Memory Organization

3.3.2 External Data Memory Mapping

Figure 3-2 illustrated External Data Memory Mapping.

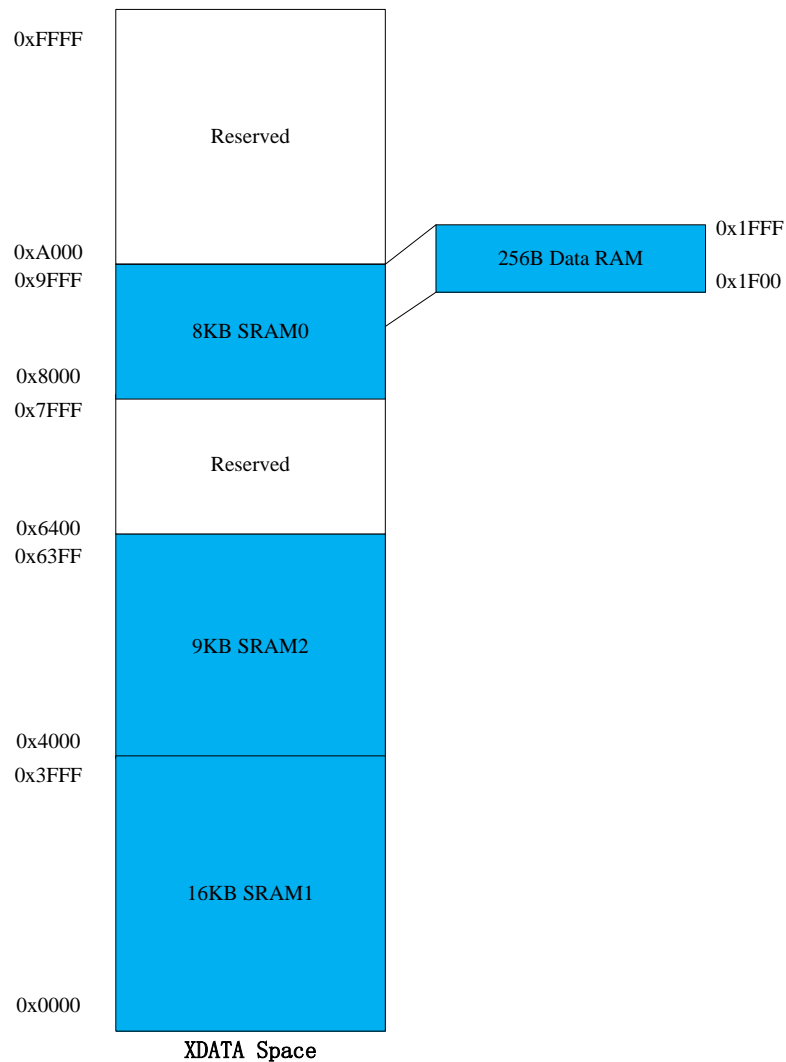


Figure 3-2 External Data Memory Mapping

3.3.3 Internal Data Memory Mapping

Internal data memory locates in SRAM0 at the address from 0x9F00 to 0x9FFF as showed in *Figure 3-2*. Internal data memory is mapped in *Figure 3-3*. The memory space is shown divided into three blocks, which are generally referred to as the Lower 128, the Upper 128, and SFR space.

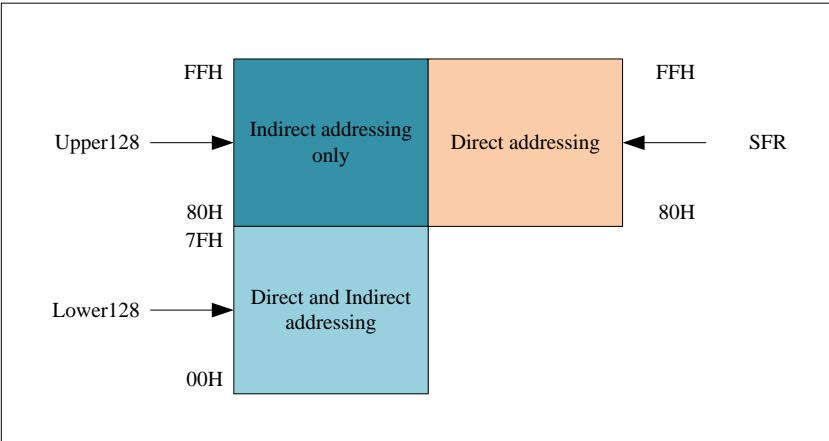


Figure 3-3 Internal data memory mapping

As shown in [Figure 3-4](#) the Lowest 32 bytes in Lower 128 are grouped into 4 banks of 8 registers. Program instructions call out these registers as R0 through R7. Two bits in the PSW select which register bank are in use.

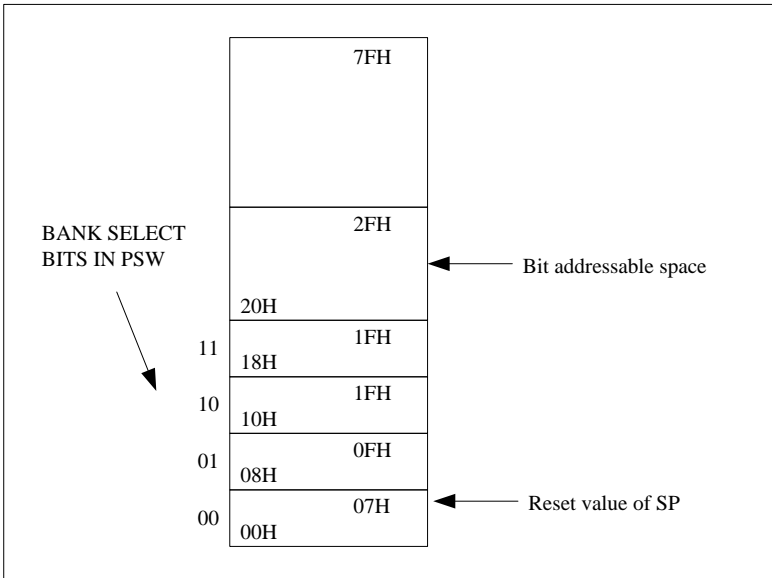


Figure 3-4 Lowest 32 bytes in Internal data memory Lower 128

3.4 Interrupt Processing

3.4.1 Interrupt sources

The CW6631A provides 15 interrupt sources. All interrupts are controlled by a series combination of individual enable bits and a global enable (EA) in the interrupt-enable register (IE0.7). Setting EA to logic 1 allows individual interrupts to be enabled. Setting EA to logic 0 disables all interrupts regardless of the individual interrupt-enable settings. The interrupt enables and priorities are functionally identical to those of the 80C52.

The CW6631A provides 3 sets of vectors entry addresses, starting from 0x0003, 0x4003 and 0x8003. The vector base address is set by DPCON [7:6]. [Table 3-2](#) lists the interrupt summary.

Table 3-2 Interrupt Summary

Interrupt Sources	Interrupt Vector	Interrupt Number	Natural Order	Interrupt Flag	Interrupt Enable Bit	Priority Control Bit
SINT0	0x0003 0x4003 0x8003	0	1	SPMODE.7	IE0.0	IPH0.0 IP0.0
SINT1 AGC	0x000B 0x400B 0x800B	1	2	SPMODE.6 AGCDMACON.0	IE0.1	IPH0.1 IP0.1
Timer 1	0x0013 0x4013 0x8013	2	3	TMR1CON.7 TMR1CON.6	IE0.2	IPH0.2 IP0.2
Timer 2	0x001B 0x401B 0x801B	3	4	TMR2CON.7 TMR2CON.6	IE0.3	IPH0.3 IP0.3
MP3/FFT1	0x0023 0x4023 0x8023	4	5	AUCON7.6 AUCON7.5 AUCON7.4 AUCON7.3 AUCON7.2 AUCON7.1 AUCON7.0 AUCON11.6 FFT1CON1.1	IE0.4	IPH0.4 IP0.4
Huffman/ UART1 (overflow)	0x002B 0x402B 0x802B	5	6	HFMCON.7 HFMCON.6 UART1STA.1	IE0.5	IPH0.5 IP0.5
USBSOF UART1	0x0033 0x4033 0x8033	6	7	USBCON2.1 UART1STA.3&UART1STA2	IE0.6	IPH0.6 IP0.6
USBCTL	0x003B 0x403B 0x803B	7	8		IE1.0	IPH1.0 IP1.0
SDC	0x0043 0x4043 0x8043	8	9	SDCON1.5 SDCON1.4	IE1.1	IPH1.1 IP1.1
PORT	0x004B 0x404B 0x808B	9	10	WKPND	IE1.2	IPH1.2 IP1.2
SPI0	0x0053 0x4053 0x8053	10	11	SPI0CON.7	IE1.3	IPH1.3 IP1.3
Timer 3	0x005B 0x405B	11	12	TMR3CON.7	IE1.4	IPH1.4 IP1.4

Interrupt Sources	Interrupt Vector	Interrupt Number	Natural Order	Interrupt Flag	Interrupt Enable Bit	Priority Control Bit
	0x805B					
Timer 0	0x0063 0x4063 0x8063	12	13	TMR0CON.7	IE1.5	IPH1.5 IP1.5
RTCC UART0 WDT LVD	0x006B 0x406B 0x806B	13	14	RTCON.7 UARTSTA.5&UARTSTA.4 IP0.7 LVDCON.7	IE1.6	IPH1.6 IP1.6
SPI1	0x0073 0x4073 0x8073	14	15	SPI1CON.7	IE1.7	IPH1.7 IP1.7

3.4.2 Interrupt Priority

There are 4 levels of interrupt priority: Level 3 to 0. All interrupts have individual priority bits in the interrupt priority registers to allow each interrupt to be assigned a priority level from 3 to 0. All interrupts also have a natural hierarchy. In this manner, when a set of interrupts has been assigned the same priority, a second hierarchy determines which interrupt is allowed to take precedence. The natural hierarchy is determined by analyzing potential interrupts in a sequential manner with the order listed in [Table 3-2](#).

The processor indicates that an interrupt condition occurred by setting the respective flag bit. This bit is set regardless of whether the interrupt is enabled or disabled.

3.5 Special Function Register Mapping (SFR)

Table 3-3 Special function registers naming and address

	0	1	2	3	4	5	6	7
0x80	P0	SP	DPL0	DPH0	DPL1	DPH1	DPCON	PCON0
0x88	SDCON0	SDCON1	SDCON2	MEMCON	ATDAT	ERABYT0	/	ERABYT1
0x90	P1	BFBYTEPTL	BFBYTEPTRH	BFDATAL	BFDATAH	BFBITPTR	BFCON	PCON3
0x98	PWKEN	PWKEDGE	PIE0	SPH	PCON1	ISDCHSUM	IRTCDAT	IRTCN
0xA0	P2	IIS_CON2	SPI1CON	SPI1BUF	ATADR	SPI1DMACNT	SPI1DMASP	IRCON0
0xA8	IE0	IE1	SPI1DMACNTL	IUBPCON	HFMCON1	IRCON1	AGCCON2	SPMODE
0xB0	P3	SQRT_DATA0	SQRT_DATA1	SQRT_DATA2	ERABYT2	ERABYT3	EMIBUF	PLLCON
0xB8	IP0	IP1	P0DIR	P1DIR	P2DIR	P3DIR	ERABYT4	LVDCON
0XC0	IIS_CON0	TMR2CON0	TMR2CON1	IIS_CON1	RTCON1	SECCNT	OTP_ADR	IRAM_ADR
0XC8	HFMCON	USBCON0	USBCON1	USBCON2	USBDATA	USBADR	OIRAMCNT	OIRAMCON
0XD0	PSW	HFMCNT	ADCCON	PCON2	ADCDATAL	ADCDATAH	COS_VALH	COS_VALL
0XD8	SPI0BUF	SPI0CON	ADCMode	CLKCON	CLKCON1	USBDPDM	SQRT_DATA3	PBANK0
0XE0	ACC	IPH0	IPH1	AUCON0	AUCON1	AUCON2	AUCON3	AUCON4

0XE8	AUCON5	AUCON6	AUCON7	AUCON8	AUCON9	AUCON10	SQRT_CFG	COS_IDX
0XF0	B	ER0H	ER0L	ER1H	ER1L	CRCREG	CRCFIFO	WDTCON
0XF8	TMR0CON	TMR0CNT	TMR0PR	TMR0PWM	UARTSTA	UARTCON	IIS_CON3	UARTDATA

3.6 Extend Special Function Registers Mapping (XSFR)

Table 3-4 XSFR space mapping

	7	6	5	4	3	2	1	0
78D8H	AGCSETCNT	AGCSETDATA	BS_END_ADR	BS_BEGIN_ADR				
78D0H	AGCDATL	AGCDATH	AGCDMAADR	AGCDMACON	AGCCON3	AGCANLCON	AGCCON1	AGCCON0
78C8H	-	-	FFT1_SQRTL_A DDR	FFT1_SQRT_H_A DDR	FFT1SCALE	FFT1_BUFL_A DDR	FFT1_BUFH_A DDR	FFT1_DATA_L_A DDR
78C0H	FFT1_DATAH _ADDR	-	IUBP3	IUBP2	IUBP1	IUBP0		
78B8H	P3PDS1	P2PDS1	P1PDS1	-	P3PDS0	P2PDS0	P1PDS0	-
78B0H	P3PUS1	P2PUS1	P1PUS1	-	P3PUS0	P2PUS0	P1PUS0	-
78A8H	AGCRDATL	AGCRDATH	AGCSAMPLEH	AGCSAMPLEL	AGCCON4	UART1CNTH	UART1CNTL	UART1POINTH
78A0H	UART1POINTL	UART1MINUS	UART1LOOPCNT	CLKCON2	ATCON10	ATCON9	FFT1CON1	FFT1CON
7898H	ATCON8	ATCON7	DCT_CFG	FIFO_BASE	FIFO_SPEED	AUCON11	KVADR	KVCON2
7890H	KVCON1	ATCON6	ATCON5	ATCON4	ATCON3	ATCON2	ATCON1	ATCON0
7888H	SP1BAUD	UARTDIV	LFSR32_DAT3	LFSR32_DAT2	LFSR32_DAT1	LFSR32_DAT0	UARTBAUDH	UARTBAUD
7880H	IUBP	IUADR	IUDAT1	ID1	ID0	ECN	RANDOM_CNT	ADCBAUD
7878H	IISMDA_RD_ PCNT1	IISMDA_RD_P CNT0	USBEP3TXADR H	USBEP3TXADR L	USBEP3RXAD RH	USBEP3RXAD RL	USBEP2TXADR H	USBEP2TXADR L
7870H	USBEP2RXA DRH	USBEP2RXAD RL	USBEP1TXADR H	USBEP1TXADR L	USBEP1RXAD RH	USBEP1RXAD RL	USBEP0ADRH	USBEP0ADRL
7868H	LFSR16_DAT 1	LFSR16_DAT0	-	EMICON1	EMICON0		FIFO_SET	FIFO_TRT
7860H	SFB_GEN	AUCON12	TMR2PWMH	TMR2PWML	TMR2PRH	TMR2PRL	TMR2CNTH	TMR2CNTL
7858H	PLL1FRAL	PLL1FRACH	PLL1INTL	PLL1INTH	TMR1CON1	TMR1CON0	TMR3PWM	TMR3PR
7850H	TMR3CNT	TMR3CON	TMR1PWMH	TMR1PWML	TMR1PRH	TMR1PRL	TMR1CNTH	TMR1CNTL
7848H	PLL2FRAL	PLL2FRACH	PLL2INTL	PLL2INTH	PLL2CON	P3PD0	P2PD0	P1PD0
7840H	P0PD0	-	P2PU1		PUP3	PUP2	PUP1	PUP0
7838H	PMUXCON0	PLL1DIV	SDADCDON	IIS_WSCNT1	PMUXCON1		IIS_ADR0	IIS_REFCLK_C FG
7830H	IIS_DAT7	IIS_DAT6	IIS_DAT5	IIS_DAT4	IIS_DAT3	IIS_DAT2	IIS_DAT1	IIS_DAT0
7828H	IIS_BAUD	SP1CON1	IIS_ALLBIT	IIS_DMA_RD_C NT1	IIS_DMA_RD_ CNT0	IIS_DMA_WR_ CNT1	IIS_DMA_WR_ CNT0	P3DRV0
7820H	P2DRV0	P1DRV0	P0DRV0	IIS_WSCNT	SPIBAUD	SPIDMACNT	SPIDMAPTRH	SPIDMAPTRL
7818H	CRCRES1	CRCRES0	IIS_BCLK_CFG	UARTDIV	UARTDMATXC	UARTDMARXC	UARTDMATXP	UARTDMARXP

	7	6	5	4	3	2	1	0
					NT	NT	TR	TR
7810H	UART1STA	UART1DATA	UART1BAUD	UART1CON	HFMPTRH	HFMPTRL	BFEPRH	BFEPTL
7808H	IRTADT3	IRDAT2	IRDAT1	IRDAT0	IIS_VALBIT	SPMODE1	PIE1	PWRCON2
7800H	PWRCON1	RC_TRIM	IIS_ADR1	RC_TEST	SDDPTR	SDDCNT	SDCPTR	SDBAUD

3.7 CPU and Memory related SFR Description

Register 3-1 DPCON – Data Pointer Configure Register

Position	7	6	5	4	3	2	1	0
Name	IA		DPID0	DPID1	DPAID	DPTSL	EINSTEN	DPSEL
Default	1	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

IA: Select Interrupt Vector's Base Address

00 = Base address is 0x0003

01 = Base address is 0x4003

10 = Base address is 0x8003

11 = Base address is 0xc003

note: interrupt address is determined by SPMODE1[4]

0 = interrupt base address depend on IA

1 = interrupt base address is 0x2000

DPID0: DPTR0 increase direction control

0 = DPTR increase

1 = DPTR decrease

DPID1: DPTR1 increase direction control

0 = DPTR increase

1 = DPTR decrease

DPAID: DPTR auto increment enables

0 = Auto increment disable

1 = Auto increment enable

DPTSL: DPSEL toggle enable

0 = DPSEL toggle disable

1 = DPSEL toggle enable

EINSTEN: Extern instruction enables

0 = Disable

1 = Enable

DPSEL: DPTR Select

0 = Active DPTR0

1 = Active DPTR1

Data Pointer Register is an 16-bit address pointer, it can split up into two register, DPL and DPH. Data pointer register always used as indirect addressing register.

Note: interrupt address is determined by SPMODE1[4]

Register 3-2 DPL0 – Data Pointer Low Byte

Position	7	6	5	4	3	2	1	0
Name	DPL0							
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Register 3-3 DPL1 – Data Pointer Low Byte

Position	7	6	5	4	3	2	1	0
Name	DPL1							
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Register 3-4 DPH0 – Data Pointer High Byte

Position	7	6	5	4	3	2	1	0
Name	DPH0							
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Register 3-5 DPH1 – Data Pointer High Byte

Position	7	6	5	4	3	2	1	0
Name	DPH1							
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

The data pointers (DPTR0 and DPTR1) are used to assign a memory address for the MOVX instructions. This address can point to a MOVX RAM location. Two pointers are useful when moving data from one memory area to another. The user can select the active pointer through a dedicated SFR bit (DPSEL: DPCON.0), or can activate an automatic toggling feature for altering the pointer selection (DPTSL: DPCON.2). An additional feature, if selected, provides automatic incrementing or decrementing of the current DPTR.

Data pointer increment/decrement bits DPID0 (DPCON.5) and DPID1 (DPCON.4) define how the INC DPTR instruction functions in relation to the active DPTR.

The CW6631A offers a programmable option that allows any instructions related to data pointer to toggle the DPSEL bit automatically. This option is enabled by setting the toggle-select-enable bit (DPTSL) to logic 1.

Once enabled, the DPSEL bit is automatically toggled after the execution of one of the following 5 DPTR related instructions:

MOVC A, @A+DPTR

MOVX A, @DPTR

MOVX @DPTR, A

INC DPTR

MOV DPTR, #data16

The CW6631A also offers a programmable option that automatically increases (or decreases) the contents of the selected data pointer by 1 after the execution of a DPTR-related instruction. The actual function (increment or decrement) is dependent on the setting of the DPAID bits. This option is enabled by setting the automatic increment/decrement enable (DPAID: DPCON.3) to a logic 1 and is affected by one of the following 3 DPTR-related instructions.

DPTR-related instructions are:

MOVC A, @A+DPTR

MOVX A, @DPTR

MOVX @DPTR, A

Register 3-6 SP – Stack Pointer Low Byte

Position	7	6	5	4	3	2	1	0
Name	SP							
Default	0	0	0	0	0	1	1	1
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Register 3-7 SPH – Stack Pointer High Byte

Position	7	6	5	4	3	2	1	0
Name	SPH							
Default	0	0	1	1	1	1	1	1
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

In a standard 8051, there is only an 8-bit stack pointer (SP). It can only use the internal 256 byte data memory as stack memory. To increase the stack space for more complex application, CW6631A supports a 16-bit extend stack pointer, it can use both internal data RAM and the 20K byte on-chip SRAM as stack memory. There are 2 registers for stack control.

Register 3-8 PSW – Processor Status Word

Position	7	6	5	4	3	2	1	0
Name	CY	AC	EC	RS1	RS0	OV	EZ	P
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

CY: Carry Flag**AC:** Auxiliary carry flag**EC:** Extern instruction Carry flag**RS1, RS0:** Register bank select

00 = bank0

01 = bank1

10 = bank2

11 = bank3

OV: Overflow flag

EZ: Extern instruction zero flag

P: Odd parity check of ACC

0 = There are even number of '1' bits in ACC

1 = There are odd number of '1' bits in ACC

Register 3-9 SPMODE – Special mode

Position	7	6	5	4	3	2	1	0
Name	SINT0	SINT1	PWRUP	RAM2CEM	DACRAMCEM	DECRAMCEM	IRAMCEM	IROMCEM
Default	0	0	1	1	1	1	1	1
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

SINT0: Software 0 interrupts pending

0 = No software 0 interrupt

1 = Software 0 interrupt

SINT1: Software 1 interrupts pending

0 = No software 1 interrupt

1 = Software 1 interrupt

PWRUP: System power up flag

0 = CPU writes 0 to PWRUP.

1 = System power up or CPU writes 1 to PWRUP.

RAM2CEM: RAM2 CE mode control

0 = Always stay at 0

1 = Normal

DACRAMCEM: DAC RAM CE mode control

0 = Always stay at 0

1 = Normal

DECRAMCEM: DECRAM CE mode control

0 = Always stay at 0

1 = Normal

IRAMCEM: IRAM CE mode control

0 = Always stay at 0

1 = Normal

IROMCEM: IROM CE mode control

0 = Always stay at 0

1 = Normal

Register 3-10 SPMODE1 – Special mode 1

Position	7	6	5	4	3	2	1	0
Name	SDADCADOUTEN	SDADCIDIEN	SPI1_MAP	INTADR_SEL	PAPAMODE	SPIINITMODE	SBCDEC_MEN	MP3DEC_MEN
Default					0	0	1	1

Access	R/W	R/W	R/W	R/W	RO	RO	R/W	R/W
--------	-----	-----	-----	-----	----	----	-----	-----

SDADCADOUTEN: SDADC analog data out enable

0 = disable

1 = enable

SDADCDIEN: SDADC digital data input enable

0 = disable

1 = enable

SPI1_MAP: SPI1 port mapping

0 = Select P04, P05, P06

1 = Select P30, P31, P32

INTADR_SEL: interrupt address select

0 = depend on DPCON IA

1 = 0x2000

PAPAMODE : papa mode

0 = normal mode

1 = Parallel mode

SPIINITMODE : SPI Flash initial mode

0 = normal mode

1 = SPI initial mode

SBCDEC_MEN: SBC decoder module enables

0 = Disable

1 = Enable

MP3DEC_MEN: MP3 decoder module enables

0 = Disable

1 = Enable

Note: SPMODE1[1:0] register can be write to "0", but can't be write to "1" after writing "0".

Register 3-11 MEMCON – Memory Mapping Configure

Position	7	6	5	4	3	2	1	0
Name						CC1		CC0
Default	0	0	0	0	0	0	0	0
Access	WO	WO	RO	R/W	R/W	R/W	R/W	R/W

CC0: MIX_CODE2 mapping

0 = IROM32 map to address 0x4000~0x6fff

1 = SRAM2 map to address 0x4000~0x6fff

CC1: MIX_CODE3 mapping

00 = IROM11 map to address 0xc000~0xffff

01 = IROM12 map to address 0xc000~0xffff

10 = IROM13 map to address 0xc000~0xffff

11 = IROM31 map to address 0xc000~0xffff

Register 3-12 IE0 – Interrupt Enable 0

Position	7	6	5	4	3	2	1	0
Name	EA	IE06	IE05	IE04	IE03	IE02	IE01	IE00
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

EA: Global interrupt enable

0 = Disable

1 = Enable

IE06: USB SOF interrupt enable

0 = Disable

1 = Enable

IE05: Huffman/UART1 overflow interrupt enable

0 = Disable

1 = Enable

IE04: MP3 decoder and encoder interrupt enable

0 = Disable

1 = Enable

IE03: Timer2 interrupt enable

0 = Disable

1 = Enable

IE02: Timer1 interrupt enable

0 = Disable

1 = Enable

IE01: SINT1/AGC interrupt enable

0 = Disable

1 = Enable

IE00: SINT0 interrupt enable

0 = Disable

1 = Enable

Register 3-13 IE1 – Interrupt Enable 1

Position	7	6	5	4	3	2	1	0
Name	IE17	IE16	IE15	IE14	IE13	IE12	IE11	IE10
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

IE17: SPI1 interrupt enable

0 = Disable

1 = Enable

IE16: RTCC/UART0/UART1/LVD/WDT interrupt enable

0 = Disable

1 = Enable

IE15: Timer0 interrupt enable

0 = Disable

1 = Enable

IE14: Timer 3 interrupt enable

0 = Disable

1 = Enable

IE13: SPI interrupt enable

0 = Disable

1 = Enable

IE12: Port interrupt enable

0 = Disable

1 = Enable

IE11: SDC interrupt enable

0 = Disable

1 = Enable

IE10: USB control interrupt enable

0 = Disable

1 = Enable

Register 3-14 IPH0 – Interrupt Priority high 0

Position	7	6	5	4	3	2	1	0
Name	IPH07	IPH06	IPH05	IPH04	IPH03	IPH02	IPH01	IPH00
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Register 3-15 IP0 – Interrupt Priority 0

Position	7	6	5	4	3	2	1	0
Name	IP07	IP06	IP05	IP04	IP03	IP02	IP01	IP00
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

IPH07, IP07: Watch Dog interrupt Priority select

11 = level 3 highest priority

10 = level 2

01 = level 1

00 = level 0 lowest priority

IPH06, IP06: USB SOF interrupts priority

11 = level 3 highest priority

10 = level 2

01 = level 1

00 = level 0 lowest priority

IPH05, IP05: Huffman interrupt priority

11 = level 3 highest priority

10 = level 2

01 = level 1

00 = level 0 lowest priority

IPH04, IP04: MP3 decoder interrupts priority

11 = level 3 highest priority

10 = level 2

01 = level 1

00 = level 0 lowest priority

IPH03, IP03: Timer2 interrupt priority

11 = level 3 highest priority

10 = level 2

01 = level 1

00 = level 0 lowest priority

IPH02, IP02: Timer1 interrupt priority

11 = level 3 highest priority

10 = level 2

01 = level 1

00 = level 0 lowest priority

IPH01, IP01: SINT1 interrupt priority

11 = level 3 highest priority

10 = level 2

01 = level 1

00 = level 0 lowest priority

IPH00, IP00: SINT0 interrupt priority

11 = level 3 highest priority

10 = level 2

01 = level 1

00 = level 0 lowest priority

Register 3-16 IPH1 – Interrupt Priority high 1

Position	7	6	5	4	3	2	1	0
Name	IPH17	IPH16	IPH15	IPH14	IPH13	IPH12	IPH11	IPH10
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Register 3-17 IP1 – Interrupt Priority 1

Position	7	6	5	4	3	2	1	0
Name	IP17	IP16	IP15	IP14	IP13	IP12	IP11	IP10
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

IPH17, IP17: SPI1 interrupt priority

11 = level 3 highest priority

10 = level 2

01 = level 1

00 = level 0 lowest priority

IPH16, IP16: RTCC/UART/LVD/WDT interrupt priority

11 = level 3 highest priority

10 = level 2

01 = level 1

00 = level 0 lowest priority

IPH15, IP15: Timer0 interrupt priority

11 = level 3 highest priority

10 = level 2

01 = level 1

00 = level 0 lowest priority

IPH14, IP14: Timer 3 interrupts priority

11 = level 3 highest priority

10 = level 2

01 = level 1

00 = level 0 lowest priority

IPH13, IP13: SPI interrupt priority

11 = level 3 highest priority

10 = level 2

01 = level 1

00 = level 0 lowest priority

IPH12, IP12: Port interrupts priority

11 = level 3 highest priority

10 = level 2

01 = level 1

00 = level 0 lowest priority

IPH11, IP11: SDC interrupt priority

11 = level 3 highest priority

10 = level 2

01 = level 1

00 = level 0 lowest priority

IPH10, IP10: USB control interrupts priority

11 = level 3 highest priority

10 = level 2

01 = level 1

00 = level 0 lowest priority

4 Reset Generation

4.1 Power-on Reset (POR)

CW6631A provides an on-chip Power-On-Reset (POR) circuit to detect power-on and to reset internal logic before VDD reaches the pre-determined POR threshold voltage. When VDD=1.2V, the POR threshold voltage is set to be about 0.7V~0.9V.

Sometimes, when the VDD is power-off and quickly power-on again, there might be cases that the POR will work improperly and internal reset might not be generated. For this reason, CW6631A POR circuit incorporates an internal self-reset module to discharge PORB output during power-off to ensure each power cycle will work properly.

However, it is also highly recommended user should have a long time between power-off and next power-on to ensure proper start-up. The time depends on actual system board environment and how much decoupling capacitors between power and ground. User has to take into account this effect during board level design.

Figure 4-1 illustrates the power-on and reset signals waveform during proper power-on. Internally, there is TPOR and TRC time for both the POR circuit and the internal counter. TPOR is the time for the POR circuit to stay at zero voltage until it reaches VPOR and the time varies for different VDD rise-up time. It can be assumed to be about 2/3 of the VDD rise-up time. TRC is the time for internal counter to count 4ms using internal RC-oscillator when the counter sees a high logic from PORB signal. As a result, the overall internal reset time is the sum of TPOR and TRC. Such a long time is required to ensure the Power is stable for system use. It also ensures all internal logics are properly reset.

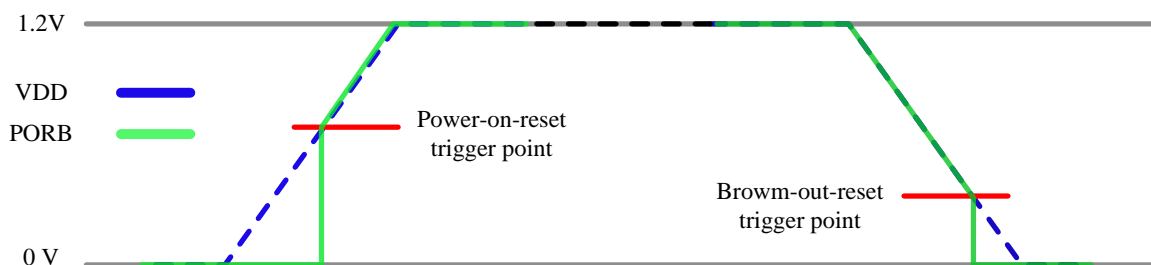


Figure 4-1 Power on reset

4.2 System Reset

All reset signals are OR'ed together inside the device to generate an overall system reset to reset the chip. Once reset, the program memory address is reset to 8000h, which is the start address of the Normal Mode. *Figure 4-2* illustrates the reset sources.

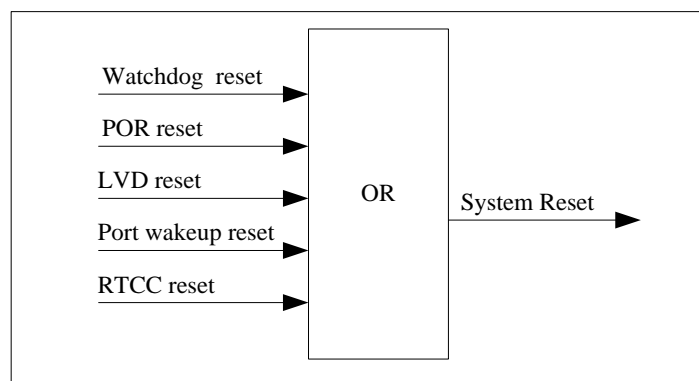


Figure 4-2 Reset Sources

4.2.1 LVD

CW6631A provides 4 levels programmable Low Voltage Detector (LVD) for user to detect VDDLDO power supply voltage or external pin voltage multiplexed with GPIO P3.3. It is for doing so since VDDLDO is the input voltage source for on-chip Low-Drop-Out regulator (LDO) and that supplies power to internal VDDCORE. User for such reason can momentarily monitor the VDDLDO power if externally connects to some batteries and detect if external power source starts dropping to a level that CW6631A LDO cannot tolerate and can do proper actions in the system program.

LVD can also be used to monitor external voltage source through the GPIO P3.3 to enhance programmability for different voltage levels. One of the examples can be used to monitor external power sources or batteries voltage or some voltages related to say pressure or temperature. It is there to provide a simple interface compared to ADC since ADC requires more programming space and procedures to detect precise voltage level. If user requires un-precise voltage detection without fine voltage range, LVD will be a good choice compared to ADC measurement. *Table 4-1* illustrates different voltage detection levels.

Remark:

- When LVD_ENB is enabled, there is approximately 100us for the band-gap and the comparator to be stable before the end-user can use it as low voltage detection. During the time, LVD_OEB has to be H in order to disable the LVD output with possibly fluctuating signal level.
- Different power supply falling time will affect the voltage detection. It is recommended that the power supply falling time should be larger than 1ms for stable low voltage detection.

Upon detection occurs, interrupt can be generated if LVD interrupt is enabled, or, CW6631A can undergo reset if interrupt is disabled.

Note that the detection is slightly dependent on power supply falling rate and noise fluctuation during power drop may alter the detection results. For this reason, internally the comparator has about 150mV hysteresis voltage level defined as $V_{HYS} = V_{LVDR} - V_{LVDS}$ to filter out the noise may occur. Also, the detection level may have a maximum of 100mV difference compared to the value stated in [Table 4-1](#)

Table 4-1 LVD level setting

BORS[3:0]	Detected VDDLDO V	BORS[3:0]	Detected VDDLDO V
4'b0000	2.200	4'b1000	3.267

BORS[3:0]	Detected VDDLDO V	BORS[3:0]	Detected VDDLDO V
4'b0001	2.333	4'b1001	3.400
4'b0010	2.467	4'b1010	3.533
4'b0011	2.600	4'b1011	3.667
4'b0100	2.733	4'b1100	3.800
4'b0101	2.867	4'b1101	3.933
4'b0110	3.000	4'b1110	4.067
4'b0111	3.133	4'b1111	4.200

For the best operation, below shows a recommended operation for the LVD.

1. Select either VDDLDO or external pin to be monitored. Set VD1_ENB = 0 for VDDLDO or VD2_ENB = 0 for external pin
2. Select the detection voltage by setting bits BORS[3:0]
3. Enable the LVD by setting LVD_ENB = 0
4. Wait for at least 30us for the internal band-gap and comparator to become stable
5. Enable the LVD output by setting LVD_OEB = 0
6. The EX_PIN detect voltage must be less than VDDIO

Register 4-1 LVDCON– LVD control

Position	7	6	5	4	3	2	1	0
Name	LVDFIF	LVDRSTEN		LVDOE				
Default	0	1	0	0	1	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

LVDFIF: LVD interrupt pending bit.

0 = When LVD threshold not detect. Cleared by writing a 0 to it

1 = When LVD threshold is detected

LVDRSTEN: LVD Reset enable bit.

0 = LVD Reset is disabled

1 = LVD is enabled

LVDOE: LVD output enable bit. Low active

0 = LVD output is enabled

1 = LVD output is disabled

4.2.2 RTCC Reset

CW6631A can be reset by RTCC second and alarm interrupt when IRTSTEN bit in RTCON is set to 1.

4.2.3 Watchdog Reset

If Watchdog timer is enabled, and WDTCON [5] is not written by 1 within watchdog overflow time period, CW6631A will be reset by Watchdog overflow.

4.2.4 Port Wakeup Reset

During SLEEP mode, port wakeup event will cause CW6631A reset.

4.3 Clock System

4.3.1 Clock Control

CW6631A embeds 32K/4M/12M/24M OSC internal oscillator circuits. External crystal is needed to generate a clock source. One internal PLL can generate 48MHz from the crystal clock source. One internal RC oscillator is also embedded.

To make sure the USB module operate properly, the USB clock must set to be 48MHz. In this case, system clock can be 48 MHz or 24MHz.

Register 4-2 PCON0 – Power control 0

Position	7	6	5	4	3	2	1	0
Name	DRAMCEN	IRAMCEN	IROMCEN	RAM2CEN	IRCEN	IDLE	HOLD	SLEEP
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

DRAMCEN: DECRAM clock enable

0 = Enable

1 = Disable

IRAMCEN: IRAM clock enable

0 = Enable

1 = Disable

IROMCEN: IROM clock enable

0 = Enable

1 = Disable

RAM2CEN: RAM2 clock enable

0 = Enable

1 = Disable

IRCEN: IR clock enable

0 = Enable

1 = Disable

IDLE: IDLE mode

0 = Disable

1 = Enable IDLE mode

HOLD: HOLD mode

0 = Disable

1 = Enable HOLD mode

SLEEP: SLEEP mode

0 = Disable

1 = Enable SLEEP mode

Register 4-3 PCON1 – Power control 1

Position	7	6	5	4	3	2	1	0
Name	DACCEN	MP3CEN	Reserved	TMRCEN	UARTCEN	SDCCEN	FFTCEN	SPICEN
Default	1	0	0	0	0	0	1	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

DACCEN: DAC clock enable

0 = Enable

1 = Disable

MP3CEN: MP3 decoder clock enable

0 = Enable

1 = Disable

TMRCEN: Timer clock enable

0 = Enable

1 = Disable

UARTCEN: UART clock enable

0 = Enable

1 = Disable

SDCCEN: SDC clock enable

0 = Enable

1 = Disable

FFTCEN: FFT/IFFT clock enable

0 = Enable

1 = Disable

SPICEN: SPI clock enable, SPI1/SPI0 should enable

0 = Enable

1 = Disable

Register 4-4 PCON2 – Power control 2

Position	7	6	5	4	3	2	1	0
Name	--	USBCEN	TSCLK_OUT_EN	EMICEN	RTCCEN	WDTCCEN	LVDCEN	ADCCEN
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

USBCEN: USB clock enable

0 = Enable

1 = Disable

TSCLK_OUT_EN: RC or PLL clock output enables

0 = Disable

1 = Enable

EMICEN: EMI clock enable

0 = Enable

1 = Disable

RTCCEN: RTCC clock enable

0 = Enable

1 = Disable

WDTCCEN: WDT clock enable

0 = Enable

1 = Disable

LVDCEN: LVD clock enable

0 = Enable

1 = Disable

ADCCEN: ADC clock enable

0 = Enable

1 = Disable

Register 4-5 PCON3 – Power control 3

Position	7	6	5	4	3	2	1	0
Name	XOSC32KEN	XOSC12MEN	BASSCEN	AUALUEN	reserved	AGCEN	RCEN	SYS_PLL_SEL
Default	0	0	1	1	1	1	1	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

XOSC32KEN: XOSC 32K enable

0 = Disable

1 = Enable

XOSC12MEN: XOSC 12M enable

0 = Disable

1 = Enable

BASSCEN: Bass clock enable

0 = Enable

1 = Disable

AUALUEN: Audio clock enable

0 = Disable

1 = Enable

AGCEN: AGC clock enable

0 = Enable

1 = Disable

RCEN: RC enable bit

0 = Disable

1 = Enable

SYS_PLL_SEL: system PLL clock select

0 = PLL1 48MHz

1 = PLL2 49.152 MHz

Register 4-6 CLKCON – Clock control

Position	7	6	5	4	3	2	1	0
Name	Reserved	RCSEL		WDTCSSEL	RTCCS		SCSEL	
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

RCSEL: RC frequency select

00 = RC 512K

01 = RC 32K

10 = RC 1M

11 = RC 4M or XOSC26M controlled by CLKCON2[3]

WDTCSSEL: WDT clock section

0 = Internal 32 KHz RC oscillator output

1 = External 32 KHz or 12MHz crystal oscillator controlled by CLKCON2 [6] and CLKCON2 [7] as shown in *Figure 4-3*

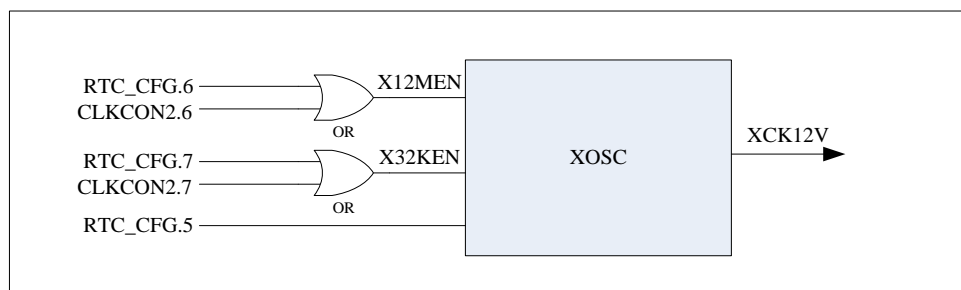


Figure 4-3 Source of XCK12V

RTCCS: RTCC clock source select

00 = External 32 KHz or 12MHz crystal oscillator controlled by CLKCON2 [6] and CLKCON2 [7] as shown in *Figure 4-3*

01 = Internal 32 KHz RC oscillator output

10 = Select 32 KHz clock source derived from external 12MHz crystal oscillator

11 = Reserve

SCSEL: System clock select

00 = Internal 512 KHz RC oscillator output

01 = External 32 KHz or 12MHz crystal oscillator controlled by PCON3 [5]

10 = PLL 48/24/16/12 MHz output, controlled by CLKCON1 [1:0]

11 = Reserve

Register 4-7 CLKCON1 – Clock control 1

Position	7	6	5	4	3	2	1	0
Name	ATCLKSEL		---	DECDIV	SYSDIV		PLLDIVSEL	
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

ATCLKSEL: Audio clock select

00 = Select external 12MHz crystal oscillator invert

01 = Select external 12MHz crystal oscillator

10 = Select PLL 24MHz output invert

11 = Select PLL 24MHz output

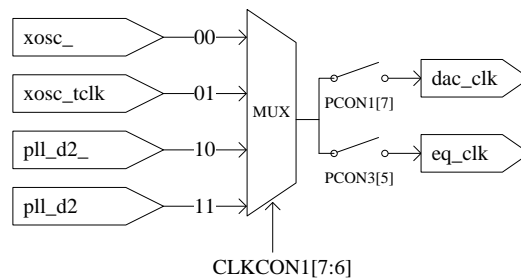


Figure 4-4 DAC clock select figure

DECDIV: Decoder clock divide 2 from system clock

0 = Disable

1 = Enable

SYSDIV: System clock divide from clock source

00 = System clock source

01 = Divided by 2 from system clock source

10 = Divided by 4 from system clock source

11 = Divided by 8 from system clock source

PLLDIVSEL: PLL output divide select

00 = Select 48MHz output

01 = Select 24MHz output

10 = Select 16MHz output

11 = Select 12MHz output

Register 4-8 CLKCON2 – Clock control 2

Position	7	6	5	4	3	2	1	0
Name	Reserved		Reserved		TSCLK_OUT_SEL	IR32K_SEL	IR_CLK_SEL	
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

TSCLK_OUT_SEL: RC or PLL clock output select

0 = RC clock output

1 = 26MHz XOSC from BT

IR32K_SEL: IR digital model work at 32K clock

0 = Work at 1M clock

1 = Work at 32K clock

IR_CLK_SEL: ir_clk sel divide select

00 = 1MHz PLL

01 = 1MHz RC

10 = External 32 KHz or 12MHz crystal oscillator controlled by CLKCON2 [6] and CLKCON2 [7] as shown in *Figure 4-3*

11 = 1MHz div form XOSC26M

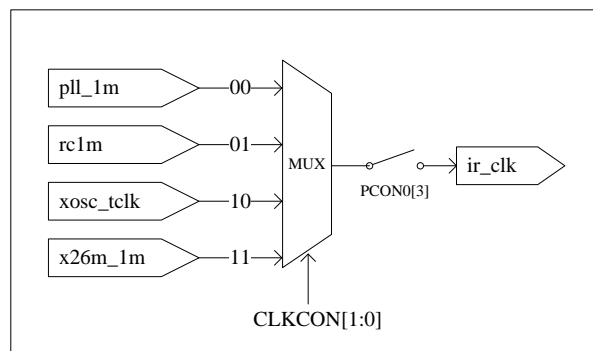


Figure 4-5 IR clock select figure

4.3.2 Clock Gating

CW6631A provides comprehensive clock gating options for eliminating power-wasting activities.

4.3.3 Phase Lock Loop (PLL)

CW6631A provides one on-chip Phase Locked Loop (PLL 48M) clock generators. The PLL has reference clock from external 32 KHz/4M/12 M crystal oscillators to provide a stable reference clock and the reference clock is multiplied to provide the final PLL output.

Register 4-9 PLLCON – PLL Configuration

Position	7	6	5	4	3	2	1	0
Name	SDADCLKEN	Reserved	SDADCCLK_SEL		PLL12DREF_SEL		PLL1 DREF_SEL	
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

PLL1AREF_SEL: PLL1 input reference clock digital select

00 = XOSC

01 = RCOSC

10 = RCOSC div

11 = Reserved

PLL2AREF_SEL: PLL2 input reference clock digital select

00 = XOSC

01 = RCOSC

10 = PLL1 div

11 = Reserved

SDADCCLK_SEL: SDADC clock select

00 = XOSC inv

01 = XOSC

10 = PLL2 div2 inv

11 = PLL2

SDADCEN: SDADC clock enable

0 = disable

1 = enable

Register 4-10 PLL1CON – PLL1 Configuration

Position	7	6	5	4	3	2	1	0
Name	Reserved	Reserved	PLL1 AREF_SEL		X12EN	PLL1DEN32K	PLL1DEN	PLL1AEN
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

PLL1AEN: PLL analog module enables

0 = Disable

1 = Enable

PLL1DEN: PLL digital module enables

0 = Disable

1 = Enable

When change the divider, also need write 1 to PLLDEN

PLL1DEN32K: PLL digital 32K enable

0 = disable

1 = enable

X12EN: XOSC 12M 374 divider enable bit

0 = Disable

1 = Enable

PLL1AREF_SEL: PLL input reference clock analog select

00 = 12M XOSC

01 = 4M XOSC

10 = 32K XOSC

11 = 32K XOSC

Register 4-11 PLL1DIV – PLL1 clock div for PLL2

Position	7	6	5	4	3	2	1	0
----------	---	---	---	---	---	---	---	---

Name	PLL1DIV							
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

PLL1DIV Clock = 48MH/PLL1DIV;

Register 4-12 PLL1INT – PLL1 integer low

Position	7	6	5	4	3	2	1	0
Name	PLL1INT							
Default	0	0	1	0	0	1	1	1
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

PLL1INT = int(60MHz/pll1_refclock)

Register 4-13 PLL1FRACH – PLL1 fraction high

Position	7	6	5	4	3	2	1	0
Name	FRACH							
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Register 4-14 PLL1FRACL – PLL1 fraction low

Position	7	6	5	4	3	2	1	0
Name	FRACL							
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

When the fraction is less than 0.25, set FOVER=1, and fraction = (fraction+1)/2, integer = (integer-1)

When the fraction is more than 0.80, set FOVER=1, and fraction = fraction/2, integer = integer

FRAC = fraction*65535;

Register 4-15 PLL2CON – PLL2 Configuration

Position	7	6	5	4	3	2	1	0
Name	Reserved	Reserved	PLL2 AREF_SEL		PLL1_DIVEN	PLL2DEN32K	PLL2DEN	PLL2AEN
Default	0	0	1	0	0	1	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

PLL2AEN: PLL2 analog module enables

0 = Disable

1 = Enable

PLL2DEN: PLL2 digital module enables

0 = Disable

1 = Enable

When change the divider, also need write 1 to PLL2DEN

PLL2DEN32K: PLL2 digital 32K enable

0 = disable

1 = enable

PLL1_DIVEN: PLL1 divide enable

0 = disable

1 = enable

PLL2AREF_SEL: PLL2 input reference clock analog select

00 = 12M XOSC

01 = 4M XOSC

10 = 32K XOSC

11 = 32K XOSC

Register 4-16 PLL2INTH – PLL2 integer high

Position	7	6	5	4	3	2	1	0
Name	PLL2INT[11:8]							
Default	0	0	0	0	1	0	1	1
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Register 4-17 PLL2INTL – PLL2 integer low

Position	7	6	5	4	3	2	1	0
Name	PLL2INT[7:0]							
Default	1	0	1	0	1	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

$PLL2INT = \text{int}(98.304\text{MHz}/pll2_refclock)$

Register 4-18 PLL2FRACH – PLL2 fraction high

Position	7	6	5	4	3	2	1	0
Name	FRACH							
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Register 4-19 PLL2FRACL – PLL2 fraction low

Position	7	6	5	4	3	2	1	0
Name	FRACL							
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

When the fraction is less than 0.25, set FOVER=1, and fraction = (fraction+1)/2, integer = (integer-1)

When the fraction is more than 0.80, set FOVER=1, and fraction = fraction/2, integer = integer

$FRAC = \text{fraction} * 65535$

User guide:

1. PLL1 frequency division

PLL1 input reference clock is f_0 (from RC or OSC), its internal dividing clock is 60M, frequency dividing ratio is $60M/f_0$.

Clock divide ratio consist of integer and decimal, the default value of integer part is 1831 (default reference clock is 32.768k), the default value of decimal part is 0 (only integral frequency division this time).

If $f_0=32.768k$, frequency dividing ratio is 1831, decimal fraction part set 0.

If $f_0=12M$, frequency dividing ratio is 5, decimal fraction part set 0.

If $f_0=4M$, frequency dividing ratio is 15, decimal fraction part set 0.

2. If frequency dividing ratio is 58.a, then integer set 58, decimal fraction is $a*65535$.
3. PLL2 same as PLL1

5 Low Power Management

5.1 Power Saving Mode

CW6631A device has the low power management mode that can help reducing power consumption when the device does not require intensive CPU resources and speed. There are four low power modes available: SLEEP mode, Hold mode, IDLE mode and power down mode.

5.1.1 Sleep Mode

SLEEP mode is an ultimate power reduction mode that will stop all the clock sources, and all the memory chip select signals are disabled to further reduce power consumption. However, before entering sleep mode, all peripherals should be disabled separately, especially those analog peripherals and memory, unless those peripherals will stop themselves if no clock source is applied to the peripherals.

Note: Before Entering SLEEP mode, the system clock is recommended to change back to oscillator clock as the system clock.

To enter SLEEP mode, user need to write a '1' to SLEEP register (Bit0 of PCON0).

During SLEEP mode, the device can be wake up by either external port wakeup reset or watchdog reset or RTCC reset.

After exit SLEEP mode by wakeup, the device will be reset.

SLEEP mode will enable DECRAM and IRAM and system clock automatically.

5.1.2 Hold Mode

HOLD mode will stop the clock from entering to system. The system clock is gated with the HOLD mode control. Once enter HOLD mode, clock to the system logic halts. Therefore, there will be no clock switching entering the system logic so that power consumption is minimized due to no AC switching. However, the clock sources are not disabled and they are still running. This allows the clock to be resumed in real time without waiting for the PLL to lock again. Watchdog interrupt, RTCC interrupt, Port interrupt and all reset event will cause system to exit HOLD mode.

TO enter HOLD mode, user need to write a '1' to HOLD register (Bit1 of PCON0).

When wakeup from HOLD Mode by port or RTCC, if interrupt is enabled, CW6631A enters corresponding interrupt service subroutine (ISR), else CW6631A will execute the instruction following HOLD.

When wakeup from HOLD Mode by watchdog, if watchdog reset enable, CW6631A will be reset, else if watchdog interrupt is enabled, CW6631A will enter watchdog's ISR. Else CW6631A will execute the instruction following HOLD.

5.1.3 Idle Mode

IDLE mode will stop the clock from entering to the CPU. The CPU clock is gated with the IDLE mode control. Once enter IDLE mode, clock to the CPU logic halts. Therefore, there will be no clock switching entering the CPU logic so CPU power consumption is minimized.

All interrupt sources will cause system to exit IDLE mode, which include all peripheral interrupt.

TO enter IDLE mode, user need to write a '1' to IDLE register (Bit2 of PCON0).

When exit IDLE mode, CW6631A will enter interrupt service subroutine if EA is enable. If EA is disabled, the instruction next to IDLE will be executed.

5.1.4 Power Down Mode

Power Down mode will disable core 1.2V and VDDIO 3.3V power, all the IO state, RAM, MROM and logic (except for IRTCC) will be power off. The content in RAM and logic disappears, should be initial after wake up.

Enter power down mode:

- 1) Disable the entire analog model
- 2) Select wake up source in WK_EN
- 3) Disable RC, RVDD, VDD1P8, VDD3P3, PMU, in PWRCON (RTC power field); RCEN, RVDD_EN, DVDD_EN, VDDIO_EN, PMU_EN

Power down mode wake up source:

- 1) RTC alarm wake up
- 2) RTC WKO pin wake up
- 3) RTC every minute wake up
- 4) RTC every day wake up

NOTE: After exit Power Down mode by wakeup, the device will be reset.

5.2 Power Supply

CW6631A provides two on-chip low drop-out regulators (LDO) to convert from 5V to 3.3V, 1.5V to 1.2V for internal core power use. It is there to provide high power supply noise rejection and also to minimize power consumption. LDO is always enabled.

CW6631A also provides Build-in buck converter, DC-DC 5V to 1.5V

To provide a more stable and reliable power source to internal core logic, it is recommended to add frequency compensation through external component.

Note:

- The recommended value for L0 is 10 uH.
- The recommended value for C0 is 10 uF.
- The recommended value for C1 is 10 uF.
- The recommended value for C2 is 10 uF.
- The recommended value for C3 is 10 uF.
- L0, Cx should be placed closely to the chip.

LDO enable and current select configure, please refer to "Register 5-x PWRCONx – Power control"

Register 5-1 PWRCON1 – Power control 1

Position	7	6	5	4	3	2	1	0
Name	DB1MODE1	DB1MODE0	DB1TB2	DB1TB1	DB1TB0	DZISEL2	DZISEL1	DZISEL0
Default	0	1	0	0	0	0	0	0

Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
--------	-----	-----	-----	-----	-----	-----	-----	-----

DB1MODE1~0: BUCK mode choose

00 = force PFM mode

01 = force PWM mode

DB1TB2~0: BUCK output adjust 1.25v:output

000: vout=1.25V(default);

001: vout=1.2V

010: vout=1.15V

011: vout=1.1V

100: vout=1.25V

101: vout=1.35V

110: vout=1.32V

111: vout=1.28V

DZISEL2~0: ZERO_de current adjust

000 = 6.67uA

001 = 8.01uA

010 = 9.06uA

011 = 11.819uA

100 = 0.745uA

101 = 2.23uA

110 = 3.708uA

111 = 5.202uA

Register 5-2 PWRCON2 – Power control 2

Position	7	6	5	4	3	2	1	0
Name	reserved	BORS2	BORS1	BORS0	-	DPR_AD1	DPR_AD0	DRINGOFF
Default	0	0	0	0	-	0	0	0
Access	RW	RW	RW	RW	-	RW	RW	RW

DRINGOFF:

DPR_AD1~DPR_AD0: PFM regulator voltage select:

00 = 2.0V

01 = 2.1V

10 = 2.2V

11 = 2.3V

BORS2~BORS0: VDDLDO detection voltage selection (VLVDR/VLVDS V) .

S=000 : 2.26/2.41

S=001 : 2.39/2.54

S=010 : 2.54/2.68

S=011 : 2.66/2.81

S=100 : 2.79/2.96

S=101 : 2.92/3.11

S=110 : 3.06/3.24

S=111 : 3.19/3.39

Register 5-3 PWRCON3 – Power control 3

Position	7	6	5	4	3	2	1	0
Name	V33SEL1	V33SEL0	LVD_OEB	LVD_EN			BGOPEN	BATDET
Default	1	0	0	1			0	0
Access	RW	RW	RW	RW			RW	RW

BATDET: Battery voltage detection enable

1=enable

0=disable

BGOPEN: Bg voltage output enable

1=enable

0=disable

LVD_EN: LVD module enable

1=enable

0=disable

LVD_OEB: LVD output enable

1=enable

0=disable

V33SEL1~ V33SEL0: VDDIO voltage selection

00 = 2.8V

01 = 2.9V

10 = 3.0V

11 = 3.2V

Register 5-4 PWRCON4 – Power control 4

Position	7	6	5	4	3	2	1	0
Name	CURRENTSEL_D1	CURRENTSEL_D0	V18SELR1	V18SELR0	CURRENTSEL_R1	CURRENTSEL_R0	VD2_ENB	VD1_ENB
Default	1	0	1	0	1	0	1	0
Access	RW	RW	RW	RW	RW	RW	RW	RW

VD1_ENB: VDDLDO voltage detection enable

0=enable

1=disable

VD2_ENB: External pin voltage detection enable.

0=enable

1=disable

CURRENTSEL_R1~CURRENTSEL_R0: Modulate 3.3v LDO sleep current**V18SELR1~ V18SELR0:** RF part LDO output voltage selection:

00 = 1.67

01 = 1.75

10 = 1.83 default

11 = 1.91

CURRENTSEL_D1~CURRENTSEL_D0: VDD core LDO amp bias current selection

00 = X1

01 = X2

10 = X3 default

11 = X4

Register 5-5 PWRCON5 – Power control 5

Position	7	6	5	4	3	2	1	0
Name							V18SELD1	V18SELD0
Default								
Access	RW	RW	RW	RW	RW	RW	RW	RW

V18SELD1~ V18SELD0: VDD core part LDO output voltage selection

00 = 1.67

01 = 1.75

10 = 1.83 default

11 = 1.91

6 General Purpose Input/Output (GPIO)

6.1 Overview

The general purpose input/output port (GPIO) provides 30 dedicated general purpose one-bit contacts that can be individually configured as either inputs or outputs. Contacts configured as outputs reflect internal register values, and those configured as inputs can be detected by reading internal registers. All GPIOs are divided into 5 groups: Port0, Port1, Port2, Port3 and Port4 .

6.2 Features

The GPIO includes the following features:

- Drive specific data to output using the data register;
- Control the direction of the signal using the GPIO direction register;
- Enable CPU to sample the status of the corresponding inputs by reading the data register;
- Enable internal pull-up resistor using pull-up resistor control register;
- Select suitable pull-up resistor value;
- Enable internal pull-up resistor using pull-down resistor control register;
- Select suitable pull-down resistor value;
- Select suitable output driving current capability;

There are 5 types of GPIO that can meet the variation of application requirements. [Table 6-1](#) shows the difference between pad types

Table 6-1 Pad types

Type	Driving (mA)		Pull-up resistor (Kohm)			Pull-down resistor (Kohm)				Mode
A	8	24	10	/	/	10	/	/	/	Normal
B	8	24	10	0.2	/	10	0.2	/	/	Normal
C	8	24	10	200	0.5	10	3.3	0.5	/	Normal
D	8	24	10	/	/	10	/	/	/	MUTE
E	/	/	/	/	/	/	/	/	/	Analog

6.3 Function multiplexing

In order to provide more flexible port functions and to minimize pin counts, some of the ports are multiplexed with other peripherals or functions. [Table 6-2](#) illustrates the “Ports multiplexed mapping”.

Several GPIO are multiplexed with analog module. GPIO digital input and output must be disabled when the corresponding analog module is enabled.

Table 6-2 Ports multiplexed mapping

Pins	Func1	Func 2	Func3	Func4	Func5	Func6	Func7	Fun8	Type
P00	AUXL0	UARTRX1		SDDAT1		SPI0DIN2			A
P01	AUXR0	UARTTX1	PORTINT/WKUP0	SDDAT2					A
P02	AUXL1					SPI0DOUT1	TMR1PWM		A
P03	AUXR1					SPI0CLK1	TMR0CAP		A
P04						SPI1DOUT/DIN1			A
P05						SPI1CLK			A
P06			PORTINT/WKUP1			SPI1DIN/SPI0DIN1	TMR0CKI/TMR1CKI	IISDI0	A
P07			PORTINT/WKUP3	Ir_input			TRM1CAP		A
P10					EMIWR				C
P11									C
P12									C
P13	ADC5							IISBCLK0	B
P14	ADC2			SDDAT3		SPI0DOUT2	TMR3CAP/TMR3PWM	IISDO0	A
P15							TMR3CKI		B
P16		BTUART1TX	UARTTX0	Ir_input			TMR2CAP/TMR2PWM	IISREF	A
P17		BTUART1RX					TMR2CKI	IISWS0	B
P20	AUXL2			SDCMD	EMIDAT0				C
P21	AUXR2/ADC1			SDCLK	EMIDAT1				C
P22	ADC3/LVDIN				EMIDAT2			IISDO1	C
P23					EMIDAT3			IISDI1	C
P24					EMIDAT4				C
P25					EMIDAT5	SPI0DIN0/DOUT0		IISBCLK1	C
P26	ADC6				EMIDAT6	SPI0CLK0		IISWS1	C
P27				SDDAT0	EMIDAT7	SPI0DOUT0			C
P30	ADC4			SDCLK		SPI0CLK3			C
P31				SDCMD		SPI0DIN3			C
P32				SDDAT0		SPI0DOUT3/DIN3			C
P33	ADC0			Ir_input	32K/xosc12m	SysClk	TRM1CAP		A
P34		UARTRX0	PORTINT/WKUP2			SPI0CLK2	TMR0PWM		C
P35	MUTE								D
P36									A
P37	GPIO								B
P40				Ir_input		SPI0CLK4			A
P41									A
P42						SPI1DIN1'			A
P43									A
P44	DACL								E
P45	DACR								E

6.4 Port interrupt and wakeup

CW6631A supports Port interrupt and wakeup function.

The PWKEN registers (Wakeup Enable Register) allow Port to cause wakeup.

The PWKEN registers are set to 0Fh upon reset. Clearing bit0-3 in the PWKEN register enables wakeup on corresponding pin. The trigger condition on the selected pin can be either rising edge or falling edge. The WKED register (Wakeup Edge Select) selects the desired transition edge. Setting a bit in WKED register selects the falling edge of the corresponding pin. Resetting the bit selects the rising edge.

Once a valid transition occurs on the selected pin, the WKPND (PWKEN.7~PWKEN.4) register (Wakeup Pending Register) latches the transition in the corresponding bit position. Logic '1' indicates the occurrence of the selected trigger edge on the corresponding Port pins. Upon reset, logic '0' is set to all bits of WKPND.

Note:

1. To Wakeup initialization, to avoid any false signaling to port, the followings would be a recommended procedure for Wakeup initialization:
 - Configure the edge select of Port 0 pins on WKEDG register,
 - Clear the corresponding bits on WKPND Wakeup Pending Register
 - Clear the corresponding bits in the PWKEN registers to enable the wakeup on the corresponding port pins

Figure 2015- Upon exiting the sleep down mode, the Multi-Input Wakeup logic causes full chip reset.

6.5 GPIO Special Function Registers

Register 6-1 P0DIR-P0 direction Register

Position	7	6	5	4	3	2	1	0
Name	P0DIR							
Default	1	1	1	1	1	1	1	1
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

P0xDIR: P0x direction control

0 = Output

1 = Input

Register 6-2 P1DIR-P1 direction Register

Position	7	6	5	4	3	2	1	0
Name	P1DIR							
Default	1	1	1	1	1	1	1	1
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

P1xDIR: P1x direction control

0 = Output

1 = Input

Register 6-3 P2DIR-P2 direction Register

Position	7	6	5	4	3	2	1	0
Name	P2DIR							
Default	1	1	1	1	1	1	1	1
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

P2xDIR: P2x direction control

0 = Output

1 = Input

Register 6-4 P3DIR-P3 direction Register

Position	7	6	5	4	3	2	1	0
Name	P3DIR							
Default	1	1	1	1	1	1	1	1
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

P3xDIR: P3x direction control

0 = Output

1 = Input

Register 6-5 P4DIR-P4 direction Register

Position	7	6	5	4	3	2	1	0
Name	P4DIR							
Default	-	-	1	1	1	1	1	1
Access	-	-	R/W	R/W	R/W	R/W	R/W	R/W

P4xDIR: P4x direction control

0 = Output

1 = Input

Register 6-6 P0 – P0 data register

Position	7	6	5	4	3	2	1	0
Name	P0							
Default	x	x	x	x	x	x	x	x
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

P0[x]: P0x data. Valid when P0x is used as GPIO

0 = P0x is in low state when read and output low at P0x when write

1 = P0x is in high state when read and output high at P0x when write

Register 6-7 P1 – P1 data register

Position	7	6	5	4	3	2	1	0
Name	P1							
Default	x	x	x	x	x	x	x	x
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

P1[x]: P1x data. Valid when P1x is used as GPIO

0 = P1x is in low state when read and output low at P1x when write

1 = P1x is in high state when read and output high at P1x when write

Register 6-8 P2 – P2 data register

Position	7	6	5	4	3	2	1	0
Name	P2							
Default	x	x	x	x	x	x	x	x
Access	W/R	W/R	W/R	W/R	W/R	W/R	W/R	W/R

P2[x]: P2x data. Valid when P2x is used as GPIO

0 = P2x is in low state when read and output low at P2x when write

1 = P2x is in high state when read and output high at P2x when write

Register 6-9 P3 – P3 data register

Position	7	6	5	4	3	2	1	0
Name	P3							
Default	x	x	x	x	x	x	x	x
Access	W/R	W/R	W/R	W/R	W/R	W/R	W/R	W/R

P3[x]: P3x data. Valid when P3x is used as GPIO

0 = P3x is in low state when read and output low at P3x when write

1 = P3x is in high state when read and output high at P3x when write

Register 6-10 P4 – P4 data register

Position	7	6	5	4	3	2	1	0
Name	P4							
Default	-	-	x	x	x	x	x	x
Access	-	-	RO	RO	W/R	W/R	W/R	W/R

P3[x]: P3x data. Valid when P3x is used as GPIO

0 = P3x is in low state when read and output low at P3x when write

1 = P3x is in high state when read and output high at P3x when write

Table 6-3 DRVx register setting

Register	Address	Set bit “x” of PxDRV0 as “1”	Clear bit “x” of PxDRV0 as “0”	Initial value
P0DRV0	R/W	Driving is 24mA	Driving is 8mA	00h
P1DRV0	R/W	Driving is 24mA	Driving is 8mA	00h
P2DRV0	R/W	Driving is 24mA	Driving is 8mA	00h
P3DRV0	R/W	Driving is 24mA	Driving is 8mA	00h
P4DRV0	R/W	Driving	Driving is 8mA	00h

Table 6-4 PUPx register setting

Register	Address	Set bit “x” of PxPU0 as “1”	Clear bit “x” of PxPU0 as “0”	Initial value
P0PU	R/W	Enable pull-up	Disable pull-up	00h

Register	Address	Set bit "x" of PxPU0 as "1"	Clear bit "x" of PxPU0 as "0"	Initial value
P1PU	R/W	Enable pull-up	Disable pull-up	00h
P2PU	R/W	Enable pull-up	Disable pull-up	00h
P3PU	R/W	Enable pull-up	Disable pull-up	00h
P4PU	R/W	Enable pull-up	Disable pull-up	00h

Table 6-5 PDNx register setting

Register	Address	Set bit "x" of PxPD0 as "1"	Clear bit "x" of PxPD0 as "0"	Initial value
P0PD	R/W	Enable pull-down	Disable pull-down	00h
P1PD	R/W	Enable pull-down	Disable pull-down	00h
P2PD	R/W	Enable pull-down	Disable pull-down	00h
P3PD	R/W	Enable pull-down	Disable pull-down	00h
P4PD	R/W	Enable pull-down	Disable pull-down	00h

Register 6–11 P1PUS0– P1 pull up select

Position	7	6	5	4	3	2	1	0
Name	P17PUS0	P16PUS0	P15PUS0	P14PUS0	P13PUS0	P12PUS0	P11PUS0	P10PUS0
Default	0	0	0	0	0	0	0	0
Access	W/R	W/R	W/R	W/R	W/R	W/R	W/R	W/R

Register 6–12 P1PUS1– P1 pull up select

Position	7	6	5	4	3	2	1	0
Name	P17PUS1	P16PUS1	P15PUS1	P14PUS1	P13PUS1	P12PUS1	P11PUS1	P10PUS1
Default	0	0	0	0	0	0	0	0
Access	W/R	W/R	W/R	W/R	W/R	W/R	W/R	W/R

P17PUS1,P17PUS0:

00 = select 10K pull up

01 = select 200Ω pull up

1x = reverse

P16PUS1,P16PUS0:

00 = select 10K pull up

01 = select 500Ω pull up

1x = select 200K pull up

P15PUS1,P15PUS0:

00 = select 10K pull up

01 = select 200Ω pull up

1x = reverse

P14PUS1,P14PUS0:

00 = select 10K pull up

01 = reverse

1x = reverse

P13PUS1,P13PUS0:

00 = select 10K pull up

01 = reverse

1x = reverse

P12PUS1,P12PUS0:

00 = select 10K pull up

01 = select 500Ω pull up

1x = select 200K pull up

P11PUS1,P11PUS0:

00 = select 10K pull up

01 = select 500Ω pull up

1x = select 200K pull up

P10PUS1,P10PUS0:

00 = select 10K pull up

01 = select 500Ω pull up

1x = select 200K pull up

Register 6–13 P2PUS0– P2 pull up select

Position	7	6	5	4	3	2	1	0
Name	P27PUS0	P26PUS0	P25PUS0	P24PUS0	P23PUS0	P22PUS0	P21PUS0	P20PUS0
Default	0	0	0	0	0	0	0	0
Access	W/R	W/R	W/R	W/R	W/R	W/R	W/R	W/R

Register 6–14 P2PUS1– P2 pull up select

Position	7	6	5	4	3	2	1	0
Name	P27PUS1	P26PUS1	P25PUS1	P24PUS1	P23PUS1	P22PUS1	P21PUS1	P20PUS1
Default	0	0	0	0	0	0	0	0
Access	W/R	W/R	W/R	W/R	W/R	W/R	W/R	W/R

P27PUS1,P27PUS0:

00 = select 10K pull up

01 = select 500Ω pull up

1x = select 200K pull up

P26PUS1,P26PUS0:

00 = select 10K pull up

01 = select 500Ω pull up

1x = select 200K pull up

P25PUS1,P25PUS0:

00 = select 10K pull up

01 = select 500Ω pull up

1x = select 200K pull up

P24PUS1,P24PUS0:

00 = select 10K pull up

01 = select 500Ω pull up

1x = select 200K pull up

P23PUS1,P23PUS0:

00 = select 10K pull up

01 = select 500Ω pull up

1x = select 200K pull up

P22PUS1,P22PUS0:

00 = select 10K pull up

01 = select 500Ω pull up

1x = select 200K pull up

P21PUS1,P21PUS0:

00 = select 10K pull up

01 = select 500Ω pull up

1x = select 200K pull up

P20PUS1,P20PUS0:

00 = select 10K pull up

01 = select 500Ω pull up

1x = select 200K pull up

Register 6–15 P3PUS0– P3 pull up select

Position	7	6	5	4	3	2	1	0
Name	P37PUS0	P36PUS0	P35PUS0	P34PUS0	P33PUS0	P32PUS0	P31PUS0	P30PUS0
Default	0	0	0	0	0	0	0	0
Access	W/R	W/R	W/R	W/R	W/R	W/R	W/R	W/R

Register 6–16 P3PUS1– P3 pull up select

Position	7	6	5	4	3	2	1	0
----------	---	---	---	---	---	---	---	---

Name	P37PUS1	P36PUS1	P35PUS1	P34PUS1	P33PUS1	P32PUS1	P31PUS1	P30PUS1
Default	0	0	0	0	0	0	0	0
Access	W/R	W/R	W/R	W/R	W/R	W/R	W/R	W/R

P37PUS1,P37PUS0:

00 = select 10K pull up

01 = select 200Ω pull up

1x = reverse

P36PUS1,P36PUS0:

00 = select 10K pull up

01 = reverse

1x = reverse

P35PUS1,P35PUS0:

00 = select 10K pull up

01 = reverse

1x = reverse

P34PUS1,P34PUS0:

00 = select 10K pull up

01 = select 500Ω pull up

1x = select 200K pull up

P33PUS1,P33PUS0:

00 = select 10K pull up

01 = reverse

1x = reverse

P32PUS1,P32PUS0:

00 = select 10K pull up

01 = select 500Ω pull up

1x = select 200K pull up

P31PUS1,P31PUS0:

00 = select 10K pull up

01 = select 500Ω pull up

1x = select 200K pull up

P30PUS1,P30PUS0:

00 = select 10K pull up

01 = select 500Ω pull up

1x = select 200K pull up

Register 6–17 P1PDS0– P1 pull down select

Position	7	6	5	4	3	2	1	0
Name	P17PDS0	P16PDS0	P15PDS0	P14PDS0	P13PDS0	P12PDS0	P11PDS0	P10PDS0
Default	0	0	0	0	0	0	0	0
Access	W/R	W/R	W/R	W/R	W/R	W/R	W/R	W/R

Register 6–18 P1PDS1– P1 pull down select

Position	7	6	5	4	3	2	1	0
Name	P17PDS1	P16PDS1	P15PDS1	P14PDS1	P13PDS1	P12PDS1	P11PDS1	P10PDS1
Default	0	0	0	0	0	0	0	0
Access	W/R	W/R	W/R	W/R	W/R	W/R	W/R	W/R

P17PDS1,P17PDS0:

00 = select 10K pull down

01 = select 200Ω pull down

1x = reverse

P16PDS1,P16PDS0:

00 = select 10K pull down

01 = select 500Ω pull down

1x = select 330Ω pull down

P15PDS1,P15PDS0:

00 = select 10K pull down

01 = select 200Ω pull down

1x = reverse

P14PDS1,P14PDS0:

00 = select 10K pull down

01 = reverse

1x = reverse

P13PDS1,P13PDS0:

00 = select 10K pull down

01 = reverse

1x = reverse

P12PDS1,P12PDS0:

00 = select 10K pull down

01 = select 500Ω pull down

1x = select 330Ω pull down

P11PDS1,P11PDS0:

00 = select 10K pull down

01 = select 500Ω pull down

1x = select 330Ω pull down

P10PDS1,P10PDS0:

00 = select 10K pull down

01 = select 500Ω pull down

1x = select 330Ω pull down

Register 6–19 P2PDS0– P2 pull down select

Position	7	6	5	4	3	2	1	0
Name	P27PDS0	P26PDS0	P25PDS0	P24PDS0	P23PDS0	P22PDS0	P21PDS0	P20PDS0
Default	0	0	0	0	0	0	0	0
Access	W/R	W/R	W/R	W/R	W/R	W/R	W/R	W/R

Register 6–20 P2PDS1– P2 pull down select

Position	7	6	5	4	3	2	1	0
Name	P27PDS1	P26PDS1	P25PDS1	P24PDS1	P23PDS1	P22PDS1	P21PDS1	P20PDS1
Default	0	0	0	0	0	0	0	0
Access	W/R	W/R	W/R	W/R	W/R	W/R	W/R	W/R

P27PDS1,P27PDS0:

00 = select 10K pull down

01 = select 500Ω pull down

1x = select 330Ω pull down

P26PDS1,P26PDS0:

00 = select 10K pull down

01 = select 500Ω pull down

1x = select 330Ω pull down

P25PDS1,P25PDS0:

00 = select 10K pull down

01 = select 500Ω pull down

1x = select 330Ω pull down

P24PDS1,P24PDS0:

00 = select 10K pull down

01 = select 500Ω pull down

1x = select 330Ω pull down

P23PDS1,P23PDS0:

00 = select 10K pull down

01 = select 500Ω pull down

1x = select 330Ω pull down

P22PDS1,P22PDS0:

00 = select 10K pull down

01 = select 500Ω pull down

1x = select 330Ω pull down

P21PDS1,P21PDS0:

00 = select 10K pull down

01 = select 500Ω pull down

1x = select 330Ω pull down

P20PDS1,P20PDS0:

00 = select 10K pull down

01 = select 500Ω pull down

1x = select 330Ω pull down

Register 6–21 P3PDS0– P3 pull down select

Position	7	6	5	4	3	2	1	0
Name	P37PDS0	P36PDS0	P35PDS0	P34PDS0	P33PDS0	P32PDS0	P31PDS0	P30PDS0
Default	0	0	0	0	0	0	0	0
Access	W/R	W/R	W/R	W/R	W/R	W/R	W/R	W/R

Register 6–22 P3PDS1– P3 pull down select

Position	7	6	5	4	3	2	1	0
Name	P37PDS1	P36PDS1	P35PDS1	P34PDS1	P33PDS1	P32PDS1	P31PDS1	P30PDS1
Default	0	0	0	0	0	0	0	0
Access	W/R	W/R	W/R	W/R	W/R	W/R	W/R	W/R

P37PDS1,P37PDS0:

00 = select 10K pull down

01 = select 200Ω pull down

1x = reverse

P36PDS1,P36PDS0:

00 = select 10K pull down

01 = reverse

1x = reverse

P35PDS1,P35PDS0:

00 = select 10K pull down

01 = reverse

1x = reverse

P34PDS1,P34PDS0:

00 = select 10K pull down

01 = select 500Ω pull down

1x = select 330Ω pull down

P33PDS1,P33PDS0:

00 = select 10K pull down

01 = reverse

1x = reverse

P32PDS1,P32PDS0:

00 = select 10K pull down

01 = select 500Ω pull down

1x = select 330Ω pull down

P31PDS1,P31PDS0:

00 = select 10K pull down

01 = select 500Ω pull down

1x = select 330Ω pull down

P30PDS1,P30PDS0:

00 = select 10K pull down

01 = select 500Ω pull down

1x = select 330Ω pull down

Register 6-23 PIE0 – Port digital input enable control

Position	7	6	5	4	3	2	1	0
Name	PIE07	PIE06	PIE05	PIE04	PIE03	PIE02	PIE01	PIE00
Default	1	1	1	1	1	1	1	1
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

PIE07: P17 digital input enables bit

0 = P17 Input Disabled

1 = P17 Input Enabled

PIE06: P16 digital input enables bit

0 = P16 Input Disabled

1 = P16 Input Enabled

PIE05: P14 digital input enables bit (For ADC2 input)

0 = P14 Input Disabled

1 = P14 Input Enabled

PIE04: P13 digital input enables bit (For ADC5 input)

0 = P13 Input Disabled

1 = P13 Input Enabled

PIE03: P03 Digital Input Enable Bit (For AUXR1)

0 = P03 Input Disabled

1 = P03 Input Enabled

PIE02: P02 Digital Input Enable Bit (For AUXL1)

0 = P02 Input Disabled

1 = P02 Input Enabled

PIE01: P01 Digital Input Enable Bit (For AUXR0)

0 = P01 Input Disabled

1 = P01 Input Enabled

PIE00: P00 Digital Input Enable Bit (For AUXL0)

0 = P00 Input Disabled

1 = P00 Input Enabled

Register 6-24 PIE1 – Port digital input enable control1

Position	7	6	5	4	3	2	1	0
Name	PIE17	PIE16	PIE15	PIE14	PIE13	PIE12	PIE11	PIE10
Default	0	1	1	1	1	1	1	1
Access	RO	R/W	R/W	R/W	R/W	R/W	R/W	R/W

PIE17: P37 Digital Input Enable Bit (For VCMBUF)

0 = P37 digital Input Disabled

1 = P37 digital Input Enabled

PIE16: P35 Digital Input Enable Bit (For UDSW)

0 = P35 digital Input Disabled

1 = P35 digital Input Enabled

PIE15: P33 Digital Input Enable Bit (For ADC0/LVDDDET)

0 = P33 digital Input Disabled

1 = P33 digital Input Enabled

PIE14: P30 Digital Input Enable Bit (For ADC4)

0 = P30 digital Input Disabled

1 = P30 digital Input Enabled

PIE13: P26 Digital Input Enable Bit (For ADC6)

0 = P26 digital Input Enabled

1 = P26 digital Input Disabled

PIE12: P22 Digital Input Enable Bit (For ADC3 input)

0 = P22 digital Input Disabled

1 = P22 digital Input Enabled

PIE11: P21 Digital Input Enable Bit (For AUXR2 or ADC1 input)

0 = P21 digital Input Disabled

1 = P21 digital Input Enabled

PIE10: P20 Digital Input Enable Bit (For AUXL2)

0 = P20 digital Input Disabled

1 = P20 digital Input Enabled

Register 6-25 PMUXCON0 – Port Function MUX control 0

Position	7	6	5	4	3	2	1	0
Name	Reserved	UART1_MAP	SPI0_P4_MAP	SPI0_DO_P25	WKPIN_SEL		SDTWO	P2SDEN
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

UART1_MAP: UART1 port mapping

0 = Select P16, P17

1 = Select Chip Bluetooth

SPI0_P4_MAP: SPI0 port4 mapping

0 = SPI0 clock pin map to P30

1 = SPI0 clock pin map to P40

SPI0_DO_P25: SPI0 DOUT output at P25

0 = Disable

1 = Enable

WKPIN_SEL: Port interrupt/wakeup event 2 sources selection

00 = Select P34

01 = Select DP

10 = Select DM

11 = Select IRTWKO

SDTWO: Dual SD card mode control

0 = only support one SD card plugged in at the same time

1 = support two SD cards plugged in at the same time. P30 is SDCLK shared by these two SD cards.

P2SDEN: SDCCLK, SDCCMD and SDCDAT0 port mapping control

0 = SDCCLK, SDCCMD and SDCDAT0 are mapped to P30, P31 and P32.

1 = SDCCLK, SDCCMD and SDCDAT0 are mapped to P20, P21 and P27

Register 6-26 PMUXCON1 – Port Function MUX control 1

Position	7	6	5	4	3	2	1	0
Name	P07WK_EN	Reserved	WBEDGES	WKPIN0SEL1	Reserved	Reserved	WKPIN1SEL	WKPIN0SEL
Default	1	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

P07WK_EN: P07 wakeup pin3 enable bit

0 = disable

1 = enable

WBEDGES: wire less board wake pin edge selection

0 = falling edge

1 = rising edge

WKPIN0SEL1: wakeup pin0 select bit1

0 = control by WKPIN0SEL

1 = P30

WKPIN1SEL: wakeup pin1 select bit1

0 = P06

1 = BT_CTS

WKPIN0SEL: wakeup pin0 select bit0

0 = P01

1 = BT_CDCLK

Register 6-27 PMUXCON2 – Port Function MUX control 2

Position	7	6	5	4	3	2	1	0
Name	PMUXCON2							
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

PMUXCON2: PORT 2 Wake up enable

0 = disable

1 = enable

Register 6-28 PMUXCON3 – Port Function MUX control 3

Position	7	6	5	4	3	2	1	0
Name	PMUXCON3							
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

PMUXCON3: PORT 3 Wake up enable

0 = disable

1 = enable

Register 6-29 PMUXCON4 – Port Function MUX control 4

Position	7	6	5	4	3	2	1	0
Name	PMUXCON4_74				PMUXCON4_30			
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

PMUXCON4_76: P12/P13/P16/P17 Wake up enable

0 = disable

1 = enable

PMUXCON4_30: P00/P01/P02/P03 Wake up enable

0 = disable

1 = enable

6.5.1 wakeup registers

Register 6-30 PWKEN – Port wakeup enable

Position	7	6	5	4	3	2	1	0
Name	WKPND3	WKPND2	WKPND1	WKPND0	PWKEN3	PWKEN2	PWKEN1	PWKEN0
Default	0	0	0	0	1	1	1	1
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

WKPND3

0 = No INT3 wakeup event occurred

1 = INT3 wakeup event occurred

WKPND2

0 = No INT2/DP/DM/IRTWKO wakeup event occurred

1 = INT2/DP/DM/IRTWKO wakeup event occurred

WKPND1

0 = No INT1 wakeup event occurred

1 = INT1 wakeup event occurred

WKPND0

0 = No INT0 wakeup event occurred

1 = INT0 wakeup event occurred

PWKEN3

0 = Enable INT3 Wakeup

1 = Disable INT3 Wakeup

PWKEN2

0 = Enable INT3/DP/DM/IRTWKO Wakeup

1 = Disable INT3/DP/DM/IRTWKO Wakeup

PWKEN1

0 = Enable INT1 Wakeup

1 = Disable INT1 Wakeup

PWKEN0

0 = Enable INT0 Wakeup

1 = Disable INT0 Wakeup

Note:

1. to enable WKPNDx, set PWKENx to '0'.
2. To clear WKPNDx, write '0' to WKPNDx. WKPNDx will be '0' 2 clocks later after write '0' to WKPNDx.
3. WKPNDx is cleared when PWKENx is '1'.

Register 6-31 PWKEDGE – Port wakeup Event select

Position	7	6	5	4	3	2	1	0
Name	LDOBG0E	SPI0PS1	COSEL		WKEDG3	WKEDG2	WKEDG1	WKEDG0

Default	0	0	0	0	x	x	x	X
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

LDOBGOE: LDO Bandgap output enable

0 = Disable

1 = Enable

SPI0PS1: SPI0 port select 1. See chapter 16 SPI0

COSEL: CLKO sources selection

00 = P3[3]

01 = PLL 12MHz

10 = System clock

11 = XOSCO

WKEDGx: Port interrupt Edge Select

0 = Select rising edge as interrupt trigger event

1 = Select falling edge as interrupt trigger event

6.6 Operation Guide

Port 0 to Port 3 are memory-mapped into the Data Memory addressing space. They are respectively mapped into 80h, 90h, A0h and B0h registers for ports P0, P1, P2 and P3. Writing to a port data register sets the voltage levels of the corresponding port pins that have been configured to operate as outputs. Reading from a data register reads the voltage levels of the corresponding port pins.

As illustrated in Figure 8-1, there are major differences reading the port values when the port is set as input and output. When the port is set as output, the CPU will read the port value from Px register instead of the port pin value. When the port is set as input, the CPU will read the value from port pin directly instead of the port value from Px register. As a result, the user should be very careful when using Read-then-Write instructions to access the ports and change PxDIR before write the output value to Px when using port as output. For example:

Code assembler:

```
ANL P0DIR, #0FEH
```

```
MOV P0, #01h
```

Code C51:

```
P0DIR &= 0Xfe;
```

```
P0 = 0x01;
```

The first instruction in this example configures P00 as output, and then the second instruction writes the Port 0 data register (P0), which controls the output levels of the Port 0 pins, P00 through P07. Figure 8-1 shows the internal hardware structure and configuration registers for each pin of Port 0~3.

7 Timers

7.1 Timer0

Timer0 is an 8-bit timer/counter with a 7-bit prescaler. It can be configured as timer, counter or PWM generator.

7.1.1 Timer0 Features

- 8bits counter
- 7bits pre-scaler
- Counter mode (clock source from system clock or TMR0)
- Capture mode (event source from CAP0)
- PWM mode (PWM signal output to PWM0)

7.1.2 Timer0 Special Function Registers

Register 7-1 TMR0CON – Timer0 control

Position	7	6	5	4	3	2	1	0
Name	T0PND	T0ES	T0M		T0IS	T0PSR		
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

T0PND: Timer0 Pending Flag

0 = Not Pending

1 = Pending

T0ES: Timer0 Capture Mode Edge Select

0 = CAP0 Rising Edge

1 = CAP0 Falling Edge

T0M: Timer0 Mode

00 = Timer0 is disabled

01 = Timer0 is enabled and works in Counter Mode

10 = Timer0 is enabled and works in PWM Mode

11 = Timer0 is enabled and works in Capture Mode

T0IS: Timer0 Increase Source

0 = Select system clock cycle

1 = Select TMR0 rising edge

T0PSR: Timer0 Prescaler

000 = Timer0 counts at every counting source event

001 = Timer0 counts at every 2 counting source events

010 = Timer0 counts at every 4 counting source events

011 = Timer0 counts at every 8 counting source events

100 = Timer0 counts at every 16 counting source events

101 = Timer0 counts at every 32 counting source events

110 = Timer0 counts at every 64 counting source events

111 = Timer0 counts at every 128 counting source events

Register 7-2 TMR0CNT – Timer0 Counter

Position	7	6	5	4	3	2	1	0
Name	TMR0CNT							
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Note: Timer0 will increase in proper condition while it is enabled. It overflows when $TMR0CNT = TMR0PR$, TMR0CNT will be clear to 0x00 when overflow occurs, and the interrupt flag will be set '1' by hardware.

Register 7-3 TMR0PR – Timer0 Period

Position	7	6	5	4	3	2	1	0
Name	TMR0PR							
Default	1	1	1	1	1	1	1	1
Access	WO	WO	WO	WO	WO	WO	WO	WO

Note: The overflow period of the timer is: $T_{inc-source} * T0PSR * (T0PR + 1)$.

Register 7-4 TMR0PWM – Timer0 PWM duty

Position	7	6	5	4	3	2	1	0
Name	TMR0PWM							
Default	x	x	x	x	x	x	x	x
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Note: TMR0PWM is reserved in timer/counter mode. In PWM mode, it is used as duty cycle setting. In capture mode, the value of TMR0CNT will be captured to TMR0PWM when selected event occurs.

7.2 Timer1

Timer1 is a 16-bit timer/counter with a 7-bit prescaler. It can be configured as timer, counter or PWM generator.

7.2.1 Timer1 Features

- 16bits counter
- 7bits pre-scaler
- Counter mode (clock source from system clock or TMR1)
- Capture mode (event source from CAP1)
- PWM mode (PWM signal output to PWM1)

7.2.2 Timer1 Special Function Registers

Register 7-5 TMR1CON0 – Timer1 control 0

Position	7	6	5	4	3	2	1	0
Name	T1ES		T1M		T1CPSEL	T1IS		
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

T1ES: Timer1 Capture Edge Select

00 = CAP1 Rising Edge

01 = CAP1 Falling Edge

1X= CAP1 Rising Edge and Falling Edge

T1M: Timer1 Mode Select

00 = Timer1 is disabled

01 = Timer1 is enabled and works in Counter Mode

10 = Timer1 is enabled and works in PWM Mode

11 = Timer1 is enabled and works in Capture Mode

T1CPSEL: Timer1 capture input pin select

0 = Capture CAP1

1 = Capture IR1

T1IS: Timer1 Increase Source

000 = TMR1 Rising Edge

001 = TMR1 Falling Edge

010 = TMR1 Rising and Falling Edge

011 = External 32 KHz crystal oscillator

1xx = System clock cycle

Register 7-6 TMR1CON1 – Timer1 control 1

Position	7	6	5	4	3	2	1	0
Name	T1TPND	T1CPND	T1TIE	T1CIE	-	T1PSR		
Default	0	0	0	0	-	0	0	0
Access	R/W	R/W	R/W	R/W	-	R/W	R/W	R/W

T1TPND: Timer1 over Flow Pending Bit

0 = Not Pending

1 = Pending

T1CPND: Timer1 Capture mode Pending Bit

0 = Not Pending

1 = Pending

T1TIE: Timer1 over Flow Interrupt Enable Bit

0 = Interrupt Disable

1 = Interrupt Enable

T1CIE: Timer1 Capture mode Interrupt Enable Bit

0 = Disable

1 = Enable

T1PSR: Timer1 Prescaler

000 = Timer1 counts at every counting source event

001 = Timer1 counts at every 2 counting source events

010 = Timer1 counts at every 4 counting source events

011 = Timer1 counts at every 8 counting source events

100 = Timer1 counts at every 16 counting source events

101 = Timer1 counts at every 32 counting source events

110 = Timer1 counts at every 64 counting source events

111 = Timer1 counts at every 128 counting source events

Register 7-7 TMR1CNTH/TMR1CNTL – Timer1 Counter

Position	7	6	5	4	3	2	1	0
Name	TMR1CNTH/TMR1CNTL							
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Note: Timer1 will increase in proper condition while it is enable, it overflows when $TMR1CNT = TMR1PR$, TMR1CNT will be cleared to 0x0000 when overflow, and the interrupt flag will be set '1' by hardware.

Register 7-8 TMR1PRH/TMR1PRL – Timer1 Period

Position	7	6	5	4	3	2	1	0
Name	TMR1PRH/TMR1PRL							
Default	1	1	1	1	1	1	1	1
Access	WO	WO	WO	WO	WO	WO	WO	WO

The overflow period of the timer is: $Tinc-source * T1PSR * (T1PR + 1)$.

Register 7-9 TMR1PWMH/TMR1PWML – Timer1 PWM duty

Position	7	6	5	4	3	2	1	0
Name	TMR1PWMH/TMR1PWML							
Default	x	x	x	x	x	x	x	x
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Note: TMR1PWM is reserved in timer/counter mode. In PWM mode, it is used as duty cycle setting. In capture mode, the value of TMR1CNT will be captured to TMR1PWM when selected event occurs.

7.3 Timer2

Timer2 is a 16-bit timer/counter with a 7-bit prescaler. It can be configured as timer, counter or PWM generator.

7.3.1 Timer2 Features

- 16bits counter
- 7bits pre-scaler
- Counter mode (clock source from system clock or TMR2)
- Capture mode (event source from CAP2)
- PWM mode (PWM signal output to PWM2)

7.3.2 Timer2 Special Function Registers

Register 7-10 TMR2CON0 – Timer2 control 0

Position	7	6	5	4	3	2	1	0
Name	T2ES		T2M		Reserve	T2IS		
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

T2ES: Timer2 Capture Edge Select

00 = CAP2 Rising Edge

01 = CAP2 Falling Edge

1X= CAP2 Rising Edge and Falling Edge

T2M: Timer2 Mode Select

00 = Timer2 is disabled

01 = Timer2 is enabled and works in Counter Mode

10 = Timer2 is enabled and works in PWM Mode

11 = Timer2 is enabled and works in Capture Mode

T2IS: Timer2 Increase Source

000 = TMR2 Rising Edge

001 = TMR2 Falling Edge

010 = TMR2 Rising and Falling Edge

011 = External 32 KHz crystal oscillator

1xx = System Clock cycle

Register 7-11 TMR2CON1 – Timer2 control 1

Position	7	6	5	4	3	2	1	0
Name	T2TPND	T2CPND	T2TIE	T2CIE	-	T2PSR		
Default	0	0	0	0	-	0	0	0
Access	R/W	R/W	R/W	R/W	-	R/W	R/W	R/W

T2TPND: Timer2 over Flow Pending Bit

0 = Not Pending

1 = Pending

T2CPND: Timer2 Capture mode Pending Bit

0 = Not Pending

1 = Pending

T2TIE: Timer2 over Flow Interrupt Enable Bit

0 = Interrupt Disable

1 = Interrupt Enable

T2CIE: Timer2 Capture mode Interrupt Enable Bit

0 = Disable

1 = Enable

T2PSR: Timer2 Prescaler

000 = Timer2 counts at every counting source event

001 = Timer2 counts at every 2 counting source events

010 = Timer2 counts at every 4 counting source events

011 = Timer2 counts at every 8 counting source events

100 = Timer2 counts at every 16 counting source events

101 = Timer2 counts at every 32 counting source events

110 = Timer2 counts at every 64 counting source events

111 = Timer2 counts at every 128 counting source events

Register 7-12 TMR2CNTH/TMR2CNTL – Timer2 Counter

Position	7	6	5	4	3	2	1	0
Name	TMR2CNTH/TMR2CNTL							
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Note: Timer2 will increase in proper condition while it is enable, it overflows when TMR2CNT = TMR2PR, TMR2CNT will be clear to 0x0000 when overflow, and the interrupt flag will be set '1' by hardware.

Register 7-13 TMR2PRH/TMR2PRL – Timer2 Period

Position	7	6	5	4	3	2	1	0
Name	TMR2PRH/TMR2PRL							
Default	1	1	1	1	1	1	1	1
Access	WO	WO	WO	WO	WO	WO	WO	WO

The overflow period of the timer is: $T_{inc-source} * T2PSR * (T2PR + 1)$.

Register 7-14 TMR2PWMH/TMR2PWML – Timer2 PWM duty

Position	7	6	5	4	3	2	1	0
Name	TMR2PWMH/TMR2PWML							
Default	x	x	x	x	x	x	x	x
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Note: TMR2PWM is reserved in timer/counter mode. In PWM mode, it is used as duty cycle setting. In capture mode, the value of TMR2CNT will be captured to TMR2PWM when selected event occurs.

7.4 Timer3

Timer3 is an 8-bit timer/counter with a 7-bit prescaler. It can be configured as timer, counter or PWM generator.

7.4.1 Timer3 Features

- 8bits counter
- 7bits pre-scaler
- Counter mode (clock source from system clock or TMR3)
- Capture mode (event source from CAP3)
- PWM mode (PWM signal output to PWM3)

7.4.2 Timer3 Special Function Registers

Register 7-15 TMR3CON – Timer3 control

Position	7	6	5	4	3	2	1	0
Name	T3PND	T3ES	T3M		T3IS	T3PSR		
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

T3PND: Timer3 Pending Flag

0 = Not Pending

1 = Pending

T3ES: Timer3 Capture Mode Edge Select

0 = CAP3 Rising Edge

1 = CAP3 Falling Edge

T3M: Timer3 Mode

00 = Timer3 is disabled

01 = Timer3 is enabled and works in Counter Mode

10 = Timer3 is enabled and works in PWM Mode

11 = Timer3 is enabled and works in Capture Mode

T3IS: Timer3 Increase Source

0 = System Clock

1 = TMR3 rising edge

T3PSR: Timer3 Prescaler

000 = Timer3 counts at every counting source event

001 = Timer3 counts at every 2 counting source events

010 = Timer3 counts at every 4 counting source events

011 = Timer3 counts at every 8 counting source events

100 = Timer3 counts at every 16 counting source events

101 = Timer3 counts at every 32 counting source events

110 = Timer3 counts at every 64 counting source events

111 = Timer3 counts at every 128 counting source events

Register 7-16 TMR3CNT – Timer3 Counter

Position	7	6	5	4	3	2	1	0
Name	T3CNT							
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Note: Timer3 will increase in proper condition while it is enabled. It overflows when TMR3CNT = TMR3PR, TMR3CNT will be clear to 0x00 when overflow occurs, and the interrupt flag will be set '1' by hardware.

Register 7-17 TMR3PR – Timer3 Period

Position	7	6	5	4	3	2	1	0
Name	TMR3PR							
Default	1	1	1	1	1	1	1	1
Access	WO	WO	WO	WO	WO	WO	WO	WO

Note: The overflow period of the timer is: Tinc-source * T3PSR * (T3PR + 1).

Register 7-18 TMR3PWM – Timer3 PWM duty

Position	7	6	5	4	3	2	1	0
Name	TMR3PWM							
Default	x	x	x	x	x	x	x	x
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Note: TMR3PWM is reserved in timer/counter mode. In PWM mode, it is used as duty cycle setting. In capture mode, the value of TMR3CNT will be captured to TMR3PWM when selected event occurs.

7.5 Watchdog Timer (WDT)

The Watchdog Timer (WDT) logic consists of a 20bit Watchdog Timer. The Watchdog Timer is clocked by internal RC oscillator running at 32 KHz. When device resets, the WDT is disabled and user should enable the WDT if it is needed.

In the default configuration, WDT overflows in 2ms. The application program needs to write a '1' into WDTCON [5] at least once 2 ms to prevent WDT time out. The lower 3 bits of the WDTCON register control the selection of overflow time period.

7.5.1 Watchdog Wake up

WDT can be used to wake up CW6631A from Idle, Hold or Sleep mode. RSTEN bit (WDTCON [3]) is used to determine the actions after WDT wake up. When RSTEN sets to 0, the watchdog will generate a non-reset wake up after counter overflows. And When RSTEN sets to 1, the watchdog will wake up CW6631A by resetting the whole chip. After non-reset wake up CW6631A will continue to execute next instruction.

- During Idle mode, CW6631A can be wake up by WDT with interrupt or reset.
- During Hold mode, CW6631A can be wakeup by WDT with interrupt or reset or just continue to execute the

next instruction.

- During Sleep mode, CW6631A can be wakeup by WDT with reset.
- During Deep Sleep mode, CW6631A cannot be wakeup by WDT.

7.5.2 Watchdog SFR

Register 7-19 WDTCON – Watchdog control

Position	7	6	5	4	3	2	1	0
Name	WDTPD	WDTTO	CLRWDT	WDTEN	RSTEN	WDTPS		
Default	0	0	0	1	1	1	0	1
Access	RO	RO	WO	R/W	R/W	R/W	R/W	R/W

WDTPD:

0 = read '0' before sleep operation

1 = read '1' after sleep operation

WDTTO:

0 = Read '0' after clear Watchdog or Power up

1 = Read '1' after Watchdog time out

CLRWDT:

1 = Clear WDT counter

0 = No action

WDTEN:

0 = Disables the Watchdog timer

1 = Enables the Watchdog timer

RSTEN:

0 = Disables the Watchdog reset

1 = Enables the Watchdog reset

WDTPS: WDT time out period setting

000 = 2ms

001 = 8ms

010 = 32ms

011 = 128ms

100 = 512ms

101 = 2048ms

110 = 8192ms

111 = 32768ms

8 Universal Asynchronous Receiver/Transmitter (UART)

8.1 UART0

8.1.1 Overview

UART0 is a serial port capable of asynchronous transmission. The UART0 can function in full duplex mode. Receive data is buffered in a holding register. This allows the UART0 to start reception of a second incoming data byte before software has finished reading the previous data byte.

When PSEL = 0

- Receive pin (RX) – UART0RX0
- Transmit pin (TX) – UART0TX0

When PSEL = 1

- Receive pin (RX) – UART0RX1
- Transmit pin (TX) – UART0TX1

8.1.2 UART0 Special Function Registers

Register 8-1 UARTCON – UART0 control

Position	7	6	5	4	3	2	1	0
Name	UTSBS	UTTXNB	NBITEN	UTEN	UTTXINV	UTRXINV	TXIE	RXIE
Default	0	1	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

UTSBS: Stop Bit Select

0 = 1 bit as Stop Bit

1 = 2 bits as Stop Bit

UTTXNB: The ninth bit data of transmitter buffer. Write the ninth bit into this location that you want to transmit

NBITEN: Nine-BIT mode Enable Bit

0 = Eight-bit mode

1 = Nine-bit mode

UTEN: UART Enable Bit

0 = Disable UART module

1 = Enable UART module

UTTXINV: Transmit Invert Selection Bit

0 = Transmitter output without inverted

1 = Transmitter output inverted

UTRXINV: Receive Invert Selection Bit

0 = Receiver input without inverted

1 = Receiver input inverted

TXIE: Transmit Interrupt Enable

0 = Transmit interrupt disable

1 = Transmit interrupt enable

RXIE: Receive Interrupt Enable

0 = Receiver interrupt disable

1 = Receiver interrupt enable

Register 8-2 UARTSTA – UART0 status

Position	7	6	5	4	3	2	1	0
Name	UTRXNB	FEF	RXIF	TXIF	-	-	-	PSEL
Default	x	x	0	1	-	-	-	0
Access	R/W	R/W	R/W	RO	-	-	-	R/W

UTRXNB: The ninth bit data of receiver buffer

FEF: Frame Error Flag

0 = the stop bit is '1' in the last received frame

1 = the stop bit is '0' in the last received frame

RXIF: RX Interrupt Flag

0 = RX not done

1 = RX done

TXIF: TX Interrupt Flag

0 = TX not done

1 = TX done

Writing data to UTBUF will clear this flag.

PSEL: UART0 Port Select

0 = Select UART0RX0 and UART0TX0

UART0RX0: P34

UART0TX0: P16

1 = Select UART0RX1 and UART0TX1

UART0RX1: P00

UART0TX1: P01

Register 8-3 UARTBAUDL – UART0 Baud Rate Low Byte

Position	7	6	5	4	3	2	1	0
Name	UARTBAUDL							
Default	x	x	x	x	x	x	x	x
Access	WO	WO	WO	WO	WO	WO	WO	WO

Register 8-4 UARTBAUDH – UART0 Baud Rate High Byte

Position	7	6	5	4	3	2	1	0
Name	UARTBAUDH							
Default	0	0	0	0	0	0	0	0
Access	WO	WO	WO	WO	WO	WO	WO	WO

UARTBAUD = {UARTBAUDH, UARTBAUDL}

Register 8-5 UARTDIV

Position	7	6	5	4	3	2	1	0
Name	UARTDIV							
Default	0	0	0	0	0	0	0	0
Access	WO	WO	WO	WO	WO	WO	WO	WO

Baud Rate = $F_{\text{sys clock}} / [(UARTBAUD + 1) \times (UARTDIV + 1)]$

Register 8-6 UARTDATA – UART0 Data

Position	7	6	5	4	3	2	1	0
Name	UARTDATA							
Default	x	x	x	x	x	x	x	x
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Write this location will load the data to transmitter buffer. And read this location will read the data from the receiver buffer.

8.2 UART1

8.2.1 Overview

UART1 is a serial port capable of asynchronous transmission. The UART1 can function in normal and DMA full duplex mode. Please see PMUXCON0 bit 6 descriptions

when PMUXCON0[6] == 0

- Receive pin (RX) – UART1RX0 (P17)
- Transmit pin (TX) – UART1TX0 (P16)

Or PMUXCON0[6] == 1

- Receive pin (RX) – UART1RX1 (BT_TX)
- Transmit pin (TX) – UART1TX1 (BT_RX)

8.2.2 UART1 Special Function Registers

Register 8-7 UART1CON – UART1 control

Position	7	6	5	4	3	2	1	0
Name	UTSBS	UTTXNB	NBITEN	UTEN	TXIE	RXIE	OVERFLOWIE	DMASEL
Default	0	1	0	0	0	0	-	0

Access	R/W	R/W	R/W	R/W	R/W	R/W	-	R/W
--------	-----	-----	-----	-----	-----	-----	---	-----

UTSBS: Stop Bit Select

0 = 1 bit as Stop Bit

1 = 2 bits as Stop Bit

UTTXNB: The ninth bit data of transmitter buffer. Write the ninth bit into this location that you want to transmit

NBITEN: Nine-BIT mode Enable Bit

0 = Eight-bit mode

1 = Nine-bit mode

UTEN: UART Enable Bit

0 = Disable UART module

1 = Enable UART module

TXIE: Transmit Interrupt Enable

0 = Transmit interrupt disable

1 = Transmit interrupt enable

RXIE: Receive Interrupt Enable

0 = Normal Receive interrupt disable or AUTO DMA mode Receive one word Interrupt disable

1 = Normal Receive interrupt enable or AUTO DMA mode Receive one word Interrupt enable

OVERFLOWIE: Receive DMA overflow interrupt enable

0 = overflow Interrupt disable

1 = overflow Interrupt enable

DMASEL: AUTO DMA choose

0 = AUTO DMA mode off

1 = AUTO DMA mode on

Register 8-8 UART1STA – UART1 status

Position	7	6	5	4	3	2	1	0
Name	UART_GIIE	-	UTRXNB	RX_BYTE_HIGH	RXIF	TXIF	OVERFLOWIF	RXKICK
Default	0	-	x	0	0	1	0	0
Access	R/W	-	R/W	RO	R/W	R/W	R/W	WO

UART_GIE: UART Global Interrupt 15 Enable

0 = UART Global I Interrupt disable

1 = UART Global I Interrupt enable

UTRXNB: The ninth bit data of receiver buffer

RX_BYTE_HIGH : receive data high byte(only for DMA)

0 = waiting receive data low byte

1 = waiting receive data high byte

RXIF: UART RX Interrupt Flag

0 = Normal Receive or AUTO DMA mode Receive one word not done

1 = Normal Receive or AUTO DMA mode Receive one word done

In normal mode , it become “1” every byte, but in DMA mode ,it become “1” every word.

TXIF: UART TX Interrupt Flag

0 = UART transmit not done

1 = UART transmit done

Writing data to UTBUF or Writing UARTDMATXCNT will clear this flag.

OVERFLOWIF: UART overflow Interrupt Flag

0 = UART overflow not done

1 = UART overflow done

RXKICK: UART DMA receive KICK start

0 = not KICK start

1 = KICK start

Register 8-9 UART1DIV – UART1 divide register

Position	7	6	5	4	3	2	1	0
Name	UART1DIV							
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Register 8-10 UART1BAUD – UART1 Baud Rate register

Position	7	6	5	4	3	2	1	0
Name	UART1BAUD							
Default	x	x	x	x	x	x	x	x
Access	WO	WO	WO	WO	WO	WO	WO	WO

Baud Rate = Fsys clock / [(UARTDIV+1) (UART1BAUD + 1)]

Register 8-11 UART1DATA – UART1 Data

Position	7	6	5	4	3	2	1	0
Name	UART1DATA							
Default	x	x	x	x	x	x	x	x
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Write this location will load the data to transmitter buffer. And read this location will read the data from the receiver buffer.

Register 8-12 UARTDMATXCNT –UART1 DMA Transmit counter

Portion	7	6	5	4	3	2	1	0
Name	UARTDMATXCNT							
Default	x	x	x	x	x	x	X	x
Access	WO	WO	WO	WO	WO	WO	WO	WO

Nbyte = UARTDMATXCNT + 1

Register 8-13 UARTDMATXPTR–UART1 DMA Transmit Start Pointer byte

Portion	7	6	5	4	3	2	1	0
Name	UARTDMATXPTR							
Default	x	x	x	X	x	x	X	x
Access	WO	WO	WO	WO	WO	WO	WO	WO

In order to get the correct DMA Start Pointer , you should write this register twice. First write the higher byte, then the low byte. DMA address only map to SRAM1.

Register 8-14 UARTDMARXPTR–UART1 DMA receive Start Pointer byte

Portion	7	6	5	4	3	2	1	0
Name	UARTDMARXPTR							
Default	x	x	x	X	x	x	X	x
Access	WO	WO	WO	WO	WO	WO	WO	WO

In order to get the correct DMA Start Pointer , you should write this register twice. First write the higher byte, then the low byte. DMA address only map to SRAM1.

Register 8-15 UART1MINUS–UART1 DMA receive data minus byte count by CPU

Portion	7	6	5	4	3	2	1	0
Name	UART1MINUS							
Default	x	x	x	X	x	x	X	x
Access	WO	WO	WO	WO	WO	WO	WO	WO

Nbyte = UART1MINUS+ 1'b1

Register 8-16 UART1POINTL–UART1 DMA point by CPU read

Portion	7	6	5	4	3	2	1	0
Name	UART1POINTL							
Default	x	x	x	X	x	x	X	x
Access	R/O	R/O	R/O	R/O	R/O	R/O	R/O	R/O

Register 8-17 UART1POINTH–UART DMA point by CPU read high byte

Portion	7	6	5	4	3	2	1	0
Name	UART1POINTH							
Default	x	x	x	X	x	x	X	x
Access	R/O	R/O	R/O	R/O	R/O	R/O	R/O	R/O

Register 8-18 UART1LOOPCNT–UART1 DMA loop count

Position	7	6	5	4	3	2	1	0
Name				overflowcnt		dma_loop_cnt		
Default				0	0	0	0	0
Access	WO	WO	WO	WO	WO	WO	WO	WO

overflowcnt: less than bytes UART receive data ram size

00 = 4 bytes

01 = 8 bytes

Figure 2015- = 16 bytes

11 = 32 bytes

dma_loop_cnt::UART receive data ram size

000 = 16 bytes

001 = 32 bytes

010 = 64 bytes

011 = 128 bytes

100 = 256 bytes

101 = 512 bytes

110 = 1K bytes

111 = forbidden

Register 8-19 UART1CNTH–UART1 DMA receive count high byte

Portion	7	6	5	4	3	2	1	0
Name	UART1CNTH							
Default	x	x	x	X	x	x	X	x
Access	R/O	R/O	R/O	R/O	R/O	R/O	R/O	R/O

Register 8-20 UART1CNTL–UART1 DMA receive count low byte

Portion	7	6	5	4	3	2	1	0
Name	UART1CNTL							
Default	x	x	x	x	x	x	x	x
Access	R/O	R/O	R/O	R/O	R/O	R/O	R/O	R/O

8.3 Operation Guide

Figure 2015- **UART1 Normal mode Operation Flow:**

1. Set IO in the correct direction.
2. Configure UARTDIV and UART1BAUD to choose sample rate and baud.
3. Enable UART1 module by setting UTEN to '1'
4. Set TXIE or RXIE 'to 1' if needed
5. write data to UART1DATA
6. Wait for PND to change to '1', or wait for interrupt
7. Read received data from UART1DATA if needed
8. Go to Step 5 to start another process if needed or turn off UART1 by UTEN.

2) UART1 DMA Mode Operation Flow:

1. Set IO in the correct direction.
2. Configure UARTDIV and UART1BAUD to choose sample rate and baud.
3. Configure UART1CON Select DMA.
4. Write the start DMA address. For receive, Write data to UARTDMARXPTR
5. Enable UART module by setting UTEN to '1'.
6. kick-start a DMA receive process
7. Wait overflow or delay some time ,read UART1CNTH and UART1CNTL,read data by write UART1MINUS (UART1MINUS<{UART1CNTH,UART1CNTL}).
8. Write the start DMA address. For transmission, Write data to UARTDMATXPTR
9. Write data to UARTDMATXCNT to kick-start a DMA transmit process
10. Wait for PND to change to '1', or wait for interrupt

8.4 BT Control Register

Register 8-21 BTCON1 – BT control register1

Position	7	6	5	4	3	2	1	0
Name			BTC2RS	BTCDCLKO	BTCDCLKI	BTRSTB	Reserved	XOSC26MEN
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	RO	R/W	R/W	R/W	R/W

BTC2RS: BTCON2 read select

0: read BTCONT register

1: read BT output state

BTCDCLKO: BT CDCLK output state

BTCDCLKI: BT CDCLK input state

XOSC26MEN: BT xosc26M enable

0 = disable

1 = enable

Register 8-22 BTCON2 – BT control register2

Position	7	6	5	4	3	2	1	0
Name	BTTX	BTRX	BTCTS	Reserved	BTGPIO10	BTGPIO9	BTGPIO5	BTGPIO4
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

write: write date to BT

read: depend on BTCON1[5]

Figure 9-1 SPI timing

9.1.1 SPI0 Special Function Registers

Register 9-1 SPI0CON – SPI0 control

Position	7	6	5	4	3	2	1	0
Name	SPI0PND	SPI0SM	SPI0RT	SPI0WS	SPI0PS0	SPI0EDGE	SPI0IDST	SPI0EN
Default	1	0	0	0	0	0	0	0
Access	RO	R/W	R/W	R/W	R/W	R/W	R/W	R/W

SPI0PND: SPI0 Pending bit (read only, writing SPI0BUF will clear this bit)

0 = Transmission is not finish

1 = Transmission finish

SPI0SM: SPI0 mode selection

0 = Master mode

1 = Slave mode

SPI0RT: SPI0 RX/TX select bit in 2-wire mode or DMA mode

0 = TX

1 = RX

In 3-wire mode, SPI0 can both Transmit and receive at the same time. But when using DMA mode or 2-wire mode, just one direction (TX or RX) is allowed. Use this bit to select TX or RX.

SPI0WS: SPI0 2-wire mode/3-wire mode select bit

0 = 3-wire mode

1 = 2-wire mode

SPI0PS0: SPI0 Port select 0

0 = Select P27, P25, P26 when SPI0PS1 = 0; Select P14, P00, P34 when SPI0PS1 = 1

1 = Select P04, P06, P05 when SPI0PS1 = 0

SPI0EDGE: SPI0 sampling edge select bit

When SPI0IDST = 0:

0 = Sample at falling edge

1 = Sample at rising edge

When SPI0IDST = 1:

0 = Sample at rising edge

1 = Sample at falling edge

SPI0IDST: SPI0 clock signal idle state

0 = Clock signal stay at 0 when idle

1 = Clock signal stay at 1 when idle

SPI0EN: SPI0 enable bit

0 = SPI0 disable

1 = SPI0 enable

Register 9-2 SPIBAUD – SPI0 Baud Rate

Position	7	6	5	4	3	2	1	0
Name	SPIBAUD							
Default	x	x	x	x	x	x	x	x
Access	WO	WO	WO	WO	WO	WO	WO	WO

$$\text{Baud rate} = F_{\text{system_clock}} / [2(\text{SPIBAUD}+1)]$$

Register 9-3 SPI0BUF – SPI0 Data Buffer

Position	7	6	5	4	3	2	1	0
Name	SPI0BUF							
Default	x	x	x	x	x	x	x	X
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Register 9-4 SPIDMACNT – SPI0 DMA counter

Position	7	6	5	4	3	2	1	0
Name	SPIDMACNT							
Default	x	x	x	x	x	x	x	x
Access	WO	WO	WO	WO	WO	WO	WO	WO

$$\text{Nunit} = \text{SPIDMACNT} + 1$$

$$\text{Nbyte} = \text{Nunit} * 2 = (\text{SPIDMACNT} + 1) * 2$$

Register 9-5 SPIDMAPTRH– SPI0 DMA Start Pointer high byte

Position	7	6	5	4	3	2	1	0
Name	SPIDMAPTRH							
Default	x	x	x	x	x	x	x	x
Access	WO	WO	WO	WO	WO	WO	WO	WO

Register 9-6 SPIDMAPTRL– SPI0 DMA Start Pointer low byte

Position	7	6	5	4	3	2	1	0
Name	SPIDMAPTRL							
Default	x	x	x	x	x	x	x	x
Access	WO	WO	WO	WO	WO	WO	WO	WO

9.1.2 SPI0 Operation Guide

When SPI0CON1.1=0,

SPI0 Normal Mode Operation Flow:

1. Set IO in the correct direction.
2. Select SPI0RT in 2-wire mode if 2-wire mode is selected
3. Select master mode or slave mode
4. Configure clock frequency when master mode is selected in step 3

5. Select one of the four timing mode (refer to *Figure 9-1*)
6. Enable SPI0 module by setting SPI0EN '1'
7. Set SPI0IE '1' if needed
8. Write data to SPI0BUF to kick-start the process
9. Wait for SPI0PND to change to '1', or wait for interrupt
10. Read received data from SPI0BUF if needed
11. Go to Step 8 to start another process if needed or turn off SPI0 by clearing SPI0IE and SPI0EN

SPI0 DMA Mode Operation Flow:

1. Set IO in the correct direction.
2. Select SPI0RT for DMA direction
3. Select master mode or slave mode
4. Configure clock frequency when master mode is selected in step 3
5. Select one of the four timing modes (refer to *Figure 9-1*)
6. Enable SPI0 module by setting SPI0EN to '1'
7. Set SPI0IE '1' if needed
8. Write the start address to SPI0DMASP
9. Write data to SPI0DMACNT to kick-start a DMA process
10. Wait for SPI0PND to change to '1', or wait for interrupt
11. Go to Step 8 to start another DMA process if needed or turn off SPI0 by clearing SPI0IE and SPI0EN

9.2 SPI1

CW6631A SPI1 is an accelerated SPI. It can serve as master only. It can operate in normal or DMA mode. Please see PMUXCON0 bit 5 descriptions

SPI1 uses 2 pins for 2 wire mode:

- Serial Data (SPIDIDO1) - P04
- Serial Clock (SPICLK1) - P05

SPI1 uses 3 pins for 3 wire mode:

When SPI1_MAP = 0,

- Serial Data Out (SPIDO1) - P04
- Serial Data In (SPIDI1) - P06
- Serial Clock (SPICLK1) - P05

When SPI1_MAP = 1,

- Serial Data Out (SPIDO0) - P04
- Serial Data In (SPIDI0) - P42
- Serial Clock (SPICLK0) - 05

9.2.1 SPI1 Special Function Registers

Register 9–7 SPI1CON – SPI1 Configure Register

Position	7	6	5	4	3	2	1	0
Name	SPI1PND	DMAERR	SPI1RT	SPI1WS	SPI1DEC	-		SPI1EN
Default	1	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	RO	RO	R/W

SPI1PND: SPI1 Pending bit (read only, writing SPI1BUF will clear this bit)

0 = Transmission has not finished

1 = Transmission finish

DMAERR: SPI1 DMA Error flag

0 = No DMA error

1 = DMA error happened.

SPI1RT: SPI1 RX/TX select bit in 2-wire or DMA mode

0 = TX

1 = RX

In 3-wire mode, SPI1 can both Transmit and receive at the same time. But if we use DMA mode or 2-wire mode, just one direction (TX or RX) is allowed. Use this bit to select TX or RX.

SPI1WS: SPI1 2-wire mode/3-wire mode select bit

0 = 3-wire mode

1 = 2-wire mode

SPI1DEC: SPI1 decryption function enables

0 = Disabled

1 = Enabled

SPI1EN: SPI1 enable bit

0 = SPI1 disabled

1 = SPI1 enabled

Register 9–8 SPI1CON1 – SPI1 Configure Register1

Position	7	6	5	4	3	2	1	0
Name	-	-	-	-	-	-	CRCEN	ENCRYPT
Default	-	-	-	-	-	-	0	0
Access	-	-	-	-	-	-	R/W	R/W

CRCEN: SPI1 CRC enable when SPI1 receiving data

0 = Disabled

1 = Enabled

ENCRYPT: SPI1 output encryption function enable

0 = Disabled

1 = Enabled

NOTE: ENCRYPT and SPI1DEC cannot be 1 at the same time.

Register 9–9 SPI1BUF – SPI1 Data Buffer

Position	7	6	5	4	3	2	1	0
Name	SPI1BUF							
Default	X	x	x	x	x	x	x	X
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Write this location to load the data to transmitter buffer and kick start the SPI transmission, read this location will read the data from the receiver buffer.

Register 9–10 SPI1DMASPH– SPI1 DMA Pointer

Position	7	6	5	4	3	2	1	0
Name	-	-	SPI1DMASPH					
Default	0	0	x	x	x	x	x	x
Access	-	-	WO	WO	WO	WO	WO	WO

SPI DMA start address pointer, point to the start address in IRAM that the data to be transmitted or data to be stored.

Register 9–11 SPI1DMASPL– SPI1 DMA Pointer

Position	7	6	5	4	3	2	1	0
Name	SPI1DMASPL							
Default	x	x	x	x	x	x	x	x
Access	WO	WO	WO	WO	WO	WO	WO	WO

Register 9–12 SPI1DMACNTH – SPI1 DMA Counter High byte

Position	7	6	5	4	3	2	1	0
Name						SPI1DMACNTH		
Default	X	X	x	X	x	x	x	x
Access	WO	WO	WO	WO	WO	WO	WO	WO

Register 9–13 SPI1DMACNTL – SPI1 DMA Counter Low Byte

Position	7	6	5	4	3	2	1	0
Name	SPI1DMACNTL							
Default	X	x	x	x	x	x	x	x
Access	WO	WO	WO	WO	WO	WO	WO	WO

SPI DMA counter, decide the amount of units to be transmitted or received. There is 2 bytes in a unit. DMA counter is range from 0 to 2047 words. And there is a formula as follow:

$$SPIDMACNT = \{SPIDMACNTH, SPIDMACNTL\}$$

$$Nunit = SPIDMACNT + 1$$

$$Nbyte = Nunit * 2 = (SPIDMACNT + 1) * 2$$

Write this location will enable DMA and kick start a DMA process .Caution: do not write 0 to this register.

Note: Must write SPIDMACNTH, then write SPIDMACNTL, this order can't change !!!

Register 9–14 SPI1BAUD – SPI1 BAUD RATE

Position	7	6	5	4	3	2	1	0
Name	SPI1BAUD							
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

SPI Baud Rate, from 0 to 255

SPI Clock is System Clock / (SPI1BAUD + 1) , If SPI1BAUD is 0, then SPI Clock is same as System Clock.

9.2.2 SPI1 Operation Guide

Figure 2015- **SPI Normal Mode Operation Flow:**

1. Set IO in the correct direction.
2. Select SPI1WS in 2-wire mode or 3 wire mode.
3. Select SPI1RT for reception or transmission.
4. Configure clock frequency using bit SPI1SP.
5. Enable SPI module by setting SPI1EN '1'
6. Set SPI1IE '1' if needed
7. Write data to SPI1BUF to kick-start the process
8. Wait for SPI1PND change to '1', or wait for interrupt
9. Read received data from SPI1BUF if needed
10. Go to Step 7 to start another process if needed or turn off SPI1 by clearing SPI1PND and SPI1EN

B. SPI DMA Mode Operation Flow:

1. Set IO in the correct direction.
2. Select SPI1RT for DMA direction
3. Select SPI1WS in 2-wire mode or 3 wire mode
4. Configure clock frequency using bit SPI1SP
5. Enable SPI module by setting SPI1EN '1'
6. Set SPI1IE '1' if needed
7. Write the start address to SPI1DMASP
8. Write data to SPI1DMACNT to kick-start the DMA process.
9. Wait for bit SPI1PND to change to '1', or wait for interrupt
10. Go to Step 7 to start another DMA process if needed or turn off SPI by clearing SPI1PND and SPI1EN

10 External Memory Interface (EMI)

CW6631A provides External Memory Interface (EMI) to accelerate data transfer. [Figure 10-1](#) shows EMI timing.

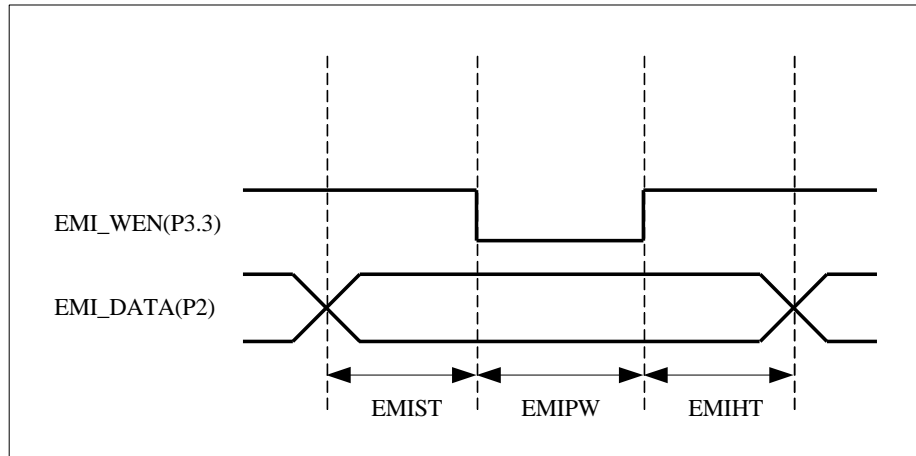


Figure 10-1 EMI timing

10.1 EMI Control Registers

Register 10-1 EMICON0 – EMI control0

Position	7	6	5	4	3	2	1	0
Name	EMIEN	EMIPW			EMIHT		EMIST	
Default	1	0	0	0	0	0	0	0
Access	WO	WO	WO	WO	WO	WO	WO	WO

EMIEN:

When writing: EMI Enable

0 = Disable

1 = Enable

EMIPW: EMI pulse width

000 = 1 system clock cycle

001 = 2 system clock cycles

010 = 3 system clock cycles

011 = 4 system clock cycles

100 = 5 system clock cycles

101 = 6 system clock cycles

110 = 7 system clock cycles

111 = 8 system clock cycles

EMIHT: EMI hold time

00 = 1 system clock cycle

01 = 2 system clock cycles

10 = 3 system clock cycles

Figure 2015- = 4 system clock cycles

EMIST: EMI setup time

00 = 1 system clock cycle

01 = 2 system clock cycles

10 = 3 system clock cycles

Figure 2015- = 4 system clock cycles

Register 10-2 EMICON1 – EMI control1

Position	7	6	5	4	3	2	1	0
Name	EMIPND	CLKSEL	OUTSEL	PWMEN	EMIDMAB		EMIDMAM	EMIM
Default	1	0	0	0	0	0	0	0
Access	RO	R/W	R/W	R/W	R/W	R/W	R/W	R/W

EMIPND: When Read EMI done flag

0 = EMI is transmitting data

1 = EMI is IDLE

When Write “0”, clear write buffer counter; write “1” affect another

CLKSEL: PWM module work clock select

0 = 24MHz

1 = 48MHz

OUTSEL: PWM output select

0 = LED anode display

1 = LED cathode display

PWMEN: PWM enable

0 = Disable

1 = Enable

EMIDMAB: EMI DMA converts byte select

00 = reserved

01 = 1 byte

10 = 2 byte

Figure 2015- = 3 byte

EMIDMAM: EMI DMA mode

0 = no convert

1 = bit convert to byte

EMIM: EMI mode

0 = work when CPU kick start

1 = work with SPI1 DMA

Register 10-3 EMIBUF – EMI output buffer

Position	7	6	5	4	3	2	1	0
Name	EMIBUF							
Default	x	x	x	x	x	x	x	x
Access	WO	WO	WO	WO	WO	WO	WO	WO

EMIBUF is the entrance of 6 bytes EMI output buffer. The 6 bytes EMI output buffer is emibuf0, emibuf1, emibuf2, emibuf3, emibuf4 and emibuf5. When CPU writes to EMIBUF, internal counter will add "1", CPU data is pushed corresponding buffer. You should clear internal counter by writing "0" to emicon1 bit 7;

PWM mode: should write eight times for eight channels PWM of P2

When EMIM = 0, emibuf0 will output to P2. Emibuf0 is updated with CPU write data.

When EMIM = 1 and in no convert mode, emibuf0 will output to P2. Emibuf0 is updated with SPI1 DMA data.

When SPI2EMI = 1 and in convert mode, there are 3 output modes:

Corresponding bit	0			1		
1 byte mode	emibuf0			emibuf3		
2 byte mode	emibuf0		emibuf1	emibuf3		emibuf4
3 byte mode	emibuf0	emibuf1	emibuf2	emibuf3	emibuf4	emibuf5

When EMIM = 0 and EMIEN = 1, EMI transfer will be started by writing to EMIBUF.

When EMIM = 1 and EMIEN = 1, EMI transfer will be started by SPI DMA.

PWM Operation Guide

1. Configure EMICON1 register;
2. Read data from FFT output buffer;
3. Write data to PWMDAT register.

11 SD Card Host Controller (SDC)

11.1 Features

The CW6631A SD card host controller can support SD/MMC card devices.

- SD memory Card Spec (Ver2.0) / MMC Spec (Ver4.3) compatible;
- CRC7 and CRC16 Generator;
- Support Interrupt and DMA Data transfer mode;
- Support 1-bit or 4-bit data bus width;

11.2 IO Mapping

Table 11-1 shows the SDC IO Mapping

Table 11-1 IO mapping

BUS signals	Port group 0	Port group 1
SDCLK	SDCLK0 – P21	SDCLK0 – P3.0
SDCMD	SDCMD0 – P20	SDCMD0 – P3.1
SDDAT0	SDDAT00 – P27	SDDAT00 – P3.2
SDDAT1	/	SDDAT1 – P0.0
SDDAT2	/	SDDAT2 – P0.1
SDDAT3	/	SDDAT3 – P1.4

11.3 SDC Special Function Registers

Register 11-1 SDCON0 – SD host control register 0

Position	7	6	5	4	3	2	1	0
Name	CKST			DKST		DW4	SDCKE	SDE
Default	0	0	0	0	0	0	0	0
Access	WO	WO	WO	WO	WO	R/W	R/W	R/W

CKST: Command operation kicks start bits

000 = No operation

001 = Send command; receive 6-byte response, without check busy

011 = Send command; receive 17-byte response, without check busy

101 = Send command; receive 6-byte response, with check busy

111 = Send command; receive 17-byte response, with check busy

010 = Send command, without receive response, without check busy

100 = Send command, without receive response, with check busy

Others = Reserved

DKST: Data operation kicks start bits

00 = No operation

01 = Receive data

10 = Send data, without check busy

11 = Send data, with check busy

DW4: Data bus width

0 = 1-bit mode

1 = 4-bit mode

SDCKE: SD clock out when no command/data is sending

0 = Disable

1 = Keep clocking out

SDE: SD host controller enable bit

0 = Disabled

1 = Enabled

Register 11-2 SDCON1 – SD host control register 1

Position	7	6	5	4	3	2	1	0
Name	CIE	DIE	CPND	DPND	CPCLR	DPCLR	8CKE	ORISE
Default	0	0	0	0	0	0	0	0
Access	R/W	R/W	RO	RO	WO	WO	R/W	R/W

CIE: Command interrupt enable bit

0 = Disable

1 = Enable

DIE: Data interrupt enable bit

0 = Disable

1 = Enable

CPND: Command interrupts pending flag

0 = Inactive

1 = Interrupt pending

DPND: Data interrupt pending flag

0 = Inactive

1 = Interrupt pending

CPCLR: Command interrupts pending clear bit

0 = Inactive

1 = Clear pending

DPCLR: Data interrupt pending clear bit

0 = Inactive

1 = Clear pending

8CKE: Send eight SD clocks after command or data

0 = Disable

1 = Enable

ORISE: Edge selection for sending data and command

0 = Falling

1 = Rising

Register 11-3 SDCON2 – SD host control register 2

Position	7	6	5	4	3	2	1	0
Name	RCRCE	DCRCE	NRPS	BUSY	SDEC	CRCS		
Default	x	x	0	x	0	x	x	x
Access	RO	RO	RO	RO	R/W	RO	RO	RO

RCRCE: Response packet CRC error flag

Update when the response CRC is receiving, so it is invalid if kick start command by 010/100 and it is only valid in R1 or R1b, software should ignore this bit in R2/R3/R6/R7.

0 = Inactive

1 = Error detected

DCRCE: Data packet CRC error flag

Update when the data CRC is receiving, so it is only valid after operation “read data” is done.

0 = Enactive

1 = Error detected

NRPS: No response received

When command is kick start by ‘001/011/101/111’ this bit indicate that response timeout (no response is received in 256 SD clocks after command).

0 = Response received

1 = No response received

BUSY: Busy flag. The logic level of pad DAT0

0 = Busy

1 = Free

SDEC: SD decryption enables

0 = Disable

1 = Enable

CRCS: CRC status of the sent data packet

Update when the CRC status is receiving, so it is only valid after operation “write data” is done.

101 = Error transmission

010 = Non-erroneous transmission

111 = Flash error

Register 11-4 SDBAUD – SD host baud rate

Position	7	6	5	4	3	2	1	0
Name	SDBAUD							
Default	0	0	0	0	0	0	0	0

Access	WO	WO	WO	WO	WO	WO	WO	WO
--------	----	----	----	----	----	----	----	----

SDBAUD: Baud rate control

Baud rate = system clock / 2*(SDBAUD +1)

Register 11-5 SDCPTR – SD host Command DMA address

Position	7	6	5	4	3	2	1	0
Name	CPTR							
Default	0	0	0	0	0	0	0	0
Access	WO	WO	WO	WO	WO	WO	WO	WO

Register 11-6 SDDPTR – SD host Data DMA address

Position	7	6	5	4	3	2	1	0
Name	DPTR							
Default	0	0	0	0	0	0	0	0
Access	WO	WO	WO	WO	WO	WO	WO	WO

Register 11-7 SDDCNT – SD host Data Counter

Position	7	6	5	4	3	2	1	0
Name	DCNT							
Default	0	0	0	0	0	0	0	0
Access	WO	WO	WO	WO	WO	WO	WO	WO

In order to get the correct DATA DMA counter, you should write this register twice. First write the higher byte, then the low byte. The range is: 0x00~0x1ff.

Total number of bytes received / transferred is (DCNT + 1) x 2

11.4 SDC Operation Guide

11.4.1 command Operation

When command is kick-started (by writing one of the following kick-start command to SDCFG[7: 5]), SD module sends out the pre-set command. After command has been sent, it will kick-start in one of the following options:

001 = Wait for 6-byte response. CPND is set to '1' by hardware after response is received.

011 = Wait for 17-byte response. CPND is set to '1' by hardware after response is received.

101 = Wait for 6-byte response. After response is received and DAT0 is '1', CPND is set to '1' by hardware.

111 = Wait for 17-byte response. After response is received and DAT0 is '1', CPND is set to '1' by hardware.

010 = Do not wait for response and set CPND to '1' by hardware immediately.

100 = Do not wait for response, if DAT0 is '1', set CPND to '1' by hardware immediately.

CPND (SDCFG [13]) will be set to 1 by hardware and it indicates that command and response operations are complete. At this moment, if RCRCE (SDCFG2 [7]) is set to 1, the received response has CRC error. The previous command should be resent.

Note: RCRCE bit is valid only when receiving R1 or R1b response. RCRCE bit can be ignored for other types of response.

Operation Flow:

1. Configure 8CE (SDCFG1 [1]) and ORISE (SDCFG1 [0]).
2. Write the outgoing command to IRAM and set SDCPTR to point to starting address of command.
3. Choose the kick-start command method according to response required.
4. Wait for CPND (SDCFG1 [5]) to become '1' or wait for interrupt.
5. If the expected response is R1 or R1b, read CCRCE (SDCFG2 [7]) to determine if CRC is valid.
6. Read content of response from IRAM.

11.4.2 data Operation

Sending data:

1. Configure DW4 (SDCFG0 [2]), 8CE (SDCFG1 [1]) and ORISE (SDCFG1 [0]).
2. Write outgoing data to IRAM and set SDDPTR to point to starting address of data.
3. Configure SDDCNT to the amount of outgoing data.
4. Kick-start data sending process.
5. Wait for DPND (SDCFG1 [4]) to become '1' or wait for interrupt.
6. Read CRCS (SDCFG2 [2:0]) to obtain CRC status value from SD device.

Receiving data:

1. Configure DW4 (SDCFG0 [2]), 8CE (SDCFG1 [1]) and ORISE (SDCFG1 [0]).
2. Set SDDPTR to point to starting address of data being stored.
3. Configure SDDCNT to the amount of incoming data.
4. Kick-start data receiving process.
5. Wait for DPND (SDCFG1 [4]) to become '1' or wait for interrupt.
6. Read DCRCE (SDCFG2 [6]) to determine if the data received has any error.
7. Read the data received from IRAM.

12 Audio Terminal (DAC)

12.1 Features

CW6631A provides 16-bit resolution audio DAC:

- Sample Rate 8 / 11.025 / 12 / 16 / 22.05 / 24 / 32 / 44.1 / 48KHz
- Low Clock Jitter Sensitivity
- Soft Mute and -48Db Attenuator
- Class AB headphone amplifier
- 32 Level analog Gain/attenuation from dB to dB

12.2 DAC Special Function Registers

There are 2 SFR to support DAC registers read/write function:

Register 12-1 ATADR – audio terminal address

Position	7	6	5	4	3	2	1	0
Name	DONE	DIR	ATADR					
Default	x	x	x	x	x	x	x	x
Access	RW	RW	RW	RW	RW	RW	RW	RW

DONE: read/write operation done flag

0 = read/write operation is done

1 = read/write operation is running

DIR: read/write direction select

0 = read register

1 = write register

ATADR: Address of DAC registers

Register 12-2 ATDAT – audio terminal data

Position	7	6	5	4	3	2	1	0
Name	ATDAT							
Default	x	x	x	x	x	x	x	x
Access	RW	RW	RW	RW	RW	RW	RW	RW

ATDAT:

After read operation, CPU read this register to get the data.

Before write operation, CPU writes data to this register.

12.2.1 DAC Register Mapping

Table 12-1 DAC registers address mapping:

Name	Address	Descriptions
DACCFG	0	DAC configuration register
DACSM	1	DAC soft mute configuration register
DACSPR	2	DAC sample rate register
DACVOLL	3	DAC volume setting low byte register
DACVOLH	4	DAC volume setting high byte register
DACVCON	5	DAC volume control register
TRIMCON1	6	DAC trim control register1
TRIMCON2	7	DAC trim control register2
TRREGLL	8	DAC left channel trim data register low byte
TRREGLH	9	DAC left channel trim data register high byte
TRREGRL	10	DAC right channel trim data register low byte
TRREGRH	11	DAC right channel trim data register high byte
EQCON1	12	EQ configuration register1
EQCOF	13	EQ coefficient FIFO
EQCON2	14	EQ configuration register2
EQVOLIN	15	EQ data input volume configuration register
DACLRMIX0	16	DAC L & R channel mixing coefficient 0
DACLRMIX1	17	DAC L & R channel mixing coefficient 1
DACLRMIX2	18	DAC L & R channel mixing coefficient 2
DACLRMIX3	19	DAC L & R channel mixing coefficient 3

12.2.2 Function of DAC Control Registers

Register 12-3 DACCFG – DAC configuration register

Position	7	6	5	4	3	2	1	0
Name	-	-	-		DIT_SEL	MIX_EN	OSSL	DACEN
Default	-	-	-			0	0	0
Access	-	-	-			RW	RW	RW

DIT_SEL: sdm dither signal select

0 = sine wave

1 = white noise

MIX_EN: DAC MIX enable

0 = Disabled

1 = Enabled

OSSL: DAC over sample mode select

0 = Normal speed mode

1 = Double speed mode

DACEN: DAC digital filter/delta-sigma modulator enable

0 = Disabled

1 = Enabled

Register 12-4 DACSM – DAC soft mute configuration register

Position	7	6	5	4	3	2	1	0
Name	DACSM							
Default	0	1	1	1	1	1	1	0
Access	RW	RW	RW	RW	RW	RW	RW	RW

DAC soft mute configuration, the reset value of DACSM is 126, user should not change it.

Register 12-5 DACSPR – DAC sample rate register

Position	7	6	5	4	3	2	1	0
Name	-	-	-	-	SRSEL			
Default	-	-	-	-	0	0	0	1
Access	-	-	-	-	RW	RW	RW	RW

SRSEL: DAC/FM sample rate select

0000 = 48 KHz

0001 = 44.1 KHz

0010 = 32 KHz

0011 = Reserved

0100 = 24 KHz

0101 = 22.05 KHz

0110 = 16 KHz

0111 = Reserved

1000 = 12 KHz

1001 = 11.025 KHz

1010 = 8 KHz

1011 = Reserved

1100 = 48K synchronized with OBUF (+-0.8% max)

1101 = 44.1K synchronized with OBUF (+-0.8% max)

1110 = 32K synchronized with OBUF (+-0.8% max)

1111 = 16K synchronized with OBUF (+-0.8% max)

1011 = 8K synchronized with OBUF (+-0.8% max)

Register 12-6 DACVOLH – DAC volume setting high byte register

Position	7	6	5	4	3	2	1	0
Name	DACVPND	DACVOLH						
Default	1	1	1	1	1	1	1	1
Access	RW	RW	RW	RW	RW	RW	RW	RW

DACVPND: DAC volume adjust done pending

Read "0": not done

Read “1”: done

Write “0” clear pending

Write “1” affects nothing

Register 12-7 DACVOLL– DAC volume setting low byte register

Position	7	6	5	4	3	2	1	0
Name	DACVOLL							
Default	1	1	1	1	1	1	1	1
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Note: When read DACVOLL and DACVOLH, the value isn't the setting value, but the actual DAC volume value

Register 12-8 DACVCON– DAC volume control register

Position	7	6	5	4	3	2	1	0
Name	-	-	-	DACVSET	DACVSTEP	DACVEN	DACVSTEP	
Default	-	-	-	0	0	0	0	0
Access	-	-	-	WO	R/W	R/W	R/W	R/W

DACVSET: Direct set DAC volume value

Write “1” to direct set DAC volume value

Write “0” affects nothing

DACVEN: DAC volume adjust enable

0 = Disable DAC volume adjust, keep the current volume

1 = Enable DAC volume adjust

{ **DACVSTEP2** , **DACVSTEP**}: DAC adjust volume steps

000 = Steps is “1”

001 = Steps is “2”

010 = Steps is “4”

011 = Steps is “8”

100 = Steps is “16”

101 = Steps is “32”

110 = Steps is “64”

111 = Steps is “128”

Register 12-9 TRIMCON1 – DAC trim control register¹

Position	7	6	5	4	3	2	1	0
Name	TRIMSPEED		-	-	DITSEL	--	DONESEL	TRIMEN
Default	0	0	-	-	0	0	0	0
Access	RW	RW	-	-	RW	RW	RW	RW

TRIMSPEED: DAC trim speed control

00 = trim 1 step every 1 sample

01 = trim 1 step every 2 samples

10 = trim 1 step every 3 samples

11 = trim 1 step every 4 samples

DITSEL: DAC trim direction select

0 = Trim direction depend on DAC analog compare out

1 = Trim direction depend on software direction

DONESEL: trimming done condition select

0 = Depend on DAC analog compare edge

1 = Depend on match data

TRIMEN: DAC trimming enable

0 = Disabled

1 = Enabled

Register 12-10 TRIMCON2 – DAC trim control register2

Position	7	6	5	4	3	2	1	0
Name	-	-	DIRETR	DIRETL	TRIMMTL	TRIMMTR	TMDONE	TRIMKST
Default	-	-	0	0	0	0	0	0
Access	-	-	RW	RW	RW	RW	RW	RW

DIRETR: DAC right trim direction

0 = Trim data decrease one step one sample

1 = Trim data add one step one sample

DIRETL: DAC left trim direction

0 = Trim data decrease one step one sample

1 = Trim data add one step one sample

TRIMMTL: DAC left channel trimming data match

0 = Not match

1 = Match

TRIMMTR: DAC right channel trimming data match

0 = Not match

1 = Match

TMDONE: DAC trimming done

0 = Not done

1 = Done

TRIMKST: DAC trimming kick start

Write 1 to kick start DAC trimming

Register 12-11 TRREGLL – DAC left channel trim data reg law byte

Position	7	6	5	4	3	2	1	0
Name	TRIMREGLL							
Default	-	-	-	-	-	-	-	-
Access	RW	RW	RW	RW	RW	RW	RW	RW

TRIMREGLL:

Write: DAC anticipant trimming data reg law byte

Read: DAC real trimming data law byte

Register 12-12 TRREGLH – DAC left channel trim data reg high byte

Position	7	6	5	4	3	2	1	0
Name	TRIMREGLH							
Default	-	-	-	-	-	-	-	-
Access	RW	RW	RW	RW	RW	RW	RW	RW

TRIMREGLL:

Write: DAC anticipant trimming data register high byte

Read: DAC real trimming data high byte

Register 12-13 TRREGRL- DAC right channel trim data reg law byte

Position	7	6	5	4	3	2	1	0
Name	TRIMREGRL							
Default	-	-	-	-	-	-	-	-
Access	RW	RW	RW	RW	RW	RW	RW	RW

TRIMREGRL:

Write: DAC anticipant trimming data register low byte

Read: DAC real trimming data low byte

Register 12-14 TRREGRH – DAC right channel trim data reg high byte

Position	7	6	5	4	3	2	1	0
Name	TRIMREGRH							
Default	-	-	-	-	-	-	-	-
Access	RW	RW	RW	RW	RW	RW	RW	RW

TRIMREGRH:

Write: DAC anticipant trimming data register high byte

Read: DAC real trimming data high byte

12.3 Operation Guide

12.3.1 BDAC Operation Guide

1. Configure DACVOLL & DACVOLH
2. Configure DACVCON
3. Clear DACVPND to kick start adjust volume

13 SARADC

13.1 Features

CW6631A provides an 11-channel moderate conversion speed and a moderate resolution 10-bit successive approximated register Analog to Digital Converter (SARADC) for users to develop applications in the following areas:

- Voice grade applications
- Audio applications requiring moderate performance
- Measurement requiring moderate performance and speed

SARADC conversion clock must be slower than 1 MHz

13.2 ADC Pin Mapping

Table 13-1 pin used

ADC Channel	Function	Description
ADC10	TP3	
ADC9	TP2	
ADC8	P26	Only for PIN detected, Not for ADKEY
ADC7	LDO Band GAP	Reference voltage 0.864V
ADC6	LDO in	1/2 Battery voltage
ADC5	P13	Normal ADC channel
ADC4	P30	Normal ADC channel
ADC3	P22	Normal ADC channel
ADC2	P14	Normal ADC channel
ADC1	P21	Normal ADC channel
ADC0	P33	Normal ADC channel

13.3 SARADC Special Function Registers

Register 13-1 ADCCON– SARADC control

Position	7	6	5	4	3	2	1	0
Name	ADCGO	EOC	TMREN	ADCTL	ADCEN	ADCSEL		
Default	0	0	x	x	0	0	0	0
Access	R/W	RO	R/W	R/W	R/W	R/W	R/W	R/W

ADCGO: ADC Conversion Start

When read:

0 = Conversion finished

1 = Conversion not finished

When write:

0 = N/A

1 = Start conversion

EOC: Check if end of conversion

0 = Finished

1 = Not finished

TMREN: Timer Input Enable

0 = Disabled

1 = Enabled

ADCTL: Timer Source Select

0 = Timer0

1 = Timer1

ADCEN: ADC Module Enable

0 = Disabled

1 = Enabled

ADCS3, ADCSEL: ADC Channel Select

0000 = P3.3 (ADC0)

0001 = P2.1 (ADC1)

0010 = P1.4 (ADC2)

0011 = P2.2 (ADC3)

0100 = P3.0 (ADC4)

0101 = P1.3 (ADC5)

0110 = 1/2 Battery voltage

0111 = LDO_BG. 0.864V

1000 = P26 (ADC8, Only for PIN detected, Not for ADKEY)

1001 = TP2

1010 = TP3

Register 13-2 ADCMODE– SARADC mode control

Position	7	6	5	4	3	2	1	0
Name	-	-	-	ADCS3	AUTOS	ADCSEL_SH		
Default	0	0	0	0	0	0	0	0
Access	RO	RO	RO	R/W	R/W	R/W	R/W	R/W

ADCS3: ADC Channel Select 3

ADCSEL_SH: ADCSEL shadow

AUTOS: Auto channel switching mode

0 = Not switch

1 = Auto load ADCSEL_SH into ADCSEL after conversion finished

Register 13-3 ADCBAUD– SARADC baud rate control

Position	7	6	5	4	3	2	1	0
Name	-	-	ADCBAUD					
Default	-	-	x	x	x	x	x	x
Access	-	-	WO	WO	WO	WO	WO	WO

ADC conversion clock = system clock / (2 x (ADCBAUD + 1))

Register 13-4 ADCDATA1– SARADC Buffer low byte control

Position	7	6	5	4	3	2	1	0
Name	ADCDATAL		-	-	-	-	-	-
Default	x	x	-	-	-	-	-	-
Access	RO	RO	-	-	-	-	-	-

Register 13-5 ADCDATAH– SARADC Buffer high byte control

Position	7	6	5	4	3	2	1	0
Name	ADCDATAH							
Default	x	x	x	x	x	x	x	x
Access	RO	RO	RO	RO	RO	RO	RO	RO

14 CRC16 /LFSR16/LFSR32

14.1 CRC16

14.1.1 Features

Cyclic Redundancy Check (CRC) is an error-checking code that is widely used in data communication systems and other serial data transmission system. CRC is based on polynomial manipulation using modular arithmetic. The device supports CRC by a CRC circuit module. The CRC FIFO supports CRC-CCITT.

The CRC-CCITT polynomial is defined as:

$$\text{CRC}(x) = X^{16} + X^{12} + X^5 + 1$$

Figure 14-1 shows CRC FIFO block diagram.

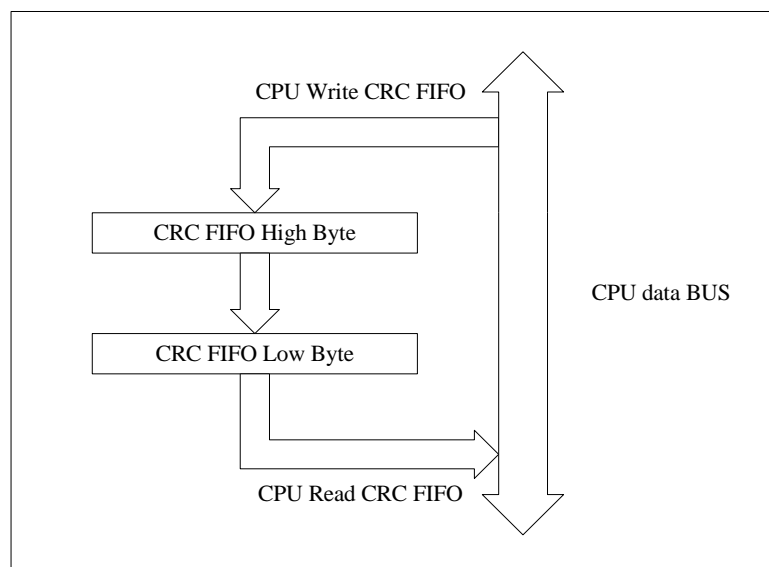


Figure 14-1 CRC FIFO block diagram

Write CRCREG to initial CRC register. Write data into CRCFIFO after initialization, and data will be shifted into module from low bit to high bit. Get the results by reading CRCRES0 and CRCRES1.

14.1.2 CRC16 Special Function Registers

Register 14-1 CRCREG– CRC initial register

Position	7	6	5	4	3	2	1	0
Name	CRCREG							
Default	1	1	1	1	1	1	1	1
Access	WO	WO	WO	WO	WO	WO	WO	WO

Write this location will initial CRC register.

Note: To initial the CRC register, user need to write 2 bytes to CRCREG for CRC16 (High byte first).

Register 14-2 CRCFIFO– CRC FIFO control

Position	7	6	5	4	3	2	1	0
Name	CRCFIFO							
Default	x	x	x	x	x	x	x	x
Access	WO	WO	WO	WO	WO	WO	WO	WO

Write this location will load the data to CRC module;

Register 14-3 CRCRES0– CRC result 0 control

Position	7	6	5	4	3	2	1	0
Name	CRCRES0							
Default	x	x	x	x	x	x	x	x
Access	RO	RO	RO	RO	RO	RO	RO	RO

Register 14-4CRCRES1– CRC result 1 control

Position	7	6	5	4	3	2	1	0
Name	CRCRES1							
Default	x	x	x	x	x	x	x	x
Access	RO	RO	RO	RO	RO	RO	RO	RO

14.2 LFSR16

14.2.1 Features

Software can control lfsr16, or enable CRCEN of SPI1CON1 [1], hardware can auto trigger lfsr16 when spi1 receive data.

The LFSR16 polynomial is defined as:

$$\text{LFSR6}(x) = X^{16} + X^{15} + X^{14} + X^{12} + X^8 + X + 1$$

14.2.2 LFSR16 Special Function Register

Register 14-5 LFSR16_DAT0– LFSR16 data 0

Position	7	6	5	4	3	2	1	0
Name	LFSR16_DAT0							
Default	1	1	1	1	1	1	1	1
Access	W/R	W/R	W/R	W/R	W/R	W/R	W/R	W/R

Note: To initial the LFSR16 register, user need to write this register 2 times to LFSR16 register for LFSR16 (High byte first).Reading will output LFSR16 data0

Register 14-6 LFSR16_DAT1– LFSR16 data 1

Position	7	6	5	4	3	2	1	0
Name	LFSR16_DAT1							
Default	1	1	1	1	1	1	1	1

Access	W/R	W/R	W/R	W/R	W/R	W/R	W/R	W/R
--------	-----	-----	-----	-----	-----	-----	-----	-----

Note: Write this register, will trigger lfsr16 calculate one time; Reading will output LFSR16 data 1

14.3 LFSR32

14.3.1 Features

The LFSR32 polynomial is defined as:

$$\text{LFSR32}(x) = X^{32} + X^{26} + X^2 + 1$$

14.3.2 LFSR32 Special Function Registers

Register 14-7 LFSR32_DAT0– LFSR32 data 0

Position	7	6	5	4	3	2	1	0
Name	LFSR32_DAT0							
Default	1	1	1	1	1	1	1	1
Access	W/R	W/R	W/R	W/R	W/R	W/R	W/R	W/R

Note: To initial the LFSR32 register, user need to write this register 4 times to LFSR32 register for LFSR32 (High byte first).Reading will output LFSR32 data0

Register 14-8 LFSR32_DAT1– LFSR32 data 1

Position	7	6	5	4	3	2	1	0
Name	LFSR32_DAT1							
Default	1	1	1	1	1	1	1	1
Access	W/R	W/R	W/R	W/R	W/R	W/R	W/R	W/R

Note: Write this register, will trigger lfsr32 calculate one time; Reading will output LFSR32 data 1

Register 14-9 LFSR32_DAT2– LFSR32 data 2

Position	7	6	5	4	3	2	1	0
Name	LFSR32_DAT2							
Default	1	1	1	1	1	1	1	1
Access	RO	RO	RO	RO	RO	RO	RO	RO

Note: Reading will output LFSR32 data 2

Register 14-10 LFSR32_DAT3– LFSR32 data 3

Position	7	6	5	4	3	2	1	0
Name	LFSR32_DAT3							
Default	1	1	1	1	1	1	1	1
Access	RO	RO	RO	RO	RO	RO	RO	RO

Note: Reading will output LFSR32 data 3

15 Characteristics

15.1 PMU Parameters

Table 15-1 PMU Parameters

Sym	Characteristics	Min	Typ	Max	Unit	Conditions
BVIN	Buck input voltage	2.8	4.2	4.8	V	
VDDLDO	VDDLDO input voltage	2.8	4.2	4.8	V	
VOUT1V5	Buck output voltage	1.15	1.35	1.6	V	
VDDCORE	1.2V output voltage	-	1.2	-	V	
VDDRTC	input voltage	2.2	4.2	4.8	V	
VDDHP	3.0V output voltage	2.8	3.0	3.3	V	
VCM	1.5V output voltage	-	1.35	-	V	
RVDD	output voltage	1.1	1.2	1.3	V	
VDDIO	3.3V output voltage	2.8	3.3	-	V	

15.2 CORE PLL Parameters

Table 15-2 PLL Parameters

Sym	Characteristics	Min	Typ	Max	Unit	Conditions
F _{I1}	Frequency input	-	32.768	-	KHz	Low frequency OSC
F _{I2}	Frequency input	1	12	15	MHz	High frequency OSC
F _{OUT1}	Frequency output	-	48	-	MHz	
T _{LOCK1}	PLL locked time	-	2	-	ms	Use low frequency OSC as input reference
T _{LOCK2}	PLL locked time	-	0.1	-	ms	Use high frequency OSC as input reference

15.3 General purpose I/O Parameters

Table 15-3 I/O Parameters

Symbol	Description	Min	Typ	Max	Units	Conditions
V _{IL}	Low-Level input voltage	-	-	30% * VDDIO	V	VDDIO = 3.3V
V _{IH}	High-level input voltage	70% * VDDIO	-	-	V	VDDIO = 3.3V
R _{PUP0}	Internal pull-up resister 0	-	10	-	KΩ	
R _{PUP1}	Internal pull-up resister 1	-	200	-	KΩ	
R _{PUP2}	Internal pull-up resister 2	-	0.5	-	KΩ	
R _{PDN0}	Internal pull-down resister 0	-	10	-	KΩ	
R _{PDN1}	Internal pull-down resister 1	-	0.33	-	KΩ	
R _{PDN2}	Internal pull-down resister 2	-	0.5	-	KΩ	
I _{LEVEL1}	Level1 current driving	8	-	-	mA	For PORT1

Symbol	Description	Min	Typ	Max	Units	Conditions
I _{LEVEL2}	Level2 current driving	24	-	-	mA	For Port1.1

15.4 Audio ADDA Parameters

Table 15-4 Audio DAC Parameters

Sym	Characteristics	Min	Typ	Max	Unit	Conditions
DAC SNR&DR		-	90	-	dB	48PIN
DAC SNR&DR		-	90	-	dB	28PIN & 20 PIN
DAC THD+N		-	-80	-	dB	10Kohm loading
PWR _{AB}	ClassAB AMP power output	-	-	16	mW	32ohm loading
V _{PP}	Maximum output voltage	-	-	2.6	V	10Kohm loading
ADC SNR/DR			93		dB	In Voice Band
ADC THD+N			89		dB	In Voice Band

15.5 USB PHY Parameters

Table 15-5 USB PHY Parameters

Sym	Characteristics	Min	Typ	Max	Unit	Conditions
RDM _{PUP}	DM pull-up resistor	-	120	-	KΩ	
RDP _{PUP}	DP pull-up resistor	-	1.5	-	KΩ	
RDM _{PDN}	DM pull-up resistor	-	15	-	KΩ	
RDP _{PDN}	DP pull-up resistor	-	15	-	KΩ	

15.6 RF Analog Blocks

Table 15-6 Frequency Synthesizer Parameters

Parameter	Condition		MIN	typ	max	Unit
Synthesizer						
Synthesizer settling time	Within +/- 25 KHz accuracy		-	70	-	us
Phase Noise	Fc=2.4GHz	ΔF=1 MHz	-	-110	-	dBc/Hz
		ΔF=2 MHz	-	-118	-	dBc/Hz
		ΔF≥3 MHz	-	-123	-	dBc/Hz
XTAL Oscillator						
Frequency range			-	26	-	MHz
Frequency Trimming Range	6 bits		-1	-	+1	kHz

Table 15-7 Receive path Parameters


Parameter	Condition	MIN	typ	max	Unit
Receiver Channel					
Minimum Usable Signal	RX sensitivity	-	-80	-	dBm
LNA					
Gain	High Gain	-	25	-	dB
	Mid Gain	-	15	-	dB
	Low Gain	-	5	-	dB
Mixer					
Conversion Gain		-	0	-	dB
Ifamp					
Gain	5/9/12/15/18 dB	-	12	-	
Complex BPF					
Band pass -3 dB BW	Figure 1.	-	2	-	MHz
Image Rejection		-	30	-	dB
VGA					
Gain Range		-6	-	+68	dB
Gain Step		-	+1/+6	-	dB
ADMOD					
SNDR	Freq = +- BW	-	>50	-	dB

Table 15-8 Transmit path Parameters

Parameter	Condition	MIN	typ	max	Unit	
Transmit Channel						
Available output power		-2	0	1.5	dBm	
Side Band Suppression		-	-30	-	dBm	
LPF						
Low pass -3 dB BW	Figure 2.	-	1	-	MHz	
TXVGA						
Gain Step		-7	-	7	dB	
PA						
Gain Range	Set paPWR[2:0] of Control Register #16	GFSK	-12	-	4	dBm
		DPSK	-15	-	1	dBm

16 Package Outline Dimensions

16.1 SSOP28

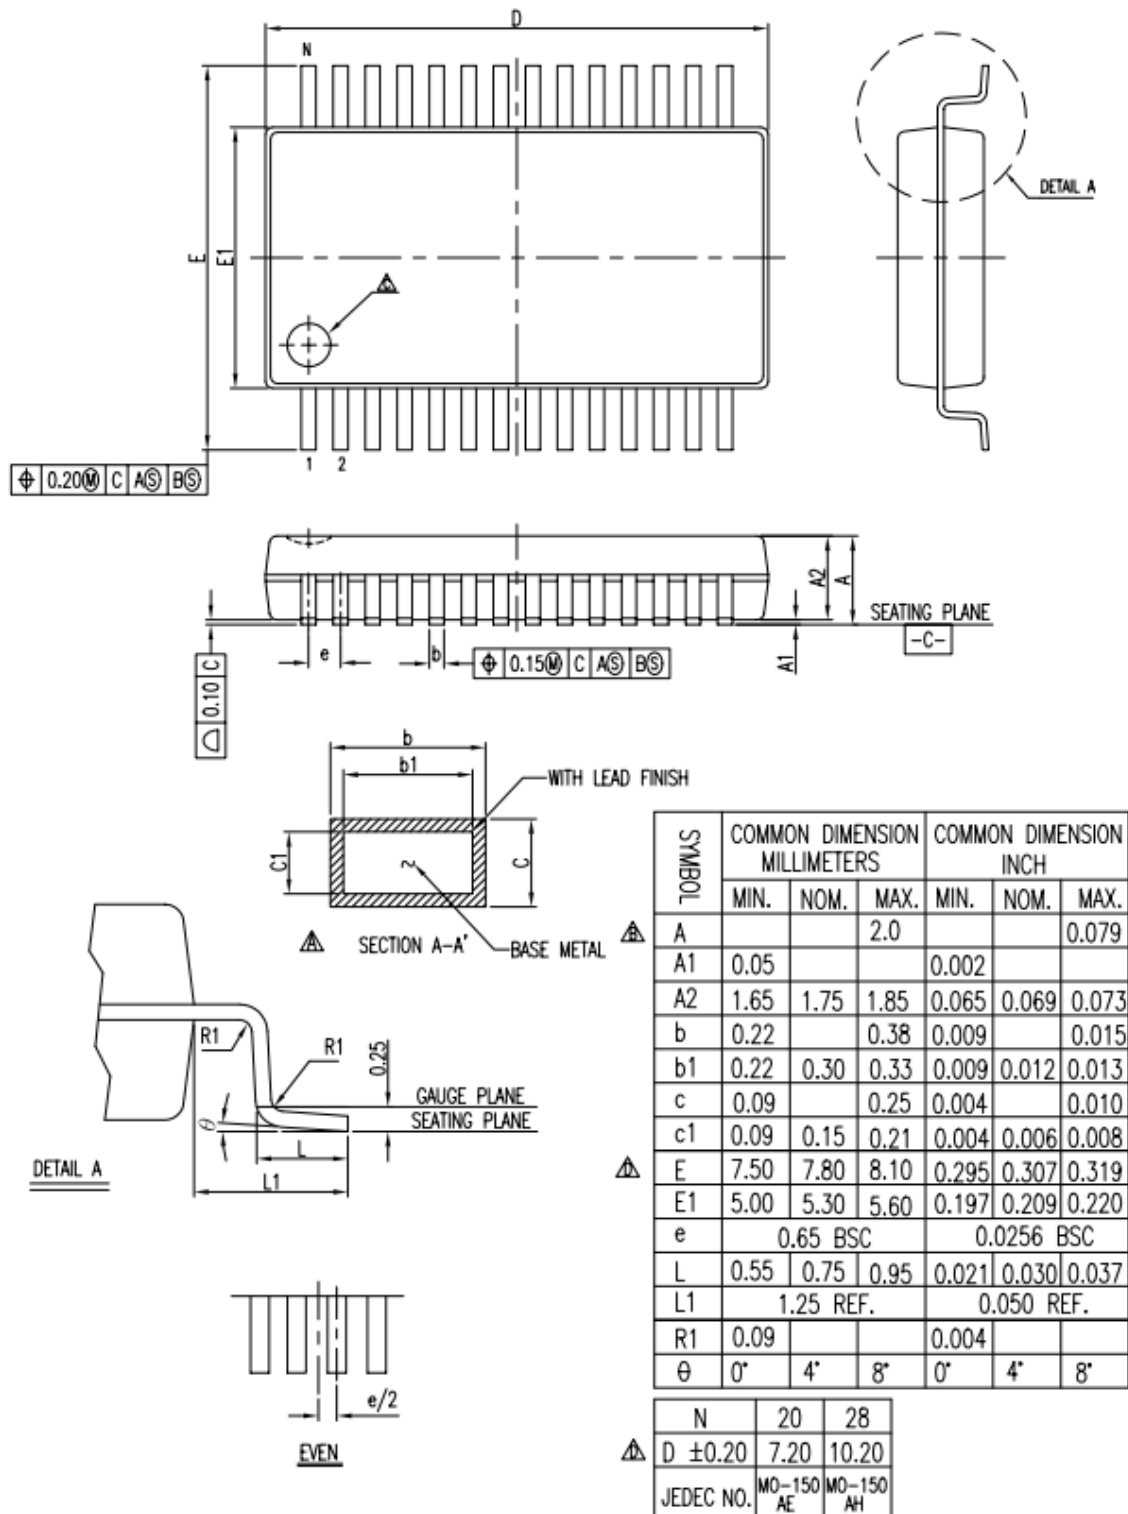

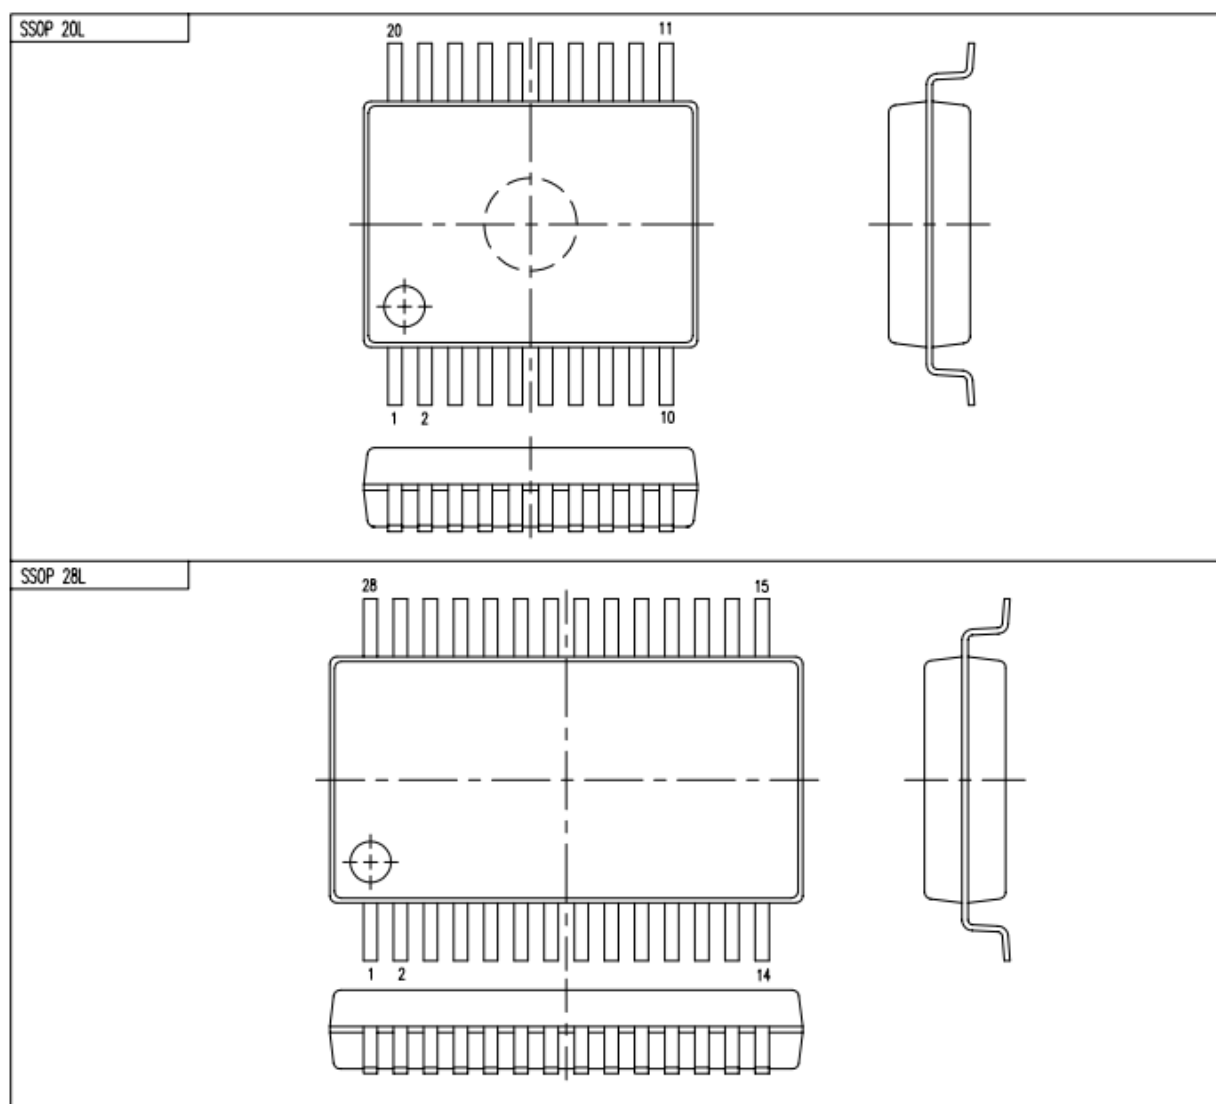


Figure 16-1 SSOP28 Package Outline Dimension

Revision History

Date	Version	Comments	Revised by
2015-6-3	0.0.1	Initial version	YX
2015-6-18	0.0.2	Modify	AE/IC team
2015-6-18	1.0.0	Released	YX