

1

2

3

4

5

6

A

Ver.	Who	Date	Description	Page	Description
Ver.A	Yin Wei	2012-07-07	Initial	1	Cover Page
Ver.A01	Yin Wei	2012-10-27	C7 100nF----->2.2uF RN4 33ohm----->22ohm R18 33ohm----->22ohm R39 260ohm--->191ohm R37,R38 90.9ohm--->60.4ohm	2 3 4-7	Block Diagram Power tree HI3518
Ver.A02	Yin Wei	2012-12-11	C90,C91 12pF--->22pF	8	Flash
Ver.A03	Yin Wei	2013-04-10	Change the multiplex function of NF_BOOT_PIN0 pins.	9	Connector
Ver.A04	Yin Wei	2013-04-20	C51 10uF----->2.2uF Add 470kohm resistor between the AC_VREF and GND.		
Ver.A05	Yin Wei	2013-10-24	Add note to SPI0_CS.		
Ver.A06	Yin Wei	2014-01-22	C65,C66 27pF----->15pF R71 10ohm----->33ohm		

HI3518ADMEB VER.A06

The demo board for HI3518A

Provided by Hisilicon

The type and specification of the components refer to the BOM

				NA	
				ECA NO	DATE
DESIGNED	YINWEI 00169616	HI3518ADMEB		00001234	
REVIEWED	LISI XXXXX				
		VER	PART_NUMBER	SHEET 1 OF 9	
		A01	03030001	HUAWEI TECH CO.,LTD.	

1

2


3

4

5

6


Diagram

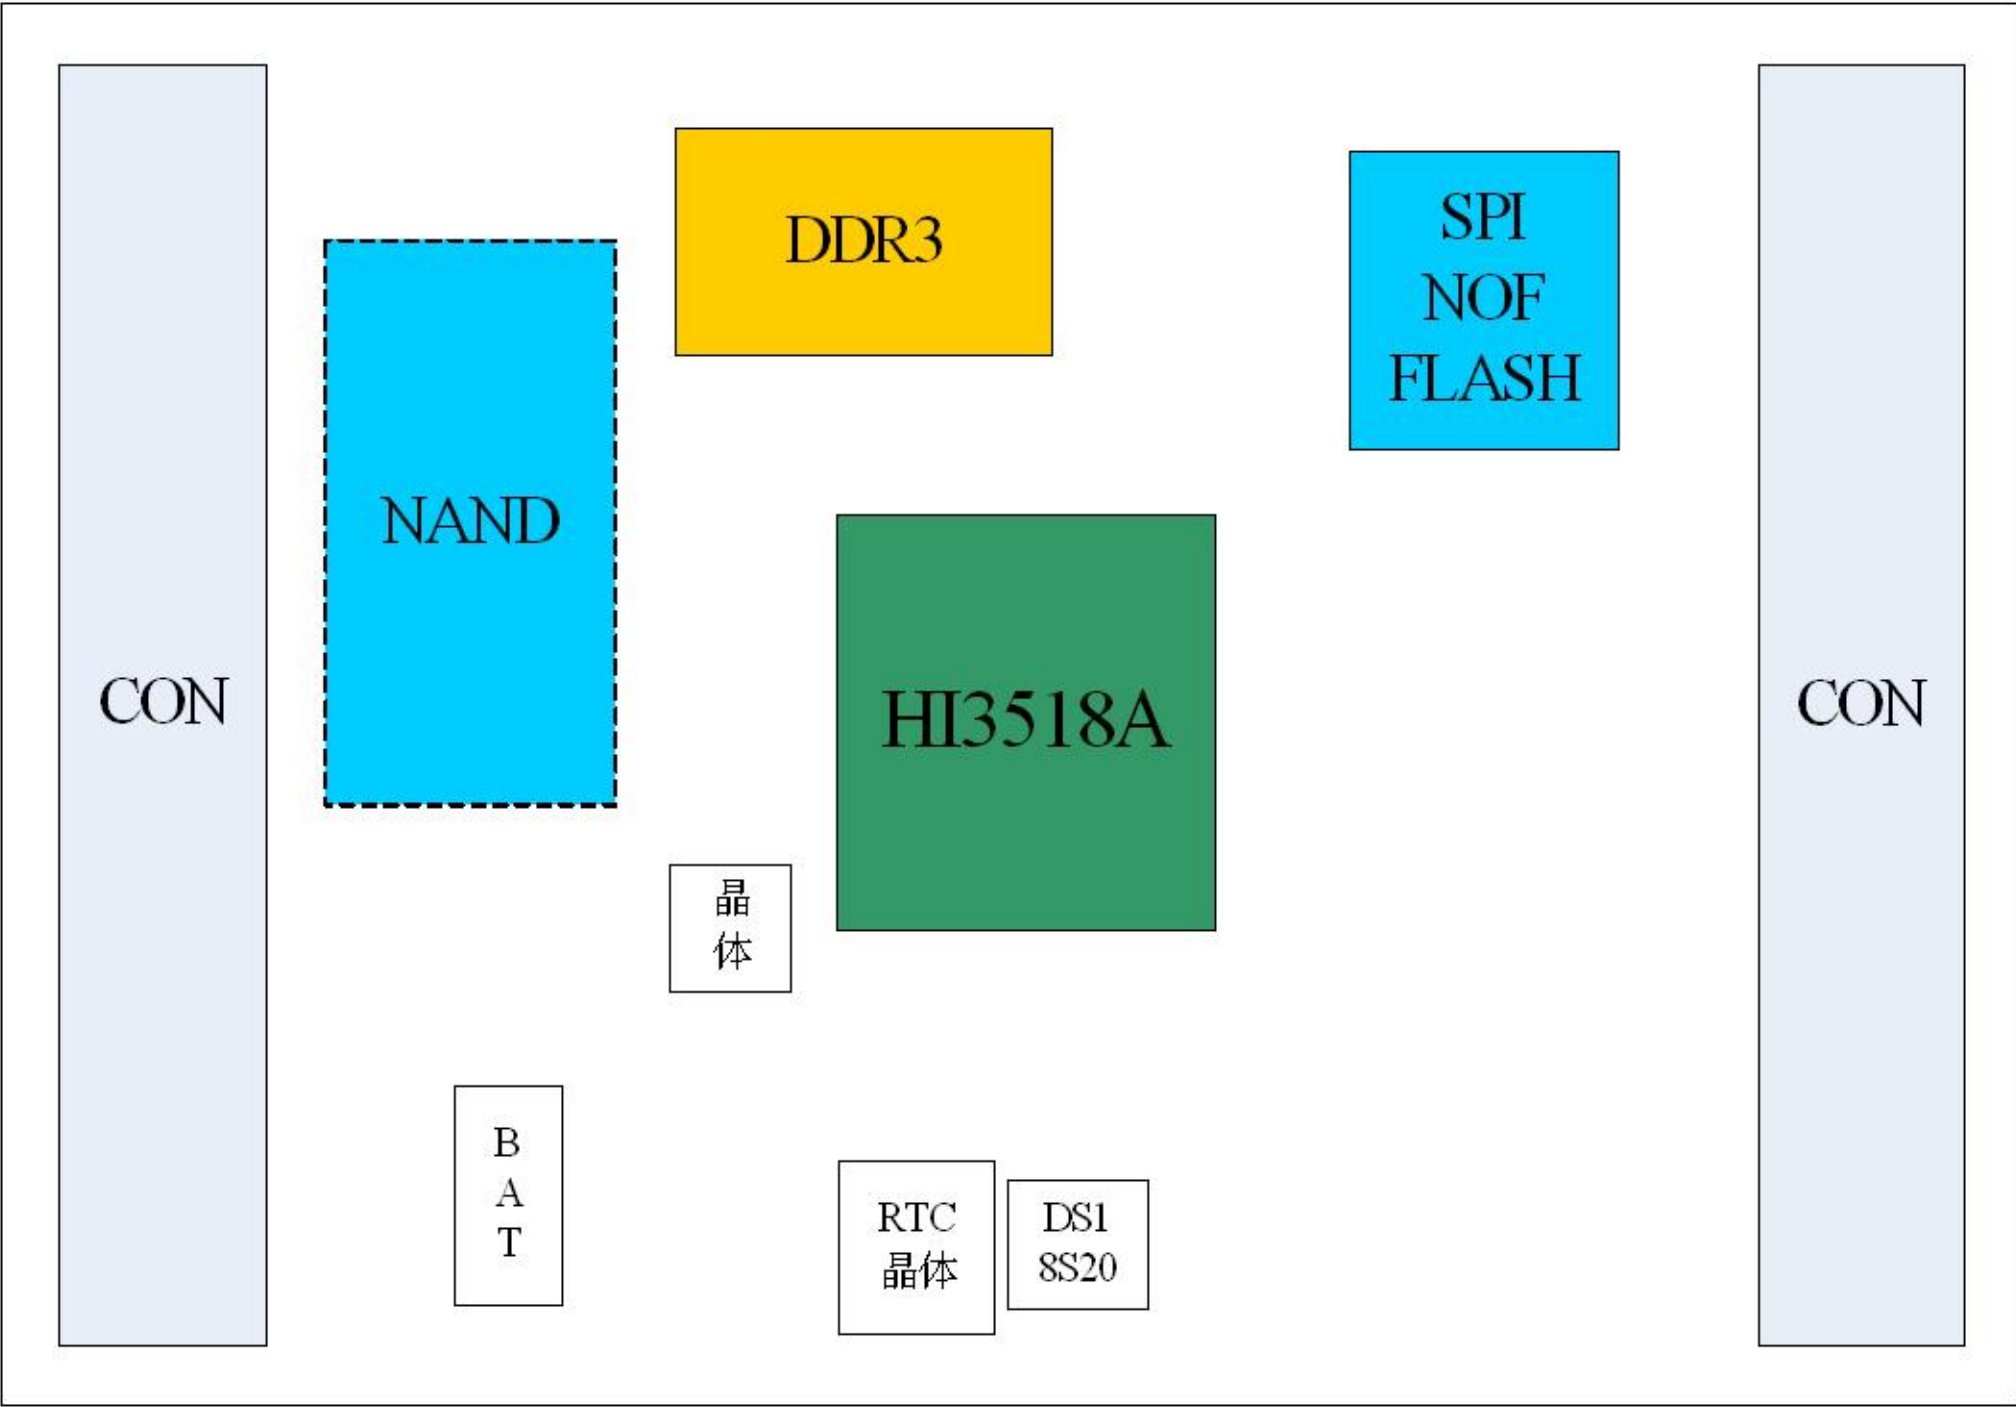

The type and specification of the components refer to the BOM

				NA	
				ECA NO	DATE
DESIGNED	YINWEI 00169616	HI3518ADMEB		00001234	
REVIEWED	LISI XXXXX				
		VER	PART_NUMBER	SHEET 2 OF 9	
		A01	03030001	HUAWEI TECH CO.,LTD.	



Power tree

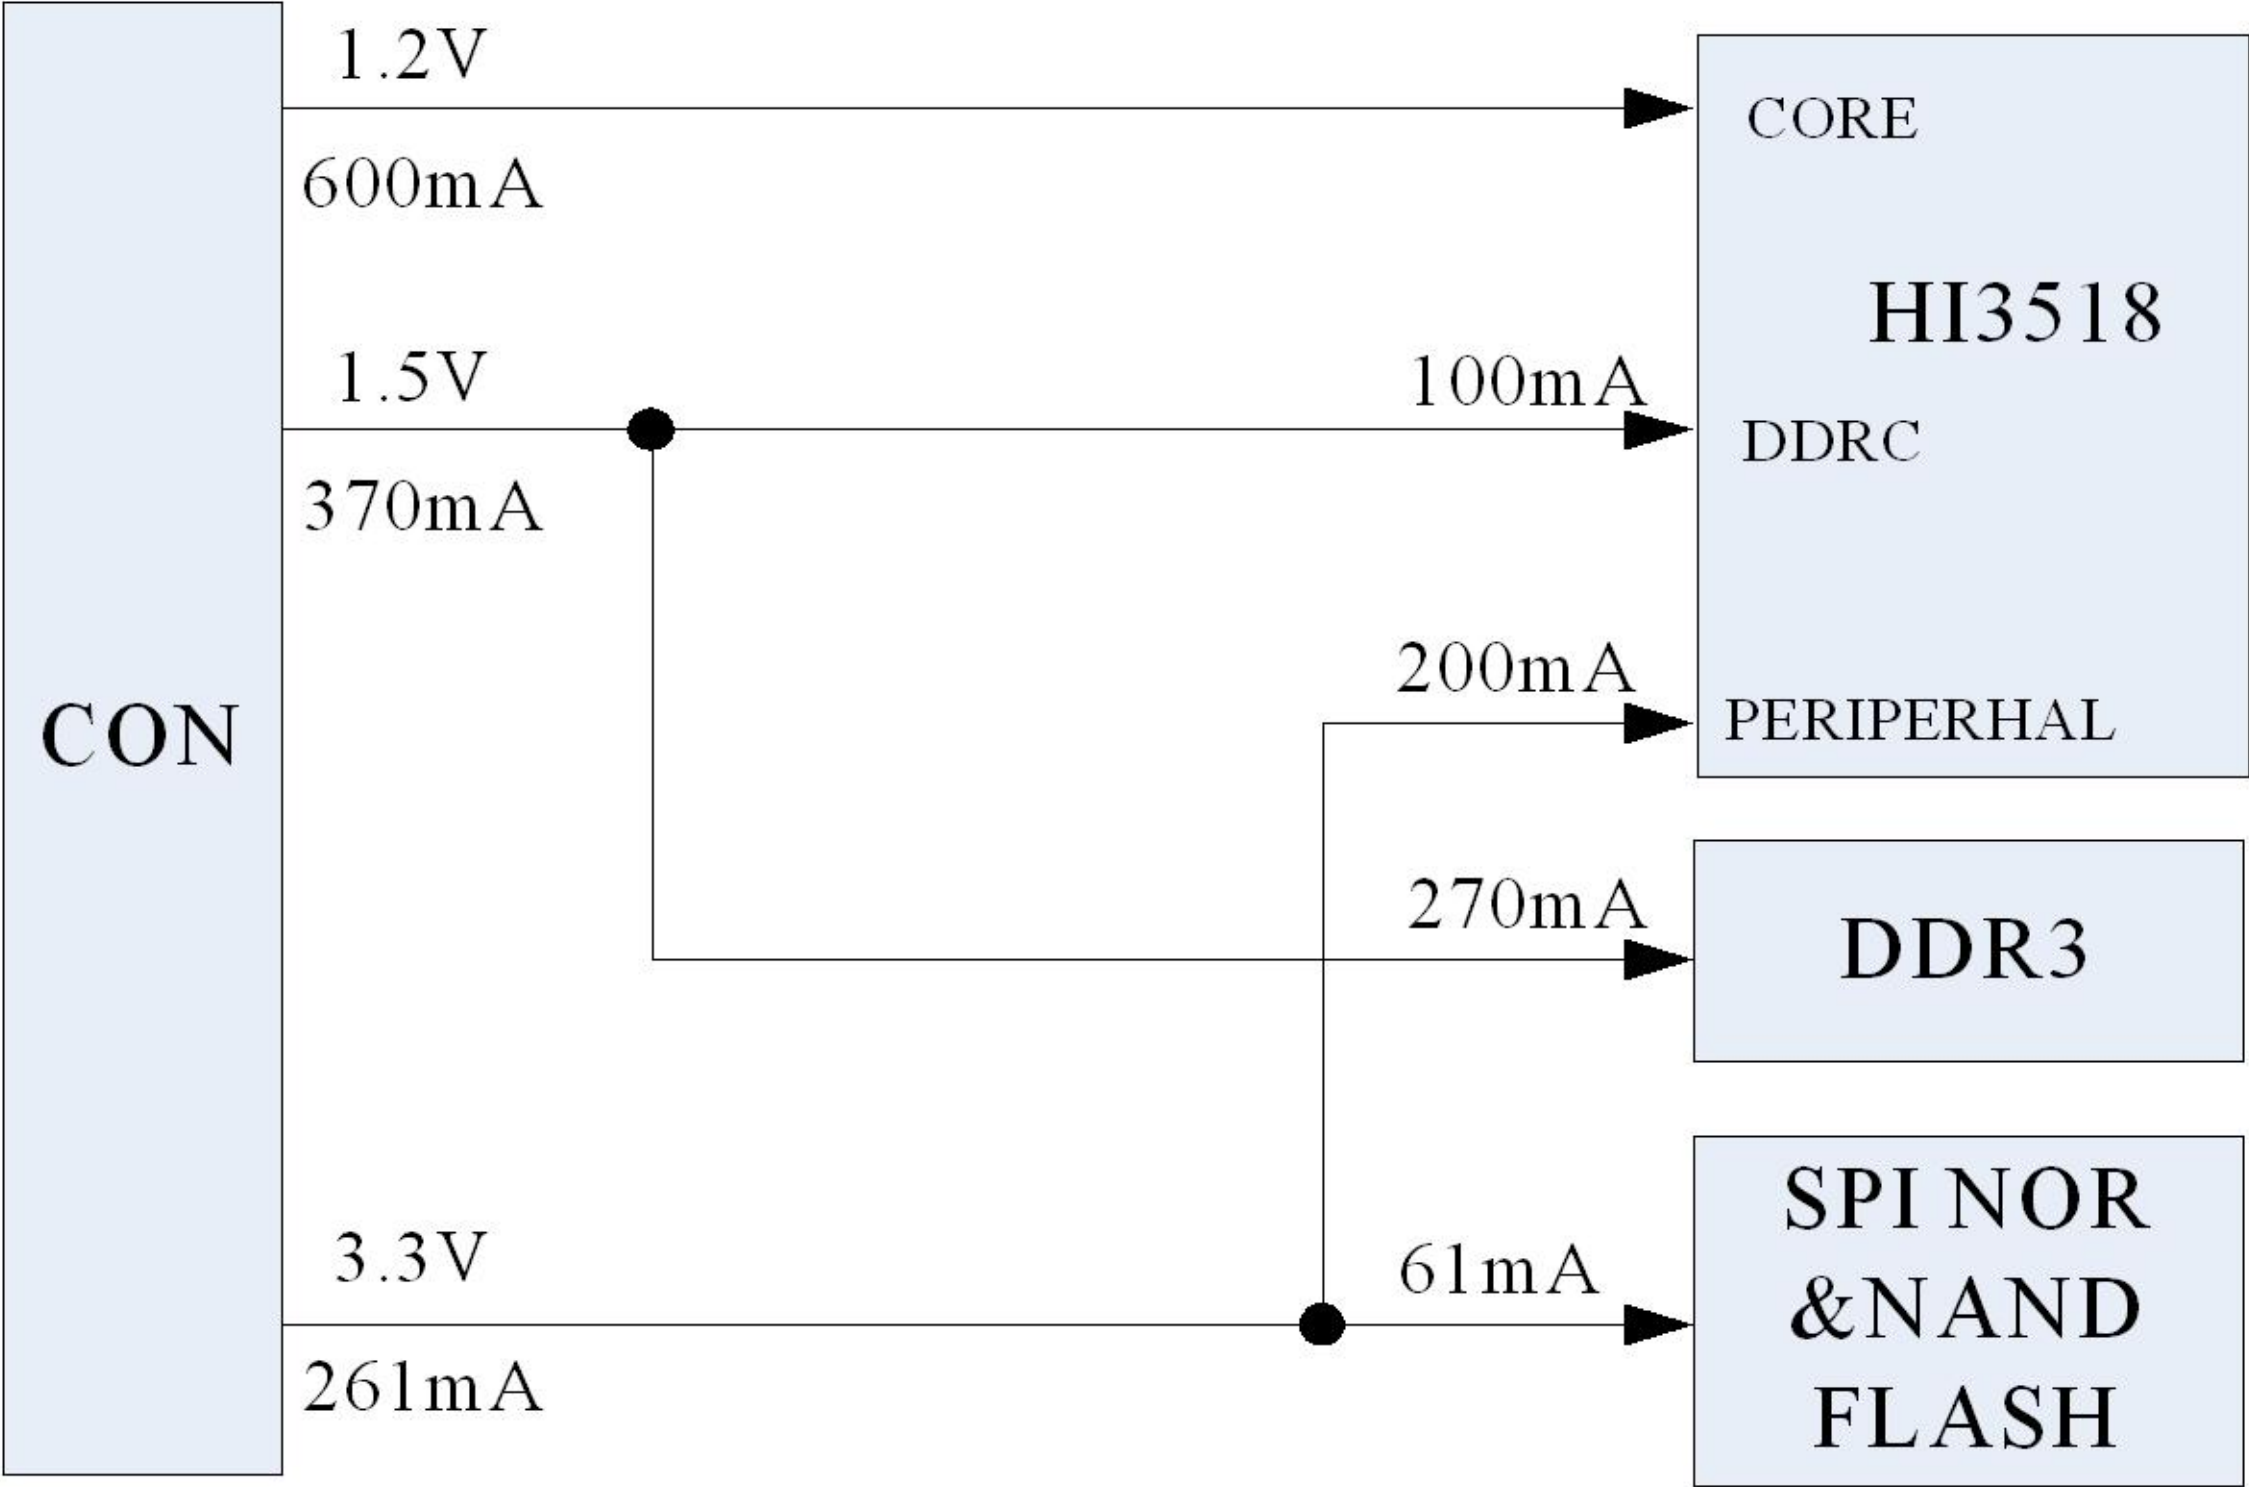

The type and specification of the components refer to the BOM

				NA	
				ECA NO	DATE
DESIGNED	YINWEI 00169616	HI3518ADMEB		00001234	
REVIEWED	LISI XXXXX				
		VER	PART_NUMBER	SHEET 3 OF 9	
		A01	03030001	HUAWEI TECH CO.,LTD.	


Unit 1 of Hi3518A(Power)

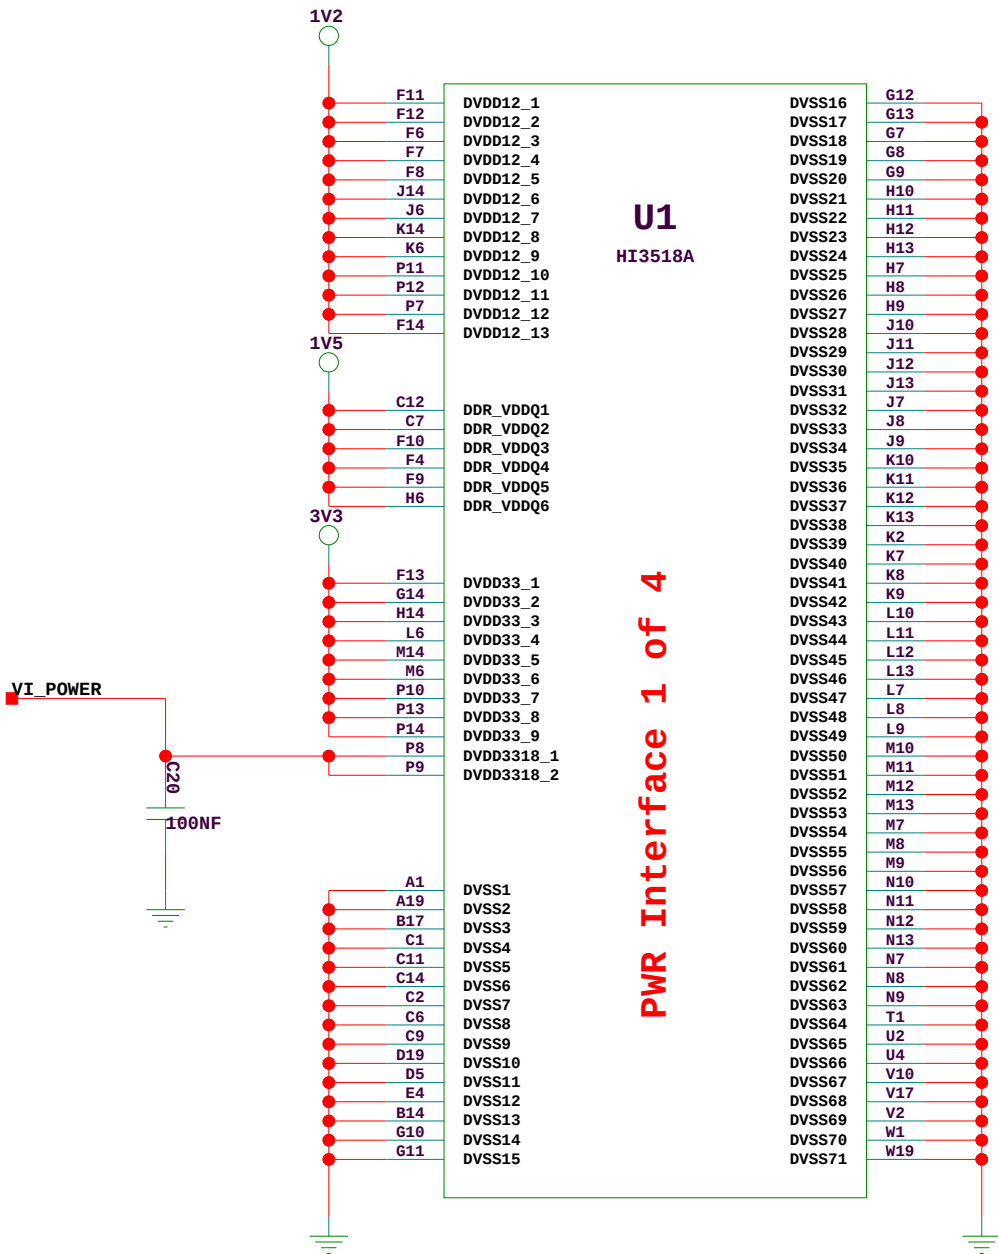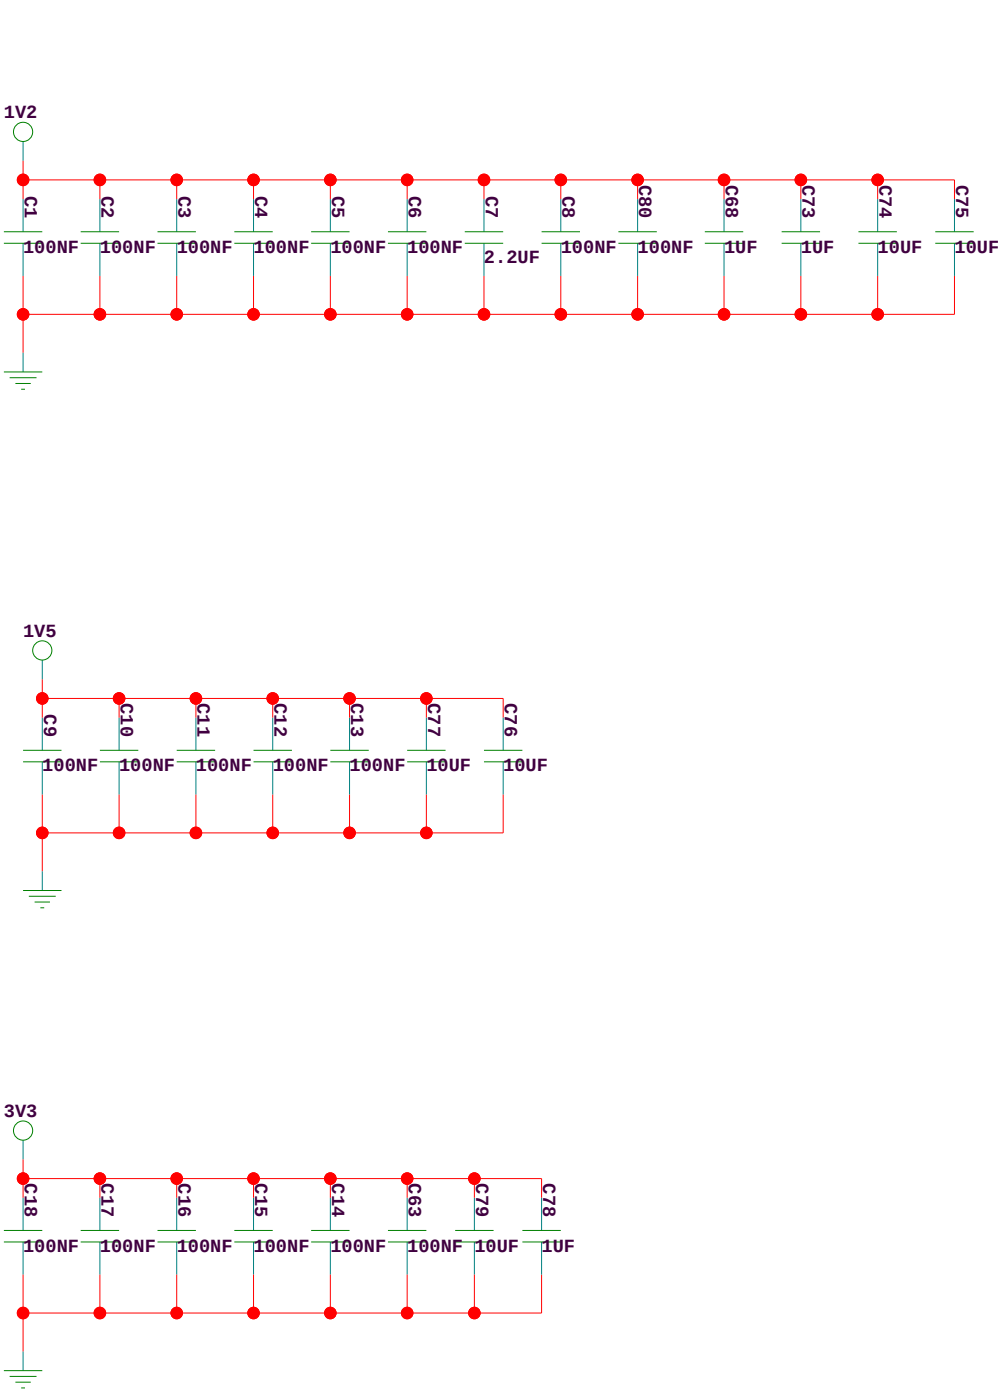

The type and specification of the components refer to the BOM

				NA	
				ECA NO	DATE
DESIGNED	YINWEI 00169616	HI3518ADMEB		00001234	
REVIEWED	LISI XXXXX				
		VER	PART_NUMBER	SHEET 4 OF 9	
		A01	03030001	HUAWEI TECH CO.,LTD.	


Unit 2 of Hi3518A(DDR)

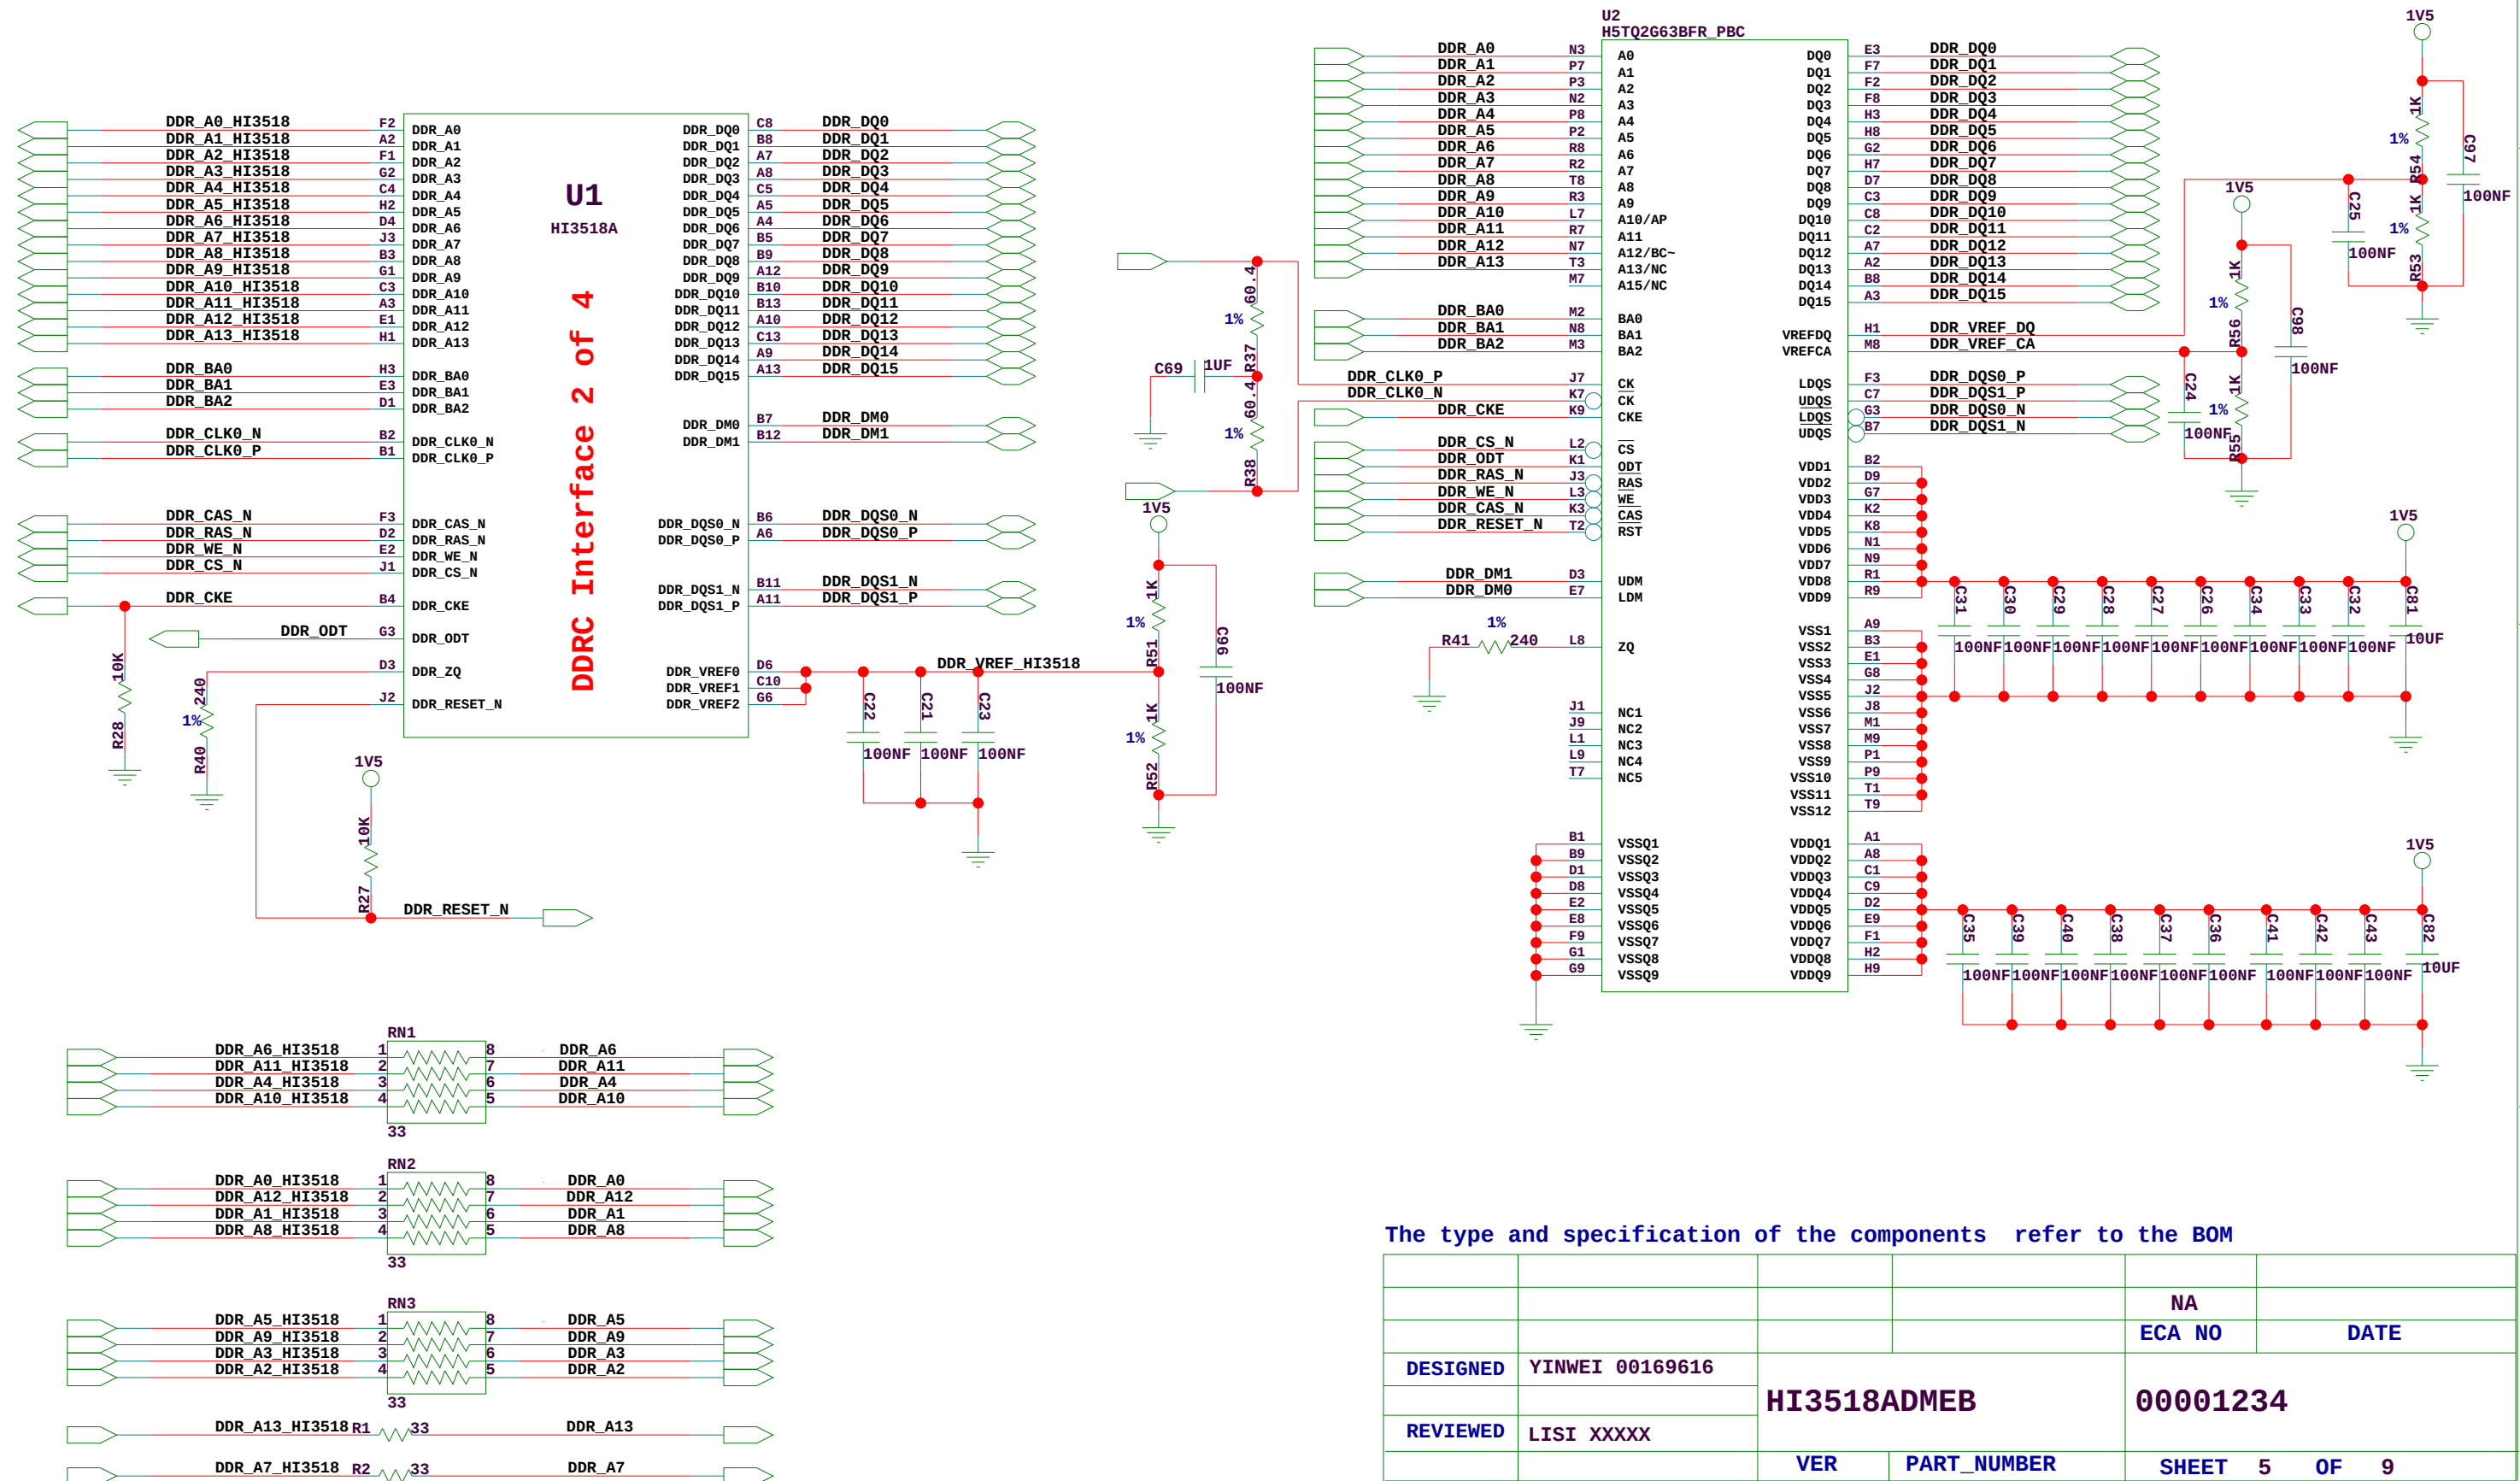

The type and specification of the components refer to the BOM

				NA	
				ECA NO	DATE
DESIGNED	YINWEI 00169616	HI3518ADMEB		00001234	
REVIEWED	LISI XXXXX				
		VER	PART_NUMBER	SHEET 5 OF 9	
		A01	03030001	HUAWEI TECH CO.,LTD.	

Unit 3 of Hi3518A(SYS)

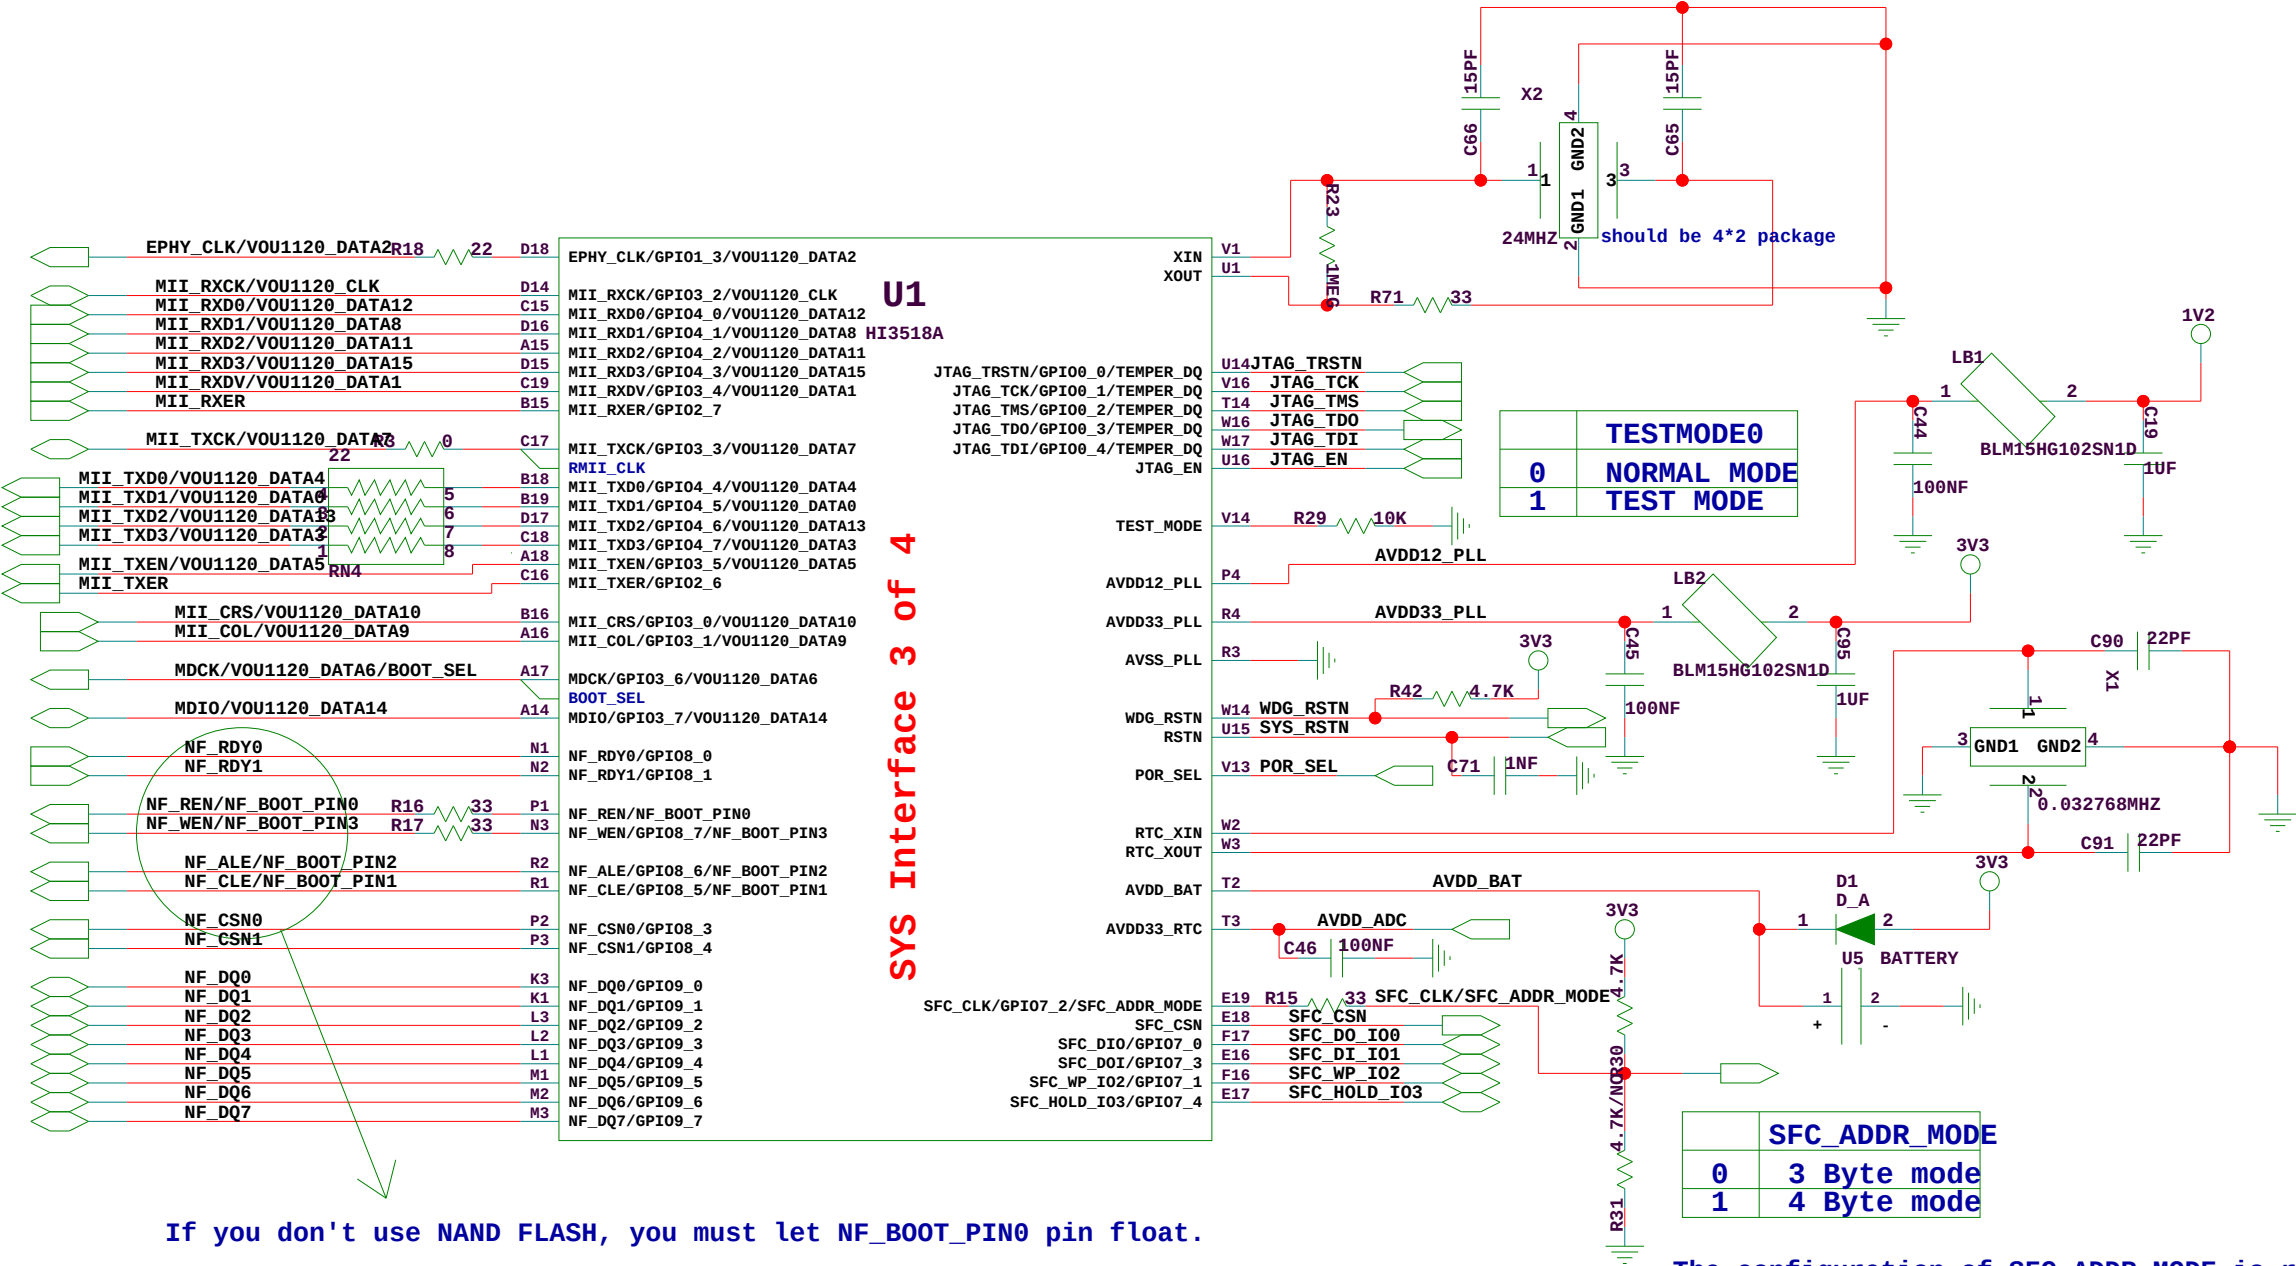

If you don't use NAND FLASH, you must let NF_BOOT_PIN0 pin float.

If you use NAND FLASH, the config value of NF_BOOT_PIN[0:4] should refer to the page 8 of HI3518PERB schematic. It couldn't exceed the value in the table.

If boot from NAND FLASH, you should connect the NF_CSN0 to your master NAND FLASH.


The configuration of SFC_ADDR_MODE is related to the type of the SPI FLASH.

The type and specification of the components refer to the BOM



				NA	
				ECA NO	DATE
DESIGNED	YINWEI 00169616	HI3518ADMEB		00001234	
REVIEWED	LISI XXXXX				
		VER	PART_NUMBER	SHEET 6 OF 9	
		A01	03030001	HUAWAI TECH CO.,LTD.	

Unit 4 of Hi3518A(PERIPHERAL)

Note:In order to support different sensors,the VI block,SSP block and SENSOR CLOCK pin of Hi3518 could support 1.8V or 3.3V voltage.
The power of pull-up resistor of SPI_CS must be same with the power of DVDD3318 pin of Hi3518.

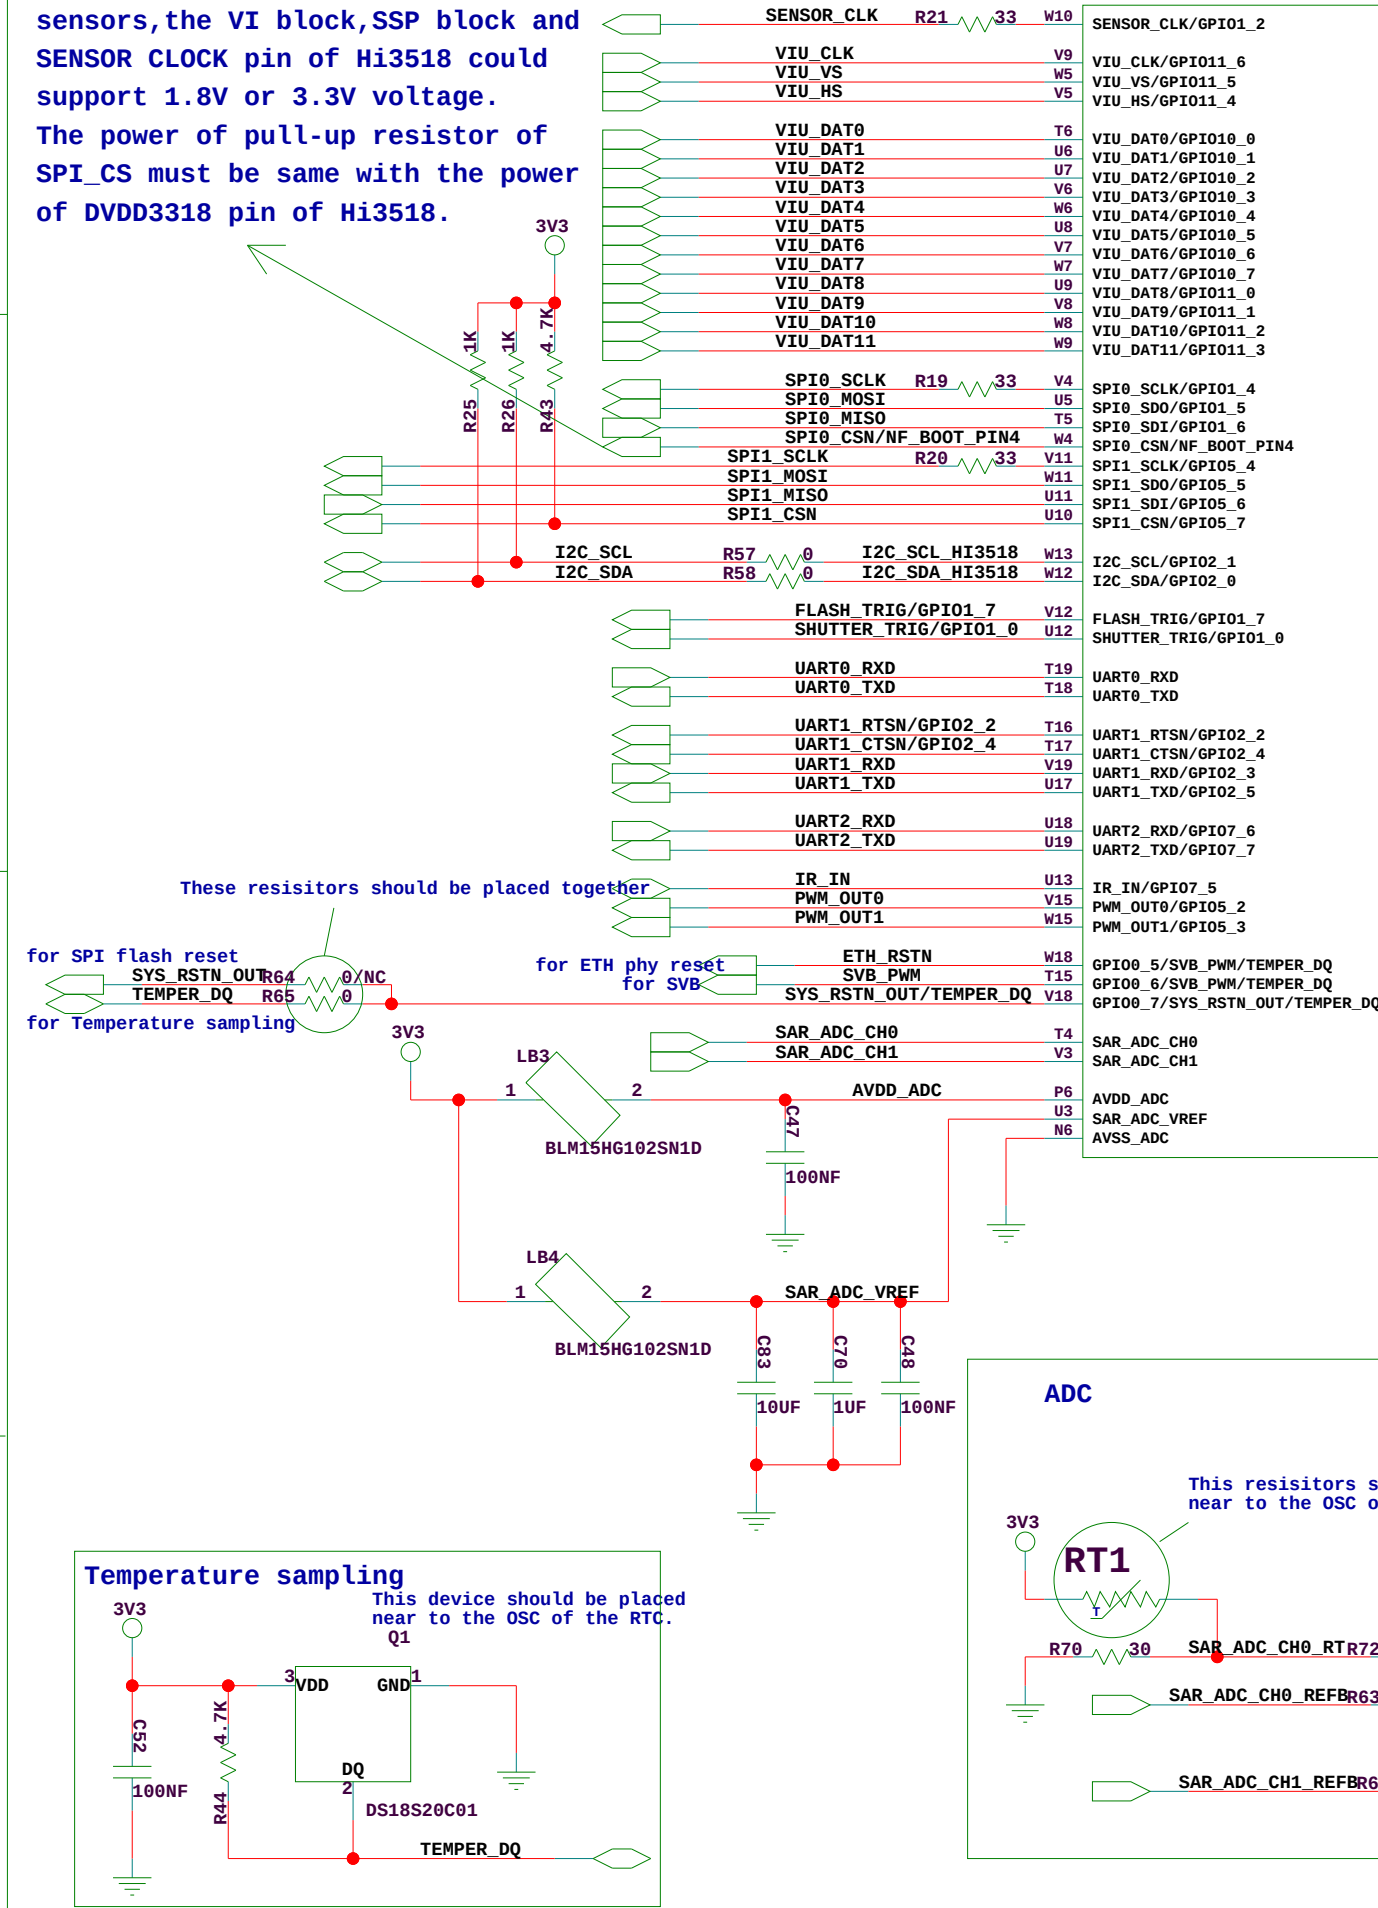


Flash

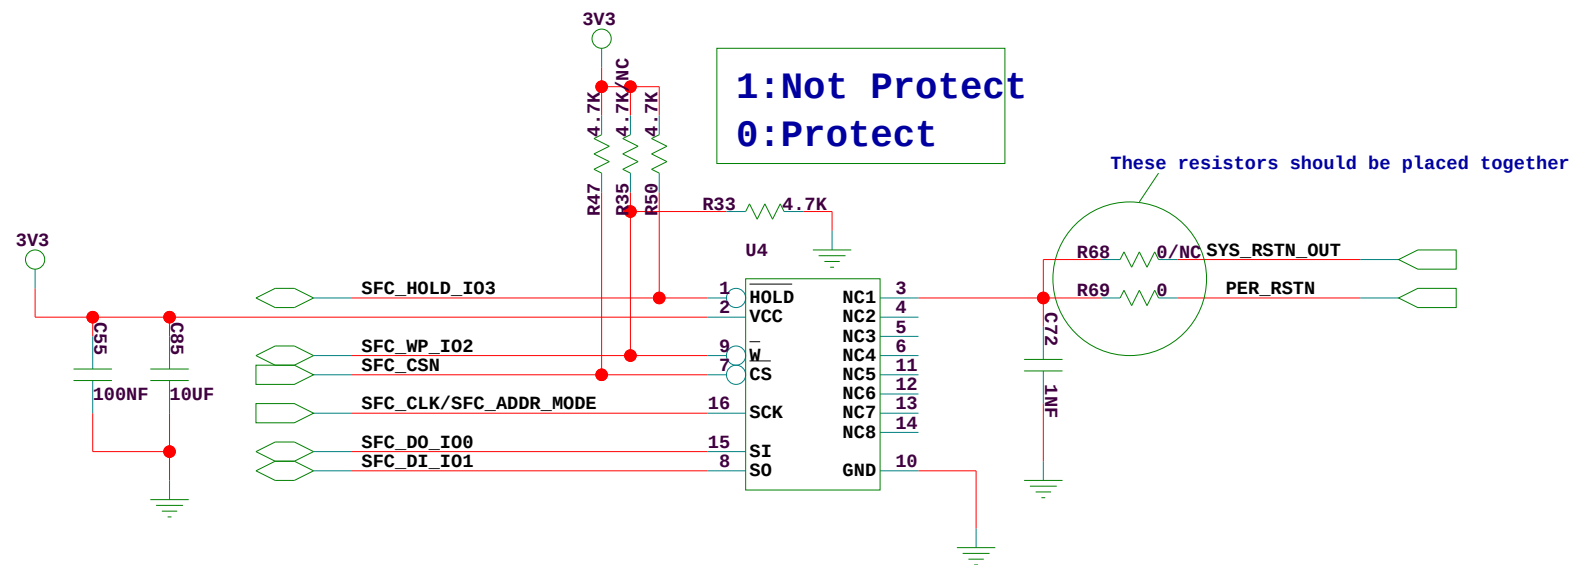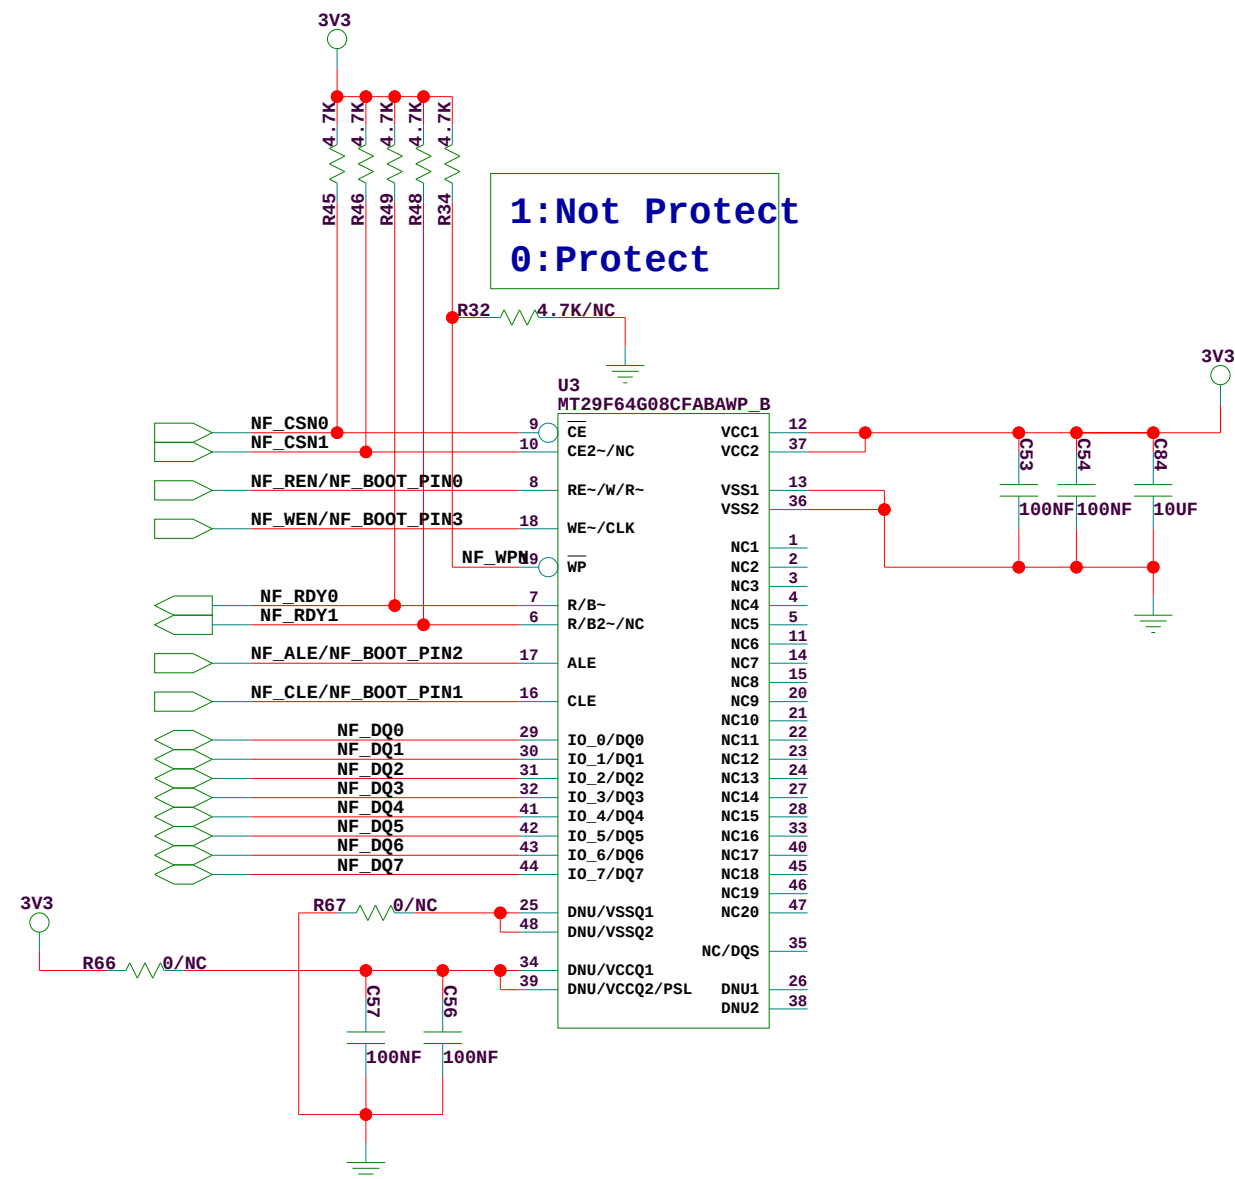

The type and specification of the components refer to the BOM

				NA	
				ECA NO	DATE
DESIGNED	YINWEI 00169616	HI3518ADMEB		00001234	
REVIEWED	LISI XXXXX				
		VER	PART_NUMBER	SHEET 8 OF 9	
		A01	03030001	HUAWEI TECH CO.,LTD.	

CONNECTOR

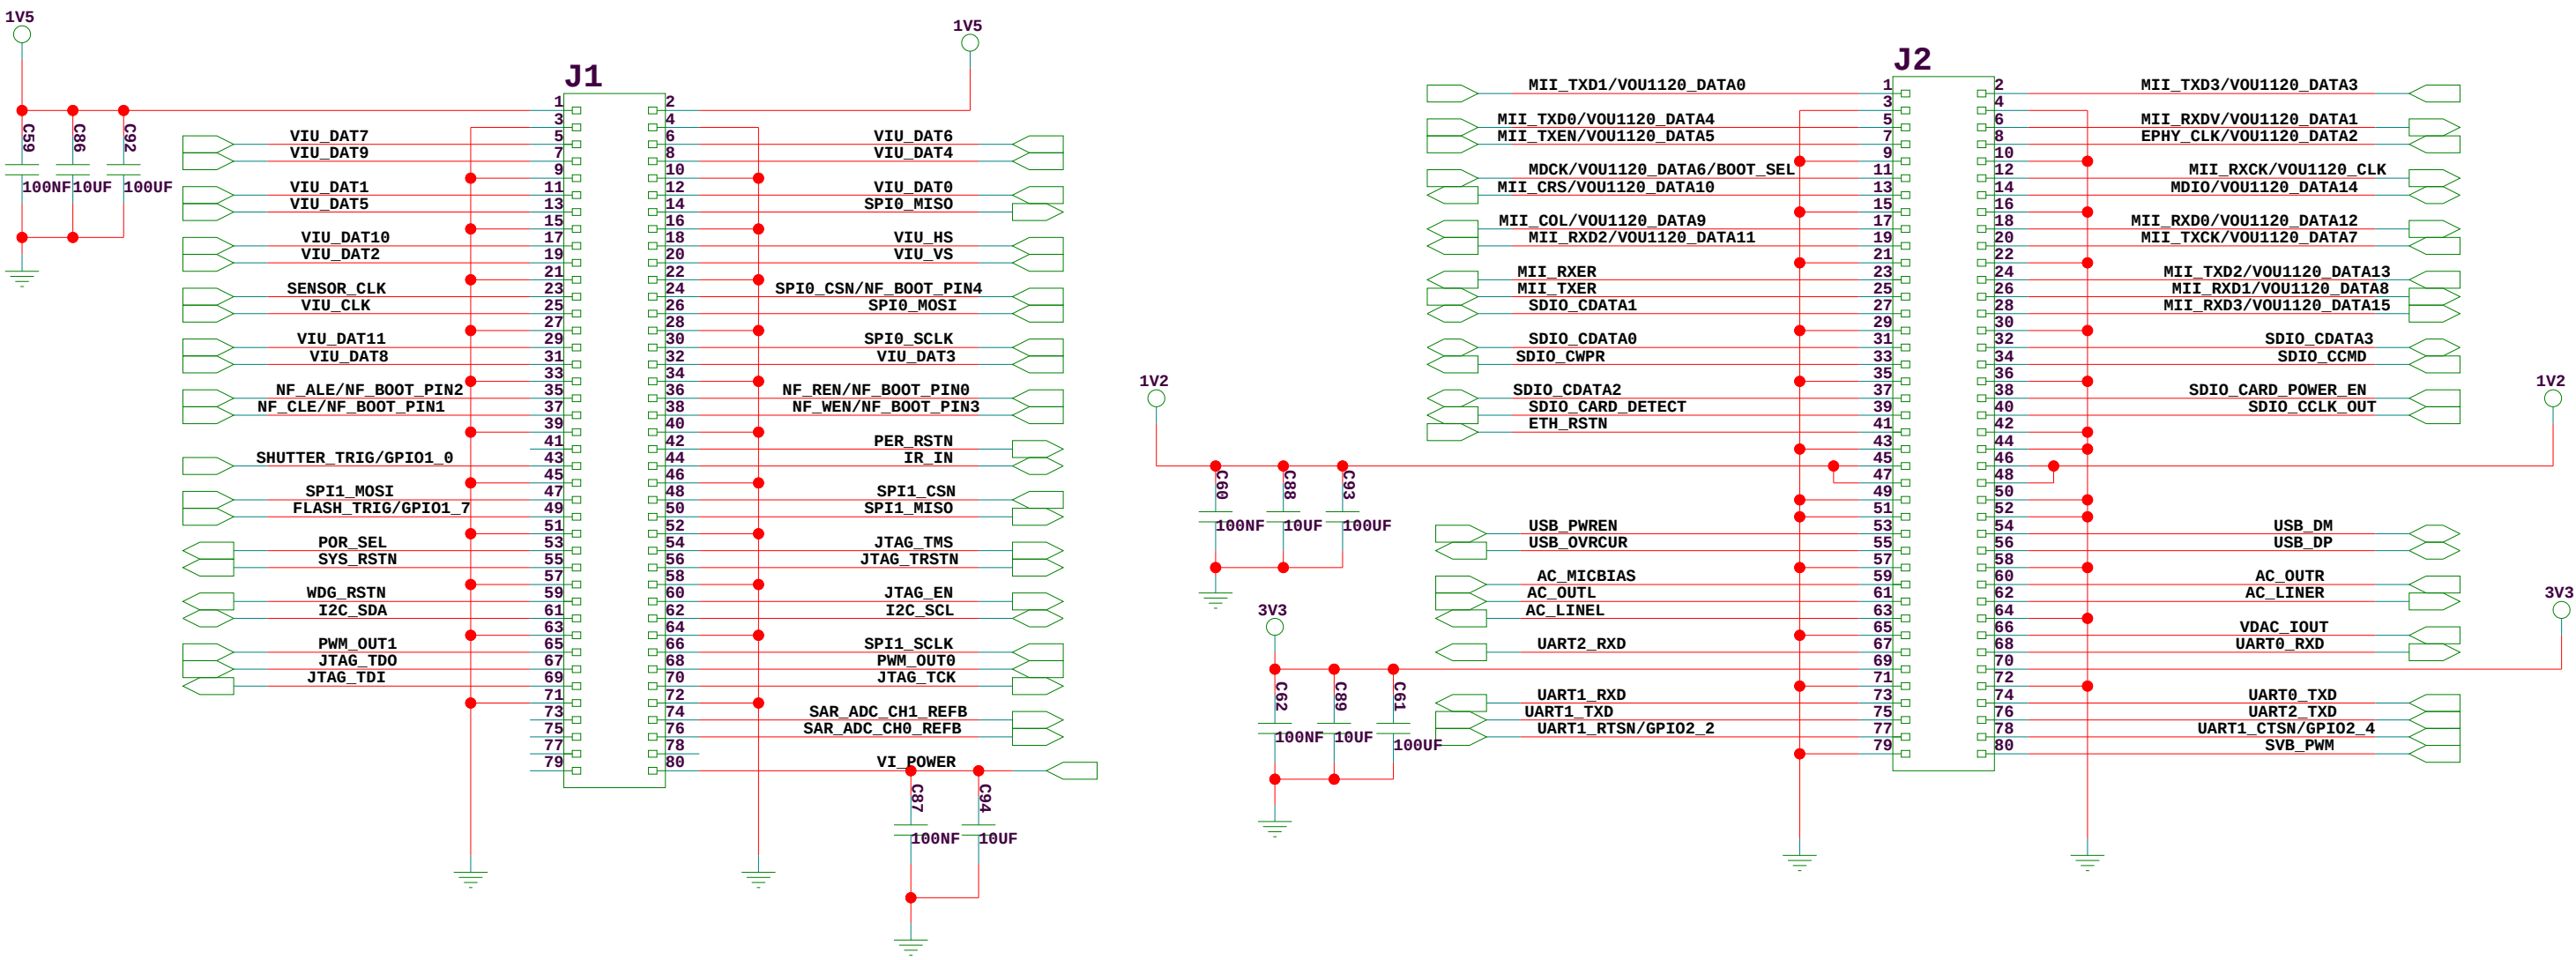

The type and specification of the components refer to the BOM

				NA	
				ECA NO	DATE
DESIGNED	YINWEI 00169616	HI3518ADMEB		00001234	
REVIEWED	LISI XXXXX				
		VER	PART_NUMBER	SHEET 9 OF 9	
		A01	03030001	HUAWEI TECH CO.,LTD.	