


RoHS Compliant
Halogen Free

SYMBOL	REV.	REVISION	APPROVAL	DATE
	A	新版圖紙	Jenny	2025.12.02

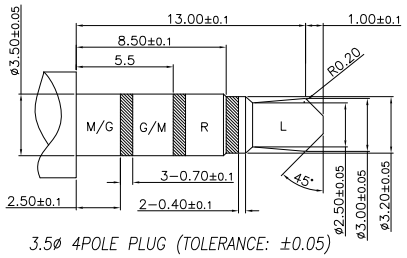



3.5Ø 4POLE PLUG (TOLERANCE: ±0.05)

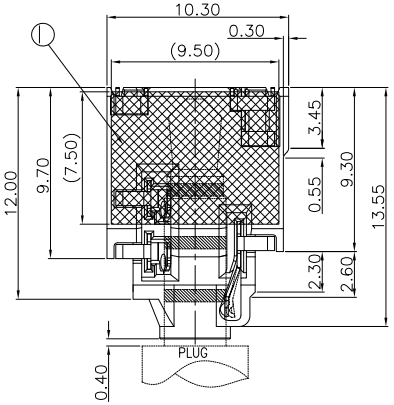





SPECIFICATIONS:
1. ELECTRICAL CHARACTERISTICS:
   1-1. RATING: 12V 1A
   1-2. CONTACT RESISTANCE: 50mΩ MAX.(INITIAL)
   1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
   1-4. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500V DVC.
2. MECHANICAL CHARACTERISTICS:
   2-1. INSERTION FORCE : 0.5~2.2Kgf. INITIAL;
   WITHDRAWAL FORCE : 0.5~2.2Kgf. INITIAL.
   2-2. INSERTION FORCE : 0.5~2.2Kgf AFTER THE 5000TH;
   WITHDRAWAL FORCE : 0.5~2.2Kgf. AFTER THE 5000TH.
3. LIFE TEST: 5,000 CYCLES MIN.
   AFTER LIFE TEST,CONTACT RESISTANCE:100mΩ MAX.
4. AFTER LIFE TEST,INSULATION RESISTANCE:50MΩ MIN.
5. SALT SPRAY 48HR.
6. FOR REFLOW SOLDERING LEAD-FREE PROCESS.




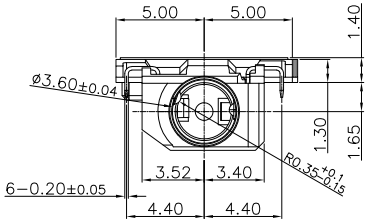


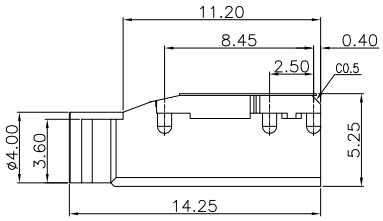

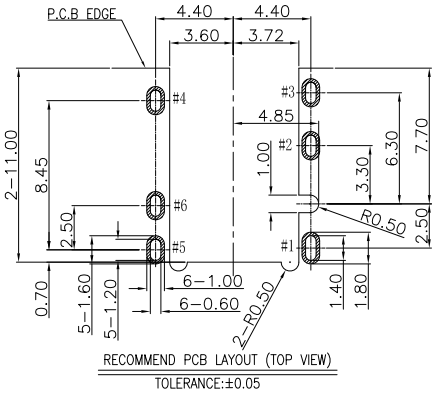


RECOMMEND PCB LAYOUT (TOP VIEW)
TOLERANCE:±0.05

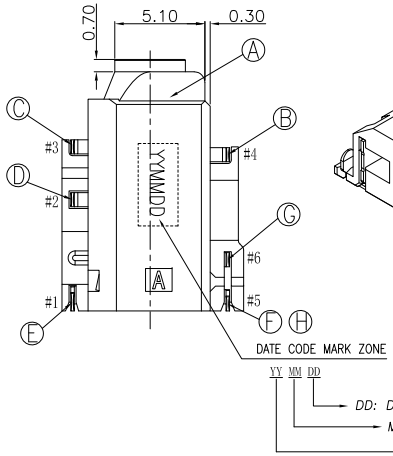




SCHEMATIC

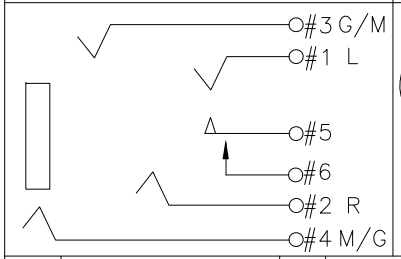

AFTER INSERT SCHEMATIC

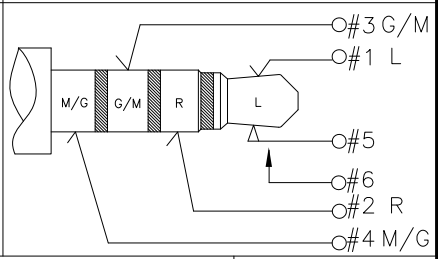

NO.	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
I	MYLAR	1	KAPTON	BLACK
H	SEPARATOR	1	PA10T UL94V-0	BLACK
G	MAKE TERMINAL	1	C5210-EH t=0.2	GOLD FLASH ON CONTACT AREA; GOLD FLASH ON SOLDER AREA; ALL OVER 50u" Ni.
F	TRANSFER TERMINAL	1	C5210-EH t=0.2	
E	TIP SPRING	1	SUS301 1/2H t=0.20	
D	RING-A	1	C5210-EH t=0.2	
C	RING-B	1	C5210-EH t=0.2	
B	EARTH	1	C5210-EH t=0.2	
A	BODY	1	PA10T UL94V-0	BLACK


DST-conn Tech. Co., Ltd.


COPYRIGHT RESERVED, PLEASE DO NOT COPY.


PART NAME	Φ3.5 Audio JACK			DRAWING	Jenny	DWG. No.	/
PART NO.	DA2-4164R-60BMX-U			CHECK	Winky	REV.	A
UNIT : mm	TOLERANCE UNLESS OTHERWISE SPECIFIED	X.X ±0.30 X.XX ±0.20 X.XXX ±0.10	ANGLE ±2°	APPROVAL	Jason	DATE	2025.12.02
				SCALE	1:1	PAGE	1 OF 1

RoHS Compliant
Halogen Free

SYMBOL	REV.	REVISION	APPROVAL	DATE
	A	新版圖紙	Jenny	2024.06.04

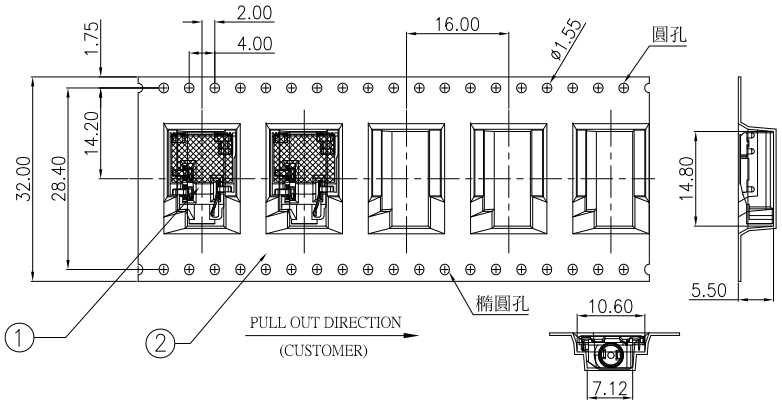


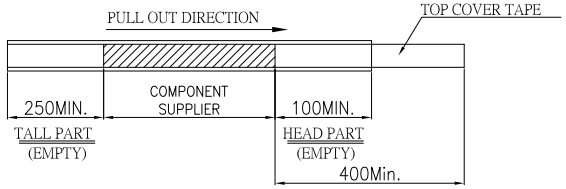




COVER TYPE PEELING FORCE:

A	165°~180°
F	0.1N~1.3N

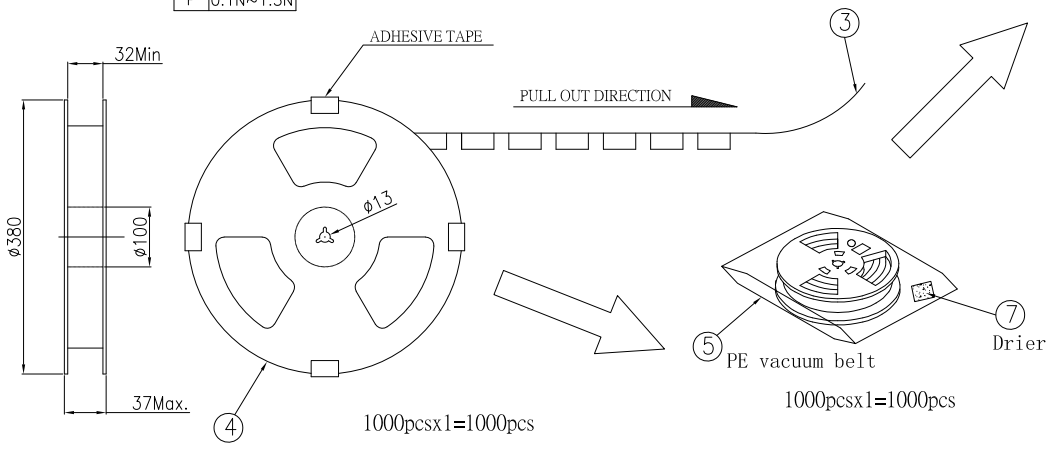

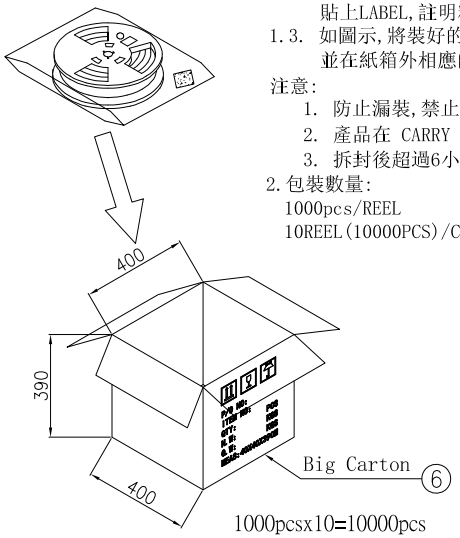

1. 包裝方式:

1.1. 使用半自動包裝機,先將CARRY TAPE 送入導軌中,並與COVER TAPE 貼合在上面,其中初始250mm Min 空槽不要放產品,然後將產品如圖所示方向依次放入CARRY TAPE內,每個槽放1PCS,每REEL共包裝產品1000PCS,最後需留100mm Min 空槽不放產品.蓋帶末段預留400mm Min.

1.2. 用膠帶將CARRY TAPE粘在一起,外圍再用塑膠帶(電周波)纏繞一圈,按客戶求在REEL上貼上LABEL,註明料號,日期,數量.

1.3. 如圖示,將裝好的REEL裝入PE袋內,再將其放入CARTON內 ,最後用膠帶封箱,並在紙箱外相應的地方貼上標籤.

注意:

1. 防止漏裝,禁止碰歪產品錫腳;
2. 產品在 CARRY TPAE中的方向須如圖所示(產品頭部朝下, 即朝載帶橢圓孔方向)
3. 拆封後超過6小時需進行烘烤（40℃/6小時）.

2. 包裝數量:

1000pcs/REEL
10REEL(10000PCS)/CARTON

NO.	DESCRIPTION	QTY	MATERIAL
⑦	DRIER	10Pcs	
⑥	CARTON	1Pcs	400*400*390 (INNER DIM.)
⑤	PE VACUUM BELT	10Pcs	450*500*0.09 (INNER DIM.)(TRANSPARENT)
④	REEL	10R	Ø380mm,H=37mm Max
③	COVER TAPE	1R	PE,W=25.5mm
②	TAPE RELL	10PCS	PS,W=32mm
①	DA2-4164R-60BMX-U	10000PCS	N/A

DST-conn Tech. Co., Ltd.

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME	Φ3.5 Audio JACK			DRAWING	Jenny	DWG. No.	/
PART NO.	DA2-4164R-60BMX-U PACKING			CHECK	Winky	REV.	A
UNIT : mm	TOLERANCE UNLESS OTHERWISE SPECIFIED	X.X ±0.30 X.XX ±0.20 X.XXX ±0.10	ANGLE ±2°	APPROVAL	Jason	DATE	2024.06.04
				SCALE	1:1	PAGE	1 OF 1