

WiFi Part III

Assignment Project Exam Help
IEEE 802.11 for Niche Applications

<https://eduassistpro.g11nsoft.com/ad/ay>

Add WeChat edu_assist_pro


Overview

1. IEEE 802.11af
2. IEEE 802.11ah
3. IEEE 802.11
4. IEEE 802.11

Assignment Project Exam Help

<https://eduassistpro.github.io/>
Add WeChat edu_assist_pro

802.11 Standards

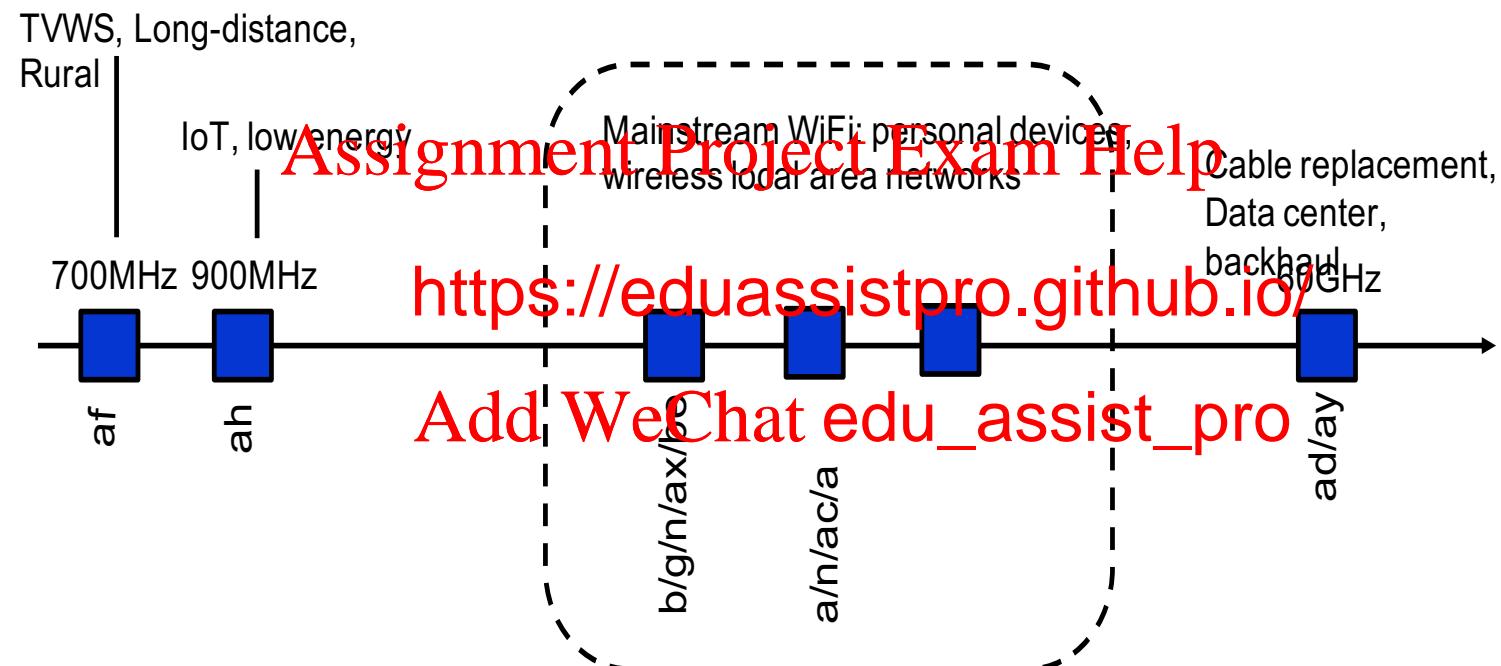



Assignment Project Exam Help


IEEE 802.11a (White-Fi)
<https://eduassistpro.github.io/>

Add WeChat edu_assist_pro


802.11af Overview

1. Television ~~Assignment~~ Project Exam Help
2. Whitespaces <https://eduassistpro.github.io/>
3. Whitespace Dat
4. Data rates and MCS Add WeChat edu_assist_pro


Over-the-Air Television Channels

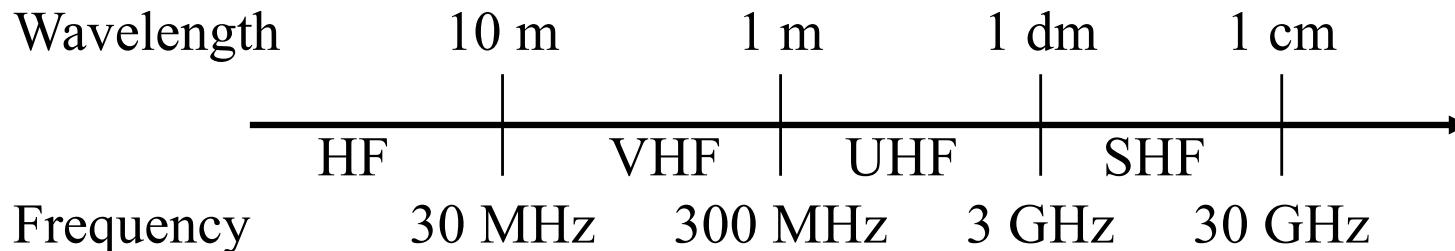

- Television channels use Very High Frequency (VHF) and Ultra High Frequency (UHF) <https://eduassistpro.github.io/>
- Each channel uses 6 MHz in US, Europe, and 7 MHz at some places

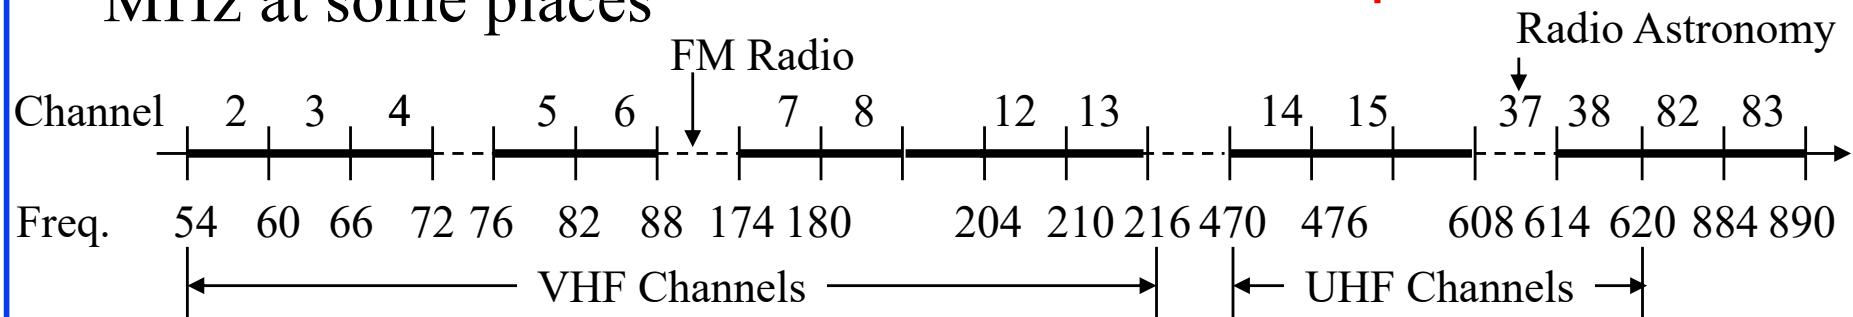

- At least one channel is skipped between two analog stations in neighboring areas to avoid interference




Digital Television




- Converting pixels to bits
⇒ Can easily encrypt, multiplex, mix with data
- Change Standard Definition (SD), High Definition (HD)
- Do not need empty channels between neighbors
- Need about 19 MHz channels in 6-8 MHz.
<https://eduassistpro.github.io/>
- US FCC stopped June 12, 2009
- A lot of TV spectrum became a **Add WeChat edu_assist_pro digital Dividend**
- Big demand for this “new” spectrum in **700 MHz band**:
 - Cellular, Emergency Services, ISM, everyone wants it
 - Government raised \$19.5 billion from auction to cellular companies and saved some for unlicensed use



700 MHz Band

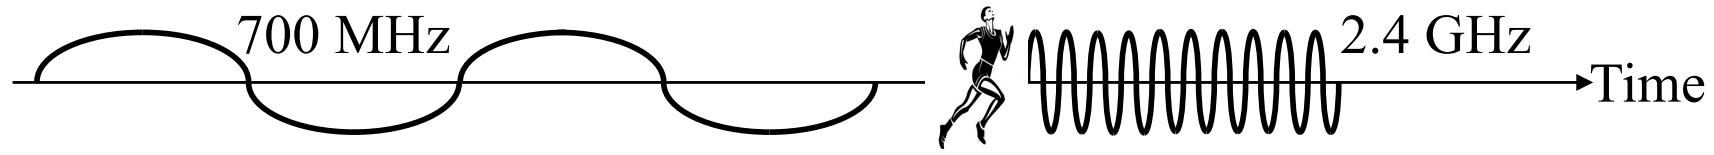

- Lower attenuation (1/7th to 1/9th of 1800/1900/2100 MHz)
⇒ Lower transmission power
⇒ Longer mobile
- Larger Cell radius <https://eduassistpro.github.io/>
- Long distance propagation → G areas.
Add WeChat edu_assist_pro

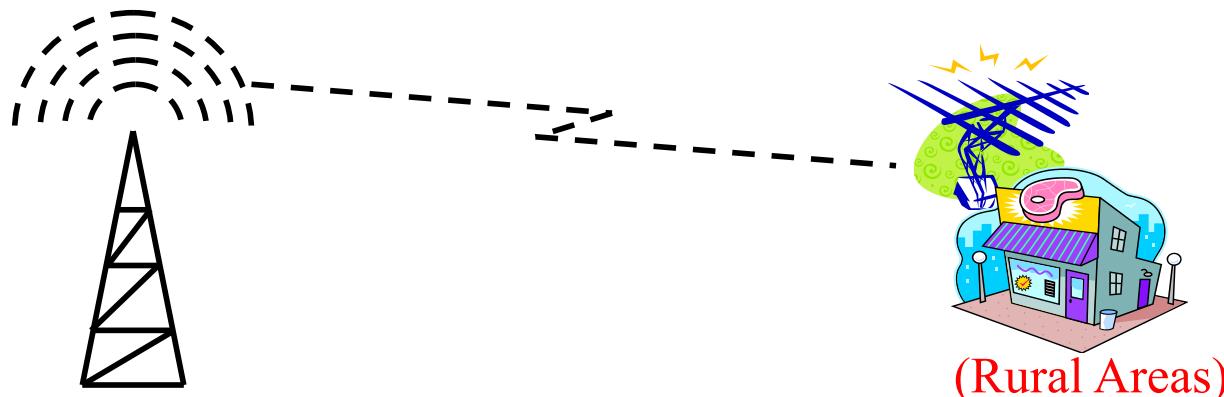


Ref: Adam LaMore, "The 700 MHz Band: Recent Developments and Future Plans,"

<http://www.cse.wustl.edu/~jain/cse574-08/700mhz.htm>

©2020 Mahbub Hassan

Spectral White Spaces

- Any spectrum at a given area at a given time available for use on a non-interfering basis:
 - Unallocated spectrum
 - Allocated but under-utilized
 - Channels not interferences i <https://eduassistpro.github.io/>
 - Digital Dividend

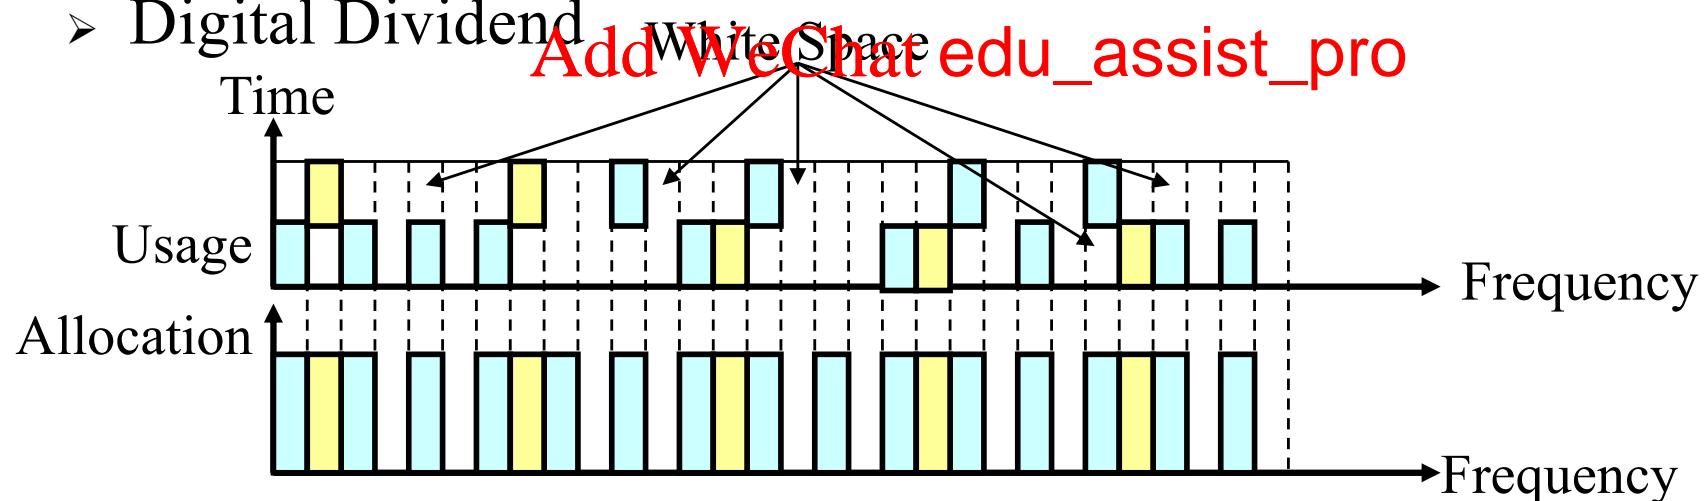

Ref: C. Gomez, “White Spaces for Rural Broadband,” April 2013,
http://www.itu.int/ITU-D/asp/CMS/Events/2013/PacificForum/ITU-APT-S3_Cristian_Gomez.pdf

©2020 Mahbub Hassan

Spectrum Usage Example

Assignment Project Exam Help

<https://eduassistpro.github.io/>

Add WeChat edu_assist_pro

White
Spaces

Ref: C. Stevenson, et al., “Tutorial on the P802.22.2 PAR for: *Recommended Practice for the Installation and Deployment of IEEE 802.22 Systems*” http://www.ieee802.org/802_tutorials/06-July/Rec-Practice_802.22_Tutorial.ppt
©2020 Mahbub Hassan

TVWS Databases

- FCC has authorized 10 companies to administer TVWS databases.
 - Get info from FCC database
 - Register fixed TVWS devices and wireless microphones
 - Synchronize d panies
 - Provide chann https://eduassistpro.github.io/ WS devices
- Europe requires devices to check hours
 - Add WeChat edu_assist_pro

White Spaces Near WUSTL, St. Louis, USA

Assignment Project Exam Help

<https://eduassistpro.github.io/>


Add WeChat edu_assist_pro

- 17 channels. Zipcode 63130.

Ref: Google Spectrum Database (not available anymore), <https://www.google.com/get/spectrumdatabase/channel/>
©2020 Mahbub Hassan

802.11af Database Operation

- Geolocation Database (GDB)
- Registered Location Secure Server (RLSS):
 - Provide faster response to access points (APs) locally in a campus.
 - May be Internet Service Provider (ISP) owned.
- Geolocation Data entities:
 - GDD Enabling <https://eduassistpro.github.io/>
 - GDD Dependent: Other static

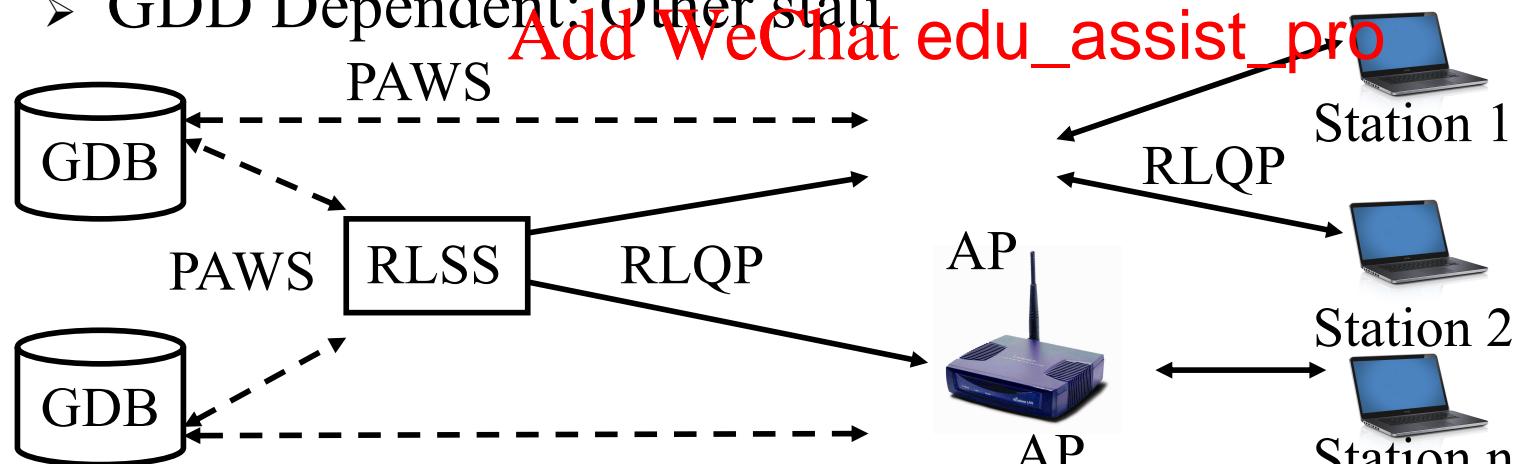


Ref: A. Flores, et al., "IEEE 802.11af: A Standard for TV White Space Spectrum Sharing,"

http://networks.rice.edu/papers/FINAL_article_80211af.pdf

©2020 Mahbub Hassan

Registered Location Query Protocol (RLQP)

- Protocol for exchange of white space map (WSM) among RLSS, APs, and stations, aka, Channel Schedule Management (CSM)

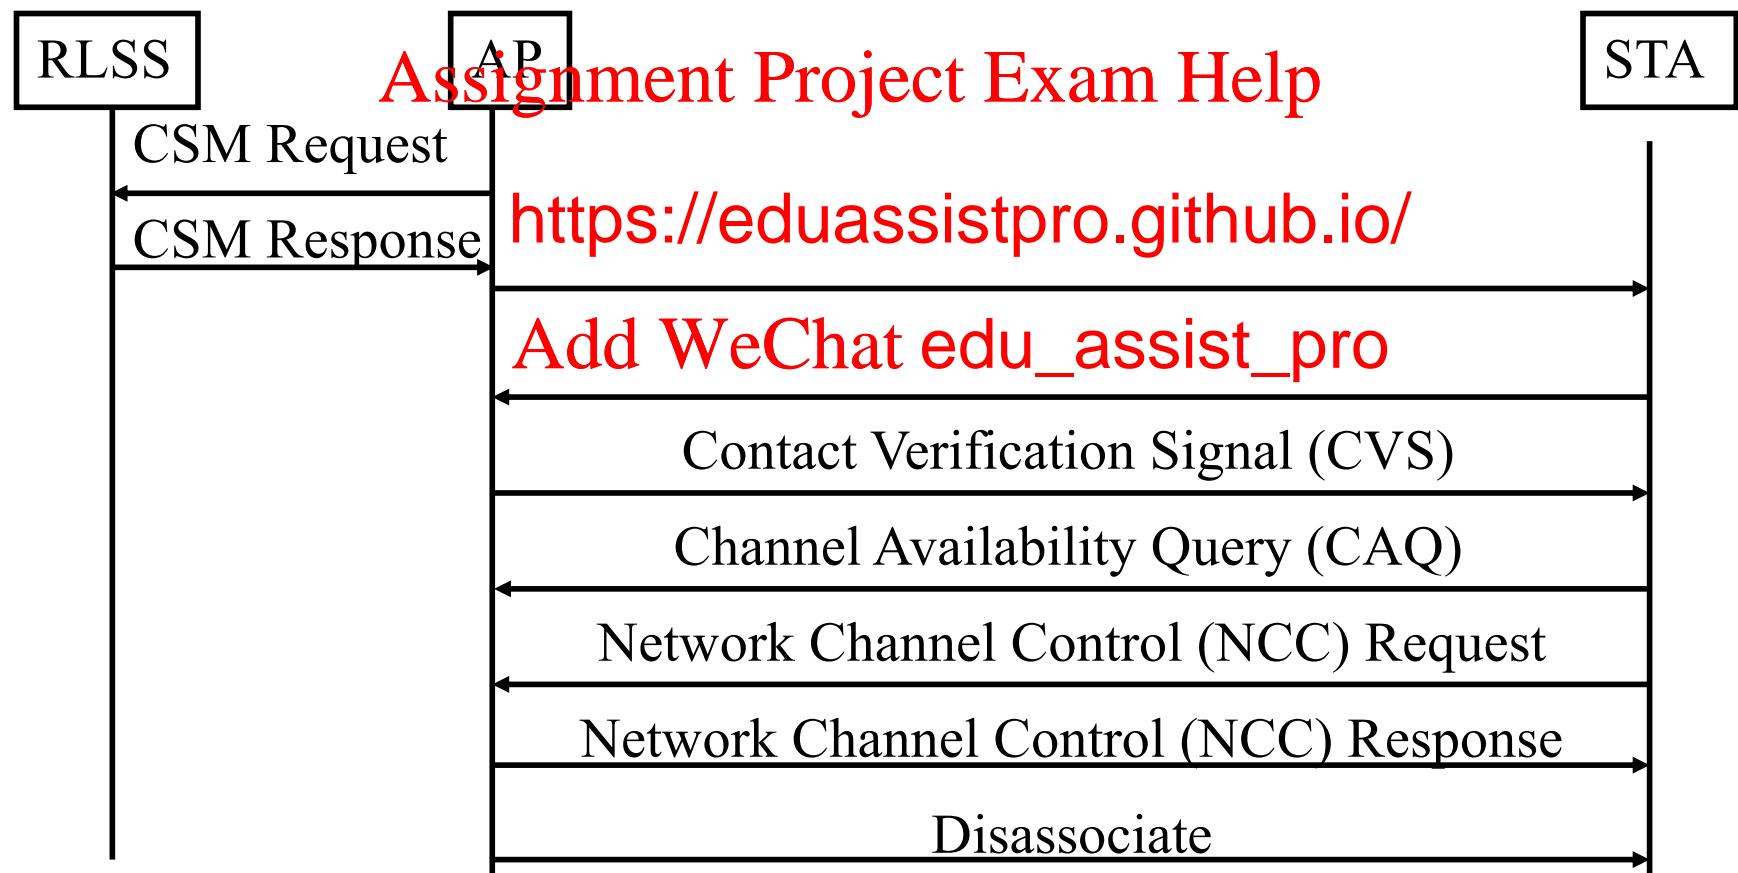


RLQP (Cont)

- ❑ CSM Request: APs ask other APs or RLSS about white space map
- ❑ APs broadcast beacons on all channels selected.
- ❑ Stations associate with the APs
- ❑ Contact Verification: APs tell their stations white space map and contact <https://eduassistpro.github.io/>
- ❑ Contact Availability Query (CAQ): APs ask APs, if they do not receive the map within a time limit
- ❑ CAQ Response
- ❑ Network Channel Control (NCC) Request: Sent by stations to APs requesting use of a channel. AP may forward to RLSS.
- ❑ NCC Response: Permission to transmit on requested channel
- ❑ Stations may be disassociated by APs if necessary

Protocol to Access White-Space (PAWS)

- ❑ IETF working group
- ❑ Mechanism to discover white space database
- ❑ Protocol to communicate with the database
- ❑ Interface Agnostic: 802.11af, 802.15.4m, 802.22, ...
Assignment Project Exam Help
- ❑ Spectrum agnostic: 6 MHz, 7 MHz, 8 MHz, ...
- ❑ Master Device: <https://eduassistpro.github.io/>
- ❑ Slave Device: W

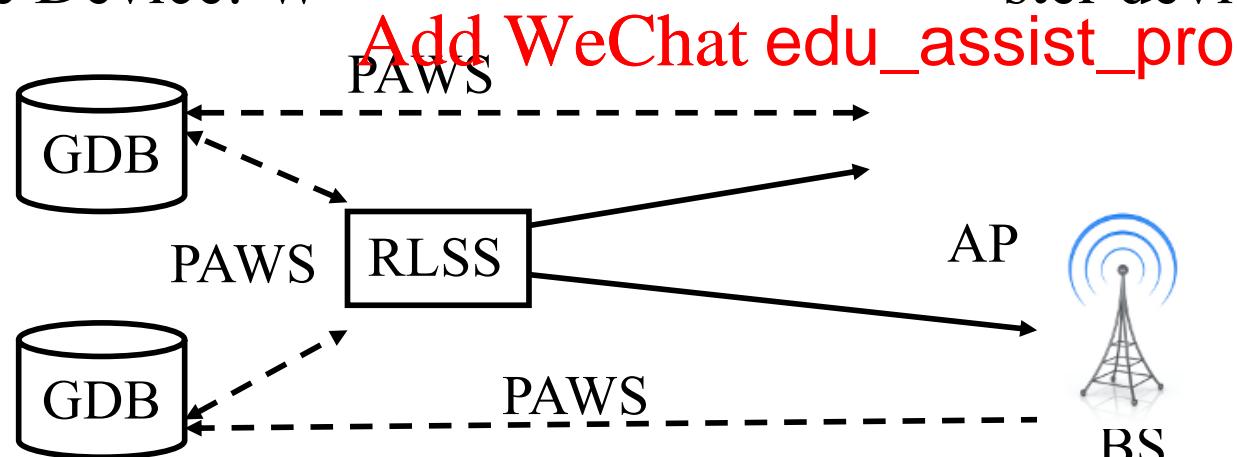

Ref: V. Chen, et al, ed. "Protocol to access White-Space (PAWS) Databases," Feb 2014,

<http://datatracker.ietf.org/doc/draft-ietf-paws-protocol/>

©2020 Mahbub Hassan

PAWS (Cont)

- ❑ Stations should be able to discover WS Database, its regulatory domain. May be preconfigured similar to DNS or Certification Authorities.
- ❑ Listing Server: Web page listing all national database servers.
Highly static ~~Assignment Project Exam Help~~
Can be cached by Master
- ❑ Master may register (model, serial, owner, ...) of itself and its devices <https://eduassistpro.github.io/>
- ❑ Mutual authentication and authentication certificates or passwords [Add WeChat edu_assist_pro](https://github.com/eduhassan/WeChat_edu_assist_pro)
- ❑ Master can then query the database
- ❑ The database should be able to push updates on channel availability changes
- ❑ Ensure security of discovery mechanism, access method, and query/response

Ref: A. Mancuso, Ed., et al, "Protocol to Access White-Space (PQWS) Databases: Use Cases and Requirements," IETF RFC 6953, May 2013, <http://tools.ietf.org/pdf/rfc6953>
©2020 Mahbub Hassan

PAWS (Cont)

- Allows WSD to specify geolocation, height, serial number, Certificates, device class, radio access technology (RAT), antenna gain, maximum EIRP, radiation pattern, spectrum mask, owner contact information <https://eduassistpro.github.io/>
- Allows database to specify a spectrum, available area, allowed power
- Allows WSD to register its selected spectrum for use
- Allows privacy to WSD (encryption)


Ref: V. Chen, et al, ed. "Protocol to access White-Space (PAWS) Databases," Feb 2014,
<http://datatracker.ietf.org/doc/draft-ietf-paws-protocol/>

©2020 Mahbub Hassan

PAWS Messages (Cont)

- Listing Request/Response: To/from listing server (not shown)
- Initialization: Exchange capability, location, get rules
Assignment Project Exam Help
- Registration: M haracteristics, owner, etc <https://eduassistpro.github.io/>
- Available Spectrum: Add: ~~WeChat individual~~ edu_assistpro.request
- Spectrum Use: register used spectrum, location, antenna etc. Get time limits in response.
- Device Validation: Database may ask masters to authenticated slaves

PAWS Messages

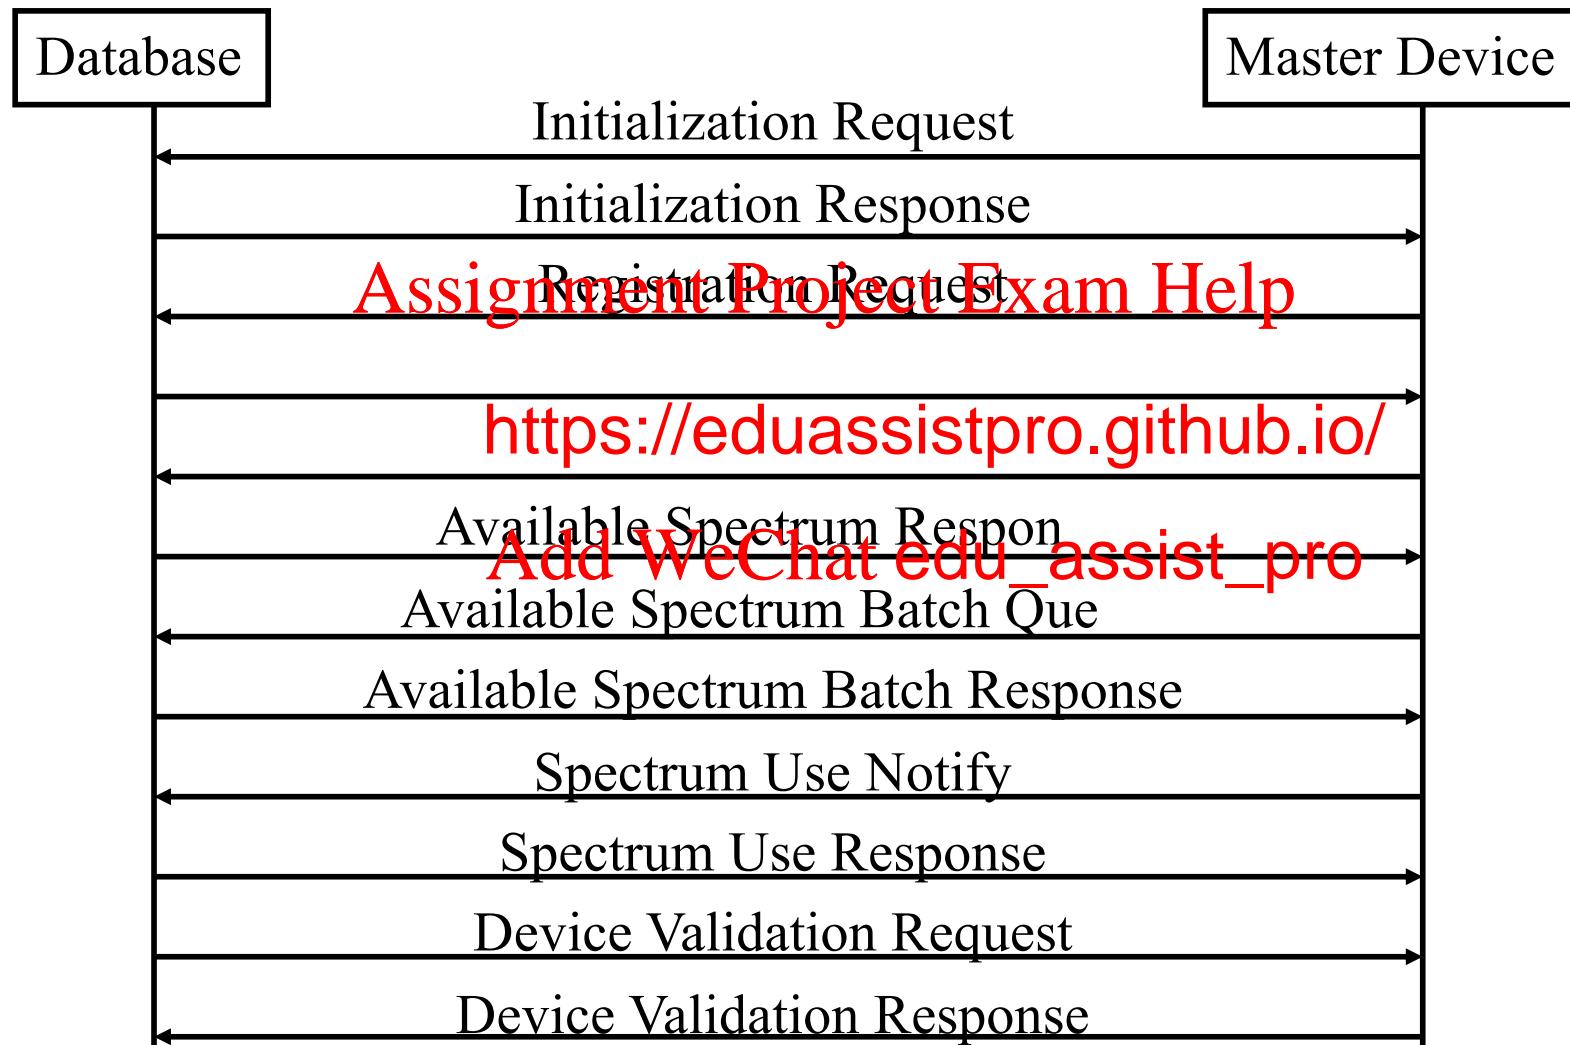

802.11af Channels

- Basic Channel Unit (BCU): One TV Channel
 $W = 6 \text{ MHz}$ in USA
- Channel Bonding: Optional
 - Contiguous: $2W, 4W$
 - Non-contiguous <https://eduassistpro.github.io/>
Add WeChat edu_assist_pro

IEEE 802.11af OFDM Data Rates

- Modulation: 256-QAM highest
- Coding: 5/6 highest
- OFDM similar to 40 MHz in 802.11n down-clocked by 7.5x
- 6MHz channel: 144 total subcarriers, 108 Data, 3 DC, 6 pilots, 36 Guard
- 7.5x down clocking <https://eduassistpro.github.io/>
 - 0.4 μ s GI in 802.11n \rightarrow 3.2 μ s in 802.11af
 - 3.2 μ s data interval \rightarrow $3.2 \times 7.5 = 24\mu$ s
 - Total symbol interval = $24+3 = 27\mu$ s
- Data rate (single stream, single channel): 26.67 Mbps
- Max. Data rate (4 stream, 4 channel): $26.67 \times 16 = 426.7$ Mbps

IEEE 802.11af Data Rates in Mbps

(Single Stream, Single Unbonded 6MHz Channel)

MCS	Modulation	Coding	Data Rate
0	BPSK	1/2	2
1	QPSK	1/2	4
2	QPSK	3/4	6
3	16-QAM		8
4	16-QAM		12
5	64-QAM		16
6	64-QAM	3/4	18
7	64-QAM	5/6	20
8	256-QAM	3/4	24
9	256-QAM	5/6	26.7

IEEE 802.11af: Data Rate Example

Question: Calculate 802.11af data rate for MCS=0

Solution:

For MCS=0, Modulation = BPSK and Coding Rate = $\frac{1}{2}$

For BPSK, we have 1

With 108 data subcarriers <https://eduassistpro.github.io/>

With 27 us symbol interval: 1/27 Mega s

Coded bits per sec: $108/27 \text{ Mbps}$


With $\frac{1}{2}$ coding rate, effective data rate = $108/(27 \times 2) \text{ Mbps} = 2 \text{ Mbps}$

Summary of 802.11af

1. Analog to Digital conversion of TV channels has freed up spectrum in 700 MHz band \Rightarrow White Space.
2. 700MHz allows long-distance communication, useful for rural areas
<https://eduassistpro.github.io/>
3. FCC has allowed some of the white space in TV bands. Requires an Add WeChat to edu_assist_pro.
4. IEEE 802.11af White-Fi spec achieves up to 426.7 Mbps using OFDM, 4-stream MIMO, 256-QAM@5/6.
5. PAWS is the protocol for accessing white space databases.

Assignment Project Exam Help
IEEE 802<https://eduassistpro.github.io/HaLow>)
Add WeChat edu_assist_pro

Sample Application

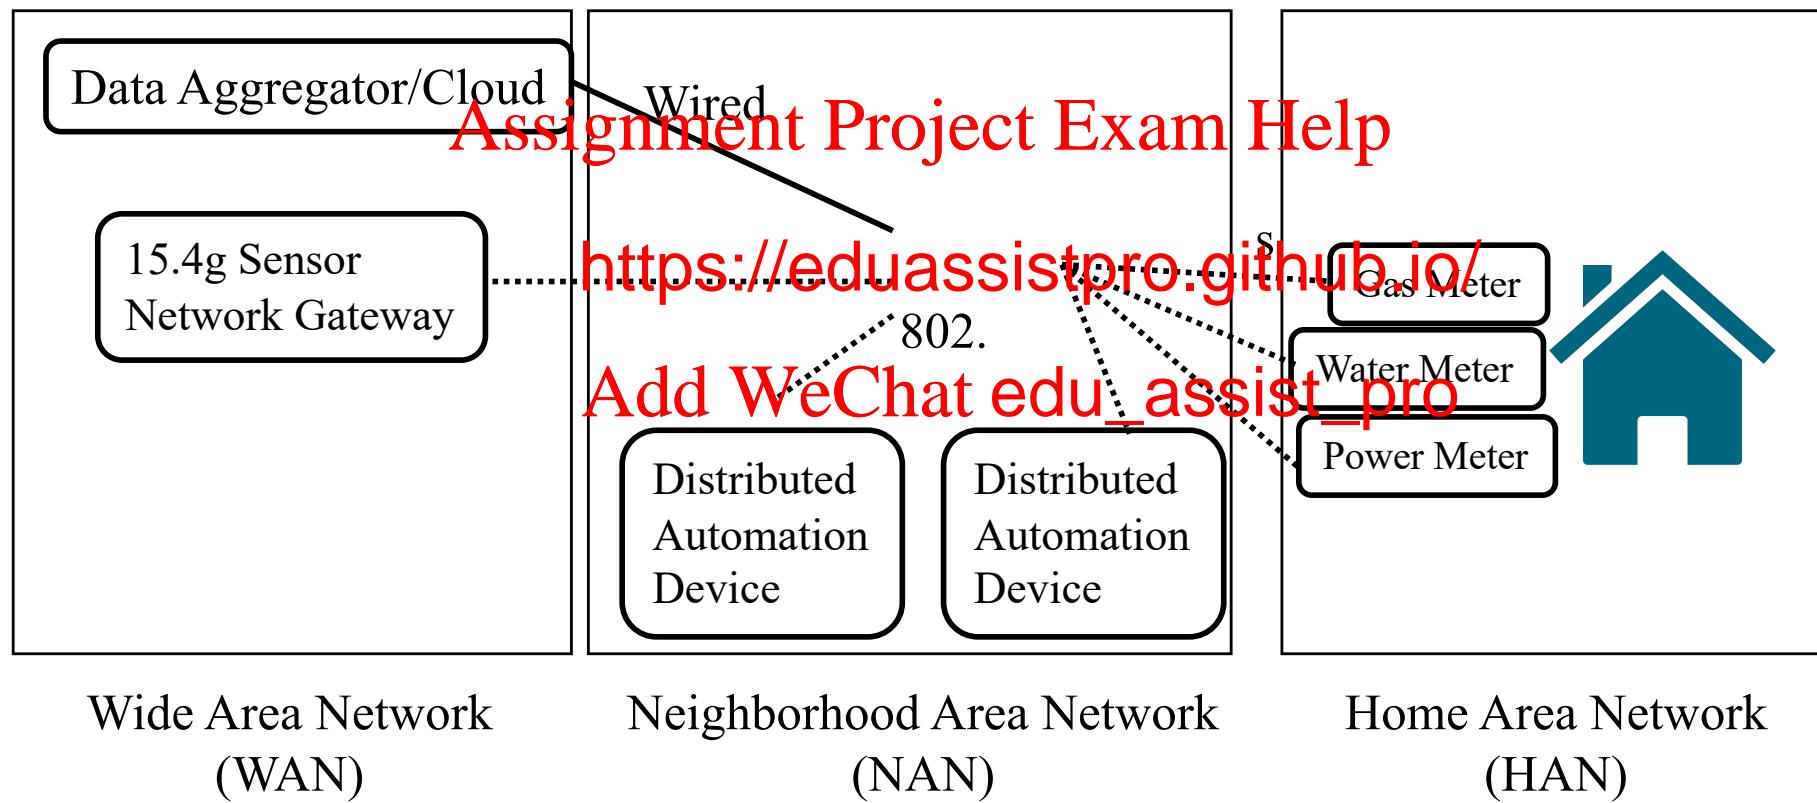

Ref: H. Wei, "Self-Organizing Energy Efficient M2M Communications," <http://cc.ee.ntu.edu.tw/~ykchen/1123-HWei.pdf>
©2020 Mahbub Hassan

802.11ah PHY

1. 802.11ac PHY **down clocked** by 10X
 - 2/4/8/16 MHz channels in place of 20/40/80/160 MHz in ac
 - 20 MHz 11ac and 2 MHz 11ah both have 64 FFT size and 48 data subcarriers + 4 pilots \Rightarrow 1/10th inter-carrier spacing
 \Rightarrow 10X longer Symbols \Rightarrow Allows 10X delay spread
 \Rightarrow All times (SIFS, ACKs) are 10X longer
 - New 1 MHz PH
2. **Adjacent channel** <https://eduassistpro.github.io/>
3. All stations have to support 1MHz and
4. Up to **4 spatial streams** (compared to **2**)
Add WeChat [edu_assist_pro](#)
5. 1 MHz also allows a new MCS 10 which is MCS0 with 2x repetition \Rightarrow Allows 9 times longer reach than 2.4GHz
6. **Beam forming** to create sectors

Ref: W. Sun, M. Choi, and S. Choi, "IEEE 802.11ah: A Long Range 802.11 WLAN at Sub 1 GHz," River Journal, 2013, pp. 1-26,
http://riverpublishers.com/journal/journal_articles/RP_Journal_2245-800X_115.pdf

©2020 Mahbub Hassan

Example

- If we reduce the clock speed of 802.11ac by a factor of 10, what would be the new symbol rate (symbols/s)?

802.11ac has a symbol duration of $3.6 \mu\text{s}$ (for 40ns GI).

New symbol duration = $\frac{1}{f_{clock}} = 36 \mu\text{s}$
New symbol rate = $\frac{1}{3.6 \mu\text{s}} / \text{s}$
<https://eduassistpro.github.io/>
Add WeChat edu_assist_pro

Example

- In USA, 902-928 MHz has been allocated for 802.11ah. How many different channels can be used if 16 MHz channel option is used?

Assignment Project Exam Help

902-928 MHz has a *(non-overlapping)* $26 \text{ MHz} / 16 \text{ MHz} = 1.625 \text{ MHz}$. There is *only one* channel out of 26 MHz.

<https://eduassistpro.github.io/>
Add WeChat edu_assist_pro

802.11 MAC

- **Large number of devices** per Access Point (AP)
 - Hierarchical Association Identifier (AID)
- **Relays** are used to allow connectivity outside the coverage area. Limited **Assignment Project Exam Help**
- **Power Savings** E <https://eduassistpro.github.io/>
 - Allows stations to enter power saving mode.
 - AP negotiates a Target Wake Time (TWT) for individual stations
- **Speed frame exchange** allows stations to exchange a sequence of frames for a TXOP.


Ref: E. Khorov, et al., "A survey on IEEE 802.11ah: An enabling networking technology for smart cities," Computer Communications, 2014, <http://dx.doi.org/10.1016/j.comcom.2014.08.008>
©2020 Mahbub Hassan

MAC Protocol Versions

- Protocol Version 0 (PV0) is same as that for b/a/g/n/ac
- Protocol version 1 (PV1) is optimized for IoT
 - Short header
 - Null Data pa <https://eduassistpro.github.io/>
 - Speed frame exchange [Add WeChat edu_assist_pro](#)
 - Improved channel access

Short MAC Header

- MAC Header shortened by 12-26 Bytes:
 - Removed: High throughput control, QoS, Duration field (No virtual carrier sensing)
 - Optional: 3rd address
 - 2-byte AID in place of some 6-byte addresses
 - Frame Control version is being used
 - Sequence file https://eduassistpro.github.io/ sses are present

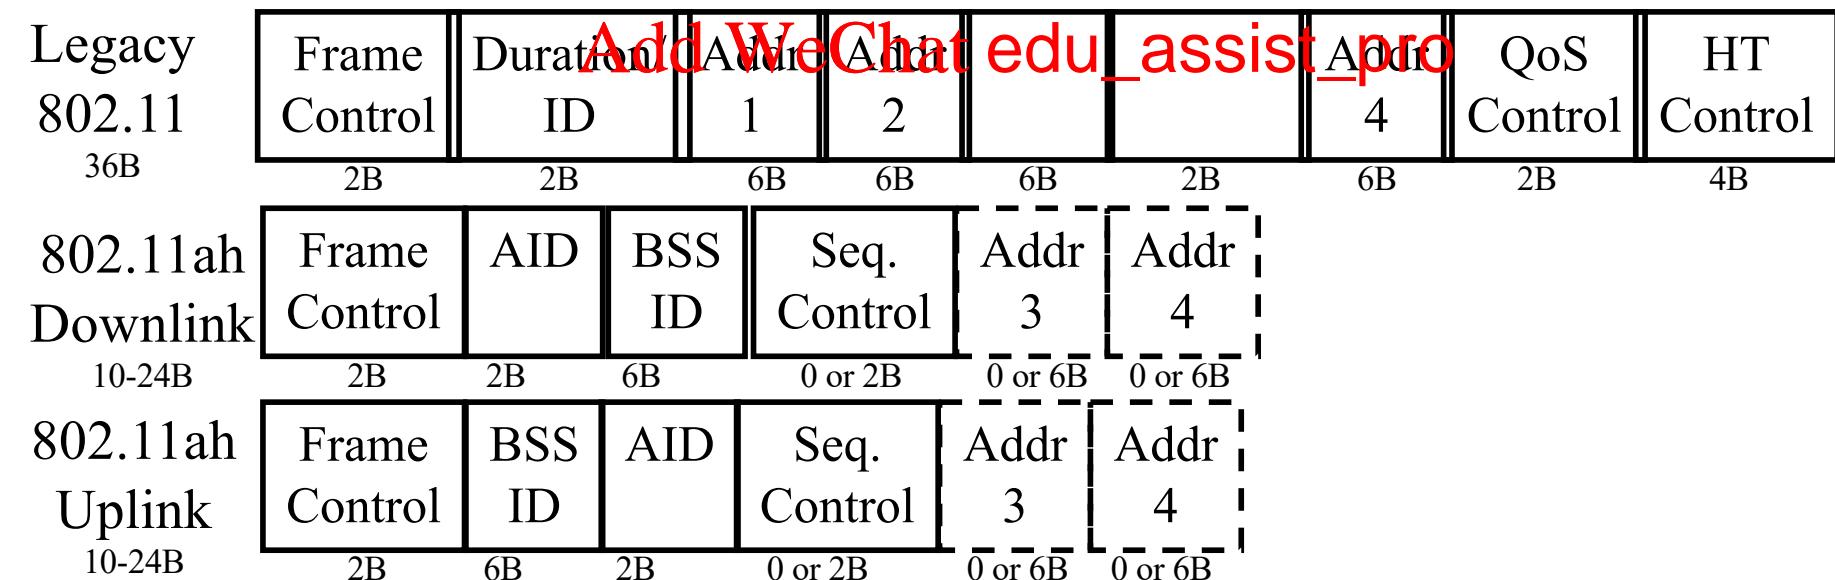

Example

- A garbage bin sensor uses 802.11ah to upload 10 bytes of bin-fill-level data once every hour. Compared to legacy 802.11 (a/b/g/n/ac), the bin sensor has to upload how many less bytes per day?

Legacy 802.11 MAC header length = 36 byte

Total bytes uploaded with 802.11ah = $10 \times 24 \times 6 = 1440$ bytes/day
Total bytes uploaded with 802.11 = $36 \times 24 \times 6 = 5184$ bytes/day

$1440 - 5184 = 624$ less bytes per day

Null Data Packet (NDP)

- ❑ RTS/CTS/ACK has no data, but consumes too much MAC overhead
- ❑ 802.11ah removes the entire MAC header for these packets and identifies these packets via the *modulation and coding* (MCS) scheme at the PHY
- ❑ ACK, Block ACK, C

Assignment Project Exam Help

S


<https://eduassistpro.github.io/>

Add WeChat edu_assist_pro

Speed Frame Exchange

- Also called “**Bi Directional Transmit (BDT)**”
- Initiator sends a frame with response indicator set to “long response”
 - Receiver can send data instead of ACK within a SIFS
 - Frames are sent until there are no more frames; block ACK at end

Assignment Project Exam Help

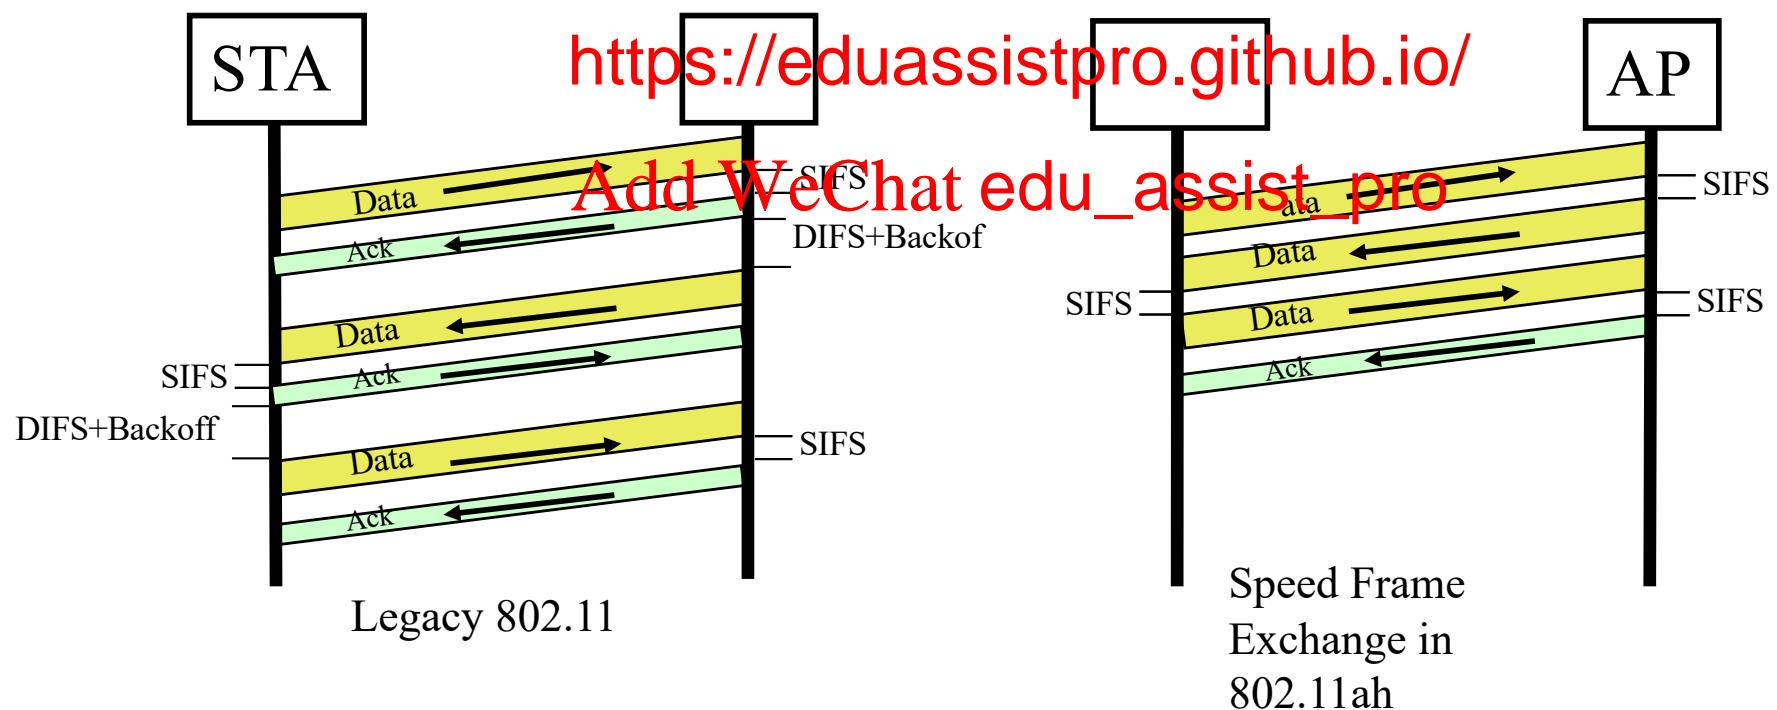

Types of Stations


- ☐ **High-Traffic**: Listens to Traffic Indication Map (TIM) in beacons and transmit accordingly within a restricted access window $\Rightarrow \text{TIM Stations}$
 - *Remain available all the time for transmission*
 - ☐ **Periodic Low-Traffic**: Listen to beacons and transmit within a session time allocated in a period. Do not listen to beacons $\Rightarrow \text{Non-TIM Stations}$
 - ☐ **Very Low-Traffic**: Send a poll to AP and get a transmission opportunity in response $\Rightarrow \text{Unscheduled Stations}$

Page Segmentation

- Announcing all buffered frames in each beacon
⇒ 8096 bits would be wasted per beacon interval
- AP segments the TIM stations in segments and announces only one segment at a time
- Every Delivery T segments have pe announces which

<https://eduassistpro.github.io/>, uplink periods.

Add WeChat edu_assist_pro

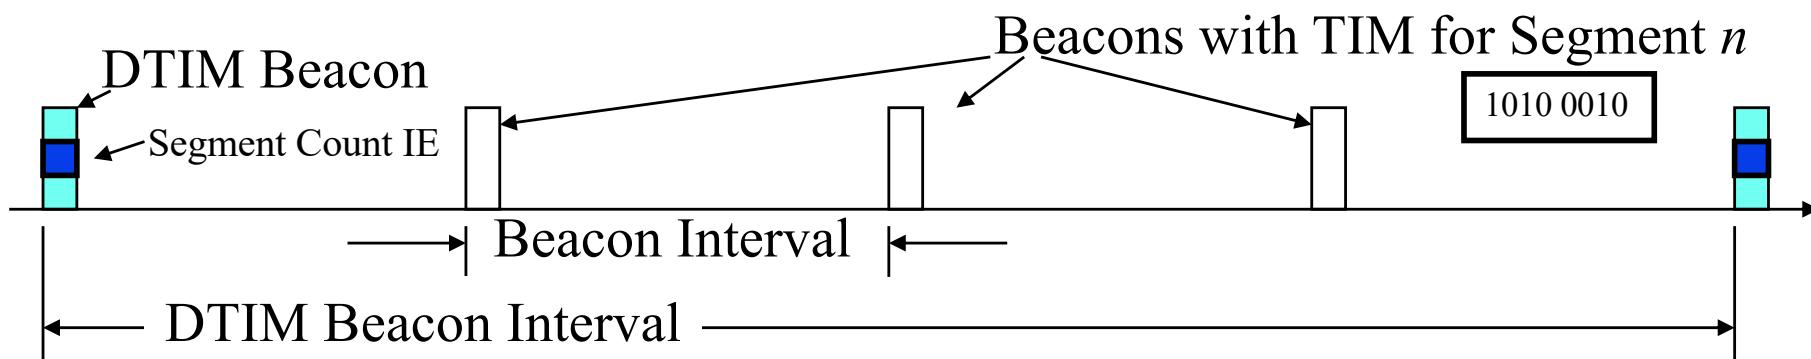

Channel Access for TIM

- ❑ Each station knows what segments they belong to.
- ❑ Stations wake up every “*DTIM*” interval and find out which beacon they should listen to. The beacon has detailed map indicating which station has pending traffic and when stations can contend for access
- ❑ If the map indicates <https://eduassistpro.github.io/>, the station uses DCF (function) to send a PS-poll to get the packet
- ❑ If a station has a packet to send, it listens to the map and uses DCF to send RTS in the allocated slot (two or more stations may be allocated to the same slot → collision is possible)
- ❑ Small number of stations per slot reduces chances of collisions
- ❑ Under low load, it becomes TDMA

Response Indication Deferral (RID)

- ❑ New virtual carrier sense mechanism replacing NAV (Network Allocation Vector)
- ❑ Can not use NAV since there is no duration field
- ❑ RID is also a time count down mechanism similar to NAV
 - NAV is MAC-based, RID is PHY-based
- ❑ RID is set after reception of PHY header
 - NAV is set after rece
- ❑ RID is set based on t_e in the PHY header (2 bits → 4 combinations)
 - Normal Response: RID ← SIFS + Ack time
 - NDP Response: RID ← SIFS + NDP Frame time
 - No Response (Broadcast frames): RID ← 0
 - Long Response: RID ← SIFS + Longest transmission time
(Used with Speed Frame Exchange)

Power Enhancements

- Page Segmentation
- Restricted Access Window
- Target Wake Time


Assignment Project Exam Help

<https://eduassistpro.github.io/>

Add WeChat edu_assist_pro

Association Identifier

- 802.11 b/g/n/ac use 11-bit identifier \Rightarrow 2007 stations
 - 2000+ bits required in “Traffic Indication Map (TIM)”
- 802.11ah uses 16-bit identifier \Rightarrow 8X stations
 - 8 pages of $\sim 2^{11}$ stations each. Actually 2007 stations.
Currently only page 0 is allowed. Page 1-7 are reserved.
First 2 bits should be 11 to distinguish AID from duration and others.

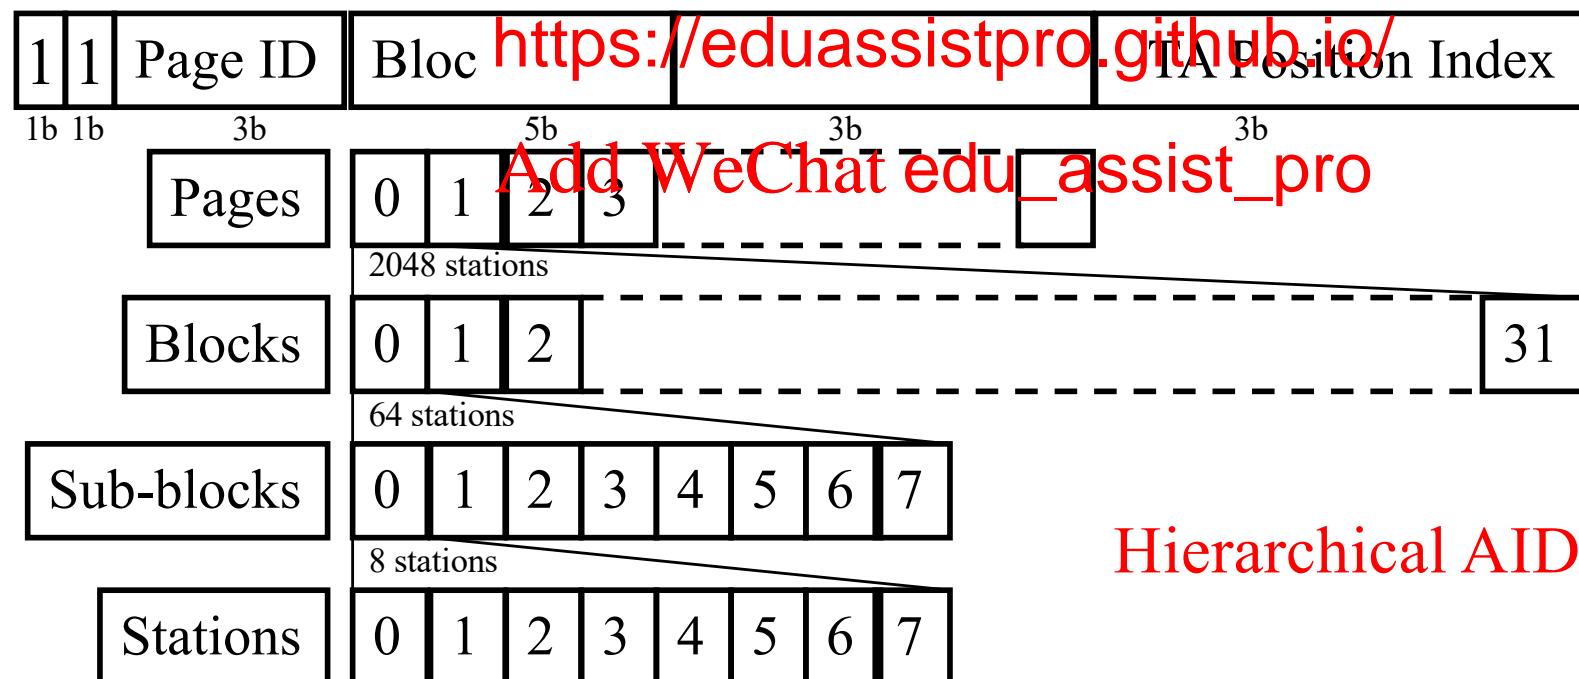

Restricted Access Window (RAW)

- ❑ Allows a set of slot to be restricted to a group of stations (pages/blocks/subblocks)
⇒ Reduces contention
- ❑ A TIM station can be allocated slots during restricted access window (RAW) to transmit/receive packets
- ❑ RAW is a part of ~~Assignment Project Exam Help~~ ~~Contention Free Period~~
- ❑ Access may granted for one or a group of stations <https://eduassistpro.github.io/>
- ❑ A RAW schedule is transmitted by AP at the start of RAW interval
- ❑ A station can tell AP that it has a frame to transmit using a Uplink Data Indication (UDI) bit
 - Helps AP to workout which stations need access in the next round
- ❑ Dividing stations into groups and dividing time into slots for each group increases the efficiency under heavy load.
 - At 100% load: RAW gives close to 100%.
Regular EDCF gives 0%.


Other RAWs

- **Periodic RAW**: Period and duration of PRAW are announced by AP for *periodic* stations
- **Sounding RAW**: used for sector sounding
- **AP Power Management RAW**: used by AP to announce the time when it will
<https://eduassistpro.github.io/>
- **Non-TIM RAW**: non-TIM stations
 - Prevents TIM stations from listening to channel
- **Triggering Frame RAW**: Used to allow stations to send PS-poll frames indicating their need to transmit

Target Wake Time (TWT)

- Non-TIM stations may sleep for a long time → waste for AP to include their buffer information in every beacon
- Non-TIM stations can provide a Target Wake Time (TWT), so the AP does not worry about these stations during their long sleeps
- Because sleeps can be very long, it is difficult to precisely provide waking tie in ms and sec. - → three parameters: Target-Wake-Time, Minimum-Wake-Duration, and Wake Interval mantissa.
- AP sends a “Null Data Packet (NDP)” to a station at its target wake up time containing buffering status. A station can then send a PS-poll and get its frames.
- AP can also sleep if all stations are sleeping

Assignment Project Exam Help

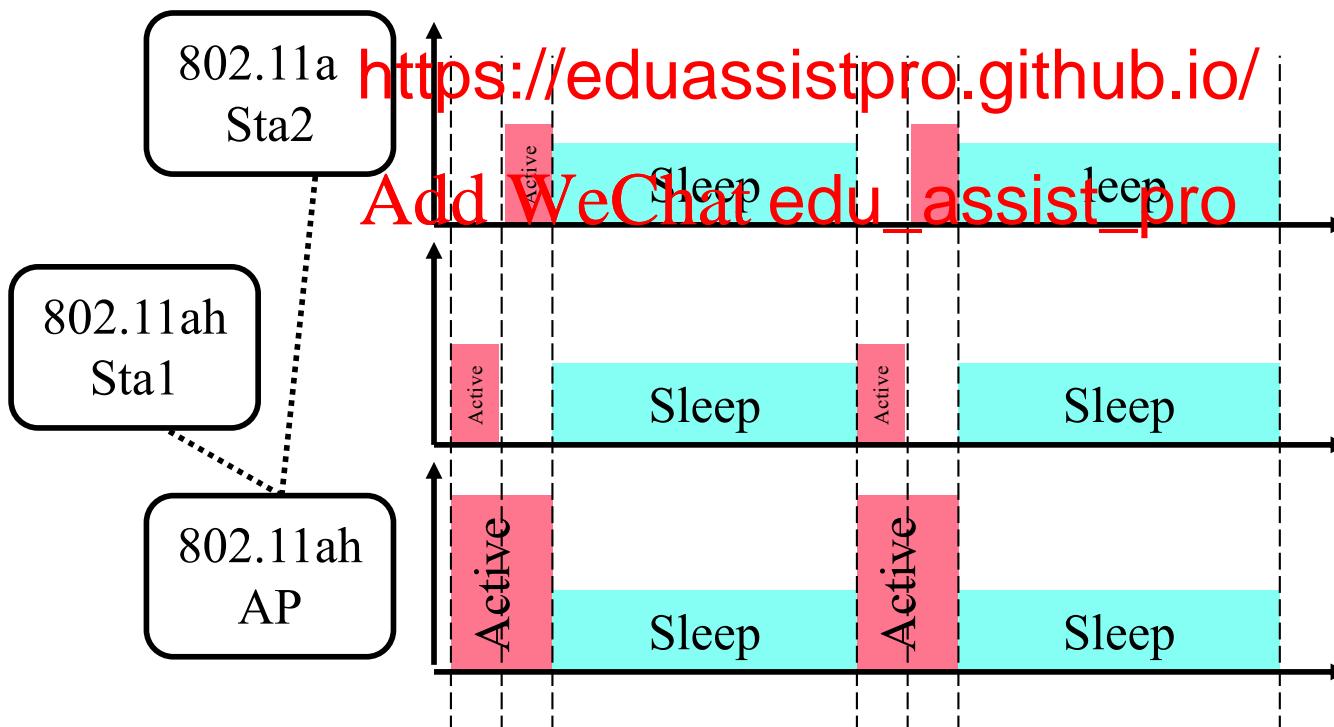

Sectorization

- AP can divide the space in sectors
Each station is told which sector it belongs to.
- Beacon announces which sectors can transmit in this sector interval **Assignment Project Exam Help**
- Some sector inter transmissions [ectional
Add WeChat **edu_assist_pro**](https://eduassistpro.github.io/)
Some may be for only some sect
- Allows spatial reuse and increase throughput



802.11ah: Summary

1. 802.11ah runs at 900 MHz band \Rightarrow Longer distance
2. 802.11ah is 802.11ac down by 10x.
It uses OFDM with 1/2/4/8/16 MHz channels.
Longer symbol Assignment Project Exam Help header, longer multi-path
3. MAC is more <https://eduassistpro.github.io/>,
aggregating acks, null data Add WeChat edu_assist_pro frame exchanges \rightarrow good for short M2M communications
4. Saves energy by allowing stations and AP to sleep longer using Target Wakeup Time, Restricted Access Window

Assignment Project Exam Help
IEEE 802.<https://eduassistpro.gkua.edu.WiGig>)
Add WeChat edu_assist_Zpro_WLAN


Overview

1. **60 GHz Frequency Allocations and characteristics**
2. **IEEE 802.11ad**
 - **PHY data rates**
 - **Network topology and MAC**
 - **Beamforming**
 - **Spatial Frequency** <https://eduassistpro.github.io/>

Add WeChat edu_assist_pro

60 GHz Frequency Allocations

- 7-9 GHz in 57-66 GHz (**millimeter** waves 30GHz-300GHz)
- 4 Channels of ~ 2 GHz
- Significant activity after FCC made 57-64 GHz license-exempt

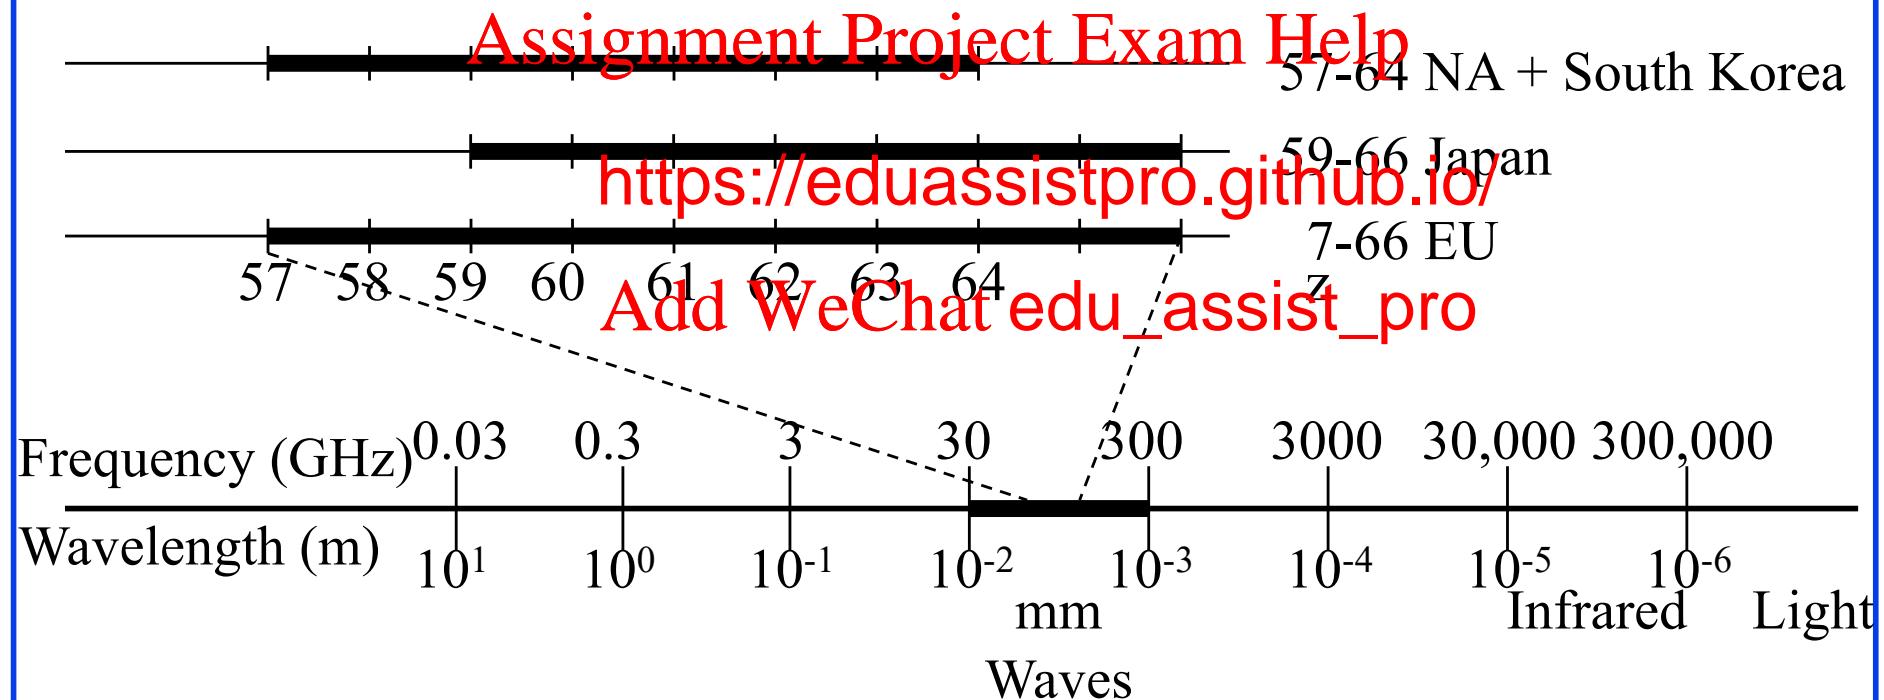

Ref: FCC, “Part 15 Rules for Unlicensed Operation in the 57-64 GHz Band,” FCC13-112, August 2013,
http://hraunfoss.fcc.gov/edocs_public/attachmatch/FCC-13-112A1.pdf

Advantages of 60 GHz Band

1. Large spectrum: 7 GHz

- 7 Gbps requires only 1 b/Hz (BPSK ok).
- Complex 256-QAM not needed

2. Small Antenna Separation:

5 mm wavelength/4 = 1.25 mm

3. Easy Beamfor

<https://eduassistpro.github.io/>

4. Low Interference

Good for urban neighbors

Add WeChat edu_assist_pro

5. Directional transmissions:

Spreading easy

6. Inherent security:

Difficult to intercept

Disadvantages of 60 GHz Band

1. **Large Attenuation:** Attenuation / frequency²
 - Strong absorption by Oxygen
 - Need larger transmit power
 - Need high antenna gain \Rightarrow directional antennas
 - Short Distance <https://eduassistpro.github.io/>
2. **Directional Deafness:** Can't hear ^{ignores}
Add WeChat edu_assist_pro
 - Carrier sense not possible
 - RTS/CTS does not work
 - Multicast Difficult
3. **Easily Blocked:** By a human/dog
Need a relay




Multi-Gigabit Wireless Applications

- **Cable Replacement:** High-Definition Uncompressed streaming video
- Interactive **gaming**
- High-speed file transfer
- Wireless Mesh **Backhaul** (200-400m)

Assignment Project Exam Help

<https://eduassistpro.github.io/>

Add WeChat edu_assist_pro

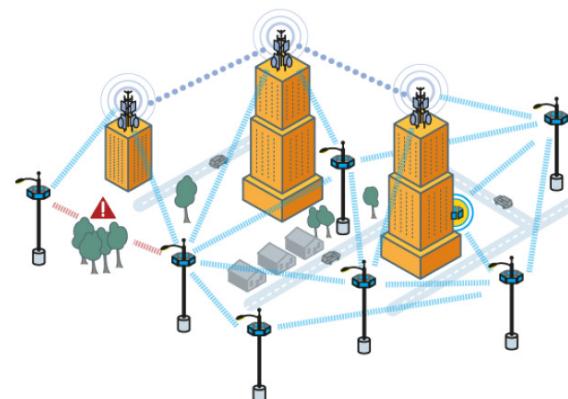

802.11ad OFDM PHY

- Total 355 subcarriers at inter-carrier spacing of 5.15626MHz
→ 1830.47MHz channel bandwidth
- 336 data subcarriers (16 pilots, 3 DC)
- Guard interval = $\frac{1}{5}$ of the data symbol interval
 - GI = 1/5 of the t
- Symbol interval <https://eduassistpro.github.io/>
- Guard interval = ~48.4ns [Add WeChat edu_assist_pro](#)
- Modulation: QPSK, 16-QAM, 64-QAM
- Coding rates: $\frac{1}{2}, \frac{3}{4}, \frac{5}{8}, \frac{13}{16}$
- Only single stream allowed

802.11ad OFDM Data Rates (Mbps)

MCS.	Modulation	Coding	Data Rate
------	------------	--------	-----------

Assignment Project Exam Help

<https://eduassistpro.github.io/>

Add WeChat edu_assist_pro

802.11ad Data Rate Example

Question: What is the 802.11ad OFDM data rate for 64-QAM with 5/8 coding rate?

Assignment Project Exam Help

Solution:

802.11ad symbol rate = <https://eduassistpro.github.io/>

of data subcarriers = 336

Add WeChat edu_assist_pro

Data rate = modulation-rate x symbol-rate

x coding-rate

Data rate = $\log_2(64) \times (1386/336) \times 336 \times (5/8) = 5197.5\text{Mbps}$

MAC Challenges for 60 GHz

- High path loss at 60 GHz
 - 28 dB higher than 2.4 GHz WLAN, 22 dB higher than 5 GHz WLAN
- Stations must have high antenna gain to overcome high path loss → directional antenna/beamforming
 - The narrower the beam, the higher the antenna gains
- Directional communication
 - AP can talk to a STA
 - Similarly, two STAs must point their beams at each other before they can exchange data
- MAC must always facilitate all stations to find the right beam directions
 - Different beam directions for different destinations
 - Beam directions change with mobility
 - Becomes challenging with many stations in a network

Assignment Project Exam Help

<https://eduassistpro.github.io/>


Add WeChat **edu_assist_pro**

IEEE 802.11ad Network Topology

- **Personal Basic Service Set (PBSS):**
Group of stations that communicate
- **PBSS Central Point (PCP)** provides scheduling and timing using beacons
 - Dedicated AP not needed, PCP function can be assumed by any 802.11ad device, such as a TV in the room can be PCP/AP
- **1 PCP/AP per PBSS**

Assignment Project Exam Help
(TA)

<https://eduassistpro.github.io/>

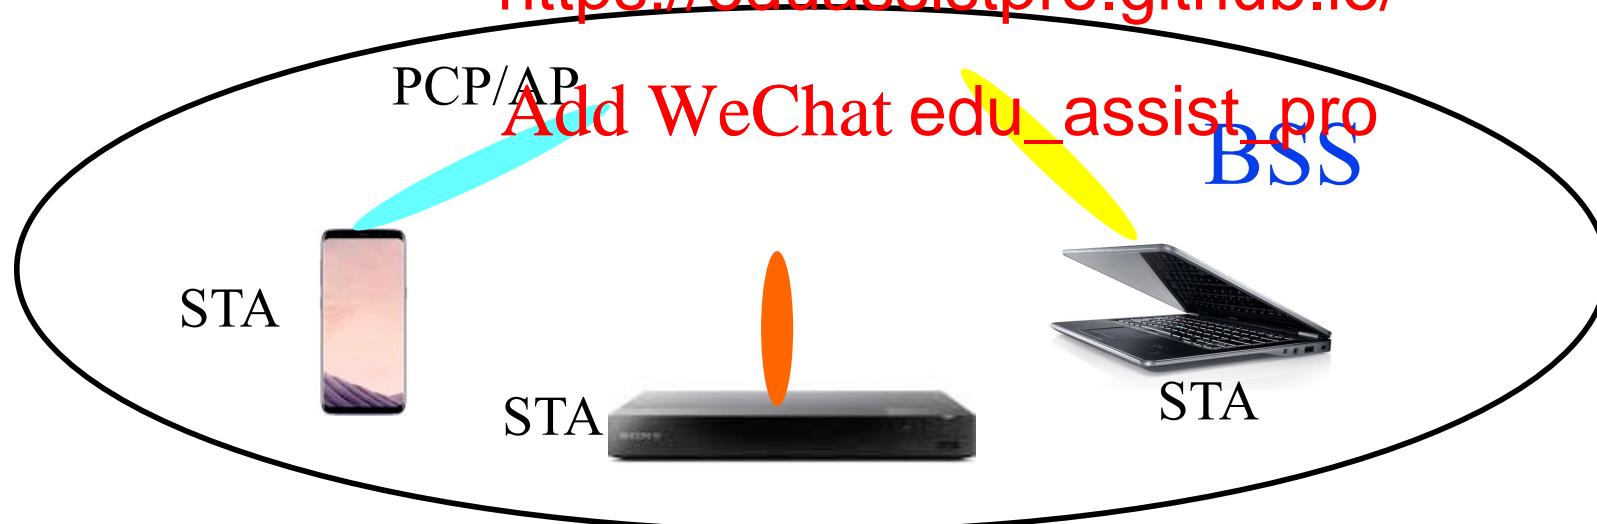


802.11ad MAC – Beacon Interval

- Each super-frame called “**Beacon Interval**” is divided into 4 *access periods*: Beacon Time (**BT**), Associating Beamforming Training (**A-BFT**), Announcement Time (**AT**), and Data Transfer Time (**DTT**)

Assignment Project Exam Help

<https://eduassistpro.github.io/>

Add WeChat edu_assist_pro

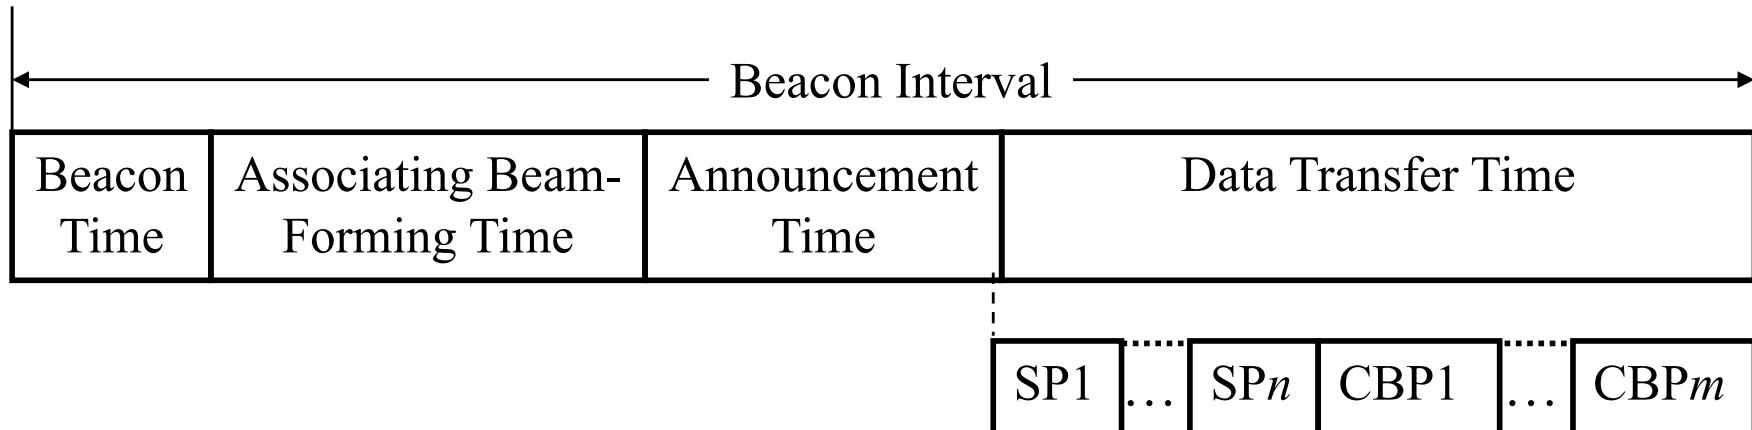


Access Periods in 802.11ad Beacon Interval

- BT: Only PCP can send a beacon during beacon time; PCP starts beamforming training in BT by sending training frames; STAs cannot transmit
- A-BFT: PCP performs antenna training with its members (STAs)
- AT: PCP polls members (STAs can request service periods or SPs) <https://eduassistpro.github.io/>
- DTT: STA-to-STA exchange data frames in a dedicated service period (SP) or by contention-based period (CBP)
 - CBP uses Distributed Coordination Function (DCF); SP uses Hybrid Coordination Function (HCF)

IEEE 802.11ad Beacon

- Beacon transmissions are omni-directional ⇒ One beacon is transmitted through every antenna configuration/sectors

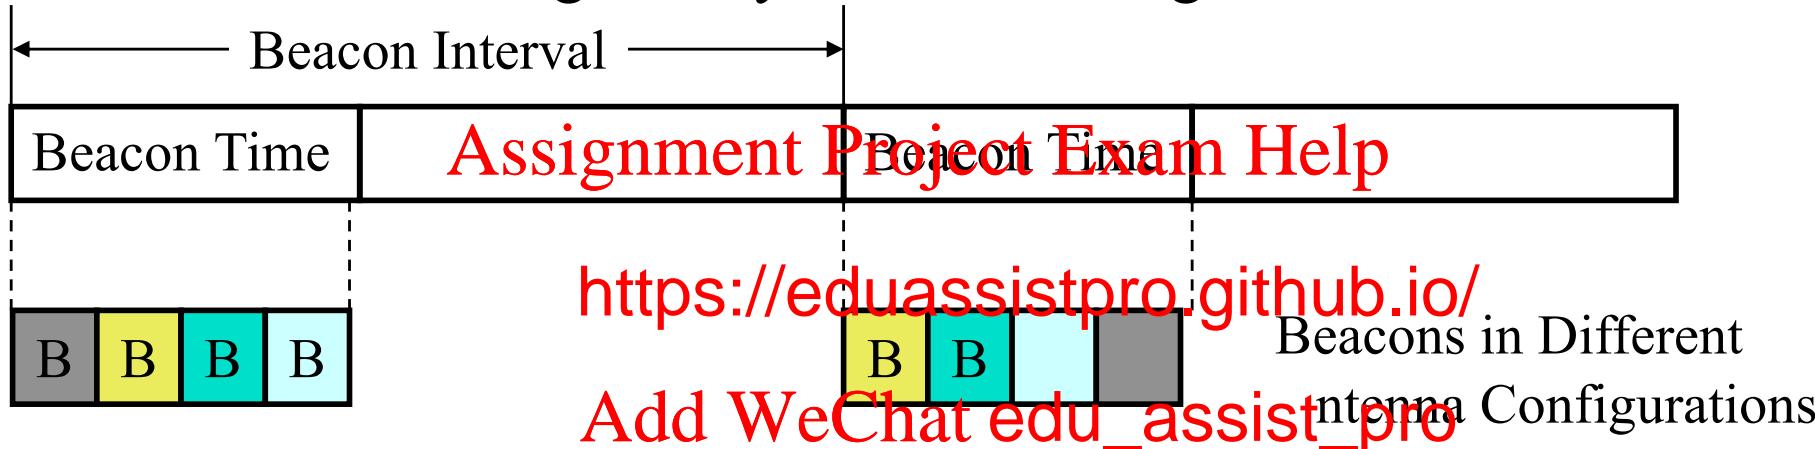

Example 1

- A 802.11ad PCP/AP has a four-sector antenna with every sector covering 90 degrees. During a Beacon Time (BT), how many beacons the AP should transmit? **Assignment Project Exam Help**



<https://eduassistpro.github.io/>

Beacons must be transmitted in **Add WeChat in edu_assist_pro**, so all STAs receive it. 360-degree coverage is achieved by four sectors (each sector covers 90 degrees). The AP therefore will send four beacons, one per sector.

Beamforming Options

- The goal of beamforming is to choose the best beam direction pair that gives the highest gain
- **Exhaustive search:** exhaustively examine all beam pairs
 - E.g., 64 pairs for 8×8 , 1024 pairs for $32 \times 32 \rightarrow O(B1 \times B2)$
 - Time and energy
- **Semi-exhaustive** <https://eduassistpro.github.io/>
 - Transmitter transmits on all beam directions (B1 transmissions)
 - Receiver uses omni-directional antenna to record RSS for all beam directions of the transmitter
 - Receiver selects the highest RSS as the best beam for the transmitter
 - The pair takes turn to find each others best beam direction (B2 transmissions) $\rightarrow O(B1 + B2)$


Exhaustive vs. Semi-exhaustive Sector Search

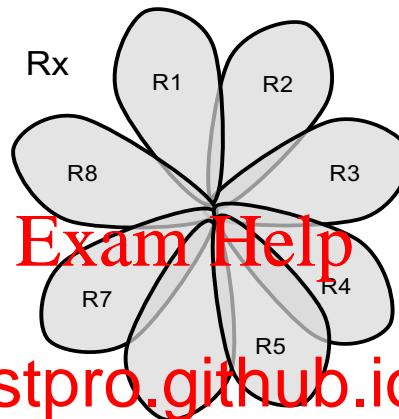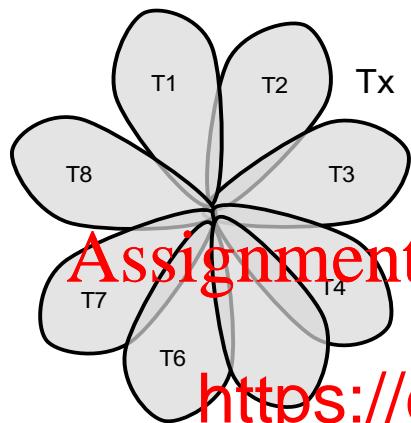

Assignment Project Exam Help
<https://eduassistpro.github.io/>

Exhaustive

Semi-exhaustive

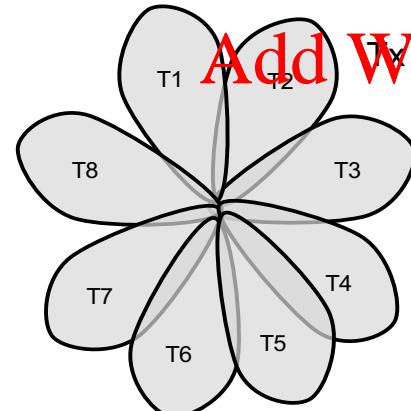

(b)

Example 2

- Two 802.11ad devices, STA1 and STA2, want to beamform. STA1 has 32 different antenna configurations (i.e., capable of steering the beam to 32 different directions). STA2 has only 4 beam directions. For Exhaustive Search, how many training frames are transmitted in total by these two devices before they discover the optimum beam pairs for communication?

Total combinations of a <https://eduassistpro.github.io/> ~~Assignment Project Exam Help~~ of the two stations is $32 \times 4 = 128$. Therefore, 128 training frames are transmitted, one per specific pair of antenna configurations, before the best pair is finally selected.

Example 3


- Two 802.11ad devices, STA1 and STA2, want to beamform. STA1 has 16 different antenna configurations (i.e., capable of steering the beam to 16 different directions). STA2 has only 4 beam directions. For Omni-direction Antenna approach, how many training frames are transmitted in total by these two devices **Assignment Project Exam Help** before they discover the optimum beam pairs for communication?

<https://eduassistpro.github.io/>

STA1 first transmits 16 training frames ~~w~~ stening in omni-direction. Then STA2 ~~Add WeChat~~ ~~edu_assist_pro~~ transmits 4 fram ~~is listening~~. Total frames transmitted = $16+4 = 20$.

IEEE 802.11ad Beamforming Training

- ❑ Each station finds the optimal antenna configuration with its recipient using a two-stage search --- **SLS** followed by **BRP**
- ❑ **Sector Level Sweep (SLS):** Sends in all sectors and finds the optimal *sector pair*
 - Sector → coarse direction (there can be several sharper beams within a sector)
 - Low data rate with sector-level beamforming
- ❑ **Beam Refinement Protocol (BRP):** Searches through the optimal sector to find the optimal parameters in that sector (identify a narrower beam)
 - Higher data rate (multi-gigabit) with beam refinement

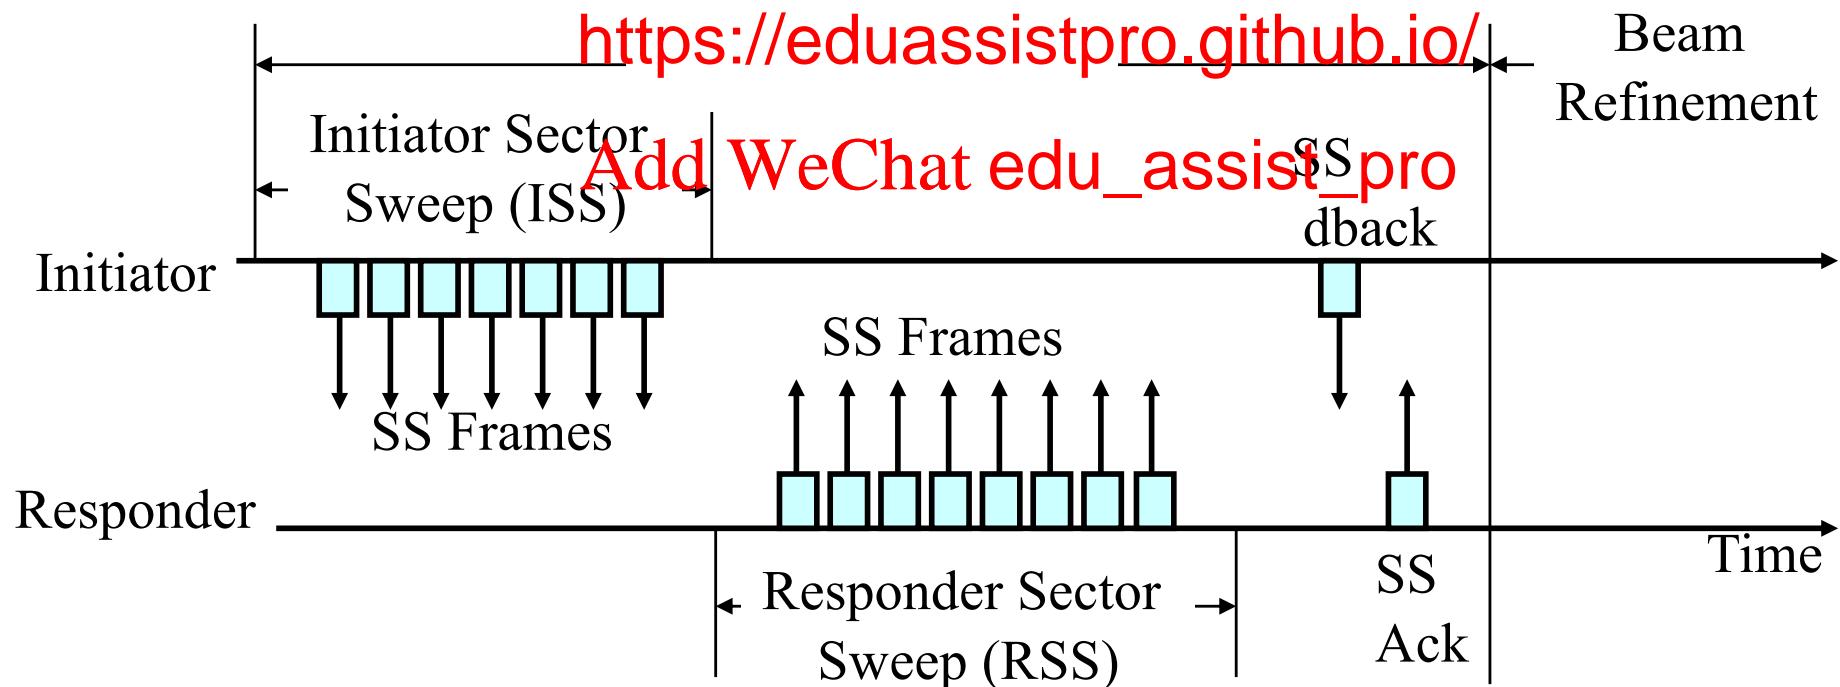

AP-STA Beamforming

- ❑ Takes place during BT and A-BFT durations
- ❑ During BT, AP transmits training frames on all its sectors; all STAs listen in omni-direction mode
- ❑ A-BFT duration is slotted; each STA selects a slot randomly and transmits training frames; AP listens in omni-direction mode <https://eduassistpro.github.io/>
- ❑ Random slot selection may lead to collision; AP provides feedback from AP to the STA if collision; STA waits for next beacon interval
- ❑ Only SLS is completed in BT and A-BFT; BFP is optional and may take place in DT duration

Example 4

- The table shows the received signal strength (RSS) at the responder for each transmitted training frame from the beam training initiator during SLS. There are four sectors for both initiator and responder, and the number after the station letter denotes the sector number. For example, a frame transmitted by station A has four sectors: A.1, A.2, A.3, and A.4. What is the optimum beam (sector) pair discovered after the SLS?

Assignment Project Exam Help

<https://eduassistpro.github.io/>

What is the optimum beam (sector) pair

discovered after the SLS?


Transmitted Training Frame	RSS at Responder
A.1	-70 dBm
A.2	-62 dBm
A.3	-50 dBm
A.4	-64 dBm
B.1	-49 dBm
B.2	-71 dBm
B.3	-75 dBm
B.4	-80 dBm

The sector that produces the strongest signal is selected as the best sector. For A, the strongest sector is 3 (-50 dBm). For B, sector 1 produces the strongest signal at A (-49 dBm). The optimum beam pair for (A,B) therefore is (3,1).


SLS vs. Beam Refinement

- SLS uses “coarse” (wider) beams
 - Quick, but low gain and hence low data rate
- Beam refinement finds narrower beams within the same sector
 - Increases gain and data rate, but takes additional time before communication can begin


<https://eduassistpro.github.io/>

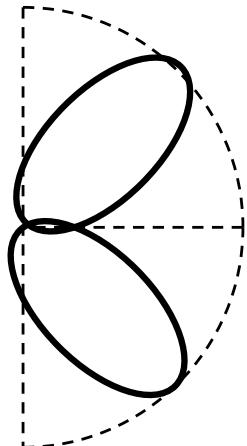

Sector-Level Sweep

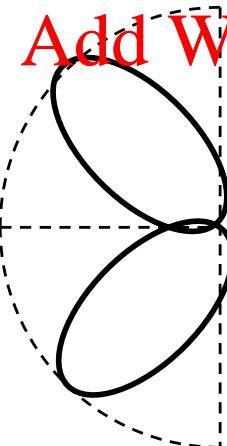

Add WeChat edu_assist_pro

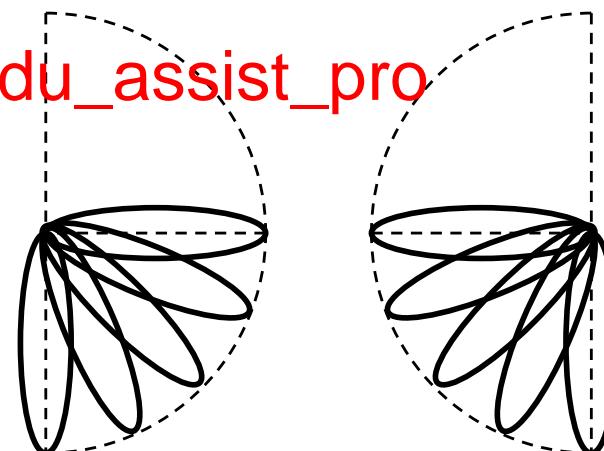

Beam Refinement

Spatial Frequency Sharing (SFS)

- ❑ Multiple transmissions may be scheduled on the same frequency at the same time if they don't interfere
- ❑ PCP asks stations to send results of any STA-STA beamforming training outcomes. PCP then has the complete knowledge of beacons within its PBSS. PCP then can work out which stations can share the same slot (will not interfere). <https://eduassistpro.github.io/> Add WeChat edu_assist_pro

Example 6

- In a given PBSS, all stations have 12 antenna sectors with 30 degree transmission angle. The table shows the beam pairs learned from beam training among 6 stations, A to F. For example, the first row of the table shows that A would use its beam #1 to communicate with B while B would use its beam #7 to communicate with A. If a communication, SP1, between A and B has already been scheduled, can SP2, a communication between A and F, be spatially shared with SP1 in the same time slots without interference?

STA Pair	Beam Pair
(A,B)	(1,7)
(A,E)	(4,12)
(B,E)	(7,2)
(B,F)	(9,10)
(C,D)	(10,4)
(A,F)	(2,7)
(E,F)	(3,7)

No. During SP1, B will transmit on its beam #7, which is the same beam number found to be optimum to communicate with E (Row 3 in the table). Therefore B's transmissions to A during SP1 will affect E. SP2 therefore cannot be spatially shared with SP1 without interference.

Summary of 802.11ad

1. 60 GHz, a.k.a. mm wave, has large bandwidth, small antenna separation allows easy beamforming and gigabit speeds but short distance due to large attenuation
2. Tri-band Wireless LAN devices with 2.4 GHz, 5.8GHz, and 60GHz are coming
3. 802.11ad LAN uses a PBSS central control point (PCP)
4. In all cases antenna alignment and tracking is required.
5. **Centralized** scheduling. Only **PCP** can send beacons. It sends beacons in all sectors.
6. Superframe (**Beacon I**) <https://eduassistpro.github.io/>, Associating Beamforming Training, Announcement Time, and Data
7. Announcement time is used for collecting **TAs**
8. Data transfer can be pre-allocated or by contention
9. **Antenna training** is a 2-phase process. Sector selection and beam refinement.
10. Multiple transmission can take place on the same frequency at the same time (**Spatial Frequency Sharing**).

IEEE 802.1 Project 2020 (Expected)

<https://eduassistpro.gHbz.WLAN>

Add WeChat edu_assist_pro

802.11ay

- 60GHz like 802.11ad, but faster than 802.11ad
 - 802.11ad is single stream and cannot bond channels (channel = 2.16GHz)
 - Single channel, single stream max speed: ~7Gbps
- 802.11ay expects to support 4 streams and bond multiple channels
 - 4 channels = 8.64GHz bandwidth
 - Max speed (4 cha<https://eduassistpro.github.io/>
- 802.11ay also offers longer range: up t
- Expected in 2020 **Add WeChat edu_assist_pro**

802.11ay projected use cases

Assignment Project Exam Help

<https://eduassistpro.github.io/>

Add WeChat edu_assist_pro

Source: KEYSIGHT Technologies

Summary: Niche WiFi

- Mainstream WiFi operates in 2.4/5GHz band: hugely popular and used in many consumer products: mobile phone, tablets, laptops, ...
 - IEEE 802.11a/b/g/n/ac/ax (11n=WiFi4, 11ac=WiFi5, 11ax=WiFi6)
- Niche WiFi: both sub-GHz and 60GHz
- Sub-GHz: 802.11af (700 MHz TV Whitespace: long-distance) and 802.11ah (900 MHz: IoT, sensors, large number of connections)
<https://eduassistpro.github.io/>
- 60GHz: 802.11ad (7Gbps; already seen niche products) and 802.11ay (upcoming; 100+Gbps cable rate, ackhaul, ...)
[Add WeChat edu_assist_pro](#)