COMP9334 Solution to Revision Questions for Week 7B (Question 1 only)

Note that the solution for Question 2 is a in a separate file.

Question 1

(a) The system throughput = Number of completed jobs / measurement time = 36,000/3,600 = 10 jobs per second.

Since service demand = utilisation of the device / system throughput.

The service demands for the CPU, Disk 1, Disk 2 and Disk 3 are respectively, 0.0750, 0.0500, 0.0500 and 0.0250 second.

(b) A sample program is given in mva_sc.m.

Note that the MVA algorithm given in the lecture assumes that the think time is zero. Think time curble taken into account by adding a pure delay element. If there is not think time, the system throughput is given by the number of users divided by the system response time (w

throughput sheat throughput sheat throughput sheat responsible throughput sheat throughput

(c) The results are plotted in figure 1. We observe that the upper bound the derived in Week is indeed to rec. It is indeed upper bounds seems to be quite accurate.

Remark: It is important to note that the upper bound from operational analysis was derived without making any assumption on the probability distribution of the service time. In other words, the bounds hold even if the probability distribution of service time is not exponential. However, for MVA to apply, the service time has to be exponentially distributed.

(d) If we speed up the CPU by f times, then the new service demand for the CPU will be $\frac{0.075}{f}$. We vary f from 1 to 2 and for each value of f, we compute the new response time using MVA. By plotting how the response time varies with f, we can find the required scaling factor.

The plot of response time is in Figure 2. From the figure, we see that the speed up factor required is about 1.65.

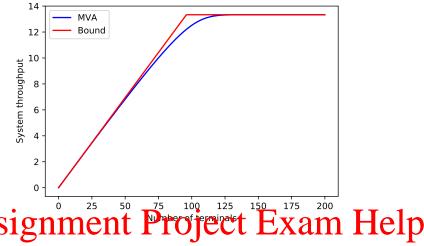


Figure 1: Throughput: MVA versus asymptotic bound.

https://eduassistpro.github.io/ Add WeChat edu_assist_pro

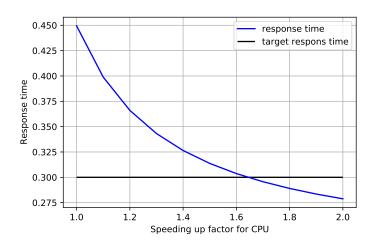


Figure 2: Response time.