




Universidad Autónoma De Chiapas

Jose Eduardo Zarate Avalos

7M

20/11/2023

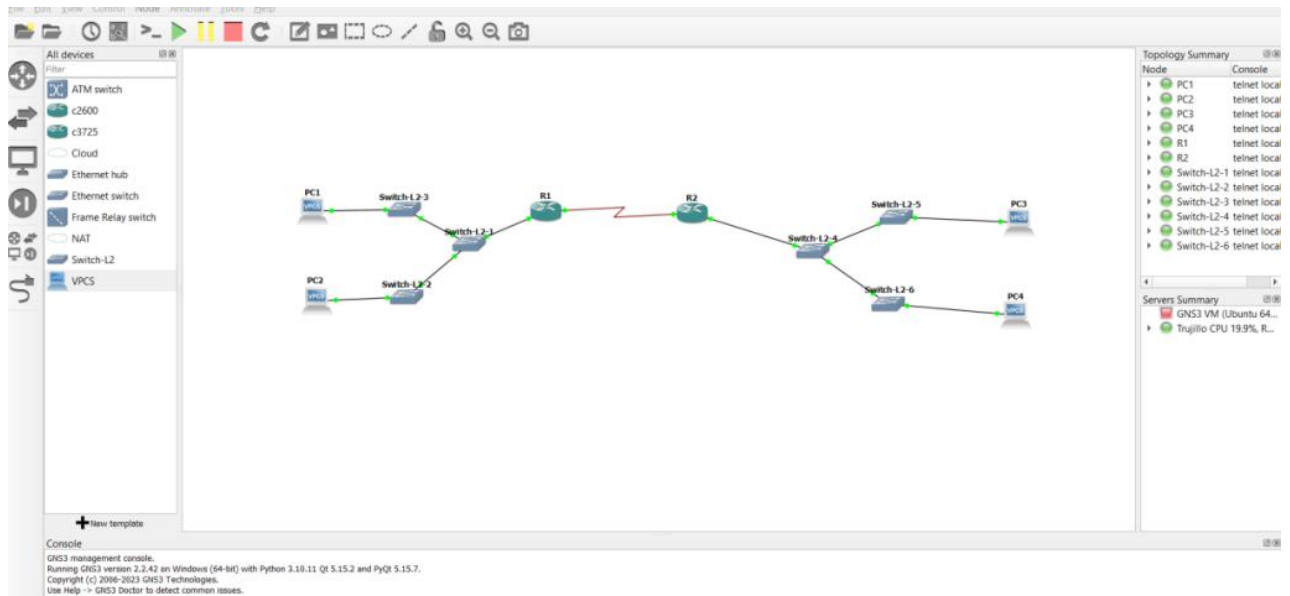

```

*Sep 15 19:08:42.848: %SYS-5-CONFIG_I: Configured from memory by console
*Sep 15 19:10:27.028: %SYS-5-RESTART: System restarted --
Cisco IOS Software, vlos_12 Software (Vlos_12-ADVANCEDSERVICES-K9), Version 15.0(TTC_20140805)FLO_D5G57, EARLY DEPLOYMENT DEVELOPMENT BUILD, synced to V152_1_0_R8_P14
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 1986-2014 by Cisco Systems, Inc.
Compiled Thu 05-Jun-14 09:35 by jpfeng
*Sep 15 19:10:38.768: %LINK-3-UPDOWN: Interface GigabitEthernet1/7, changed state to down
*Sep 15 19:10:38.762: %LINK-3-UPDOWN: Interface GigabitEthernet1/2, changed state to down
*Sep 15 19:10:38.764: %LINK-3-UPDOWN: Interface GigabitEthernet1/1, changed state to down
*Sep 15 19:10:38.763: %LINK-3-UPDOWN: Interface GigabitEthernet1/9, changed state to down
*Sep 15 19:10:38.768: %LINK-3-UPDOWN: Interface GigabitEthernet1/6, changed state to down
vIOS-12-01>
vIOS-12-01#show
vIOS-12-01#conf t
Enter configuration commands, one per line. End with CNTL/Z.
vIOS-12-01(config)#?
  domain      Set the name of the VTP administrative domain.
  file        Configure the filename where VTP configuration is stored.
  interface   Configure interface as the preferred source for the VTP IP updater
              address.
  mode        Configure VTP device mode
  password    Set the password for the VTP administrative domain
  pruning     Set the administrative domain to permit pruning
  version     Set the administrative domain to VTP version
vIOS-12-01(config)#vtp domain cisco-01
Changing VTP domain name from CISCO-VIOS to cisco-01
vIOS-12-01(config)#
*Sep 15 19:17:40.467: %SW_VLAN-6-VTP_DOMAIN_NAME_CHG: VTP domain name changed to cisco-01.
*Sep 15 19:17:42.460: %MDTP-5-DOMAINMISMATCH: Unable to perform trunk negotiation on port Gi8/1 because of VTP domain mismatch.
vIOS-12-01(config)#
*Sep 15 19:17:43.513: %MDTP-5-DOMAINMISMATCH: Unable to perform trunk negotiation on port Gi8/2 because of VTP domain mismatch.
vIOS-12-01(config)#vtp mode ?
  client      Set the device to client mode.
  off         Set the device to off mode.
  server      Set the device to server mode.
  transparent Set the device to transparent mode.
vIOS-12-01(config)#vtp mode client
Setting device to VTP client mode for VLANs.
vIOS-12-01(config)#
% Ambiguous command: "v"
vIOS-12-01(config)#vtp pass
% Incomplete command.
vIOS-12-01(config)#vtp password ?
WORD         The ascii password for the VTP administrative domain.
vIOS-12-01(config)#vtp password cisco
Setting device VTP password to cisco
vIOS-12-01(config)#?
vIOS-12-01#
*Sep 15 19:20:04.836: %SYS-5-CONFIG_I: Configured from console by console
vIOS-12-01#
Building configuration...
Compressed configuration from 5090 bytes to 1910 bytes[OK]
*Sep 15 19:20:34.548: %NR0R-5-CONFIG_MITTING: GR0R configuration is being updated on disk. Please wait...
*Sep 15 19:20:41.542: %NR0R-5-CONFIG_MITTING: GR0R configuration was written to disk successfully.

```

```

Sep 15 19:18:28.796: %LINK-3-UPDOWN: Interface GigabitEthernet0/2, changed stan
Sep 15 19:17:10.787: %VTP-3-DOWNDISPATCH: Unable to perform trunk negotiatio
*****
* IOSv - Cisco Systems Confidential
*
* This software is provided as is without warranty for internal
* development and testing purposes only under the terms of the Cisco
* Early Field Trial Agreement. Under no circumstances may this software
* be used for production purposes or deployed in a production
* environment.
*
* By using the software, you agree to abide by the terms and conditions
* of the Cisco Early Field Trial Agreement as well as the terms and
* conditions of the Cisco End User License Agreement at
* http://www.cisco.com/go/eula
*
* Unauthorized use or distribution of this software is expressly
* prohibited.
*****
CIS-12-81>
CIS-12-81>
CIS-12-81>
CIS-12-81>ena
CIS-12-81#conf t
Enter configuration commands, one per line. End with CRTL/Z.
CIS-12-81(config)#vtp domain cisco-01
Changing VTP domain name from CISCO-VIOS to cisco-01
CIS-12-81(config)#
Sep 15 19:26:59.456: %VLAN-4-VTP_DOMAIN_NAME_CHG: VTP domain name changed to cisco-01.
CIS-12-81(config)#vtp mode client
Setting device to VTP Client mode for VLANs.
CIS-12-81(config)#
Sep 15 19:27:11.933: %VLAN-4-VTP_PEER_NOTIFICATION: VTP protocol user notification: MD5 digest checksum mismatch on receipt of equal revision summary
CIS-12-81(config)#vtp password cisco
Setting device VTP password to cisco
CIS-12-81(config)#?
CIS-12-81#
Sep 15 19:29:00.759: %SYS-5-CONFIG_I: Configured from console by console
CIS-12-81#sh v
VLANname Command: "sh v"
CIS-12-81#sh vtp status
VTP Version running : 1 to 3
VTP Version capable : 2
VTP Domain Name : cisco-01
VTP Pruning Mode : Disabled
VTP Traps Generation : Disabled
Device ID : 0a02.50ac.0000
Configuration last modified by 0.0.0.0 at 0-0-00 00:00:00

Feature VLANs
-----
VTP Operating Mode : Client
Maximum VLANs supported locally : 1005
Number of existing VLANs : 8
Configuration Revision : 0
MD5 digest : 0x77 0x00 0xd1 0x0f 0xd3 0xd8 0x0d 0x59
              0x55 0xd2 0x0a 0x0e 0xd0 0xff 0xd2 0x59
*** MD5 digest checksum mismatch on trunk: Gi0/9 ***
CIS-12-81#

```

```

*****
* IOSv - Cisco Systems Confidential
*
* This software is provided as is without warranty for internal
* development and testing purposes only under the terms of the Cisco
* Early Field Trial Agreement. Under no circumstances may this software
* be used for production purposes or deployed in a production
* environment.
*
* By using the software, you agree to abide by the terms and conditions
* of the Cisco Early Field Trial Agreement as well as the terms and
* conditions of the Cisco End User License Agreement at
* http://www.cisco.com/go/eula
*
* Unauthorized use or distribution of this software is expressly
* prohibited.
*****
CIS-12-81>ena
CIS-12-81#conf t
Enter configuration commands, one per line. End with CRTL/Z.
CIS-12-81(config)#vtp domain cisco-01
Domain name already set to cisco-01.
CIS-12-81(config)#vtp mode server
Setting device to VTP Server mode for VLANs.
CIS-12-81(config)#vtp password cisco
Password already set to cisco
CIS-12-81(config)#w
^
% Invalid input detected at '^' marker.
CIS-12-81(config)#?
CIS-12-81#sh
Building configuration...

Sep 15 20:18:19.145: %SYS-5-CONFIG_I: Configured from console by consoleCompressed configuration from 5000 bytes to 1913 bytes[OK]
Sep 15 20:18:31.989: %NVRAM-S-COMPRESS_WRITEING: NVRAM configuration is being updated on disk. Please wait...
CIS-12-81#
Sep 15 20:18:34.602: %NVRAM-S-COMPRESS_WRITEING: NVRAM configuration was written to disk successfully.
CIS-12-81#

```