



Hitec HS422 Servo

SKU:SER0002




INTRODUCTION

The HS-422 has been around for a while and for a good reason, durability and the ability to be easily modified. For inexpensive robotic applications this is the perfect servo. It can easily be modified for wheeled applications since the output shaft is supported on the bottom and top with bronze bushings and the potentiometer is indirect drive. The circuit board is also separate from the motor so the potentiometer can be easily accessed. Simply a great servo at a great price.

SPECIFICATION

- Control System: +Pulse Width Control 1500usec Neutral
- Required Pulse: 3-5 Volt Peak to Peak Square Wave
- Operating Voltage: 4.8-6.0 Volts
- Operating Temperature Range: -20 to +60 Degree C
- Operating Speed (4.8V): 0.21sec/60° at no load
- Operating Speed (6.0V): 0.16sec/60° at no load
- Stall Torque (4.8V): 45.82 oz/in. (3.3kg.cm)
- Stall Torque (6.0V): 56.93 oz/in. (4.1kg.cm)
- Operating Angle: 45 Deg. one side pulse traveling 400usec
- 360 Modifiable: Yes
- Direction: Clockwise/Pulse Traveling 1500 to 1900usec
- Current Drain (4.8V): 8mA/idle and 150mA no load operating
- Current Drain (6.0V): 8.8mA/idle and 180mA no load operating
- Dead Band Width: 8usec
- Motor Type: 3 Pole Ferrite
- Potentiometer Drive: Indirect Drive
- Bearing Type: Dual Oilite Bushing
- Gear Type: Nylon
- Connector Wire Length: 11.81" (300mm=11.81in)
- Dimensions: See Schematics
- Weight: 1.6oz (45.5g)



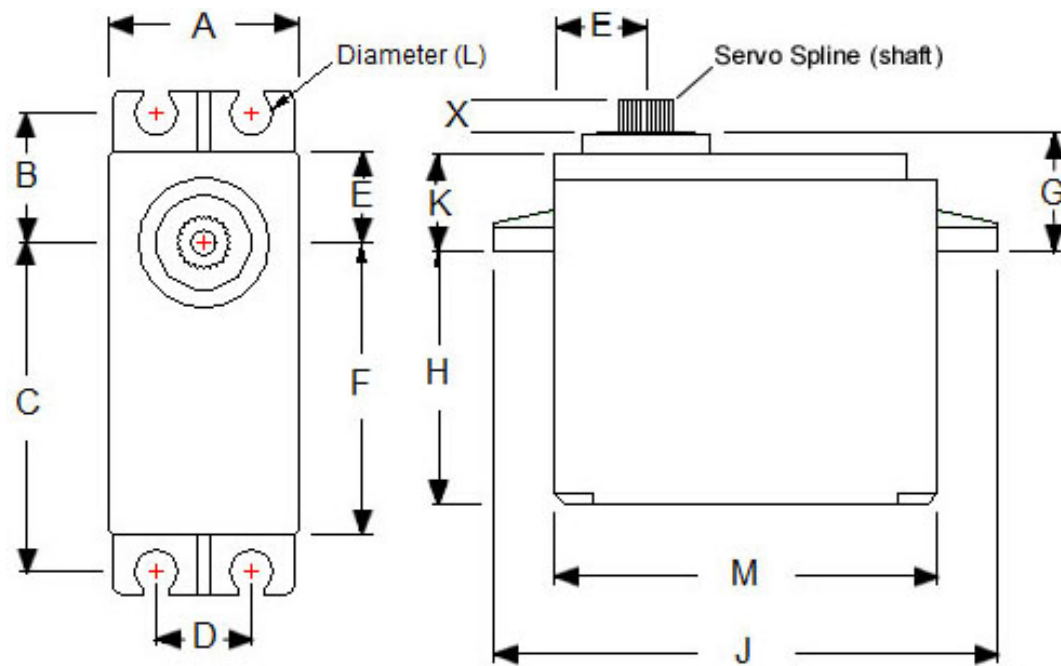

A = .780" (19.82mm=0.78in)
B = .530" (13.47mm=0.53in)
C = 1.33" (33.79mm=1.33in)
D = .400" (10.17mm=0.4in)
E = .380" (9.66mm=0.38in)
F = 1.19" (30.22mm=1.19in)
G = .460" (11.68mm=0.46in)
H = 1.05" (26.67mm=1.05in)
J = 2.08" (52.84mm=2.08in)
K = .368" (9.35mm=0.37in)
L = .172" (4.38mm=0.17in)
M = 1.57" (39.88mm=1.57in)
X = .120" (3.05mm=0.12in)

SHIPPING LIST

- Hitec HS422 Servo x1