


**ALUMINUM ALLOY
CONDUCTOR STEEL
REINFORCED (AACSR)**

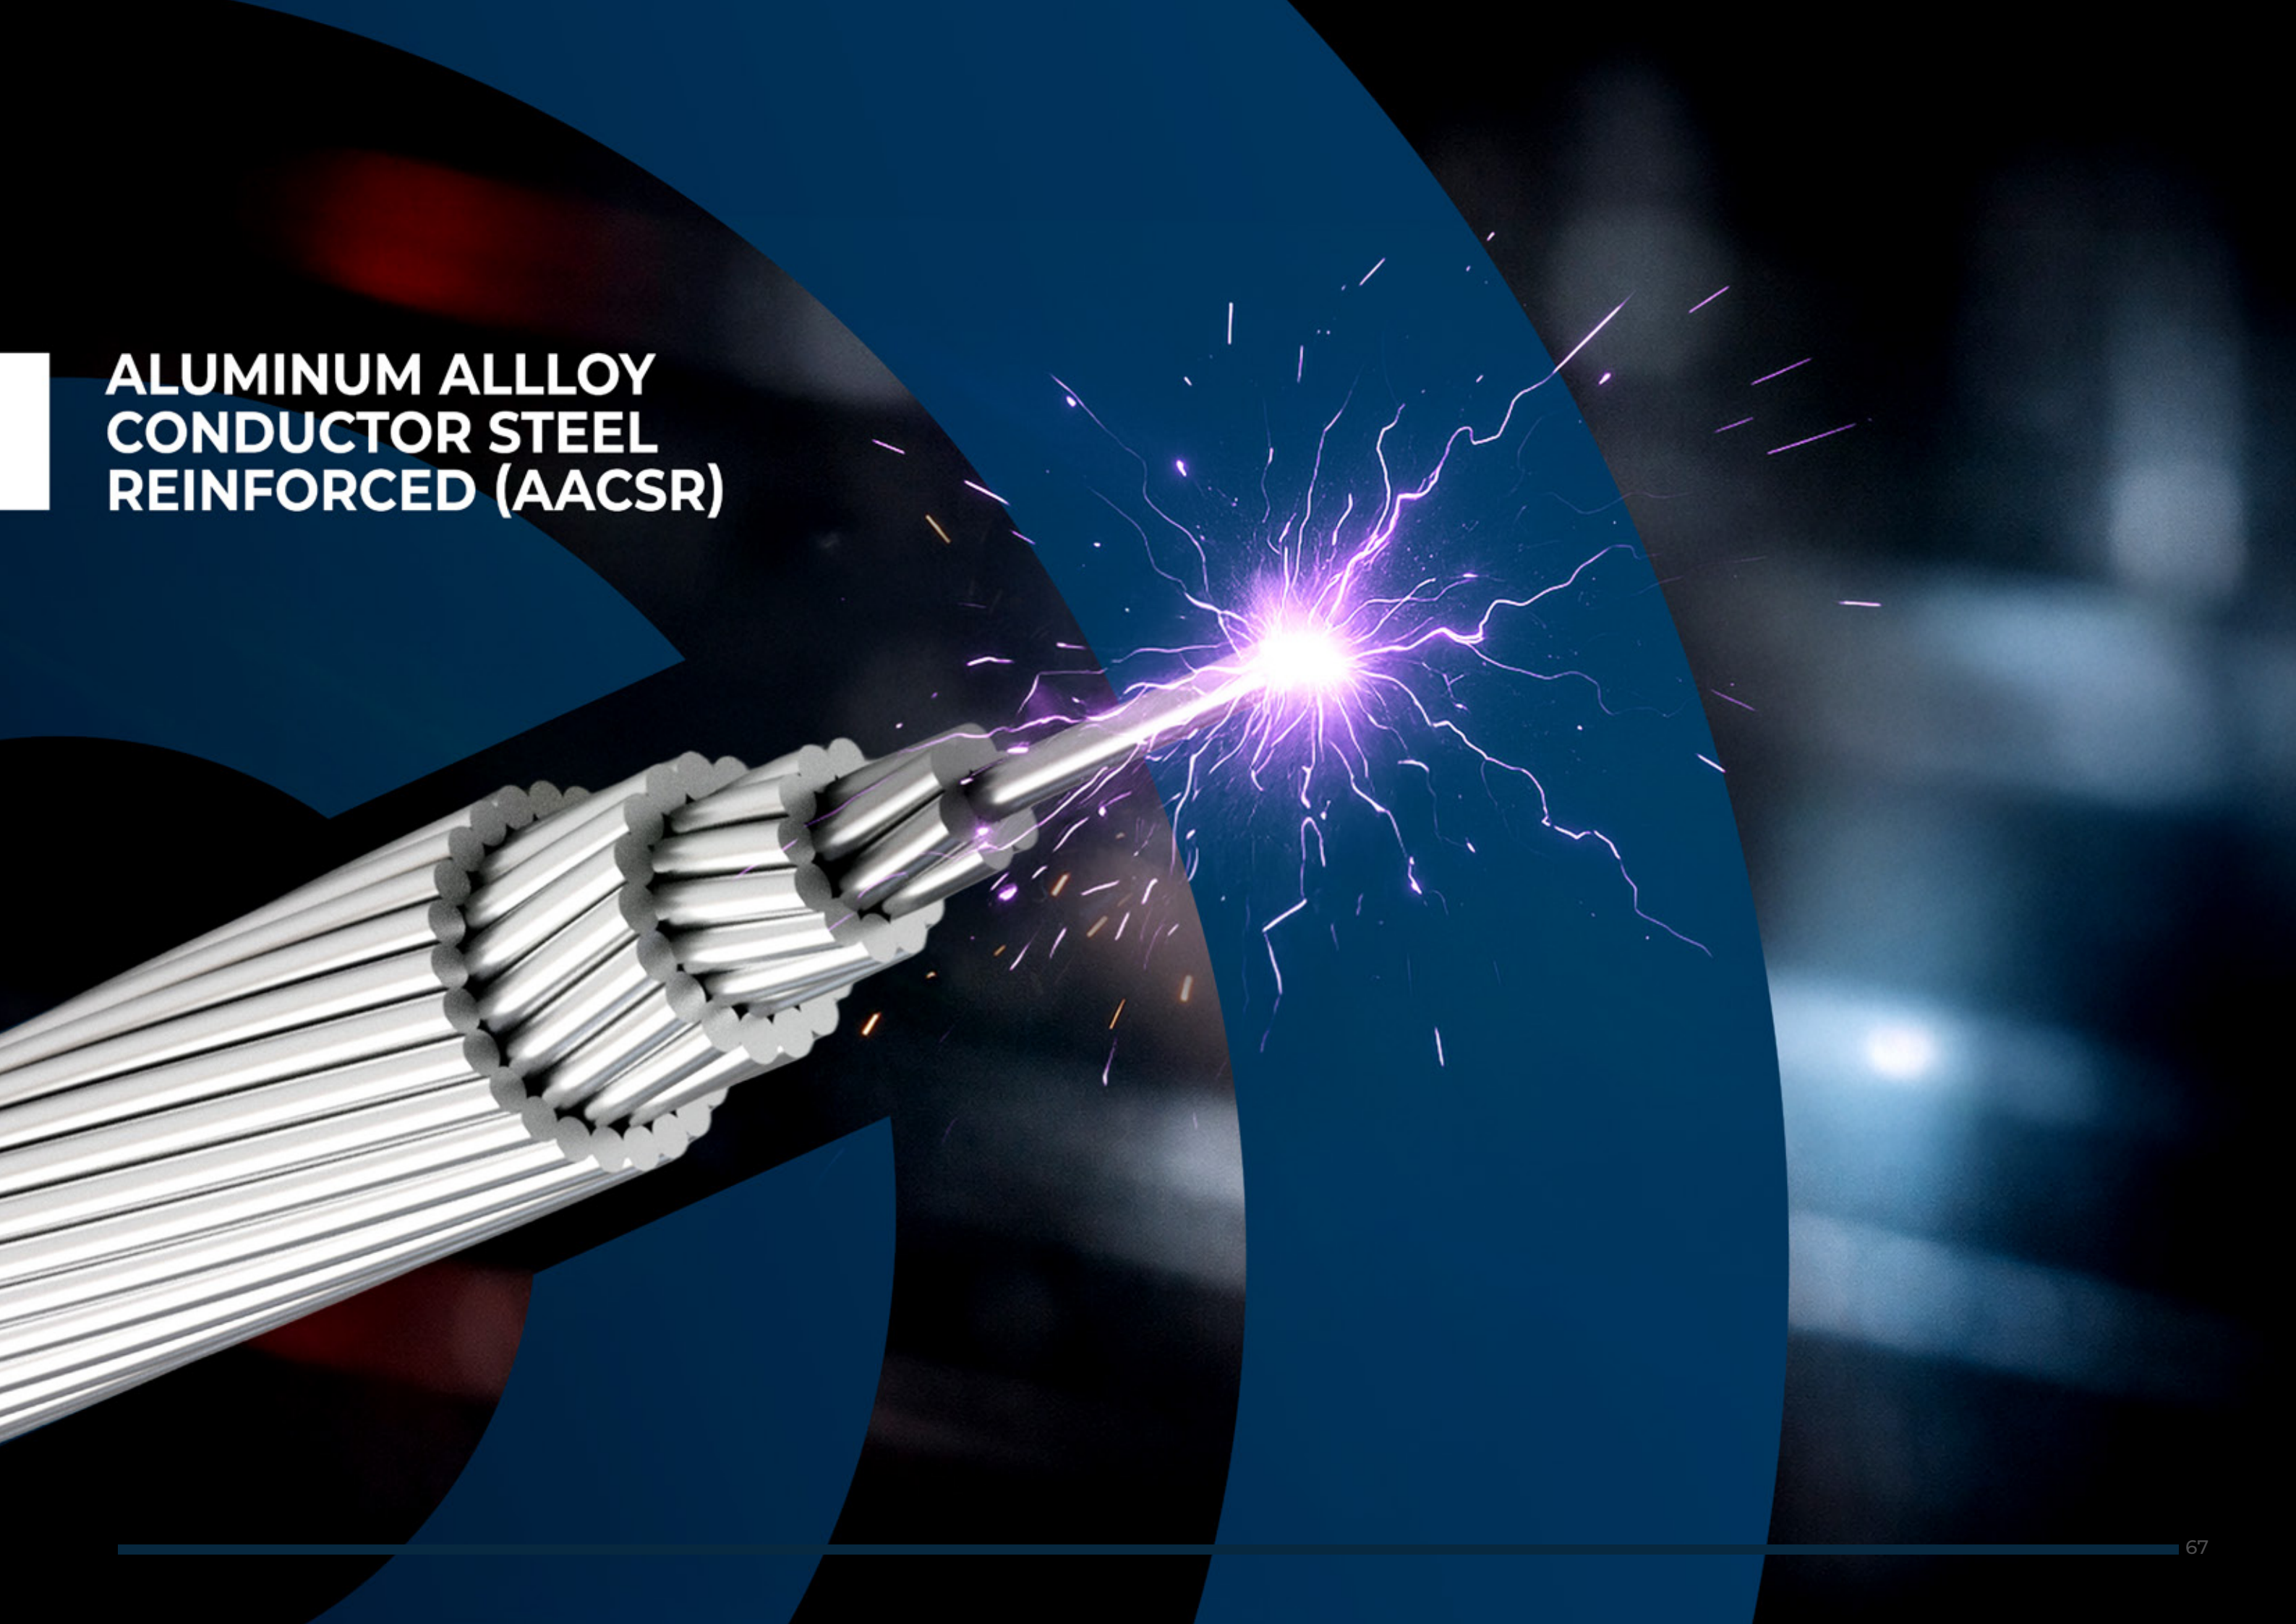

Aluminum Alloy Conductor Steel Reinforced
(AACSR)

Description

An outer layer of Aluminum Alloy conductor concentrically stranded over the central core of galvanized solid or stranded steel wires to form Aluminum Alloy steel reinforced conductor.

Application

AACSR conductors are widely used for electrical power transmission over long distance (as an earthing Conductor). It could be used as a messenger for supporting overhead electrical cables.

Technical Data

Relevant Standard	BS EN 50182
Conductor	Aluminum Alloy over the central core of galvanized solid or stranded steel wires
Minimum bending Radius	25 x outer diameter
Packing Condition	Our standard length on Wooden Drum / or according to customer request



Product Code	Total Cross Sectional Area mm²	Number and Nominal Diameter of wires		Max. D.C. Conductor Resistance at 20 °C Ω/km	Approx. Overall Diameter mm²	Minimum Breaking Load KN	Approx. Weight Kg/Km
		Aluminum No. x mm	Steel No. x mm				
A - BS EN 50182 (France)							
PHLOX 37.7	37.7	9 x 2	3 x 2	1.175	8.30	22.86	151.4
PHLOX 59.7	59.7	12 x 2	7 x 2	0.8835	10.00	44.14	276.0
PHLOX 75.5	75.5	12 x 2.25	7 x 2.25	0.6981	11.30	55.86	349.3
PHLOX 94.1	94.1	15 x 2.1	19 x 1.38	0.6435	12.60	77.96	474.2
PHLOX 116.2	116.2	18 x 2	19 x 2	0.5921	14.00	104.93	625.0
PHLOX 147.1	147.1	18 x 2.25	19 x 2.25	0.4678	15.80	132.80	791.0
PASTEL 147.1	147.1	30 x 2.25	7 x 2.25	0.2795	15.80	79.12	547.0
PHLOX 181.6	181.6	18 x 2.50	19 x 2.50	0.3789	17.50	160.22	976.6
PASTEL 181.6	181.6	30 x 2.50	7 x 2.50	0.2264	17.50	96.31	675.3
PHLOX 228	227.8	18 x 2.80	19 x 2.80	0.3021	19.60	200.98	1225.0
PASTEL 228	227.8	30 x 2.80	7 x 2.80	0.1805	19.60	120.81	847.1
PHLOX 228	288.3	18 x 3.15	19 x 3.15	0.2387	22.10	249.93	1550.4
PASTEL 228	288.3	30 x 3.15	7 x 3.15	0.1426	22.10	151.26	1072.1
PASTEL 299	299.4	42 x 2.5	19 x 2.50	0.1622	22.50	198.51	1302.8
PHLOX 376	375.6	24 x 2.80	37 x 2.80	0.227	25.20	369.27	2202.4
PASTEL 412	411.7	32 x 3.60	19 x 2.40	0.1025	26.40	223.80	1571.1
POLYGONUM 1185	1184.0	54 x 2.80	37 x 2.80	0.0349	42.00	632.15	4430.7

The above data is approximate and subject to manufacturing tolerances

