


AERIAL BUNDLED CABLES (ABC)



Aerial Bundled Cables
(ABC)

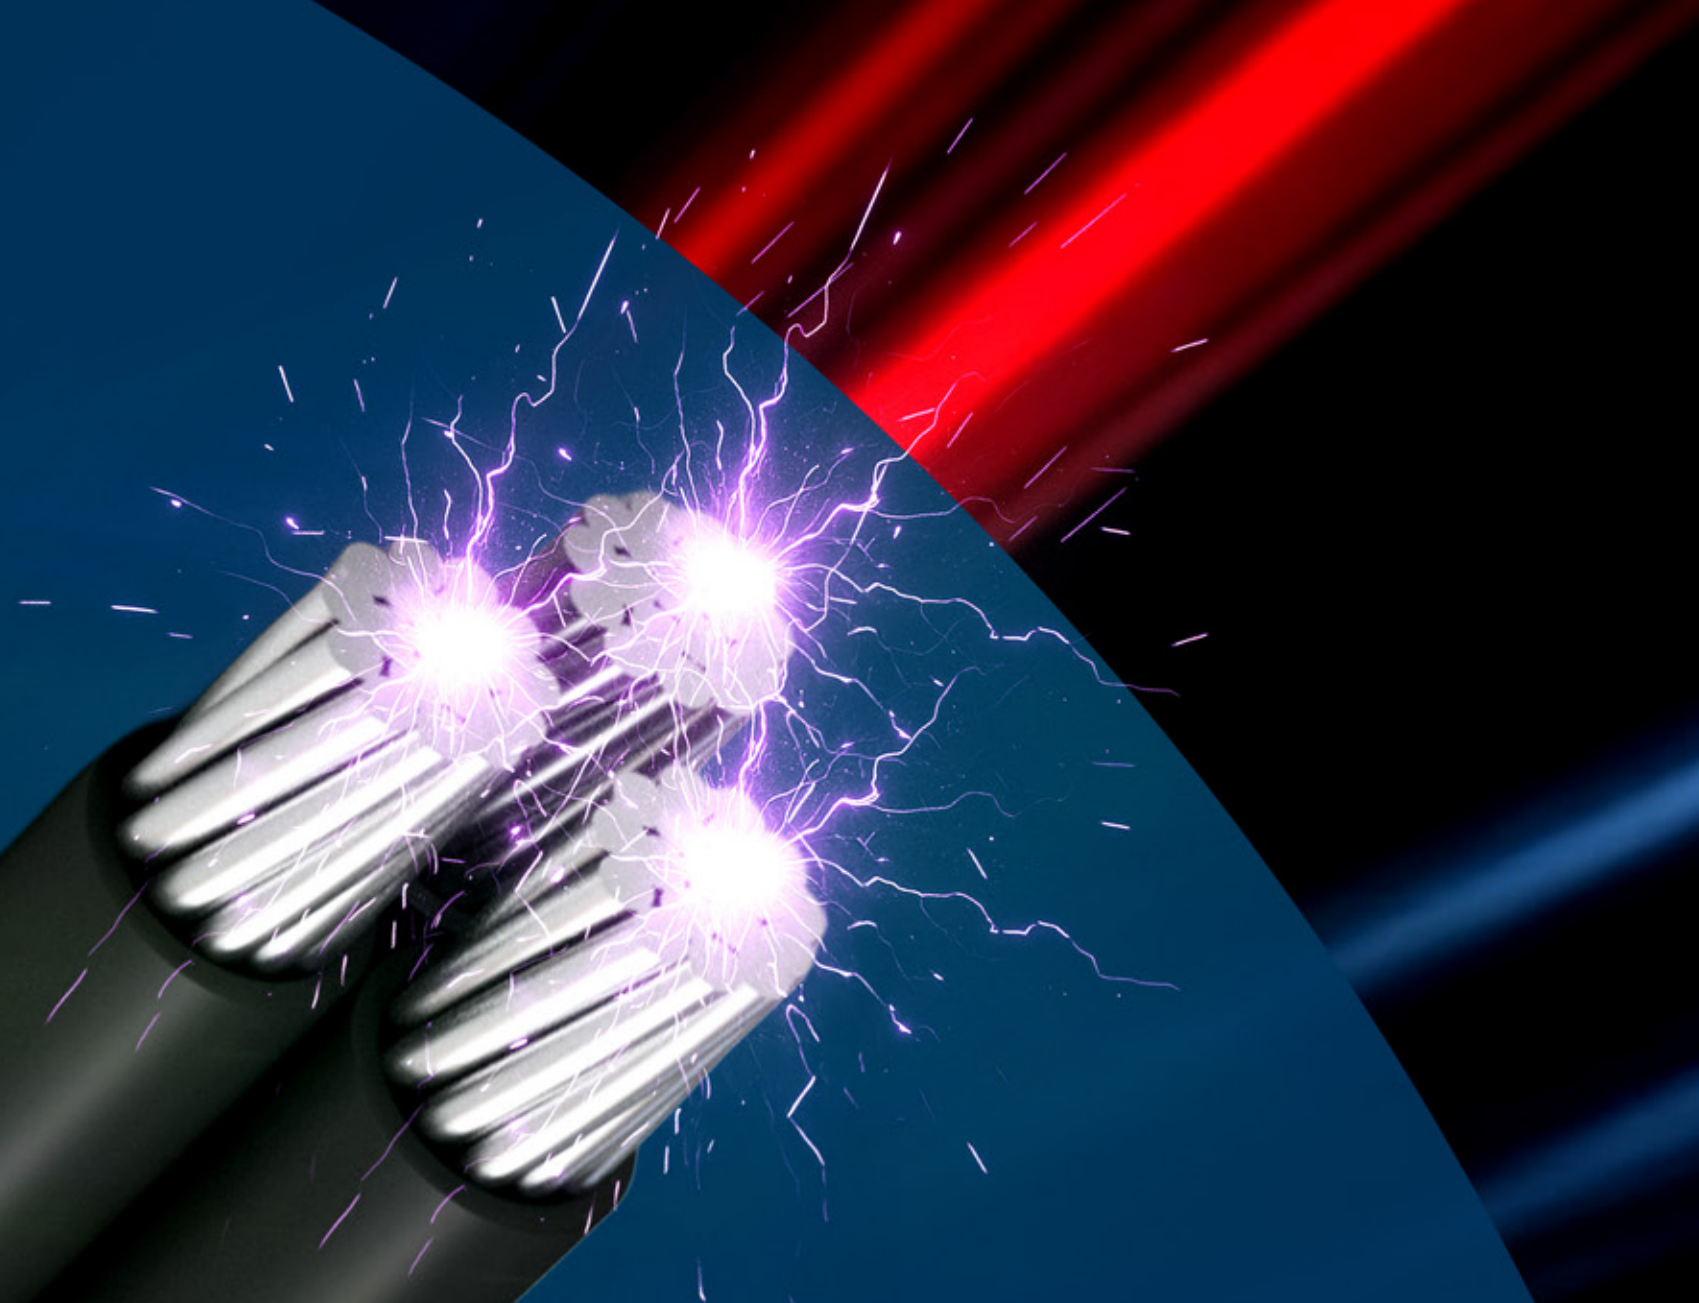

Voltage Grade

600 / 1000 VOLTS

Description

This type of cables are made from Aluminum Conductor (H14) insulated by Weather-Resistant XLPE +2.5% Carbon Black insulation for single core and for multi cores, the insulated phases are assambled together with one neutral (messenger) of All Aluminum Conductors (H14), Aluminum-Alloy Conductors (AAAC) insulated by Weather-Resistant XLPE +2.5% Carbon Black

Application

They are used for secondary over head lines on poles or as feeders to Residential premises. The use of these cables is limited to circuits, not exceeding 600 volts phase-to-phase to a normal temperature rating of the service conductor temperature of 90 °C.

Technical Data

Relevant Standard	DIN 48201-5/6, BS EN 50182, IEC 61089, IEC 60228, IEC 60502-1, ICEA S 66-524 NFC 33-209 is also available or any other specification according to customer request
Conductor	Plain hard drawn Aluminum - H14
Insulation	Extruded XLPE Compound + 2.5 % Carbon Black Rated 90 °C
Assembly (in case of more than one phase)	The insulated Cores are assembled together with suitable lay length.
Minimum bending Radius	12 x outer diameter

Notes

- 1) Extruded High Density Polyethyelene (HDPE) rated 90 °C or Low Linear Density Polyethyelene (LLDPE) rated 90 °C or PVC Compound + 2.5 % Carbon Black Rated 70 °C or 85 °C are also available according to customer request
- 2) Areal Bundled cables have many options in terms of:

i) the number of phase conductors used,

ii) the type of neutral (messenger) conductor if Aluminum - H14 (equally supported), or Aluminum Alloy (self supported)

iii) the insulation type & the phase identification.
- 3) This catalogue covers the design and construction as per the following:

i) One Core Cable of: Aluminum Conductor (H14), insulated with XLPE+2.5 C.B.%.

ii) Duplex (Two) cores cables of: One phase of Aluminum Conductor (H14), insulated with XLPE+2.5 C.B.%., assembled with One neutral of Aluminum Conductors (H14), insulated with XLPE+2.5 C.B.%., identified with phase No.1 with one ridge & phase No.2 without ridges

iii) Triplex (Three cores) cables of Two phases of Aluminum Conductor (H14), insulated with XLPE+2.5 C.B.%., assembled with One neutral of Aluminum Conductors (H14), insulated with XLPE+2.5 C.B.%., identified with phase No.1 with one ridge, phase No.2 with two ridges & phase No. 3 without ridges

iv) Quadruplex (four cores) cables Three phases of Aluminum Conductor (H14), insulated with XLPE+2.5 C.B.%., assembled with One neutral of Aluminum Conductors (H14), insulated with XLPE+2.5 C.B.%., identified with phase No.1 with one ridge, phase No.2 with two ridges, phase No. 3 with three ridges and Phase No. 4 without ridges

However, we can provide any other type or design or construction according to customer request

Product Code	Phase			Approx. Overall Diameter mm²	Approx. Weight Kg/km
	Total Cross Sectional Area mm²	Insulation Thickness mm	Max. D.C. Conductor Resistance at 20 °C Ω/km		
A) One Core					
PA-BT11-W3-01-U0	16.0	0.7	1.9100	3.50	60.0
PA-BT12-W3-01-U0	25.0	0.9	1.2000	8.10	95.0
PA-BT13-W3-01-U0	35.0	0.9	0.8680	9.30	130.0
PA-BT14-W3-01-U0	50.0	1.0	0.6410	11.00	180.0
PA-BT15-W3-01-U0	70.0	1.1	0.4430	12.70	230.0
PA-BT16-W3-01-U0	95.0	1.1	0.3200	14.70	320.0
PA-BT17-W3-01-U0	120.0	1.2	0.2530	16.40	395.0
B) Two Cores (Duplex)					
PA-BT11-W3-02-U0	16.0	1.2	1.9100	15.00	145.0
PA-BT12-W3-02-U0	25.0	1.2	1.2000	17.40	205.0
PA-BT13-W3-02-U0	35.0	1.2	0.8680	19.80	275.0
PA-BT14-W3-02-U0	50.0	1.5	0.6410	24.00	400.0
PA-BT15-W3-02-U0	70.0	1.5	0.4430	27.00	500.0
PA-BT16-W3-02-U0	95.0	1.5	0.3200	31.00	675.0
PA-BT17-W3-02-U0	120.0	1.7	0.2530	34.80	850.0
C) Three Cores (Triplex)					
PA-BT11-W3-03-U0	16.0	1.2	1.9100	16.20	220.0
PA-BT12-W3-03-U0	25.0	1.2	1.2000	18.80	305.0
PA-BT13-W3-03-U0	35.0	1.2	0.8680	21.40	410.0
PA-BT14-W3-03-U0	50.0	1.5	0.6410	25.90	600.0
PA-BT15-W3-03-U0	70.0	1.5	0.4430	29.20	745.0
PA-BT16-W3-03-U0	95.0	1.5	0.3200	33.50	1015.0
PA-BT17-W3-03-U0	120.0	1.7	0.2530	37.60	1275.0
D) Four Cores (Quadruplex)					
PA-BT11-W3-04-U0	16.0	1.2	1.9100	18.20	290.0
PA-BT12-W3-04-U0	25.0	1.2	1.2000	21.10	410.0
PA-BT13-W3-04-U0	35.0	1.2	0.8680	24.00	550.0
PA-BT14-W3-04-U0	50.0	1.5	0.6410	29.00	800.0
PA-BT15-W3-04-U0	70.0	1.5	0.4430	32.70	995.0
PA-BT16-W3-04-U0	95.0	1.5	0.3200	37.50	1355.0
PA-BT17-W3-04-U0	120.0	1.7	0.2530	42.10	1700.0

The above data is approximate and subject to manufacturing tolerances