

ALUMINUM CONDUCTOR STEEL REINFORCED (ACSR)



Aluminum Conductor Steel Reinforced
(ACSR)

Description

An outer layer of Aluminum conductor concentrically stranded over the central core of galvanized solid or stranded steel wires to form Aluminum steel reinforced conductor.



Application

Aluminum Conductors, Steel-Reinforced (ACSR) can be used in Medium, High and Extra-High voltage transmission lines; also used for primary and secondary distribution lines. The combination of aluminum and steel in the conductor design offers both efficient conductivity and high tensile strength making ACSR the most economical solution for overhead power transmission and distribution projects.

Technical Data

Relevant Standard	BS EN 50182, BS 215-2, DIN 48204, IEC 61089, ASTM B 232
Conductor	Plain bare hard drawn Aluminum - H14 over the central core of galvanized solid or stranded steel wires
Minimum bending Radius	25 x outer diameter
Packing Condition	Our standard length on Wooden Drum / or according to customer request

Product Code	Cross Sectional Area mm²	Number and Nominal Diameter of wires		Max. D.C. Conductor Resistance at 20 °C Ω/km	Approx. Overall Diameter mm²	Minimum Breaking Load KN	Approx. Weight Kg/Km	Rated Current Amps
		Aluminum No. x mm	Steel No. x mm					
A - BS EN 50182 (GERMANY) & DIN 48204								
PO-RTAA-00-01-U0	16 / 2.5	6 x 1.80	1 x 1.80	1.8769	5.40	5.80	61.60	105
PO-RTAB-00-01-U0	25 / 4	6 x 2.25	1 x 2.25	1.2012	6.75	8.95	96.30	140
PO-RTAC-00-01-U0	35 / 6	6 x 2.70	1 x 2.70	0.8342	8.10	12.37	138.70	170
PO-RTAD-00-01-U0	44 / 32	14 x 20	7 x 2.40	0.6574	11.20	44.24	369.30	209
PO-RTAE-00-01-U0	50 / 8	6 x 3.20	1 x 3.20	0.5939	9.60	16.81	194.80	210
PO-RTAF-00-01-U0	50 / 30	12 x 2.33	7 x 2.33	0.5644	11.70	42.98	374.70	227
PO-RTAG-00-01-U0	70 / 12	26 x 1.85	7 x 1.44	0.4132	11.70	26.27	282.20	290
PO-RTAH-00-01-U0	95 / 15	26 x 2.15	7 x 1.67	0.3060	13.60	34.93	380.60	350
PO-RTAI-00-01-U0	95 / 55	12 x 3.20	7 x 3.20	0.2992	16.00	77.85	706.80	367
PO-RTAJ-00-01-U0	105 / 75	14 x 3.10	19 x 2.25	0.2742	17.50	105.82	885.30	394

PO-RTAK-00-01-U0	120 / 20	26 x 2.44	7 x 1.90	0.2376	15.50	44.50	491.00	410
PO-RTAL-00-01-U0	120 / 70	12 x 3.60	7 x 3.60	0.2364	18.00	97.92	894.50	427
PO-RTAM-00-01-U0	125 / 30	30 x 2.33	7 x 2.33	0.2260	16.30	56.41	587.00	425
PO-RTAN-00-01-U0	150 / 25	26 x 2.70	7 x 2.10	0.1940	17.10	53.67	600.80	470
PO-RTAO-00-01-U0	170 / 40	30 x 2.70	7 x 2.70	0.1683	18.90	74.89	788.20	520
PO-RTAP-00-01-U0	185 / 30	26 x 3.00	7 x 2.33	0.1571	19.00	65.27	741.00	535
PO-RTAQ-00-01-U0	210 / 35	26 x 3.20	7 x 2.49	0.1381	20.30	73.36	844.10	590
PO-RTAR-00-01-U0	210 / 50	30 x 3.00	7 x 3.00	0.1363	21.00	92.46	973.10	610
PO-RTAS-00-01-U0	230 / 30	24 x 3.50	7 x 2.33	0.1250	21.00	72.13	870.90	630
PO-RTAT-00-01-U0	240 / 40	26 x 3.45	7 x 2.68	0.1188	21.80	85.12	980.10	645
PO-RTAU-00-01-U0	265 / 35	24 x 3.74	7 x 2.49	0.1095	22.40	81.04	994.40	680
PO-RTAV-00-01-U0	300 / 50	26 x 3.86	7 x 3.00	0.0949	24.40	105.09	1227.30	740
PO-RTAW-00-01-U0	305 / 40	54 x 2.68	7 x 2.68	0.0949	24.10	96.80	1151.20	740
PO-RTAX-00-01-U0	340 / 30	48 x 3.00	7 x 2.33	0.0852	25.00	91.71	1171.20	790
PO-RTAY-00-01-U0	380 / 50	54 x 3.00	7 x 3.00	0.0758	27.00	121.30	1442.50	840
PO-RTAZ-00-01-U0	385 / 35	48 x 3.20	7 x 2.49	0.0749	26.70	102.56	1333.60	850
PO-RTBA-00-01-U0	435 / 55	54 x 3.20	7 x 3.20	0.0666	28.80	133.59	1641.30	900
PO-RTBB-00-01-U0	450 / 40	48 x 3.45	7 x 2.68	0.0644	28.70	119.05	1549.10	920
PO-RTBC-00-01-U0	490 / 65	54 x 3.40	7 x 3.40	0.0590	30.60	150.81	1852.90	960
PO-RTBD-00-01-U0	495 / 35	45 x 3.74	7 x 2.49	0.0584	29.90	117.96	1632.60	985
PO-RTBE-00-01-U0	510 / 45	48 x 3.68	7 x 2.87	0.0566	30.70	133.31	1765.30	995
PO-RTBF-00-01-U0	550 / 70	54 x 3.60	7 x 3.60	0.0526	32.40	166.32	2077.20	1020
PO-RTBG-00-01-U0	560 / 50	48 x 3.86	7 x 3.00	0.0515	32.20	146.28	1939.50	1040
PO-RTBH-00-01-U0	570 / 40	45 x 4.02	7 x 2.60	0.0506	32.20	136.40	1887.10	1050
PO-RTBI-00-01-U0	650 / 45	45 x 4.30	7 x 2.87	0.0442	34.40	156.18	2159.90	1120
PO-RTBJ-00-01-U0	680 / 85	54 x 4.00	19 x 2.40	0.0426	36.00	206.56	2549.70	1150

The above data is approximate and subject to manufacturing tolerances

Note:-

The above values of current carrying capacity are calculated due to frequency up to 60 Hz, assuming an ambient temperature of 35 °C , final temperature of 80 °C, wind velocity of 0.6 m/sec, solar radiation of 900 W/m2, emissivity coefficient of 0.6, solar radiation absorption coefficient of 0.5

Aluminum Conductor Steel Reinforced
(ACSR)




Product Code	Cross Sectional Area mm²	Number and Nominal Diameter of wires		Max. D.C. Conductor Resistance at 20 °C Ω/km	Approx. Overall Diameter mm²	Minimum Breaking Load KN	Approx. Weight Kg/Km	Rated Current Amps
		Aluminum No. x mm	Steel No. x mm					
B - BS EN 50182 (United Kingdom)								
MOLE	12.4	6 x 1.50	1 x 1.50	2.7027	4.50	4.14	42.8	86
SQUIRREL	24.5	6 x 2.11	1 x 2.11	1.3659	6.33	7.87	84.7	133
GOPHER	30.6	6 x 2.36	1 x 2.36	1.0919	7.08	9.58	106.0	153
WEASEL	36.9	6 x 2.59	1 x 2.59	0.9065	7.77	11.38	127.6	172
FOX	42.8	6 x 2.79	1 x 2.79	0.7812	8.37	13.21	148.1	189
FERRET	49.5	6 x 3.00	1 x 3.00	0.6757	9.00	15.27	171.2	208
RABBIT	61.7	6 x 3.35	1 x 3.35	0.5419	10.10	18.42	213.5	240
MINK	73.6	6 x 3.66	1 x 3.66	0.454	11.00	21.67	254.9	268
SKUNK	100.1	12 x 2.59	7 x 2.59	0.4568	13.00	52.79	463.0	280
BEAVER	87.5	6 x 3.99	1 x 3.99	0.382	12.00	25.76	302.9	300
HORSE	116.2	12 x 2.79	7 x 2.79	0.3936	14.00	61.26	537.3	308
RACCOON	92.0	6 x 4.09	1 x 4.09	0.3635	12.30	27.06	318.3	309
OTIER	97.9	6 x 4.22	1 x 4.22	0.3415	12.70	28.81	338.8	322
CAT	111.3	6 x 4.50	1 x 4.50	0.3003	13.50	32.76	385.3	349
HARE	122.5	6 x 4.72	1 x 4.72	0.273	14.20	36.04	423.8	372
DOG	118.5	6 x 4.72	7 x 1.57	0.2733	14.20	32.65	394.0	371
COYOTE	151.8	26 x 2.54	7 x 1.91	0.2192	15.90	45.86	520.7	428
COUGAR	138.8	18 x 3.05	1 x 3.05	0.2188	15.30	29.74	418.8	424
TIGER	161.9	30 x 2.36	7 x 2.36	0.2202	16.50	57.87	602.2	432
WOLF	194.9	30 x 2.59	7 x 2.59	0.1829	18.10	68.91	725.3	487
DINGO	167.5	18 x 3.35	1 x 3.35	0.1814	16.80	35.87	505.2	478
LYNX	226.2	30 x 2.79	7 x 2.79	0.1576	19.50	79.97	841.6	536

CARACAL	194.5	18 x 3.61	1 x 3.61	0.1562	18.10	40.74	586.7	526
PANTHER	261.5	30 x 3.00	7 x 3.00	0.1363	21.00	92.46	973.1	588
JAGUAR	222.3	18 x 3.86	1 x 3.86	0.1366	19.30	46.57	670.8	573
LION	293.9	30 x 3.18	7 x 3.18	0.1213	22.30	100.47	1093.4	634
BEAR	326.1	30 x 3.35	7 x 3.35	0.1093	23.50	111.50	1213.4	678
GOAT	400.0	30 x 3.71	7 x 3.71	0.0891	26.00	135.13	1488.2	773
SHEEP	462.6	30 x 3.99	7 x 3.99	0.0771	27.90	156.30	1721.3	848
ANTELOPE	422.6	54 x 2.97	7 x 2.97	0.0773	26.70	118.88	1413.8	836
BISON	431.2	54 x 3.00	7 x 3.00	0.0758	27.00	121.30	1442.5	847
DEER	529.8	30 x 4.27	7 x 4.27	0.0673	29.90	179.00	1971.4	925
ZEBRA	484.5	54 x 3.18	7 x 3.18	0.0674	28.60	131.92	1620.8	913
ELK	588.5	30 x 4.50	7 x 4.50	0.0606	31.50	198.80	2189.5	989
CAMEL	538.7	54 x 3.35	7 x 3.35	0.0608	30.20	146.40	1798.8	975
MOOSE	597.0	54 x 3.53	7 x 3.53	0.0547	31.80	159.92	1997.3	1043

The above data is approximate and subject to manufacturing tolerances

Note:-

The above values of current carrying capacity are calculated due to frequency up to 60 Hz, assuming an ambient temperature of 35 °C , final temperature of 80 °C, wind velocity of 0.6 m/sec., solar radiation of 900 W/m2, emissivity coefficient of 0.6, solar radiation absorption coefficient of 0.5

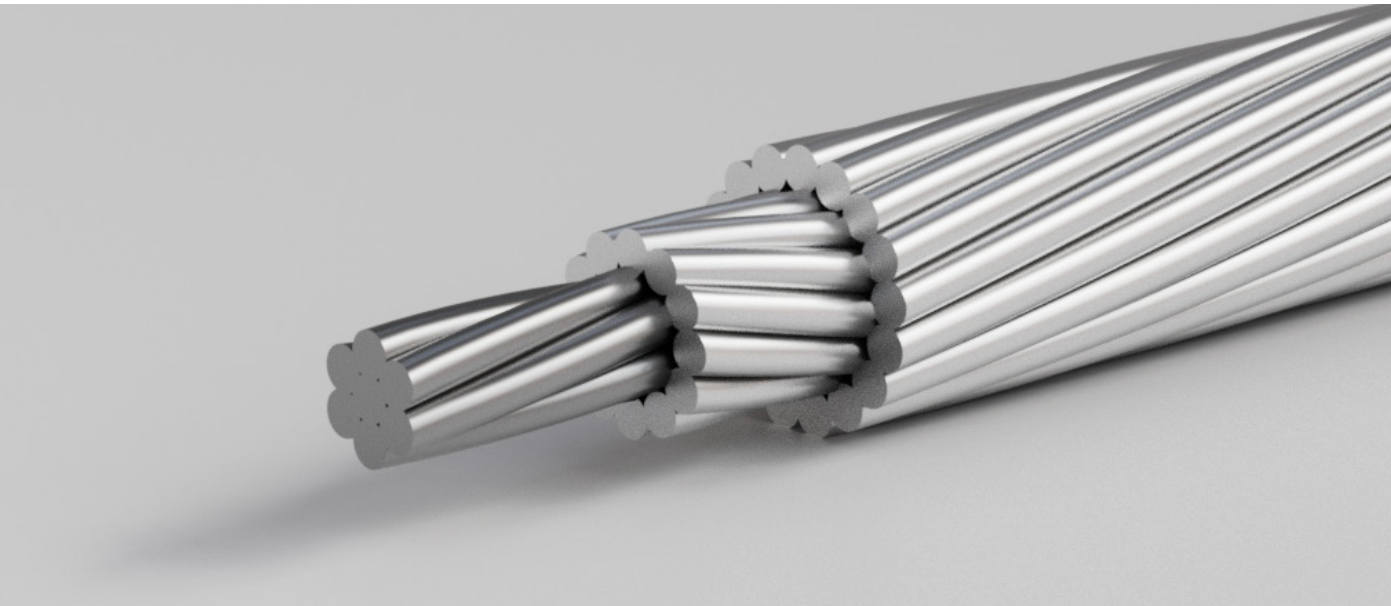

Aluminum Conductor Steel Reinforced
(ACSR)



Product Code	Cross Sectional Area mm²	Number and Nominal Diameter of wires		Max. D.C. Conductor Resistance at 20 °C Ω/km	Approx. Overall Diameter mm²	Minimum Breaking Load KN	Approx. Weight Kg/Km	Rated Current Amps
		Aluminum No. x mm	Steel No. x mm					
C - IEC 61089 (Al/S1A)								
Al/S1A - 16	18.7	6 x 1.84	1 x 1.84	1.7934	5.53	6.08	64.6	149
Al/S1A - 25	29.2	6 x 2.30	1 x 2.30	1.1478	6.91	9.13	100.9	198
Al/S1A - 40	46.7	6 x 2.91	1 x 2.91	0.7174	8.74	14.40	161.5	267
Al/S1A - 63	73.5	6 x 3.66	1 x 3.66	0.4555	11.00	21.63	254.4	358
Al/S1A - 100	117	6 x 4.61	1 x 4.61	0.2869	13.80	34.33	403.8	481
Al/S1A - 125	132	18 x 2.97	1 x 2.97	0.2304	14.90	29.17	397.9	549
Al/S1A - 125	145	26 x 2.47	7 x 1.92	0.231	15.70	45.69	503.9	557
Al/S1A - 160	169	18 x 3.36	1 x 3.36	0.18	16.80	36.18	509.3	643
Al/S1A - 160	186	26 x 2.80	7 x 2.18	0.1805	17.70	57.69	644.9	652
Al/S1A - 200	211	18 x 3.76	1 x 3.76	0.144	18.80	44.22	636.7	743
Al/S1A - 200	233	26 x 3.13	7 x 3.43	0.1444	19.80	70.13	806.2	754
Al/S1A - 250	275	22 x 3.80	7 x 2.11	0.1154	21.60	68.72	880.6	865
Al/S1A - 250	291	26 x 3.50	7 x 2.72	0.1155	22.20	87.67	1007.7	872
Al/S1A - 315	337	45 x 2.99	7 x 1.99	0.0917	23.90	79.03	1039.6	998
Al/S1A - 315	366	26 x 3.93	7 x 3.05	0.0917	24.90	106.83	1269.7	1012
Al/S1A - 400	428	45 x 3.36	7 x 2.24	0.0722	26.90	98.36	1320.1	1164
Al/S1A - 400	452	54 x 3.07	7 x 3.07	0.0723	27.90	123.04	1510.3	1173
Al/S1A - 450	481.0	45 x 3.57	7 x 2.38	0.0642	28.50	107.47	1485.2	1255
Al/S1A - 450	508.0	54 x 3.26	7 x 3.26	0.0643	29.30	138.42	1699.1	1266
Al/S1A - 500	535.0	45 x 3.76	7 x 2.51	0.0578	30.10	119.41	1650.2	1343

Al/S1A - 500	565.0	54 x 3.43	7 x 3.43	0.0578	30.90	153.80	1887.9	1355
Al/S1A - 560	599.0	45 x 3.98	7 x 2.65	0.0516	31.80	133.74	1848.2	1444
Al/S1A - 560	631.0	54 x 3.63	19 x 2.18	0.0516	32.70	172.59	2103.4	1458
Al/S1A - 630	674.0	45 x 4.22	7 x 2.81	0.0459	33.80	150.45	2079.2	1557
Al/S1A - 630	710.0	54 x 3.85	19 x 2.31	0.0459	34.70	191.77	2366.3	1572
Al/S1A - 710	759.0	45 x 4.48	7 x 2.99	0.0407	35.90	169.56	2343.2	1680
Al/S1A - 710	800.0	54 x 4.09	19 x 2.45	0.0407	36.80	216.12	2666.8	1696
Al/S1A - 800	901.0	54 x 4.34	19 x 2.61	0.0362	39.10	243.52	3004.9	1828

Note:-

- 1) Other types of ACSR as per IEC 61089 (Al/S1B, Al/S2A, Al/S2B & Al/S3A) are available as per customer request
- 2) The above values of current carrying capacity are calculated due to frequency up to 60 Hz, assuming an ambient temperature of 20 °C , final temperature of 80 °C, wind velocity of 1.0 m/sec, solar radiation of 900 W/m2, emissivity coefficient of 0.6, solar radiation absorption coefficient of 0.5

Product Code	Cross Sectional Area mm²	Number and Nominal Diameter of wires		Max. D.C. Conductor Resistance at 20 °C Ω/km	Approx. Overall Diameter mm²	Minimum Breaking Load KN	Approx. Weight Kg/Km	Rated Current Amps
		Aluminum No. x mm	Steel No. x mm					
D - BS 215-2								
GOPHER	25.0	6 x 2.36	1 x 2.36	1.093	7.08	9.61	106.0	153
WEASEL	30.0	6 x 2.59	1 x 2.59	0.9077	7.77	11.45	128.0	172
FERRET	40.0	6 x 3.00	1 x 3.00	0.6766	9.00	15.20	172.0	208
RABBIT	50.0	6 x 3.35	1 x 3.35	0.5426	10.05	18.35	214.0	240
HORSE	70.0	12 x 2.79	7 x 2.79	0.3936	13.95	61.20	538.0	308
DOG	100.0	6 x 4.72	7 x 1.57	0.2733	14.15	32.70	394.0	371
WOLF	150.0	30 x 2.59	7 x 2.59	0.1828	18.13	69.20	726.0	487
DINGO	150.0	18 x 3.35	1 x 3.35	0.1815	16.75	35.70	506.0	478
LYNX	175.0	30 x 2.79	7 x 2.79	0.1576	19.53	79.80	842.0	536
CARACAL	175.0	18 x 3.61	1 x 3.61	0.1563	18.05	41.10	587.0	526
PANTHER	200.0	30 x 3.00	7 x 3.00	0.1363	21.00	92.25	974.0	588
JAGUAR	200.0	18 x 3.86	1 x 3.86	0.1367	19.30	46.55	671.0	573
ZEBRA	400.0	54 x 3.18	7 x 3.18	0.0674	28.62	131.90	1621.0	913

The above data is approximate and subject to manufacturing tolerances

Note:-

The above values of current carrying capacity are calculated due to frequency up to 60 Hz, assuming an ambient temperature of 35 °C , final temperature of 80 °C, wind velocity of 0.6 m/sec, solar radiation of 900 W/m2, emissivity coefficient of 0.6, solar radiation absorption coefficient of 0.5

Aluminum Conductor Steel Reinforced
(ACSR)



Product Code	Aluminum Cross Sectional Area		Number and Nominal Diameter of wires		Max. D.C. Conductor Resistance at 20 °C Ω/km	Approx. Overall Diameter mm²	Calculated Breaking Load KN	Approx. Weight Kg/Km	Rated Current Amps
	kcmil	mm2	Aluminum No. x mm	Steel No. x mm					
E - ASTM B 232									
TURKEY	26.24	13.3	6 x 1.68	1 x 1.68	2.1569	5.03	5.29	53.60	99
SWAN	41.74	21.2	6 x 2.12	1 x 2.12	1.3545	6.35	8.27	85.34	133
SWANATE	41.74	21.2	7 x 1.96	1 x 2.61	1.3583	6.53	10.50	99.62	134
SPARROW	66.36	33.6	6 x 2.67	1 x 2.67	0.8540	8.03	12.68	135.71	179
SPARATE	66.36	33.6	7 x 2.47	1 x 3.3	0.8553	8.26	16.19	158.67	180
GROUSE **	80.00	40.5	8 x 2.54	1 x 4.24	0.7112	9.32	25.49	221.41	204
ROBIN	83.69	42.4	6 x 3	1 x 3	0.6764	8.99	15.79	171.12	208
PETREL**	101.80	51.6	12 x 2.34	7 x 2.34	0.5614	11.71	49.82	377.65	245
RAVEN	105.60	53.5	6 x 3.37	1 x 3.37	0.5360	10.11	19.48	216.06	241
MINORCA **	110.80	56.1	12 x 2.44	7 x 2.44	0.5163	12.22	54.27	411.13	259
QUAIL	133.10	67.4	6 x 3.78	1 x 3.78	0.4261	11.35	23.57	272.01	279
LEGHORN **	134.60	68.2	12 x 2.69	7 x 2.69	0.4248	13.46	65.83	499.22	293
GUINEA **	159.00	80.6	12 x 2.92	7 x 2.92	0.3605	14.63	77.40	589.69	326
PIGEON	167.80	85.0	6 x 4.25	1 x 4.25	0.3370	12.75	29.45	342.98	324
DOTTEREL**	176.90	89.6	12 x 3.08	7 x 3.08	0.3240	15.42	84.07	656.06	349
DORKING **	190.80	96.7	12 x 3.2	7 x 3.2	0.3002	16.03	90.74	707.84	367
BRAHMA **	203.20	103.0	16 x 2.86	19 x 2.48	0.2818	18.14	138.33	1003.80	392
COCHIN **	211.30	107.0	12 x 3.37	7 x 3.37	0.2707	16.87	100.52	783.88	392
PENGUIN	211.60	107.0	6 x 4.77	1 x 4.77	0.2676	14.30	37.14	432.71	376
WAXWING	266.80	135.0	18 x 3.09	1 x 3.09	0.2136	15.47	30.69	430.18	430
PARTRIDGE	266.80	135.0	26 x 2.57	7 x 2	0.2148	16.31	50.26	545.95	436
OSTRISH	300.00	152.0	26 x 2.73	7 x 2.12	0.1904	17.27	56.49	613.35	471
MERLIN	336.40	170.0	18 x 3.47	1 x 3.47	0.1694	17.37	38.70	542.82	500

LINNET	336.40	170.0	26 x 2.89	7 x 2.25	0.1699	18.29	62.72	687.46	506
ORIOLE	336.40	170.0	30 x 2.69	7 x 2.69	0.1703	18.82	76.95	783.28	510
CHICKADEE	397.50	201.0	18 x 3.77	1 x 3.77	0.1435	18.87	44.04	641.33	556
BRANT	397.50	201.0	24 x 3.27	7 x 2.18	0.1437	19.61	64.94	760.96	562
IBIS	397.50	201.0	26 x 3.14	7 x 2.44	0.1439	19.89	72.50	812.45	564
LARK	397.50	201.0	30 x 2.92	7 x 2.92	0.1446	20.47	90.29	925.24	567
PELICAN	477.00	242.0	18 x 4.14	1 x 4.14	0.1190	20.68	52.49	769.74	627
FLICKER	477.00	242.0	24 x 3.58	7 x 2.39	0.1199	21.49	76.51	913.48	631
HAWK	477.00	242.0	26 x 3.44	7 x 2.68	0.1199	21.79	86.74	975.09	631
HEN	477.00	242.0	30 x 3.2	7 x 3.2	0.1204	22.43	105.86	1110.64	638
OSPREY	556.50	282.0	18 x 4.47	1 x 4.47	0.1021	22.33	60.94	897.71	691
PARAKEET	556.50	282.0	24 x 3.87	7 x 2.58	0.1026	23.22	88.07	1065.56	695
DOVE	556.50	282.0	26 x 3.72	7 x 2.89	0.1025	23.55	100.52	1138.62	701
EAGLE	556.50	282.0	30 x 3.46	7 x 3.46	0.1030	24.21	123.65	1295.60	705
PEACOCK	605.00	307.0	24 x 4.03	7 x 2.69	0.0946	24.21	96.08	1158.85	735
SQUAB	605.00	307.0	26 x 3.87	7 x 3.01	0.0947	24.54	108.09	1236.97	738
WOOD DUCK	605.00	307.0	30 x 3.61	7 x 3.61	0.0946	25.25	128.55	1408.39	735
TEAL	605.00	307.0	30 x 3.61	19 x 2.16	0.0946	25.25	133.44	1396.64	735
KINGBIRD	636.00	322.0	18 x 4.78	1 x 4.78	0.0893	23.88	69.83	1026.57	753
SWIFT	636.00	322.0	36 x 3.38	1 x 3.38	0.0892	23.62	61.38	956.49	751
ROOK	636.00	322.0	24 x 4.14	7 x 2.76	0.0897	24.82	100.52	1217.48	760
GROSBEAK	636.00	322.0	26 x 3.97	7 x 3.09	0.0900	25.15	112.09	1300.81	762
SCOTER	636.00	322.0	30 x 3.7	7 x 3.7	0.0900	25.88	135.22	1480.71	762
EGRET	636.00	322.0	30 x 3.7	19 x 2.22	0.0900	25.88	140.11	1468.95	762
FLAMINGO	666.60	338.0	24 x 4.23	7 x 2.82	0.0859	25.40	105.42	1276.56	782
GANNET	666.60	338.0	26 x 4.07	7 x 3.16	0.0856	25.76	117.43	1363.31	787
STILT	715.50	363.0	24 x 4.39	7 x 2.92	0.0797	26.31	113.42	1370.45	820
STARLING	715.50	363.0	26 x 4.21	7 x 3.28	0.0800	26.70	126.32	1463.75	822
REDWING	715.50	363.0	30 x 3.92	19 x 2.35	0.0802	27.46	153.90	1650.64	828
COOT	795.00	403.0	36 x 3.77	1 x 3.77	0.0717	26.42	74.73	1195.76	865
CUCKOO	795.00	403.0	24 x 4.62	7 x 3.08	0.0720	27.74	124.10	1522.22	876
DRAKE	795.00	403.0	26 x 4.44	7 x 3.45	0.0720	28.14	140.11	1626.38	876
TERN	795.00	403.0	45 x 3.38	7 x 2.25	0.0717	27.00	98.30	1331.76	865
CONDOR	795.00	403.0	54 x 3.08	7 x 3.08	0.0720	27.74	125.43	1520.74	876
MALLARD	795.00	403.0	30 x 4.14	19 x 2.48	0.0719	28.96	170.80	1836.04	887

Product Code	Aluminum Cross Sectional Area		Number and Nominal Diameter of wires		Max. D.C. Conductor Resistance at 20 °C Ω/km	Approx. Overall Diameter mm ²	Calculated Breaking Load KN	Approx. Weight Kg/Km	Rated Current Amps
	kcmil	mm2	Aluminum No. x mm	Steel No. x mm					
RUDDY	900.00	456.0	45 x 3.59	7 x 2.4	0.0636	28.73	108.53	1507.34	940
CANARY	900.00	456.0	54 x 3.28	7 x 3.28	0.0635	29.51	141.89	1723.10	948
CATBIRD	954.00	483.0	36 x 4.14	1 x 4.14	0.0595	28.96	88.07	1434.43	973
RAIL	954.00	483.0	45 x 3.7	7 x 2.47	0.0599	29.59	115.20	1598.11	976
CARDINAL	954.00	483.0	54 x 3.38	7 x 3.38	0.0598	30.38	150.34	1825.92	985
TANAGER	1033.50	524.0	36 x 4.3	1 x 4.3	0.0551	30.12	95.19	1553.47	1022
ORTOLAN	1033.50	524.0	45 x 3.85	7 x 2.57	0.0553	30.78	123.21	1730.54	1027
CURLEW	1033.50	524.0	54 x 3.51	7 x 3.51	0.0554	31.62	162.80	1977.55	1034
BLUEJAY	1113.00	564.0	45 x 4	7 x 2.66	0.0512	31.98	132.55	1865.95	1078
FINCH	1113.00	564.0	54 x 3.65	19 x 2.19	0.0515	32.84	173.92	2127.84	1084
BUNTING	1192.50	604.0	45 x 4.14	7 x 2.76	0.0478	33.07	142.34	1996.90	1126
GRACKLE	1192.50	604.0	54 x 3.77	19 x 2.27	0.0483	33.99	186.37	2278.13	1129
SKYLARK	1272.00	645.0	36 x 4.78	1 x 4.78	0.0446	33.43	117.43	1913.57	1167
BITTERN	1272.00	645.0	45 x 4.27	7 x 2.85	0.0450	34.16	151.68	2130.82	1170
PHEASANT	1272.00	645.0	54 x 3.9	19 x 2.34	0.0451	35.10	193.93	2431.39	1178
DIPPER	1351.50	685.0	45 x 4.4	7 x 2.93	0.0423	35.20	161.02	2263.25	1216
MARTIN	1351.50	685.0	54 x 4.02	19 x 2.41	0.0425	36.17	205.94	2581.68	1223
BOBOLINK	1431.00	725.0	45 x 4.53	7 x 3.02	0.0399	36.25	170.36	2397.17	1261
PLOVER	1431.00	725.0	54 x 4.14	19 x 2.48	0.0400	37.21	218.40	2734.94	1269
NUTHATCH	1510.50	765.0	45 x 4.65	7 x 3.1	0.0379	37.24	178.36	2529.60	1302
PARROT	1510.50	765.0	54 x 4.25	19 x 2.55	0.0380	38.23	229.96	2883.74	1311
LAPWING	1590.00	806.0	45 x 4.78	7 x 3.18	0.0359	38.20	187.71	2663.52	1345
FALCON	1590.00	806.0	54 x 4.36	19 x 2.62	0.0361	39.24	242.42	3038.50	1353

The above data is approximate and subject to manufacturing tolerances

Note:-

** ACSR with High Strength Steel Wires
The above values of current carrying capacity are calculated due to frequency up to 60 Hz, assuming an ambient temperature of 35 °C , final temperature of 80 °C, wind velocity of 0.6 m/sec, solar radiation of 900 W/m2, emissivity coefficient of 0.6, solar radiation absorption coefficient of 0.5

