

BARE HARD & SOFT DRAWN COPPER CONDUCTORS



Stranded Hard Drawn Bare
Copper Conductor

Description

Plain bare hard drawn copper conductors
(Circular - Non Compacted)

Application

Bare stranded hard-drawn copper conductor is suitable for overhead transmission and distribution networks applications, where the highest electrical conductivity per unit area and good strength-to-weight ratio are required.

Technical Data

Relevant Standard	DIN 48201-1, BS 7884
Conductor	Plain bare hard drawn copper
Minimum bending Radius	25 x outer diameter
Packing Condition	Our standard length on Wooden Drum / or according to customer request




Product Code	Cross Sectional Area mm ²	Minimum Number of Wires No. x mm	Max. D.C. Conductor Resistance at 20 °C Ω/km	Approx. Overall Diameter mm ²	Minimum Breaking Load KN	Approx. Weight Kg/Km	Rated Current Amps
A- DIN 48201-1							
PR-HT10-00-01-U0	10	7 x 1.35	1.82900	4.10	4.02	90	90
PR-HT11-00-01-U0	16	7 x 1.70	1.15400	5.10	6.37	143	125
PR-HT12-00-01-U0	25	7 x 2.10	0.75630	6.30	9.72	218	160
PR-HT13-00-01-U0	35	7 x 2.50	0.53370	7.50	13.77	310	200
PR-HT14-00-01-U0	50	7 x 3.00	0.37060	9.00	19.84	446	260
PR-HT14-00-01-U0	50	19 x 1.80	0.38190	9.00	19.38	437	250
PR-HT15-00-01-U0	70	19 x 2.10	0.28060	10.50	26.38	596	310
PR-HT16-00-01-U0	95	19 x 2.50	0.19800	12.50	37.39	843	380
PR-HT17-00-01-U0	120	19 x 2.80	0.15780	14.00	46.90	1060	440
PR-HT18-00-01-U0	150	37 x 2.25	0.12640	15.75	58.96	1337	510
PR-HT19-00-01-U0	185	37 x 2.50	0.10240	17.50	72.81	1649	589
PR-HT20-00-01-U0	240	61 x 2.25	0.07528	20.30	97.23	2209	700
PR-HT21-00-01-U0	300	61 x 2.50	0.06097	22.50	120.04	2725	800
PR-HT22-00-01-U0	400	61 x 2.89	0.04560	26.00	160.42	3640	960
PR-HT23-00-01-U0	500	61 x 3.23	0.03650	29.10	200.38	4545	1110
PR-HT24-00-01-U0	630	61 x 3.62	0.02900	32.58	251.69	5700	1274

The above data is approximate and subject to manufacturing tolerances

Note:-

The above values of current carrying capacity are calculated due to frequency up to 60 Hz, assuming an ambient temperature of 35 °C , final temperature of 80 °C, wind velocity of 0.6 m/sec. emissivity coefficient of 0.6, solar radiation absorption coefficient of 0.5

Stranded Hard Drawn Bare
Copper Conductor

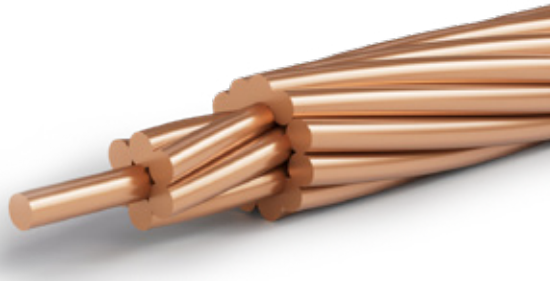

Product Code	Cross Sectional Area mm ²	Minimum Number of Wires No. x mm	Max. D.C. Conductor Resistance at 20 °C Ω/km	Approx. Overall Diameter mm ²	Minimum Breaking Load KN	Approx. Weight Kg/Km	Rated Current Amps
B - BS 7884							
HDC - 10	10	7 x 1.35	1.8290	4.05	3.752	89.82	90
HDC - 14	14	7 x 1.60	1.3030	4.80	5.267	126.20	113
HDC - 16	16	7 x 1.70	1.1540	5.10	5.946	142.40	125
HDC - 25	25	7 x 2.10	0.7563	6.30	9.073	217.30	160
HDC - 32	32	7 x 2.46	0.5497	7.38	12.442	298.20	197
HDC - 35	35	7 x 2.50	0.5337	7.50	12.860	308.00	200
HDC - 50	50	7 x 3.0	0.3706	9.00	18.520	443.50	260
HDC - 50	50	19 x 1.80	0.3819	9.00	17.700	435.80	250
HDC - 70	70	7 x 3.55	0.2646	10.65	25.930	621.10	314
HDC - 70	70	19 x 2.10	0.2806	10.50	24.090	593.20	310
HDC - 95	95	19 x 2.50	0.1980	12.50	34.140	840.70	380
HDC - 100	100	7 x 4.30	0.1810	12.90	36.540	911.20	401
HDC - 120	120	19 x 2.80	0.1578	14.00	42.830	1055.00	440
HDC - 125	125	19 x 2.90	0.1471	14.50	45.940	1131.00	459
HDC - 150	150	19 x 3.20	0.1208	16.00	55.940	1377.00	521
HDC - 150	150	37 x 2.25	0.1264	15.75	53.880	1334.00	510
HDC - 185	185	19 x 3.55	0.0982	17.75	68.860	1695.00	595
HDC - 185	185	37 x 2.50	0.1024	17.50	66.490	1647.00	589

The above data is approximate and subject to manufacturing tolerances

Note:-

The above values of current carrying capacity are calculated due to frequency up to 60 Hz, assuming an ambient temperature of 35 °C , final temperature of 80 °C, wind velocity of 0.6 m/sec, emissivity coefficient of 0.6, solar radiation absorption coefficient of 0.5

