


LOW VOLTAGE CABLES

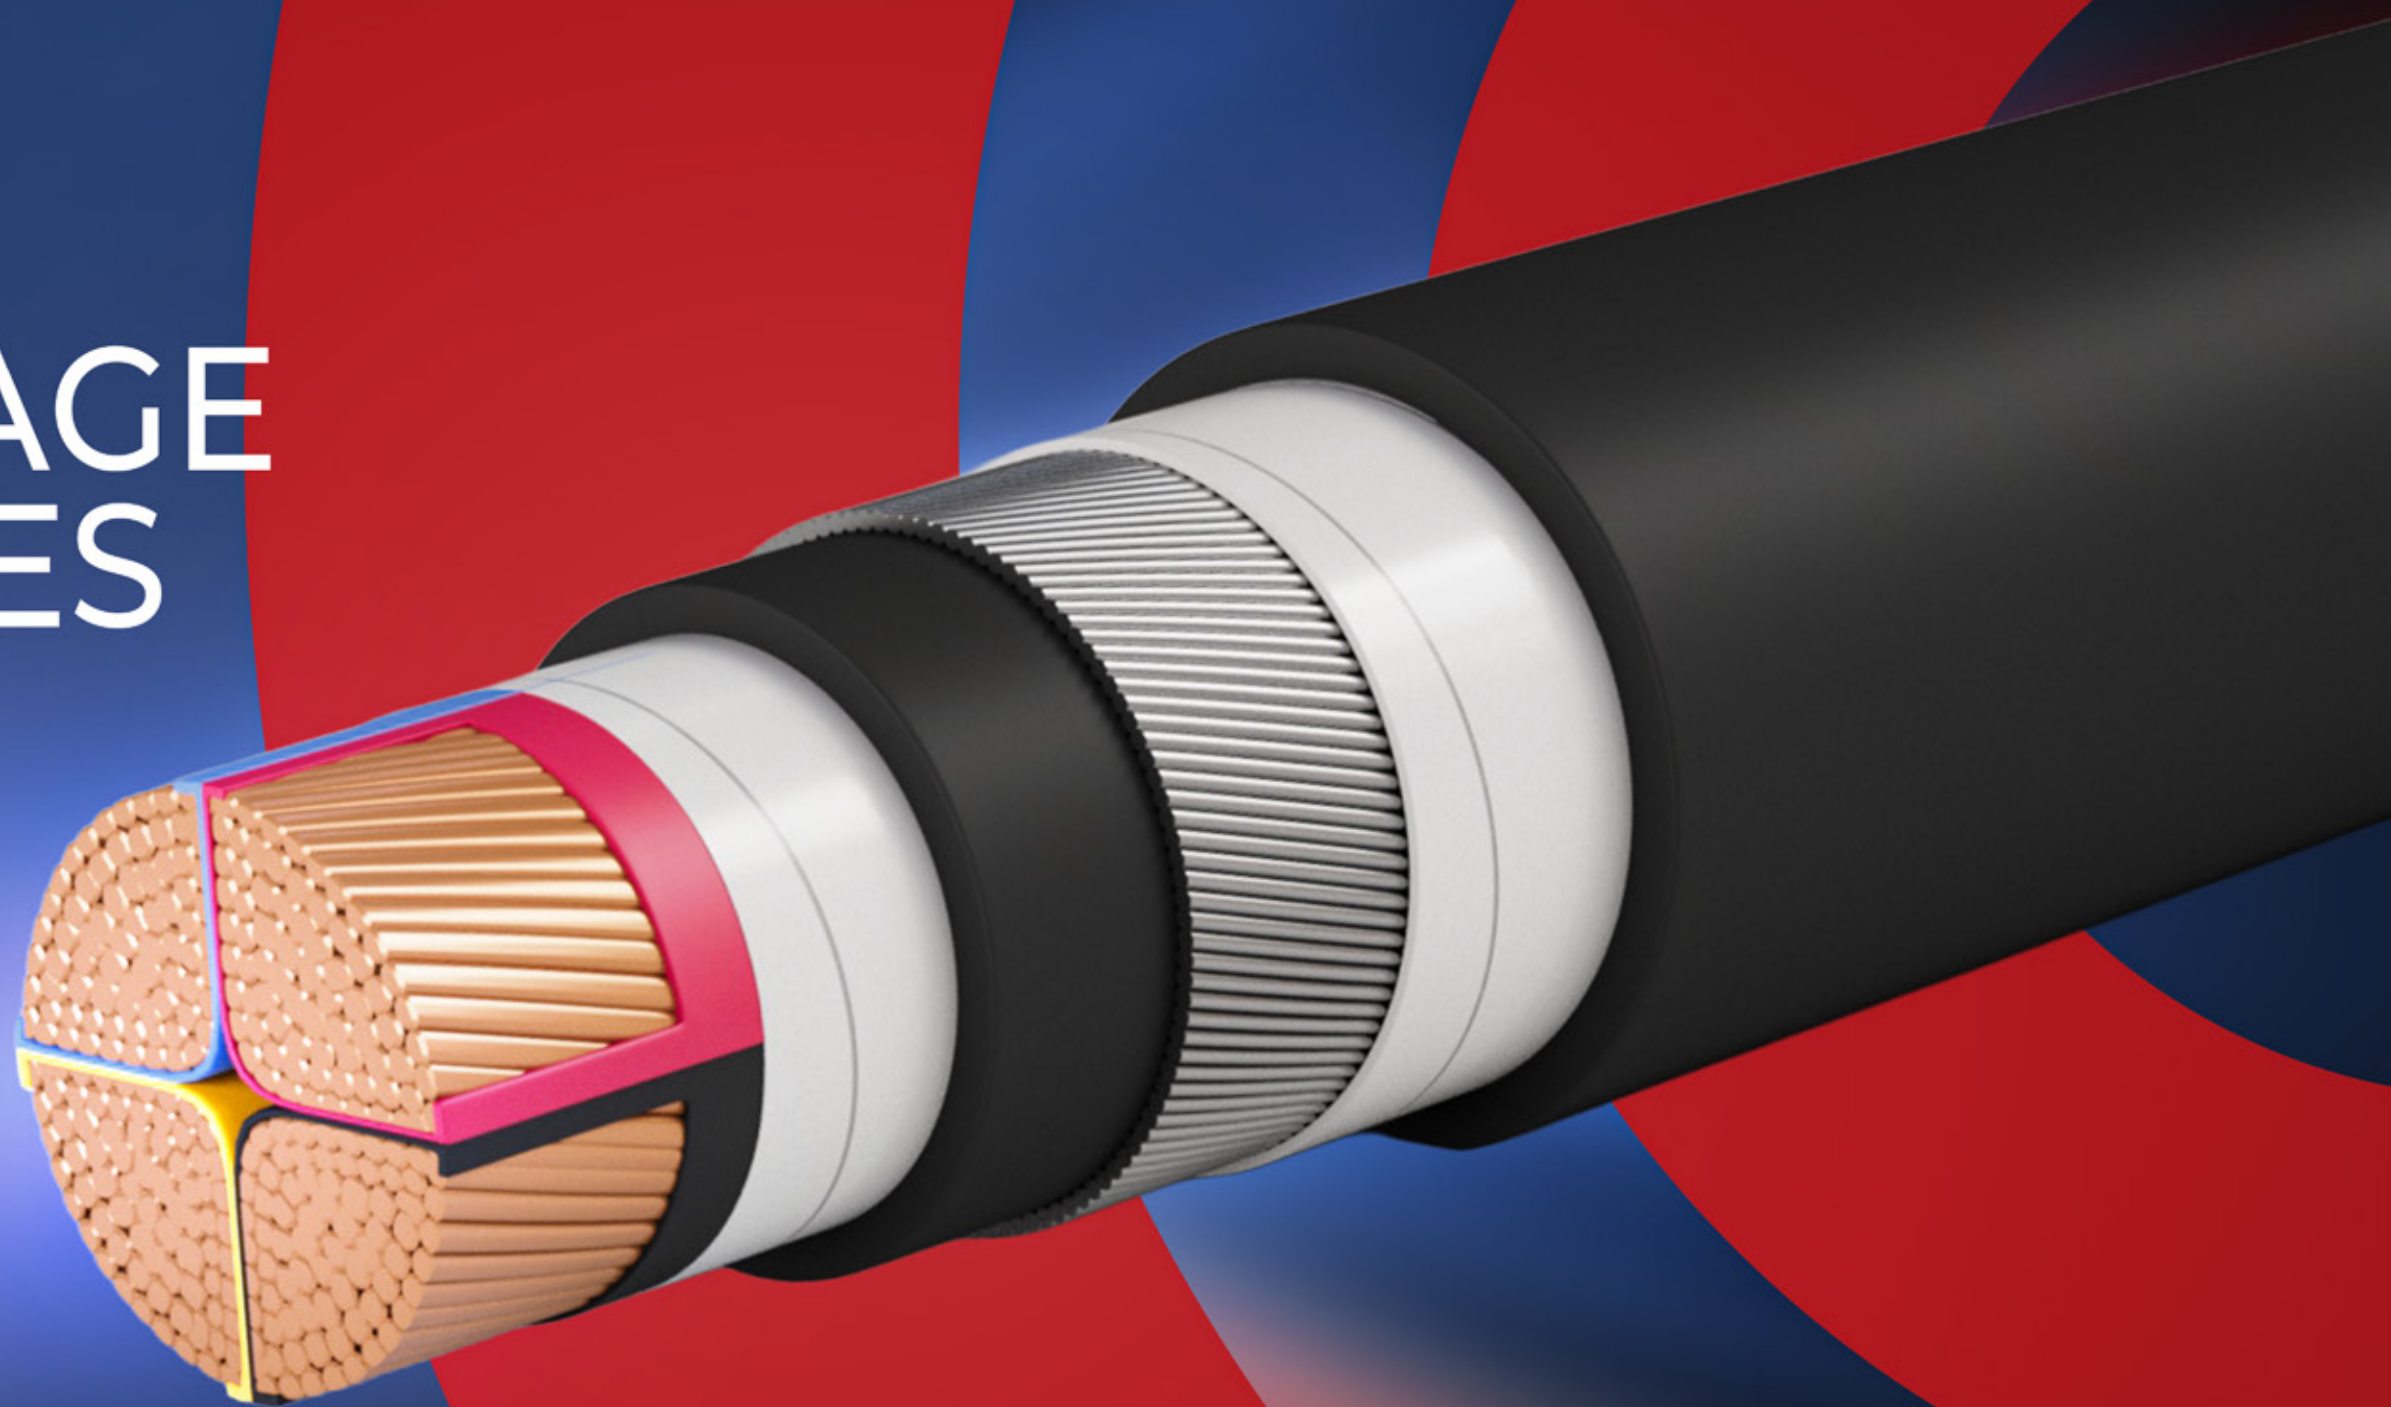

Single-core non-sheathed cable with stranded conductor

for internal wiring and PVC Insulated 450/750 V

AL/PVC

Voltage Grade

450 / 750 V

Description

Stranded Aluminum conductors (Class 2) insulated with PVC compound rated 70° C .

Application

For indoor installations In dry locations ,Laid in conduits or steel support brackets.

Technical Data

Relevant Standard	in Principle of IEC 60277-3
Conductor	Aluminum conductor H12 class 2
Insulation	PVC Compound type or PVC / C Rated 70° C
Color Code	Red , Yellow, Blue , Black , Green / Yellow as per IEC 60277-3 Or Any colors according to customer request.
Maximum Operating Temp.	70° C
Minimum bending Radius	6 x outer diameter
Packing Condition	100 Meters or 100 yards on A- Air Coil • B- Plastic Spools

Note:-

Heat resistant or/and flame retardant PVC insulated or/ and PVC sheathed are available according to customer request

Product Code	Nominal Cross Sectional Area mm2	Max. Conductor Resistance		Current Rating In Air		Approx. Overall	Approx.
		DC at 20 °C Ω/km	AC at 70 °C Ω/km	Free 	In Pipe 	Diameter	Weight
				A	A	mm	kg/km
PB-AT11-P2-01-U0	16	1.91	2.3	62	51	7.04	77.1
PB-AT12-P2-01-U0	25	1.2	1.44	95	67	8.7	119.4
PB-AT13-P2-01-U0	35	0.868	1.043	118	83	9.8	153.4
PB-AT14-P2-01-U0	50	0.641	0.771	144	101	11.2	191.2
PB-AT15-P2-01-U0	70	0.443	0.533	184	125	12.7	256.3
PB-AT16-P2-01-U0	95	0.32	0.385	231	158	14.7	351
PB-AT17-P2-01-U0	120	0.253	0.305	270	181	15.9	425.1
PB-AT18-P2-01-U0	150	0.206	0.249	308	208	17.8	523.4
PB-AT19-P2-01-U0	185	0.164	0.199	359	238	19.9	657.7
PB-AT20-P2-01-U0	240	0.125	0.153	433	286	22.7	847.2
PB-AT21-P2-01-U0	300	0.1	0.123	464	324	25.3	1049.7
PB-AT22-P2-01-U0	400	0.0778	0.09747	540	370	28.4	1343.2
PB-AT23-P2-01-U0	500	0.0605	0.0777	630	427	32.1	1711
PB-AT24-P2-01-U0	630	0.0469	0.0629	730	490	36.4	2153.5

The above data is approximate and subject to manufacturing tolerances