


LOW VOLTAGE CABLES

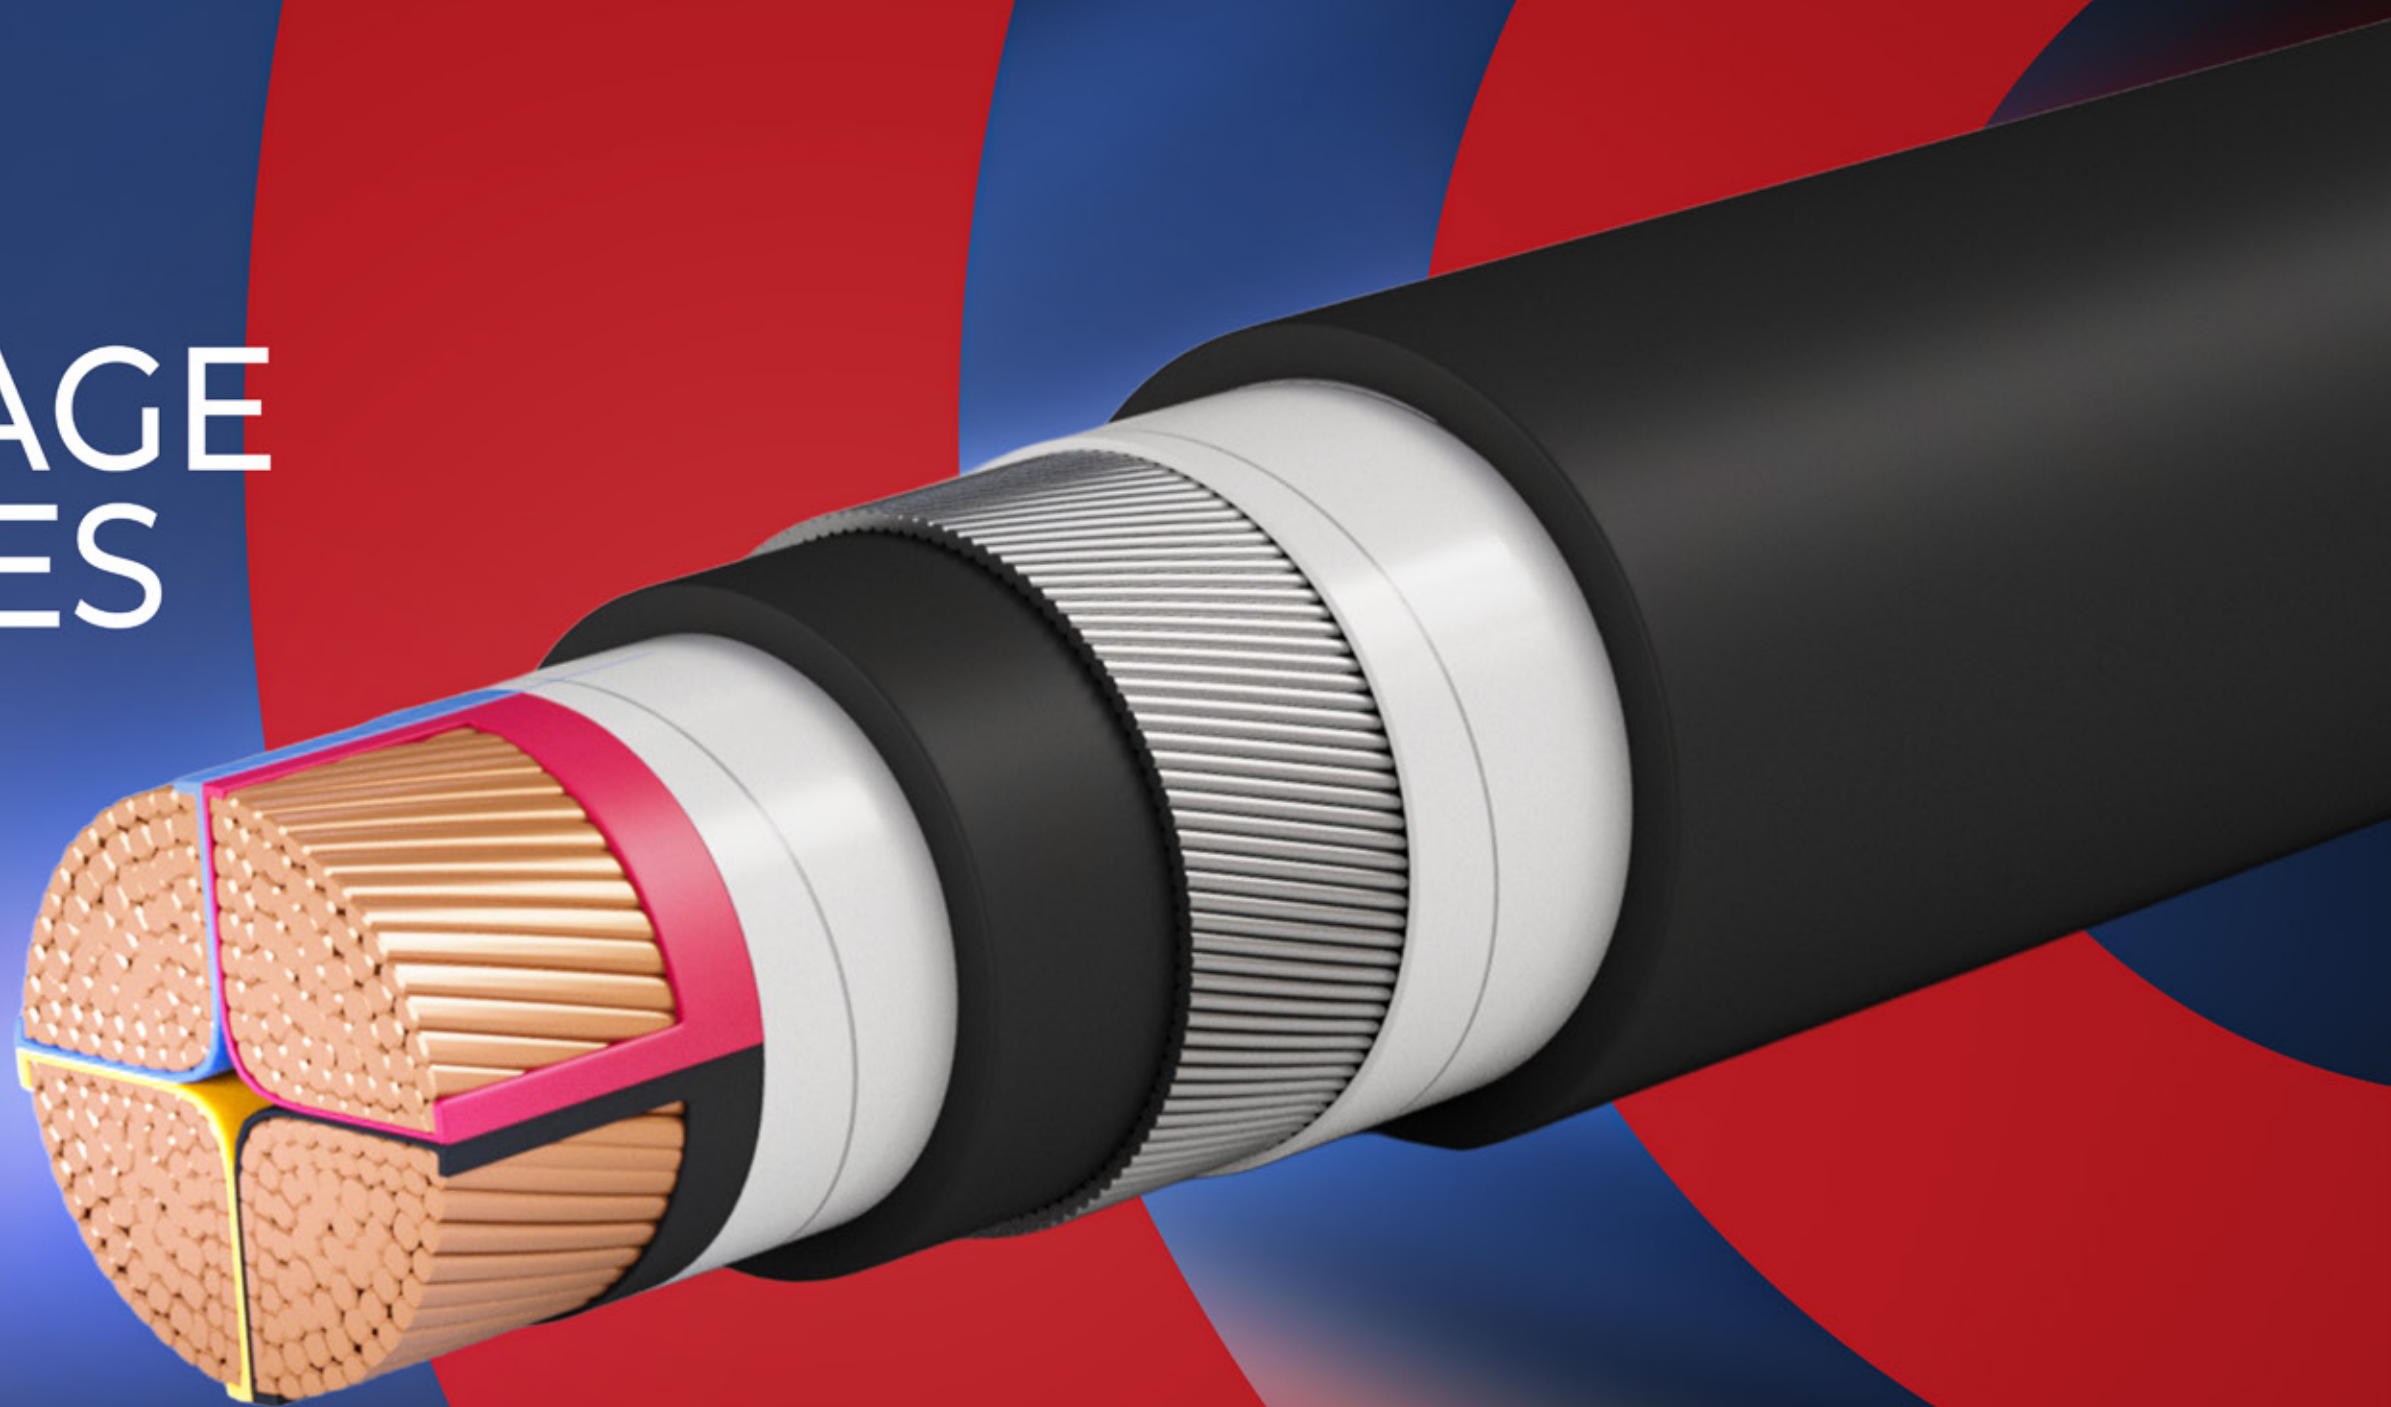

Single-core non-sheathed cable with stranded conductor

for internal wiring and PVC Insulated 450/750 V
CU/PVC

Voltage Grade

450 / 750 V

Description

Soft annealed stranded or Solid Copper conductors (Class 2 or Class 1) insulated with PVC compound rated 70° C .

Application

For indoor installations In dry locations ,Laid in conduits or steel support brackets..

Technical Data

Relevant Standard	IEC 60277-3 , BSEN 50525 and BS 6004
Harmonized Code	H07V-R
Conductor	Plain copper conductor class 2
Insulation	PVC Compound type or PVC / C Rated 70° C
Color Code	Red , Yellow, Blue , Black , Green / Yellow as per IEC 60277-3 Brown , Grey , Black , Blue , Green / Yellow as per BS 6004 and BSEN 50525 Or Any colors according to customer request.
Maximum Operating Temp.	70° C
Minimum bending Radius	6 x outer diameter
Packing Condition	100 Meters or 100 yards on A- Air Coil • B- Plastic Spools

Note:-

Heat resistant or/and flame retardant PVC insulated or/ and PVC sheathed are available according to customer request

Product Code	Nominal Cross Sectional Area mm2	Max. Conductor Resistance		Current Rating In Air		Approx. Overall	Approx.
		DC at 20 °C Ω/km	AC at 70 °C Ω/km	Free 	In Pipe 	Diameter	Weight
				A	A	mm	kg/km
H07V-R (Stranded)							
PB-CT04-P2-01-U0	1.5	12.1	14.6	19.6	15.0	2.96	21.34
PB-CT05-P2-01-U0	2	9.14	11.03	21.9	17.3	3.4	28.26
PB-CT06-P2-01-U0	2.5	7.41	8.89	27.6	21.9	3.58	32.88
PB-CT07-P2-01-U0	3	6.1	7.41	31.1	24.2	3.76	37.76
PB-CT08-P2-01-U0	4	4.61	5.51	36.8	26.5	4.12	48.79
PB-CT09-P2-01-U0	6	3.08	3.68	46.0	33.4	4.66	68.04
PB-CT10-P2-01-U0	10	1.83	2.17	65.6	47.2	5.7	107.63
PB-CT11-P2-01-U0	16	1.15	1.37	88	63	6.7	162.5
PB-CT12-P2-01-U0	25	0.727	0.86	119	81	8.2	260
PB-CT13-P2-01-U0	35	0.524	0.63	148	101	9.3	350
PB-CT14-P2-01-U0	50	0.387	0.46	180	122	10.8	475
PB-CT15-P2-01-U0	70	0.268	0.32	230	151	12.6	675
PB-CT16-P2-01-U0	95	0.193	0.23	289	191	14.5	920
PB-CT17-P2-01-U0	120	0.153	0.19	337	219	15.9	1140
PB-CT18-P2-01-U0	150	0.124	0.15	386	252	17.6	1415
PB-CT19-P2-01-U0	185	0.0991	0.12	449	288	19.9	1775
PB-CT20-P2-01-U0	240	0.0754	0.092	542	345	22.7	2320
PB-CT21-P2-01-U0	300	0.0601	0.075	621	391	25.3	2915
PB-CT22-P2-01-U0	400	0.047	0.0617	725	449	28.4	3735
PB-CT23-P2-01-U0	500	0.0366	0.0506	828	501	32.1	4800
PB-CT24-P2-01-U0	630	0.0283	0.0423	953	558	35.7	6045
H07V-U (Solid)							
PB-CS04-P2-01-U0	1.5	12.1	14.6	19.6	15.0	2.75	19.49
PB-CS05-P2-01-U0	2	9.14	11.03	21.9	17.3	3.17	26.1
PB-CS06-P2-01-U0	2.5	7.41	8.89	27.6	21.9	3.33	30.39
PB-CS07-P2-01-U0	3	6.1	7.41	31.1	24.2	3.51	35.57
PB-CS08-P2-01-U0	4	4.61	5.51	36.8	26.5	3.8	45.01
PB-CS09-P2-01-U0	6	3.08	3.68	46.0	33.4	4.3	64.03
PB-CS10-P2-01-U0	10	1.83	2.17	65.6	47.2	5.5	106.64

The above data is approximate and subject to manufacturing tolerances