


LOW VOLTAGE CABLES

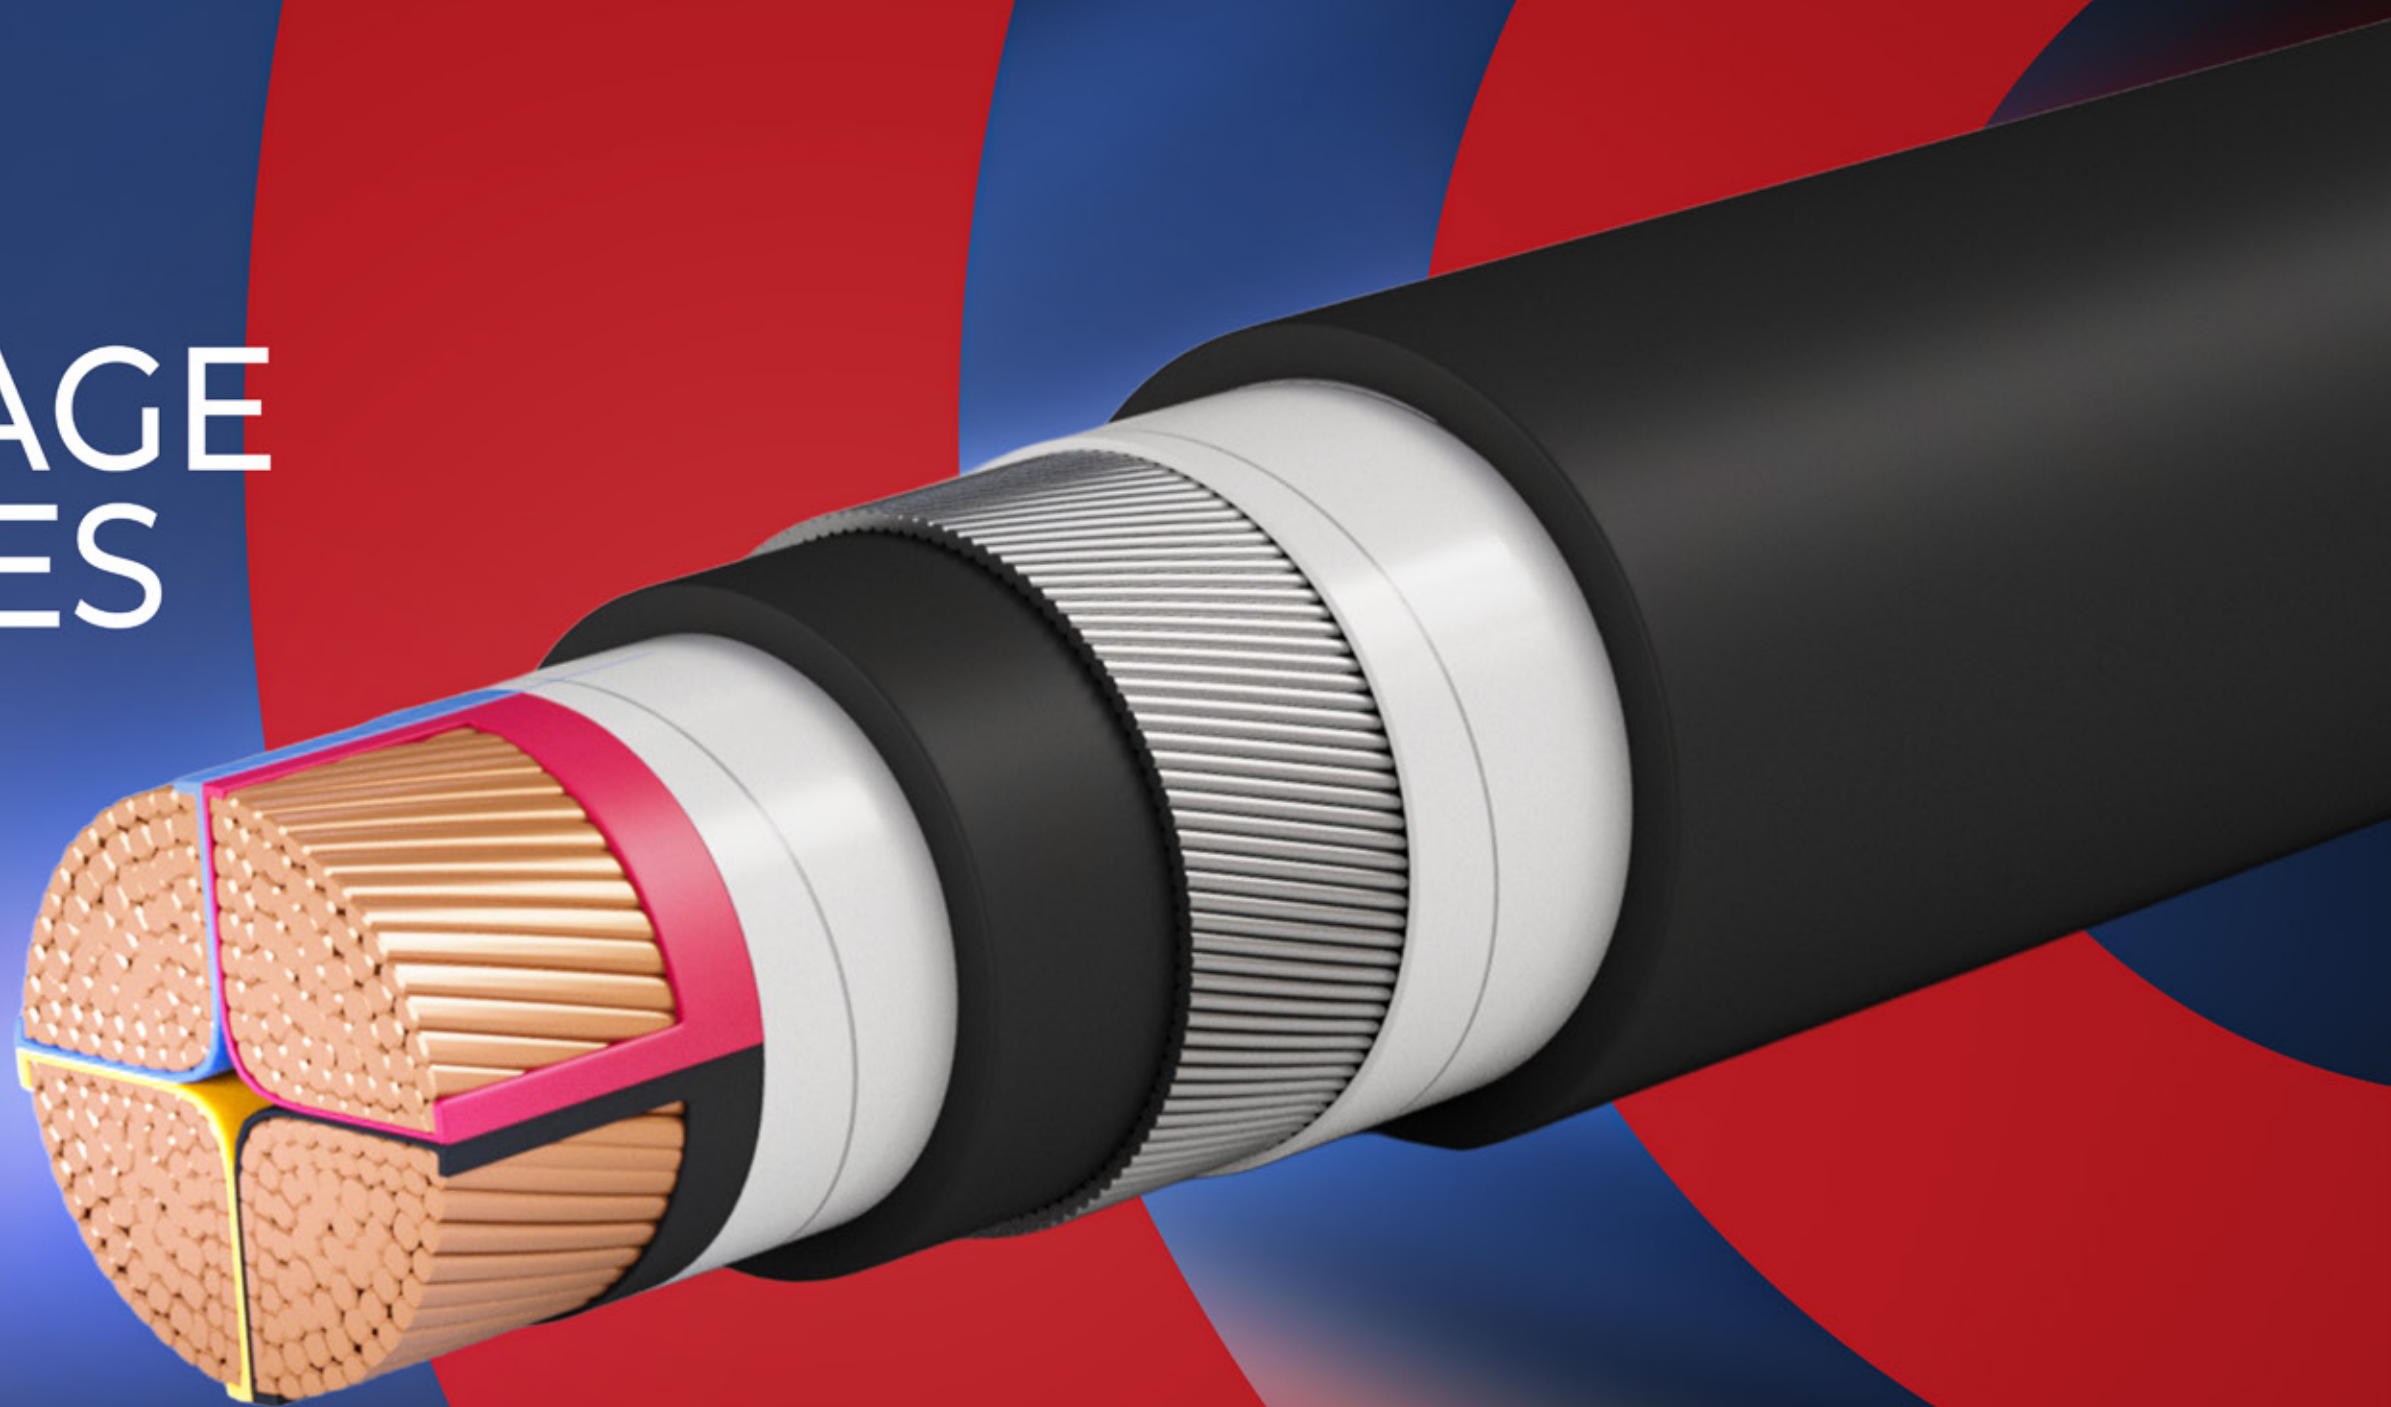

Single-core non-sheathed cable with Flexible conductor

for internal wiring and PVC Insulated 450/750 V
CU/PVC

Voltage Grade

450 / 750 V

Description

Soft annealed flexible Copper conductors (Class 5) insulated with PVC compound rated 70° C .

Application

For indoor installations In dry locations, Laid in conduits or steel support brackets.

Technical Data

Relevant Standard	IEC 60277-3 , BSEN 50525 HD 21.3 S3
Harmonized Code	H07V-K
Conductor	Plain copper conductor class 5
Insulation	PVC Compound type or PVC / C Rated 70° C
Color Code	Red , Yellow, Blue , Black , Green / Yellow as per IEC 60277-3 Brown , Grey , Black , Blue , Green / Yellow as per BS EN 50525 Or Any colors according to customer request.
Maximum Operating Temp.	70° C
Minimum bending Radius	6 x outer diameter
Packing Condition	100 Meters or 100 yards on A- Air Coil · B- Plastic Spools

Note:-

Heat resistant or/and flame retardant PVC insulated or/ and PVC sheathed are available according to customer request



Product Code	Nominal Cross Sectional Area mm2	Max. Conductor Resistance		Current Rating In Air		Approx. Overall	Approx.
		DC at 20 °C Ω/km	AC at 70 °C Ω/km	Free 	In Pipe 	Diameter	Weight
				A	A	mm	kg/km
H07V-K							
PB-CF04-P2-01-U0	1.5	13.3	15.95	20	15	2.96	20.74
PB-CF05-P2-01-U0	2	9.42	11.27	22	18	3.44	27.55
PB-CF06-P2-01-U0	2.5	7.98	9.56	28	22	3.66	32.9
PB-CF07-P2-01-U0	3	6.65	7.96	32	25	3.97	40.34
PB-CF08-P2-01-U0	4	4.95	5.93	38	27	4.2	48.22
PB-CF09-P2-01-U0	6	3.3	3.95	48	35	4.86	68.35
PB-CF10-P2-01-U0	10	1.91	2.29	68	49	6.00	109.54
PB-CF11-P2-01-U0	16	1.21	1.45	92	66	7.3	164.91
PB-CF12-P2-01-U0	25	0.78	0.94	124	85	9.2	266
PB-CF13-P2-01-U0	35	0.554	0.663	155	106	10.4	350.6
PB-CF14-P2-01-U0	50	0.386	0.462	189	128	12.5	502
PB-CF15-P2-01-U0	70	0.272	0.326	241	158	14.4	701
PB-CF16-P2-01-U0	95	0.206	0.247	303	200	17.5	928.2
PB-CF17-P2-01-U0	120	0.161	0.193	353	229	19.2	1178.7
PB-CF18-P2-01-U0	150	0.129	0.155	405	264	21.1	1432
PB-CF19-P2-01-U0	185	0.106	0.127	471	302	22	1770
PB-CF20-P2-01-U0	240	0.0801	0.096	569	362	24.4	2339

The above data is approximate and subject to manufacturing tolerances