


LOW VOLTAGE CABLES

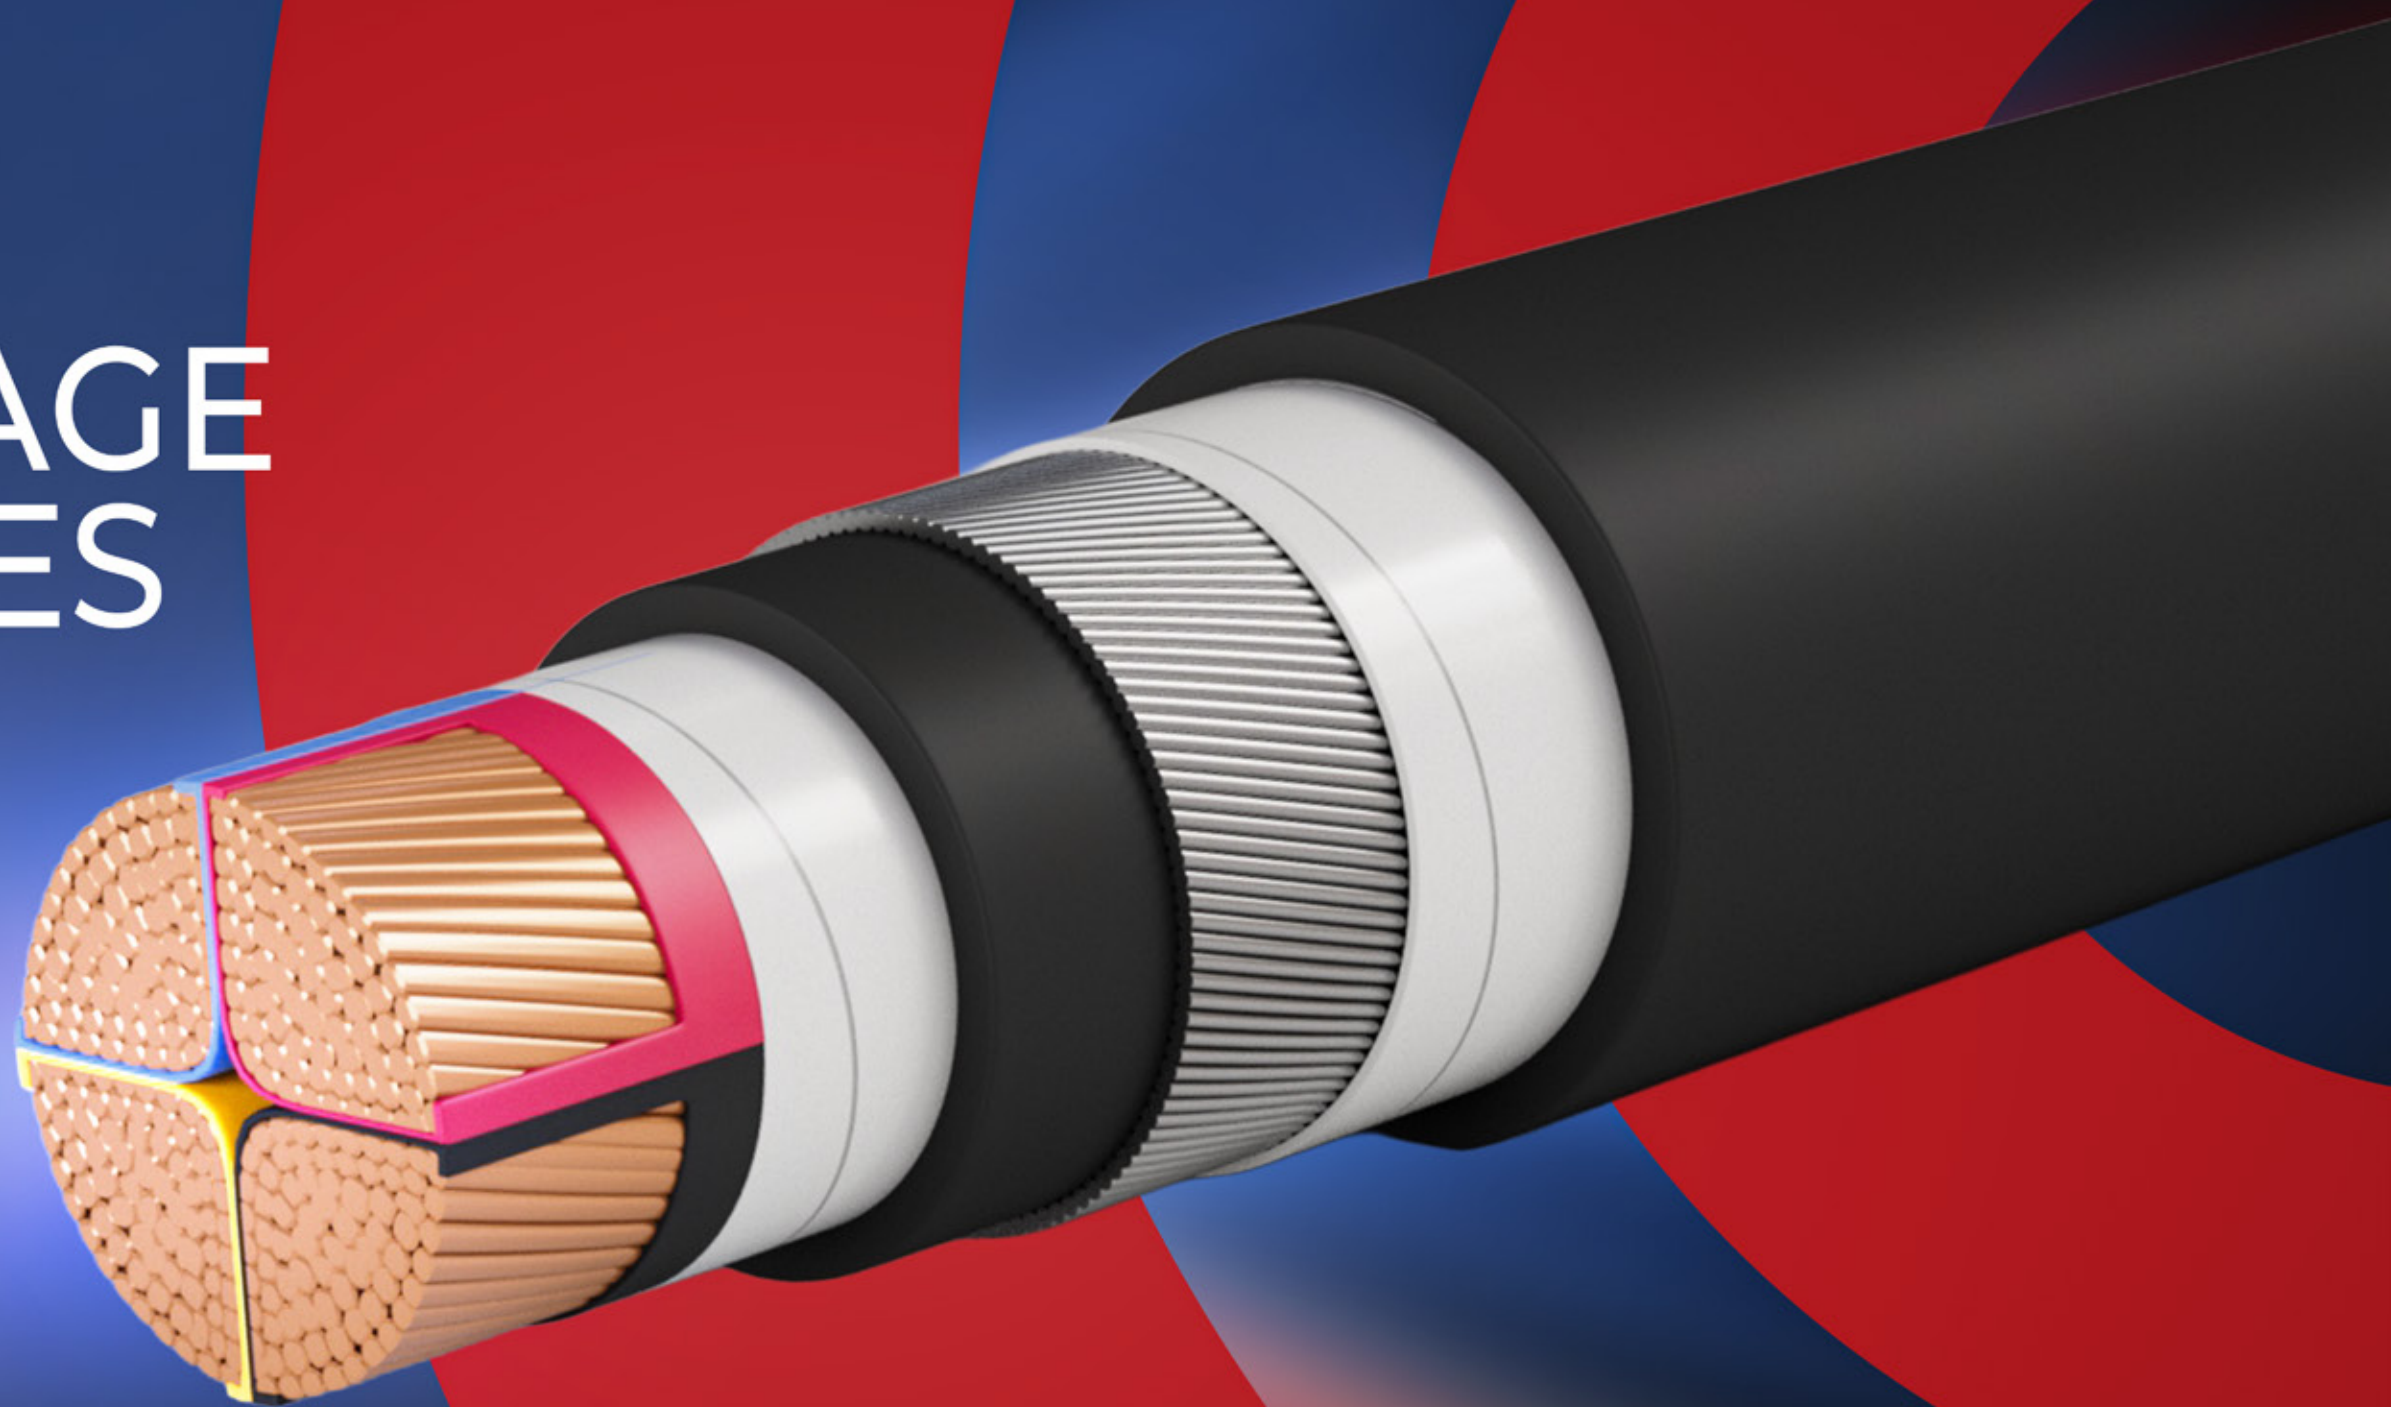

Single-core non-sheathed cable 300/500 V
With (Solid / Stranded / Flexible)

Conductor for internal wiring and PVC Insulated

Voltage Grade

300 / 500 V

Description

Soft annealed solid / Stranded / flexible Copper conductors
(Class 1 , 2 or 5) insulated with PVC compound rated 70° C.

Application

For internal wiring of equipment and protected installation in
and on luminaires, also for installation in conduit on and under
plaster, but only for signaling systems

Technical Data

Relevant Standard	IEC 60277-3 , BS EN 50525 and HD 21.3
Harmonized Code	H05V-U (Solid) • H05V-R (Stranded) • H05V-K (Flexible)
Conductor	Plain copper conductor class 1 , class 2 or class 5
Insulation	PVC Compound type or PVC / C Rated 70° C
Color Code	Red , Yellow, Blue , Black , Green / Yellow as per IEC 60277-3 Brown , Grey , Black , Blue , Green / Yellow as per BS EN 50525 Or Any colors according to customer request.
Maximum Operating Temp.	70° C
Minimum bending Radius	6 x outer diameter
Packing Condition	100 Meters or 100 yards on A- Air Coil • B- Plastic Spools

Note:-

Heat resistant or/and flame retardant PVC insulated or/
and PVC sheathed are available according to customer
request

Product Code	Nominal Cross Sectional Area mm2	Max. Conductor Resistance		Current Rating In Air		Approx. Overall	Approx.
		DC at 20 °C Ω/km	AC at 70 °C Ω/km	Free	In Pipe	Diameter	Weight
				A	A	mm	kg/km
H05V-U (Solid)							
PB-CS01-P1-01-U0	0.5	36	43.9	2.2	1.6	2.12	8.66
PB-CS02-P1-01-U0	0.75	24.5	29.9	10.4	1.6	2.12	8.66
PB-CS03-P1-01-U0	1	18.1	22.08	13.8	10.4	2.50	14.19
H05V-R (Stranded)							
PB-CT01-P1-01-U0	0.5	36	43.9	2.2	1.6	2.12	8.66
PB-CT02-P1-01-U0	0.75	24.5	29.9	10.9	7.6	2.35	11.89
PB-CT03-P1-01-U0	1	18.1	22.08	14.4	10.8	2.50	14.19
H05V-K (Flexible)							
PB-CF01-P1-01-U0	0.5	39	46.7	2.30	1.60	2.12	8.66
PB-CF02-P1-01-U0	0.75	26	31.6	11.5	8.1	2.35	11.89
PB-CF03-P1-01-U0	1	19.5	23.4	15.0	11.5	2.50	14.19

The above data is approximate and subject to manufacturing tolerances