


LOW VOLTAGE CABLES

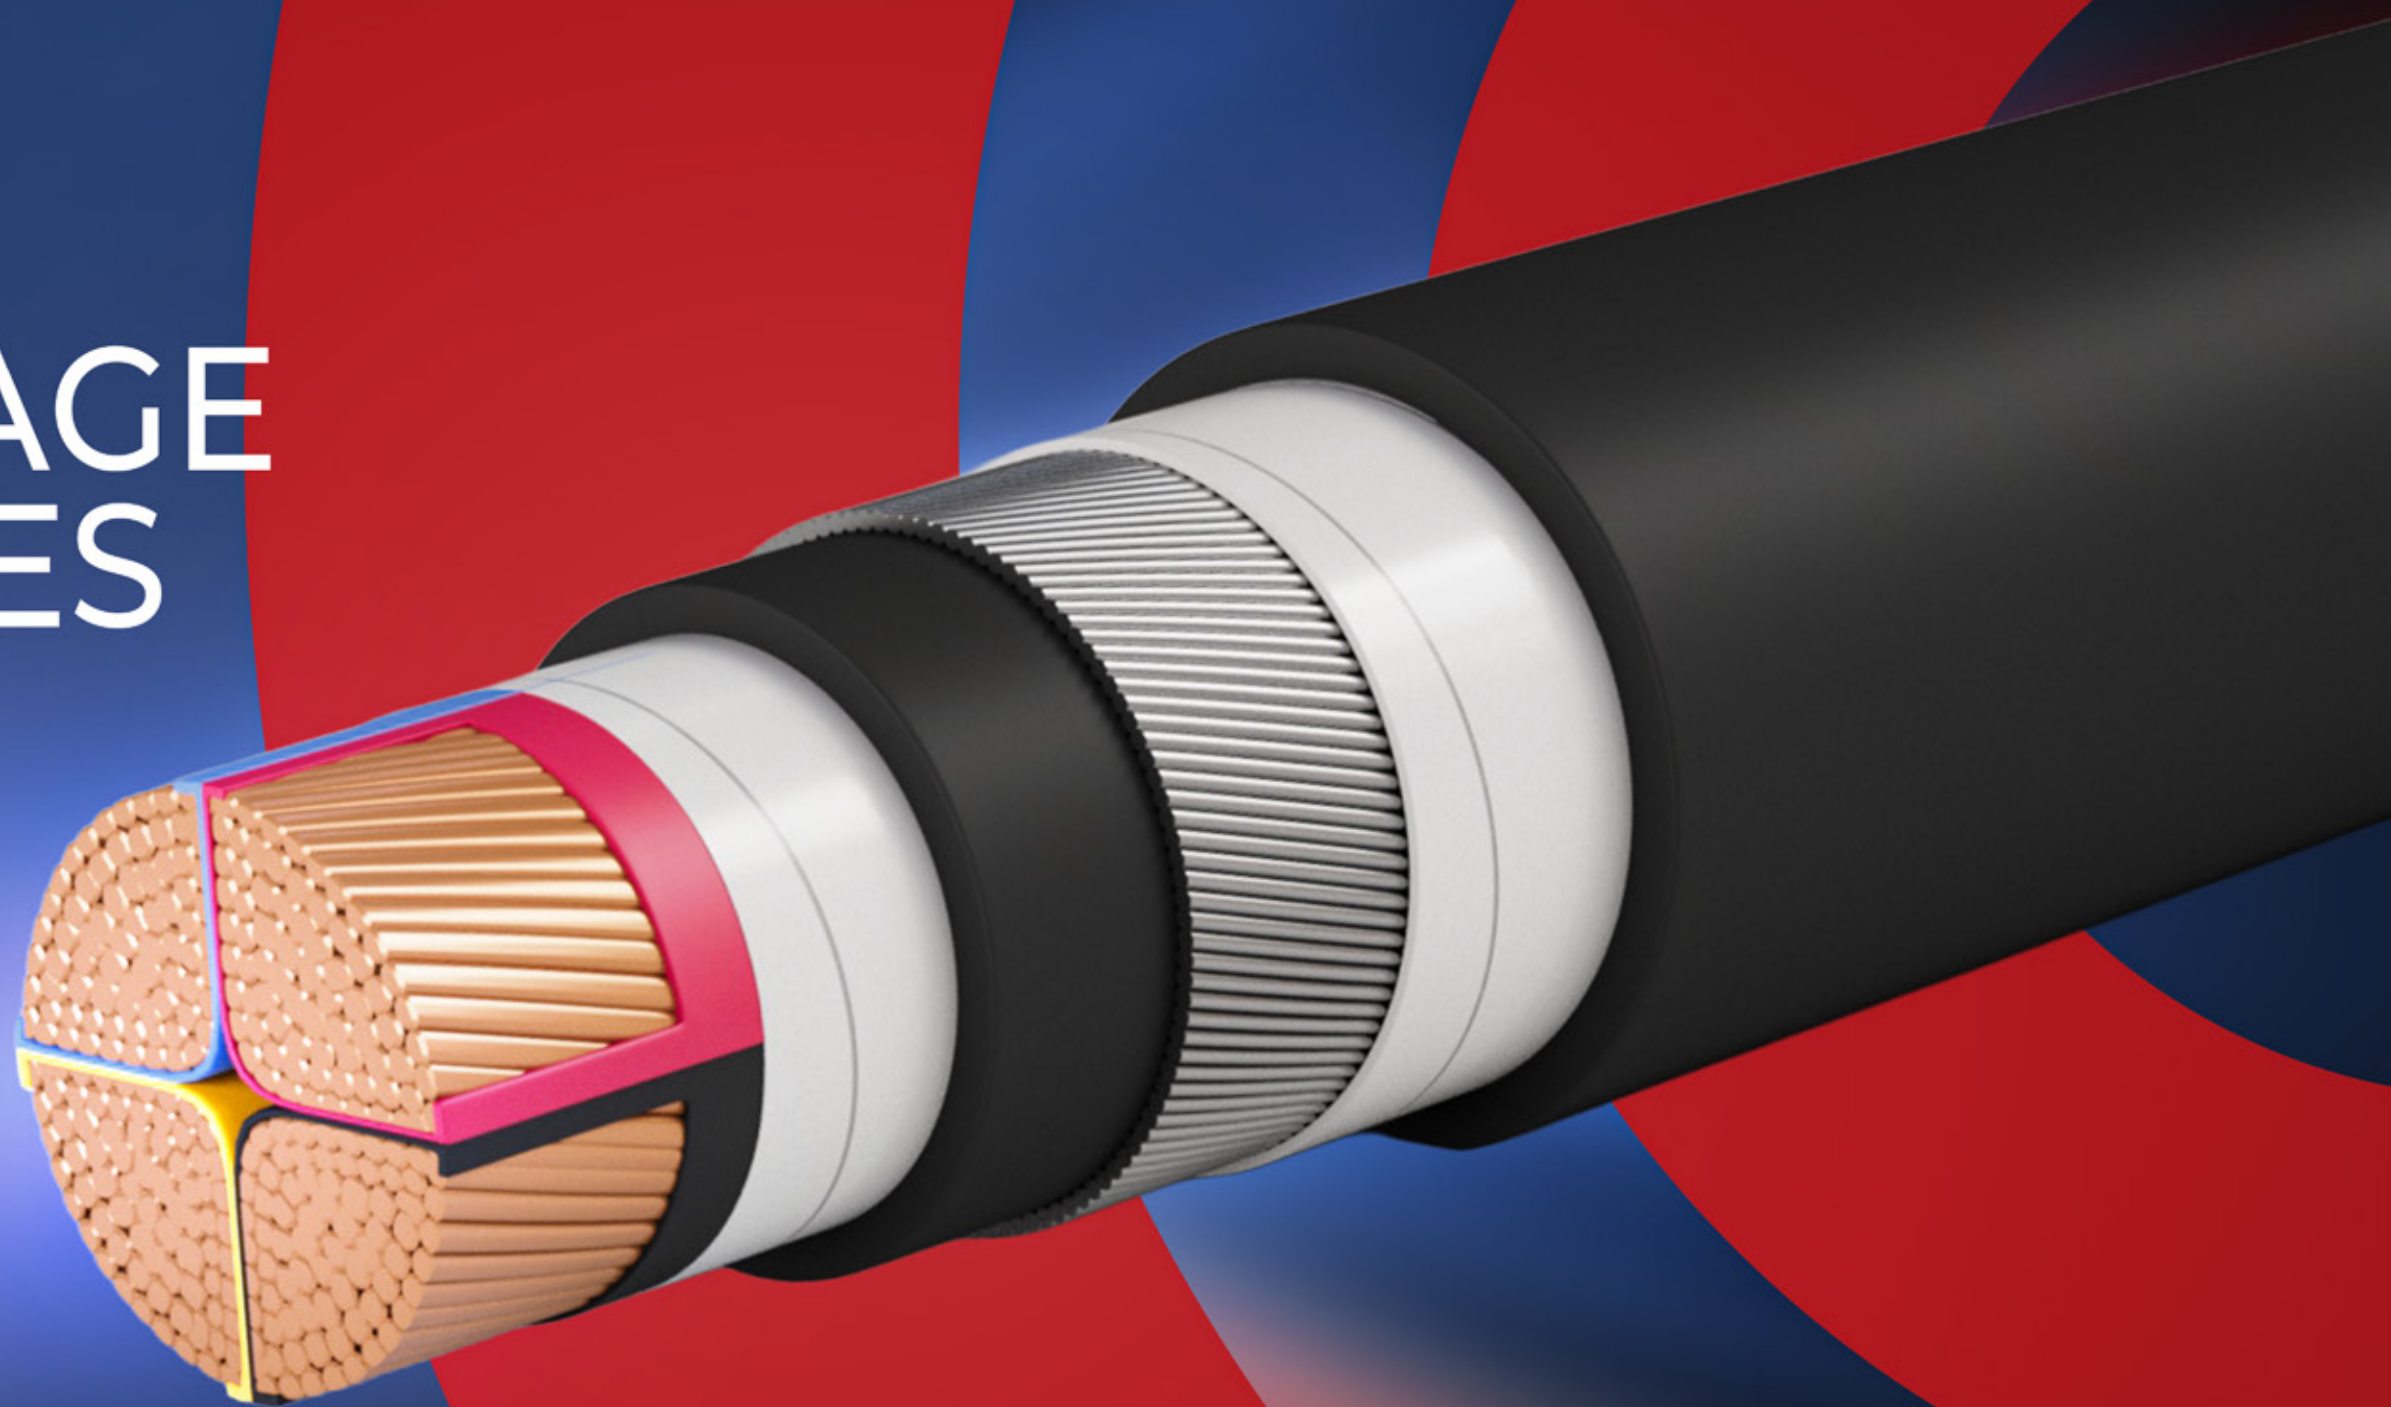

Multi Core Cables, with Stranded Circular or Sector Aluminum

Conductors, PVC Insulated and PVC Sheathed

Voltage Grade

0.6 / 1 (1.2) KV

Description

Multicore cables of stranded Aluminum conductors are insulated with PVC compound rated 70° C, assembled together, covered with an overall jacket of PVC compound.

Application


For outdoor and indoor installations in damp and wet locations.

Technical Data

Relevant Standard	IEC 60502
Conductor	Aluminum conductor H12 class 2
Insulation	Extruded PVC Compound type PVC / A Rated 70° C
Assembly	The insulated cores are assembled together using nonhygroscopic polypropylene filler (if needed), then banded with suitable tape
Outer Sheath	Extruded PVC Compound
Insulation Color	Two Cores: Red & Black Three Cores: Red, Yellow & Black Four Cores: Red, Yellow, Blue & Black, or any other color according to customer request
Outer Sheath Color	Black (default color), or any other color according to customer request
Maximum Operating Temp.	70° C
Minimum bending Radius	10 x outer diameter
Packing Condition	Our standard length on Wooden Drum / or according to customer request

Note:-

Heat resistant or/and flame retardant PVC insulated or/and PVC sheathed are available according to customer request

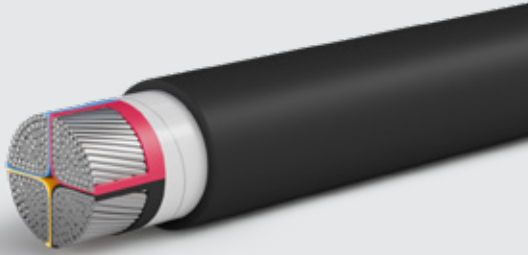

LOW VOLTAGE CABLES

Product Code	Nominal Cross Sectional Area mm ²	Max. Conductor Resistance		Current Rating			Approx. Overall	Approx.
		DC at 20 °C Ω/km	AC at 70 °C Ω/km	Laid in Ground	Laid in Duct	Laid in Free Air	Diameter	Weight
				A	A	A	mm	kg/km
Two Core Cables								
PL-AT11-P3-02-UP	16 rm	1.9100	2.2950	87	66	71	17.0	385.0
PL-AT12-P3-02-UP	25 rm	1.2000	1.4419	113	85	94	20.4	560.0
PL-AT13-P3-02-UP	35 rm	0.8680	1.0431	137	103	116	22.6	695.0
Three Core Cables								
PL-AT11-P3-03-UP	16 rm	1.9100	2.2950	75	56	62	18.6	410.0
PL-AT12-P3-03-UP	25 rm	1.2000	1.4420	95	73	81	22.3	575.0
PL-AT13-P3-03-UP	35 rm	0.8680	1.0432	114	87	100	24.7	700.0
PL-AT14-P3-03-UP	50 sm	0.6410	0.7704	139	106	120	24.0	765.0
PL-AT15-P3-03-UP	70 sm	0.4430	0.5327	170	131	151	27.1	1005.0
PL-AT16-P3-03-UP	95 sm	0.3200	0.3851	203	157	184	31.4	1360.0
PL-AT17-P3-03-UP	120 sm	0.2530	0.3048	237	179	216	33.4	1630.0
PL-AT18-P3-03-UP	150 sm	0.2060	0.2485	266	205	248	37.3	1985.0
PL-AT19-P3-03-UP	185 sm	0.1640	0.1983	301	234	287	41.5	2480.0
PL-AT20-P3-03-UP	240 sm	0.1250	0.1518	349	276	341	46.8	3165.0
PL-AT21-P3-03-UP	300 sm	0.1000	0.1222	395	316	399	51.9	3870.0
PL-AT22-P3-03-UP	400 sm	0.0778	0.0961	455	368	462	59.3	4985.0
PL-AT23-P3-03-UP	500 sm	0.0605	0.0760	518	436	537	65.8	6370.0
Four Core Cables								
PL-AT11-P3-04-UP	16 rm	1.9100	2.2950	76	57	62	20.4	510.0
PL-AT12-P3-04-UP	25 sm	1.2000	1.4420	99	75	83	21.5	610.0
PL-AT13-P3-04-UP	35 sm	0.8680	1.0432	119	90	102	23.9	750.0
PL-AT14-P3-04-UP	50 sm	0.6410	0.7704	146	110	128	28.1	1010.0
PL-AT15-P3-04-UP	70 sm	0.4430	0.5327	179	136	161	31.7	1340.0
PL-AT16-P3-04-UP	95 sm	0.3200	0.3851	214	164	197	35.6	1785.0
PL-AT17-P3-04-UP	120 sm	0.2530	0.3048	244	183	228	39.0	2175.0
PL-AT18-P3-04-UP	150 sm	0.2060	0.2485	274	209	262	43.7	2645.0
PL-AT19-P3-04-UP	185 sm	0.1640	0.1983	311	239	303	48.3	3280.0
PL-AT20-P3-04-UP	240 sm	0.1250	0.1518	360	282	361	54.8	4175.0
PL-AT21-P3-04-UP	300 sm	0.1000	0.1222	407	322	417	60.9	5135.0
PL-AT22-P3-04-UP	400 sm	0.0778	0.0961	468	376	489	69.5	6640.0
PL-AT23-P3-04-UP	500 sm	0.0605	0.0760	534	445	568	76.8	8380.0

Four Core Cables with Reduced Neutral									
PL-AT12-P3-R3-UP	25 sm	16 rm	1.200/1.9100	1.442 / 2.295	95	73	81	20.9	580.0
PL-AT13-P3-R3-UP	35 sm	16 rm	0.8680/1.9100	1.0432 / 2.295	114	87	100	22.8	695.0
PL-AT14-P3-R3-UP	50 sm	25 sm	0.6410/1.2000	0.7704 / 1.442	140	107	125	26.9	915.0
PL-AT15-P3-R3-UP	70 sm	35 sm	0.4430/0.8680	0.5327 / 1.0432	172	132	157	30.2	1180.0
PL-AT16-P3-R3-UP	95 sm	50 sm	0.3200/0.6410	0.3851 / 0.7704	206	159	192	33.9	1595.0
PL-AT17-P3-R3-UP	120 sm	70 sm	0.2530/0.4430	0.3048 / 0.5327	239	181	225	37.3	1950.0
PL-AT18-P3-R3-UP	150 sm	70 sm	0.2060/0.4430	0.2485 / 0.5327	268	207	259	41.3	2315.0
PL-AT19-P3-R3-UP	185 sm	95 sm	0.1640/0.3200	0.1983 / 0.3851	305	237	299	46.0	2895.0
PL-AT20-P3-R3-UP	240 sm	120 sm	0.1250/0.2530	0.1518 / 0.3048	353	279	356	51.8	3680.0
PL-AT21-P3-R3-UP	300 sm	150 sm	0.1000/0.2060	0.1222 / 0.2485	399	319	416	57.6	4515.0
PL-AT22-S3-S3-UP	400 sm	185 sm	0.0778/0.1640	0.0961 / 0.1983	459	372	482	65.5	5770.0
PL-AT22-P3-R3-UP	400 sm	240 sm	0.0778/0.1250	0.0961 / 0.1518	459	372	482	66.4	6020.0
PL-AT23-P3-R3-UP	500 sm	240 sm	0.0605/0.1250	0.076 / 0.1518	524	441	560	72.7	7430.0

rm : round, Stranded
sm : Sector, Stranded

The above data is approximate and subject to manufacturing tolerances

