


LOW VOLTAGE CABLES

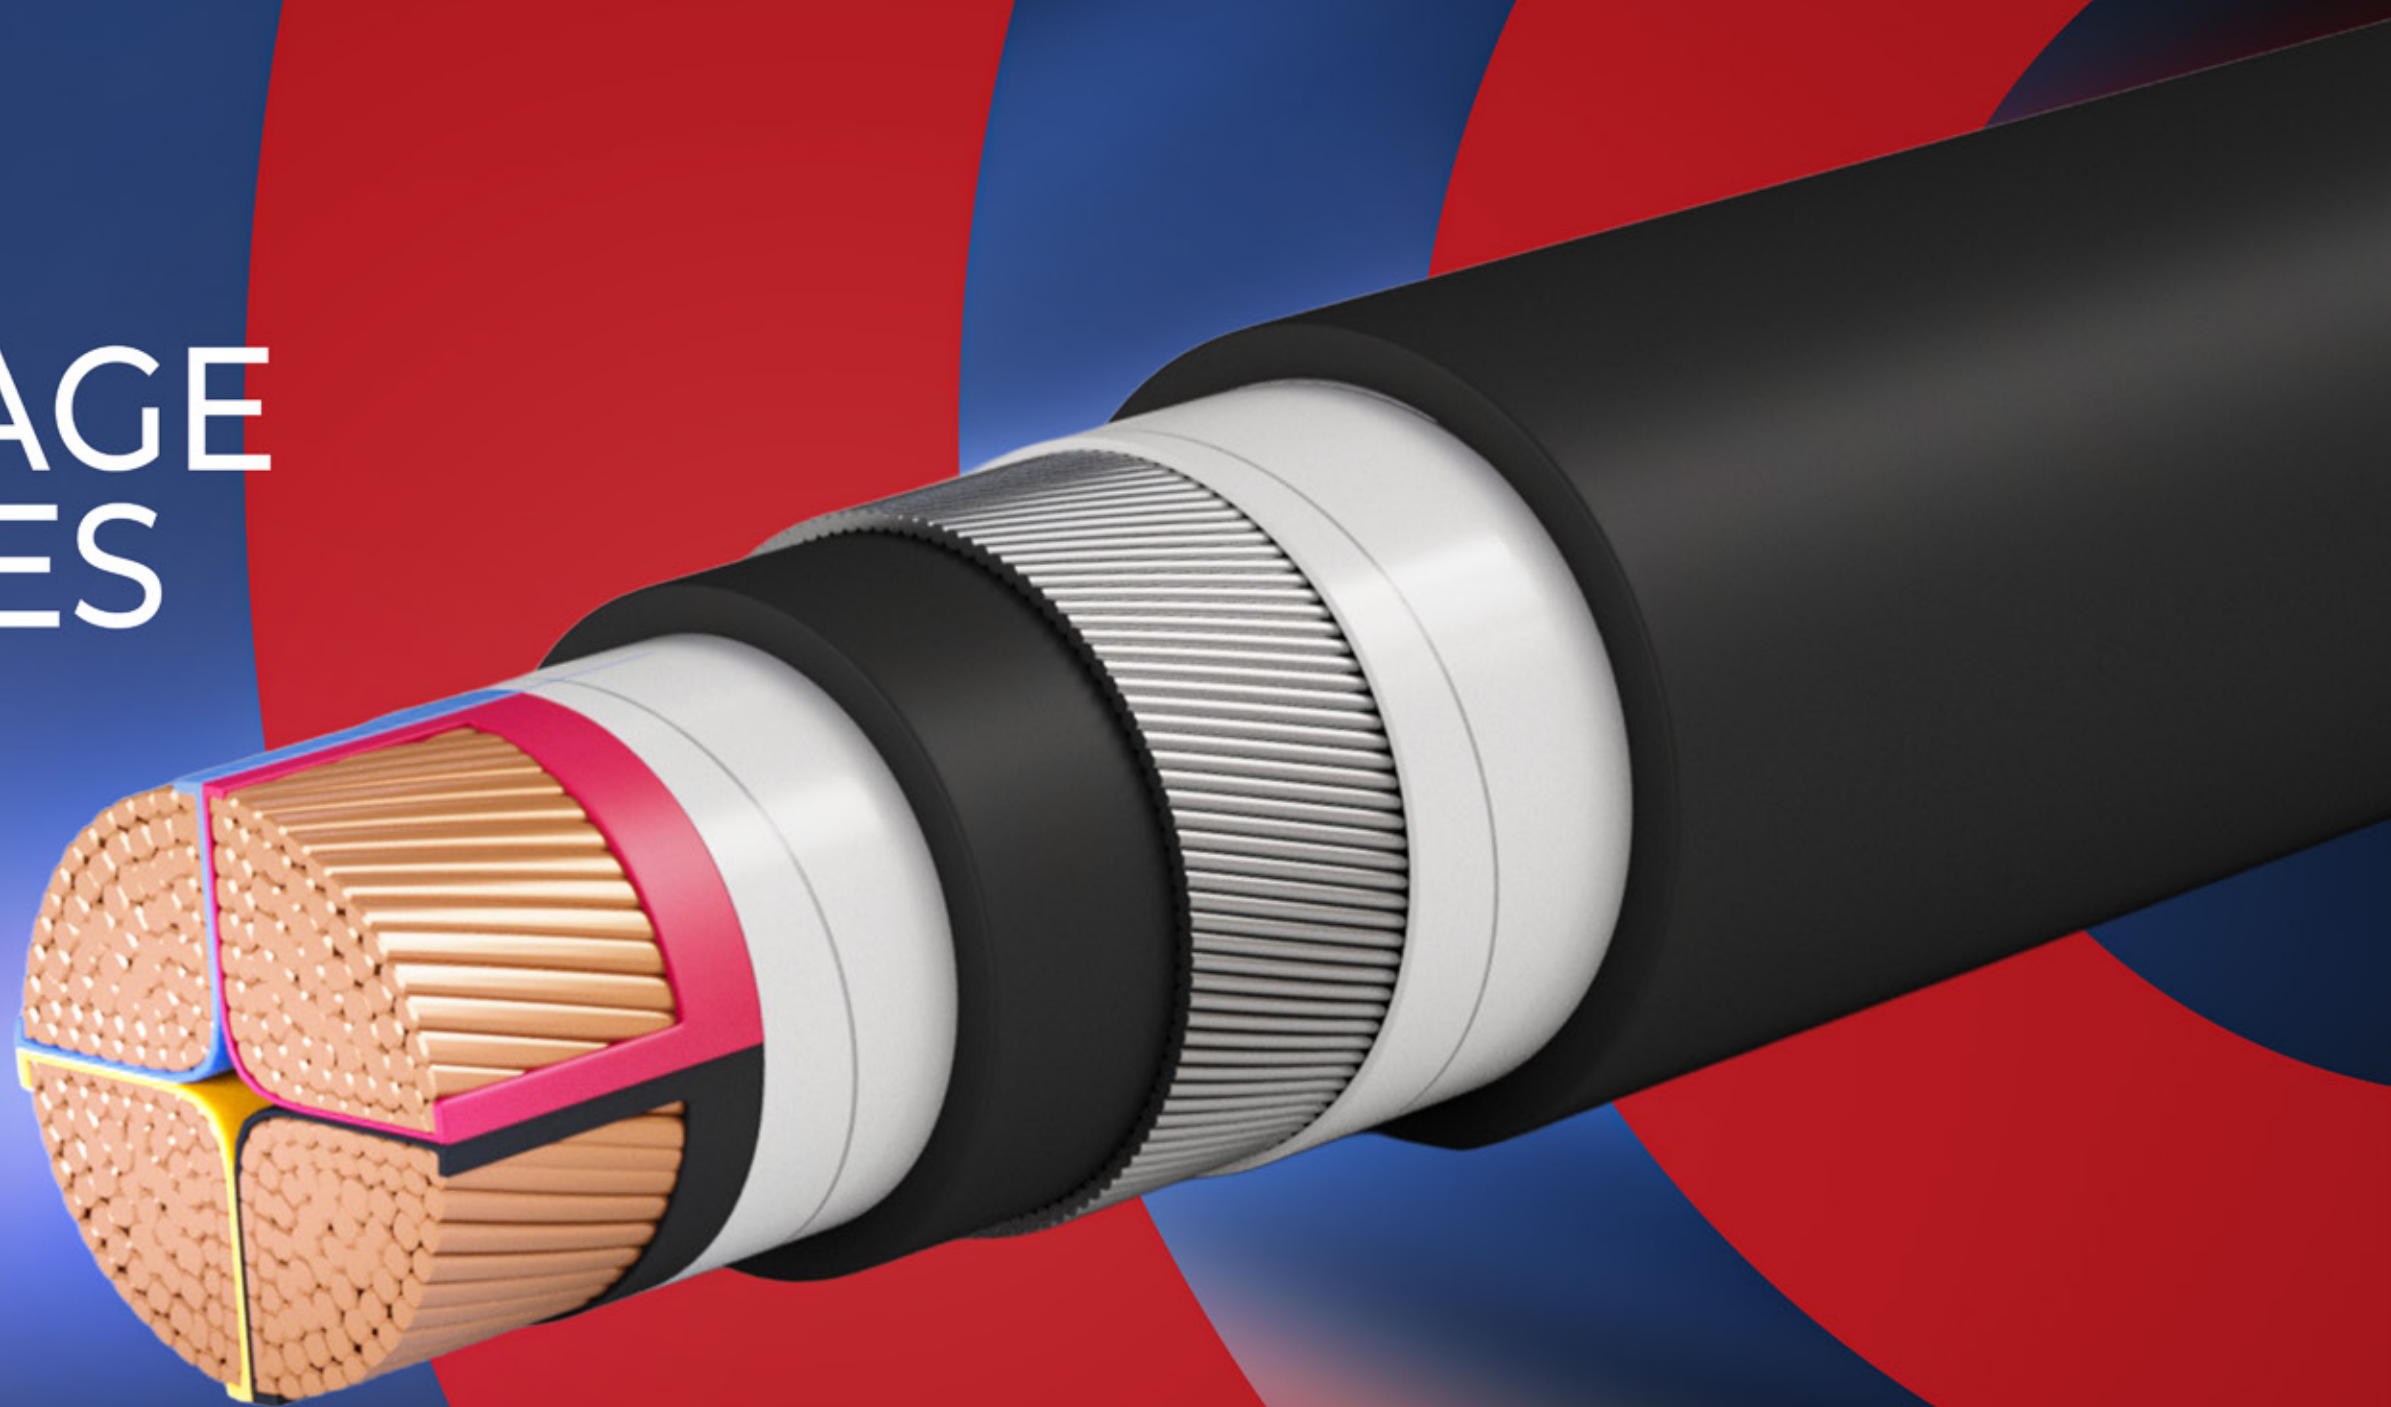

Multi Core Cables, with Stranded Circular or Sector Aluminum

Conductors, PVC Insulated, Steel Tape Armored and PVC Sheathed

Voltage Grade

0.6 / 1 (1.2) KV

Description

Multicore cables of Stranded Aluminum conductors are insulated with PVC compound rated 70° C, assembled together, armored with steel tape and covered with overall jacket of PVC compound.

Application

For outdoor and indoor installations in damp and wet locations, where mechanical damages are expected to occur.

Technical Data

Relevant Standard	IEC 60502
Conductor	Aluminum conductor H12 class 2
Insulation	Extruded PVC Compound type PVC / A Rated 70° C
Assembly	The insulated cores are assembled together using nonhygroscopic polypropylene filler (if needed), then banded with suitable tape
Inner Sheath	Extruded PVC Compound
Armoring	Double Steel Tapes applied helically over the inner sheath.
Insulation Color	Two Cores: Red & Black Three Cores: Red, Yellow & Black Four Cores: Red, Yellow, Blue & Black, or any other color according to customer request
Outer Sheath	Extruded PVC Compound
Outer Sheath Color	Black (default color), or any other color according to customer request
Maximum Operating Temp.	70° C
Minimum bending Radius	10 x outer diameter
Packing Condition	Our standard length on Wooden Drum / or according to customer request

Note:-

Heat resistant or/and flame retardant PVC insulated or/and PVC sheathed are available according to customer request

Galvanized Steel Tapes is available according to customer request

Product Code	Nominal Cross Sectional Area mm²	Max. Conductor Resistance		Current Rating		Approx. Overall	Approx.
		DC at 20 °C Ω/km	AC at 70 °C Ω/km	Laid in Ground	Laid in Free Air	Diameter	Weight
				A	A		
Two Core Cables							
PL-AT11-P3-02-TP	16 rm	1.9100	2.2950	86	70	19.8	585.0
PL-AT12-P3-02-TP	25 rm	1.2000	1.4419	110	93	23.2	795.0
PL-AT13-P3-02-TP	35 rm	0.8680	1.0431	134	115	25.4	955.0
Three Core Cables							
PL-AT11-P3-03-TP	16 rm	1.9100	2.2950	73	61	20.9	660.0
PL-AT12-P3-03-TP	25 rm	1.2000	1.4420	91	77	24.6	915.0
PL-AT13-P3-03-TP	35 rm	0.8680	1.0432	110	96	27.0	1105.0
PL-AT14-P3-03-TP	50 sm	0.6410	0.7704	135	119	27.0	1050.0
PL-AT15-P3-03-TP	70 sm	0.4430	0.5327	165	150	30.1	1325.0
PL-AT16-P3-03-TP	95 sm	0.3200	0.3851	197	183	35.6	2045.0
PL-AT17-P3-03-TP	120 sm	0.2530	0.3048	230	215	37.6	2355.0
PL-AT18-P3-03-TP	150 sm	0.2060	0.2485	258	247	41.9	2840.0
PL-AT19-P3-03-TP	185 sm	0.1640	0.1983	292	286	45.9	3395.0
PL-AT20-P3-03-TP	240 sm	0.1250	0.1518	339	340	51.6	4250.0
PL-AT21-P3-03-TP	300 sm	0.1000	0.1222	380	397	56.7	5070.0
PL-AT22-P3-03-TP	400 sm	0.0778	0.0961	432	460	64.1	6340.0
PL-AT23-P3-03-TP	500 sm	0.0605	0.0760	490	535	71.0	7945.0
Four Core Cables							
PL-AT11-P3-04-TP	16 rm	1.9100	2.2950	75	63	23.2	705.0
PL-AT12-P3-04-TP	25 sm	1.2000	1.4420	97	84	24.3	860.0
PL-AT13-P3-04-TP	35 sm	0.8680	1.0432	117	103	26.7	1025.0
PL-AT14-P3-04-TP	50 sm	0.6410	0.7704	143	129	31.1	1350.0
PL-AT15-P3-04-TP	70 sm	0.4430	0.5327	175	162	35.9	2025.0
PL-AT16-P3-04-TP	95 sm	0.3200	0.3851	210	199	39.8	2565.0
PL-AT17-P3-04-TP	120 sm	0.2530	0.3048	239	231	43.6	3055.0
PL-AT18-P3-04-TP	150 sm	0.2060	0.2485	268	265	48.1	3620.0
PL-AT19-P3-04-TP	185 sm	0.1640	0.1983	304	306	53.1	4390.0
PL-AT20-P3-04-TP	240 sm	0.1250	0.1518	351	364	59.6	5450.0
PL-AT21-P3-04-TP	300 sm	0.1000	0.1222	395	421	65.7	6545.0
PL-AT22-P3-04-TP	400 sm	0.0778	0.0961	450	494	74.7	8315.0
PL-AT23-P3-04-TP	500 sm	0.0605	0.0760	510	573	83.3	10980.0

Four Core Cables with Reduced Neutral								
PL-AT12-P3-R3-TP	25 sm	16 rm	1.200/1.9100	1.442 / 2.295	93	80	23.7	835.0
PL-AT13-P3-R3-TP	35 sm	16 rm	0.8680/1.9100	1.0432 / 2.295	112	99	25.6	975.0
PL-AT14-P3-R3-TP	50 sm	25 sm	0.6410/1.2000	0.7704 / 1.442	138	124	29.7	1225.0
PL-AT15-P3-R3-TP	70 sm	35 sm	0.4430/0.8680	0.5327 / 1.0432	169	155	33.0	1525.0
PL-AT16-P3-R3-TP	95 sm	50 sm	0.3200/0.6410	0.3851 / 0.7704	201	190	38.1	2325.0
PL-AT17-P3-R3-TP	120 sm	70 sm	0.2530/0.4430	0.3048 / 0.5327	234	223	41.9	2795.0
PL-AT18-P3-R3-TP	150 sm	70 sm	0.2060/0.4430	0.2485 / 0.5327	263	256	45.9	3260.0
PL-CT15-P3-R3-TP	185 sm	95 sm	0.1640/0.3200	0.1983 / 0.3851	298	296	50.4	3920.0
PL-AT20-P3-R3-TP	240 sm	120 sm	0.1250/0.2530	0.1518 / 0.3048	346	352	56.6	4865.0
PL-AT21-P3-R3-TP	300 sm	150 sm	0.1000/0.2060	0.1222 / 0.2485	387	412	62.4	5825.0
PL-AT22-P3-S3-TP	400 sm	185 sm	0.0778/0.1640	0.0961 / 0.1983	441	477	70.7	7355.0
PL-AT22-P3-R3-TP	400 sm	240 sm	0.0778/0.1250	0.0961 / 0.1518	441	477	71.6	7595.0
PL-AT23-P3-R3-TP	500 sm	240 sm	0.0605/0.1250	0.076 / 0.1518	500	554	79.0	9810.0

rm : round, Stranded
sm : Sector, Stranded

The above data is approximate and subject to manufacturing tolerances

