


LOW VOLTAGE CABLES

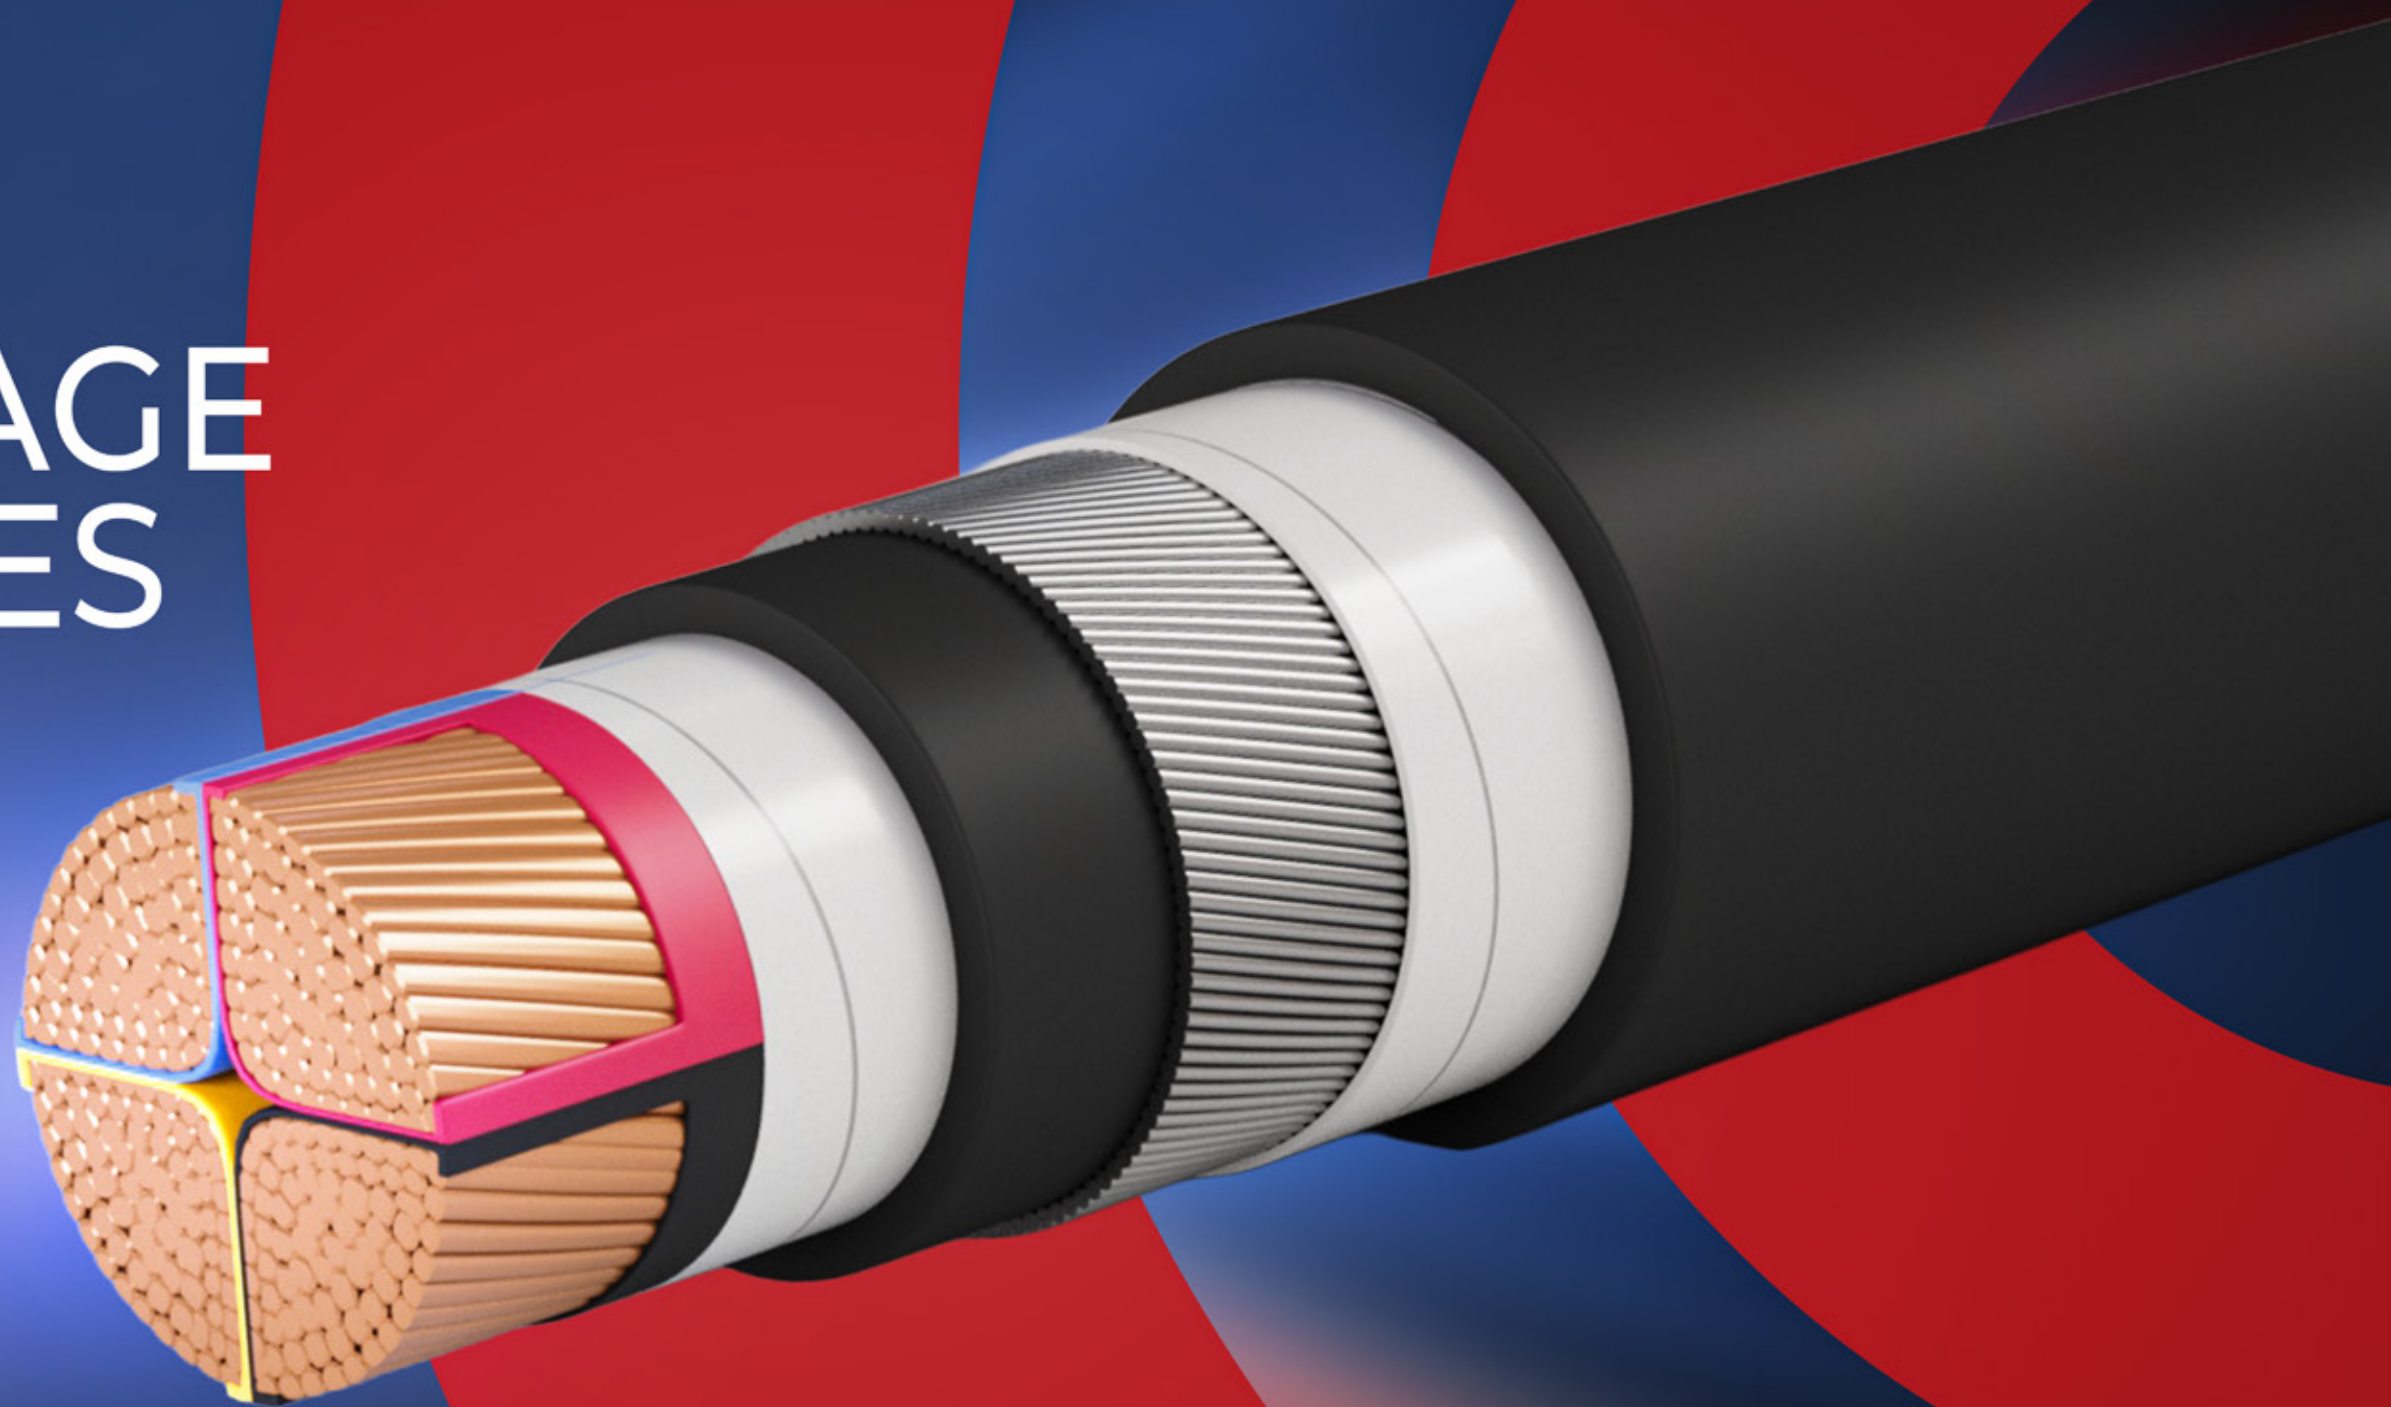

Multi Core Cables, with Stranded Circular or Sector Aluminum

Conductors, PVC Insulated, Steel Wires Armored and PVC Sheathed

Voltage Grade

0.6 / 1 (1.2) KV

Description

Multicore cables of Stranded Aluminum conductors are insulated with PVC compound rated 70° C, assembled together, armored with steel wires and covered with overall jacket of PVC compound.

Application


For outdoor and indoor installations in damp and wet locations, where mechanical damages are expected to occur.

Technical Data

Relevant Standard	IEC 60502
Conductor	Aluminum conductor H12 class 2
Insulation	Extruded PVC Compound type PVC / A Rated 70° C
Assembly	The insulated cores are assembled together using nonhygroscopic polypropylene filler (if needed), then banded with suitable tape
Inner Sheath	Extruded PVC Compound
Armoring	Galvanized Steel Wires applied over the inner sheath.
Insulation Color	Two Cores: Red & Black Three Cores: Red, Yellow & Black Four Cores: Red, Yellow, Blue & Black, or any other color according to customer request
Outer Sheath	Extruded PVC Compound
Outer Sheath Color	Black (default color), or any other color according to customer request
Maximum Operating Temp.	70° C
Minimum bending Radius	10 x outer diameter
Packing Condition	Our standard length on Wooden Drum / or according to customer request

Note:-

Heat resistant or/and flame retardant PVC insulated or/and PVC sheathed are available according to customer request

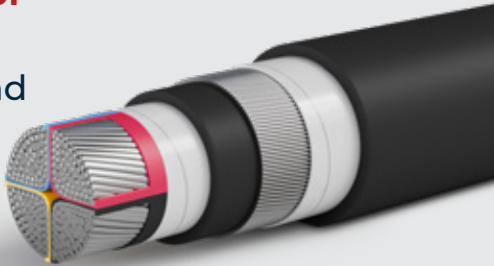

LOW VOLTAGE CABLES

Product Code	Nominal Cross Sectional Area mm²	Max. Conductor Resistance		Current Rating		Approx. Overall	Approx.
		DC at 20 °C Ω/km	AC at 70 °C Ω/km	Laid in Ground	Laid in Free Air	Diameter	Weight
				A	A	mm	kg/km
Two Core Cables							
PL-AT11-P3-02-WP	16 rm	1.9100	2.2950	86	70	22.4	890.0
PL-AT12-P3-02-WP	25 rm	1.2000	1.4419	110	93	26.5	1290.0
PL-AT13-P3-02-WP	35 rm	0.8680	1.0431	134	115	28.7	1500.0
Three Core Cables							
PL-AT11-P3-03-WP	16 rm	1.9100	2.2950	73	61	24.0	955.0
PL-AT12-P3-03-WP	25 rm	1.2000	1.4420	91	80	28.4	1360.0
PL-AT13-P3-03-WP	35 rm	0.8680	1.0432	110	99	30.8	1560.0
PL-AT14-P3-03-WP	50 sm	0.6410	0.7704	135	121	30.5	1650.0
PL-AT15-P3-03-WP	70 sm	0.4430	0.5327	165	151	34.4	2195.0
PL-AT16-P3-03-WP	95 sm	0.3200	0.3851	197	185	38.5	2705.0
PL-AT17-P3-03-WP	120 sm	0.2530	0.3048	230	217	40.5	3060.0
PL-AT18-P3-03-WP	150 sm	0.2060	0.2485	258	249	45.9	4000.0
PL-AT19-P3-03-WP	185 sm	0.1640	0.1983	292	288	49.9	4650.0
PL-AT20-P3-03-WP	240 sm	0.1250	0.1518	339	343	55.6	5645.0
PL-AT21-P3-03-WP	300 sm	0.1000	0.1222	380	401	60.9	6645.0
PL-AT22-P3-03-WP	400 sm	0.0778	0.0961	432	465	69.6	8815.0
PL-AT23-P3-03-WP	500 sm	0.0605	0.0760	490	540	76.3	10645.0
Four Core Cables							
PL-AT11-P3-04-WP	16 rm	1.9100	2.2950	75	63	26.5	1235.0
PL-AT12-P3-04-WP	25 sm	1.2000	1.4420	97	84	27.6	1400.0
PL-AT13-P3-04-WP	35 sm	0.8680	1.0432	117	103	30.2	1645.0
PL-AT14-P3-04-WP	50 sm	0.6410	0.7704	143	129	35.4	2260.0
PL-AT15-P3-04-WP	70 sm	0.4430	0.5327	175	162	39.0	2720.0
PL-AT16-P3-04-WP	95 sm	0.3200	0.3851	210	199	43.8	3645.0
PL-AT17-P3-04-WP	120 sm	0.2530	0.3048	239	231	47.6	4260.0
PL-AT18-P3-04-WP	150 sm	0.2060	0.2485	268	265	52.1	4955.0
PL-AT19-P3-04-WP	185 sm	0.1640	0.1983	304	306	57.3	5860.0
PL-AT20-P3-04-WP	240 sm	0.1250	0.1518	351	364	63.6	7070.0
PL-AT21-P3-04-WP	300 sm	0.1000	0.1222	395	421	69.7	8330.0
PL-AT22-P3-04-WP	400 sm	0.0778	0.0961	450	494	79.8	11090.0
PL-AT23-P3-04-WP	500 sm	0.0605	0.0760	510	573	87.5	13395.0

Four Core Cables with Reduced Neutral								
PL-AT12-P3-R3-WP	25 sm	16 rm	1.200/1.9100	1.442 / 2.295	93	81	27.0	1340.0
PL-AT13-P3-R3-WP	35 sm	16 rm	0.8680/1.9100	1.0432 / 2.295	112	100	29.1	1530.0
PL-AT14-P3-R3-WP	50 sm	25 sm	0.6410/1.2000	0.7704 / 1.442	138	126	34.0	2090.0
PL-AT15-P3-R3-WP	70 sm	35 sm	0.4430/0.8680	0.5327 / 1.0432	169	158	37.3	2495.0
PL-AT16-P3-R3-WP	95 sm	50 sm	0.3200/0.6410	0.3851 / 0.7704	201	193	41.2	3060.0
PL-AT17-P3-R3-WP	120 sm	70 sm	0.2530/0.4430	0.3048 / 0.5327	234	226	46.1	3970.0
PL-AT18-P3-R3-WP	150 sm	70 sm	0.2060/0.4430	0.2485 / 0.5327	263	260	49.7	4490.0
PL-CT15-P3-R3-WP	185 sm	95 sm	0.1640/0.3200	0.1983 / 0.3851	298	300	54.4	5290.0
PL-AT20-P3-R3-WP	240 sm	120 sm	0.1250/0.2530	0.1518 / 0.3048	346	357	60.6	6410.0
PL-AT21-P3-R3-WP	300 sm	150 sm	0.1000/0.2060	0.1222 / 0.2485	387	418	66.4	7505.0
PL-AT22-P3-S3-WP	400 sm	185 sm	0.0778/0.1640	0.0961 / 0.1983	441	484	76.0	10070.0
PL-AT22-P3-R3-WP	400 sm	240 sm	0.0778/0.1250	0.0961 / 0.1518	441	484	77.1	10380.0
PL-AT23-P3-R3-WP	500 sm	240 sm	0.0605/0.1250	0.076 / 0.1518	500	562	83.2	12050.0

rm : round, Stranded
sm : Sector, Stranded

The above data is approximate and subject to manufacturing tolerances

