


LOW VOLTAGE CABLES

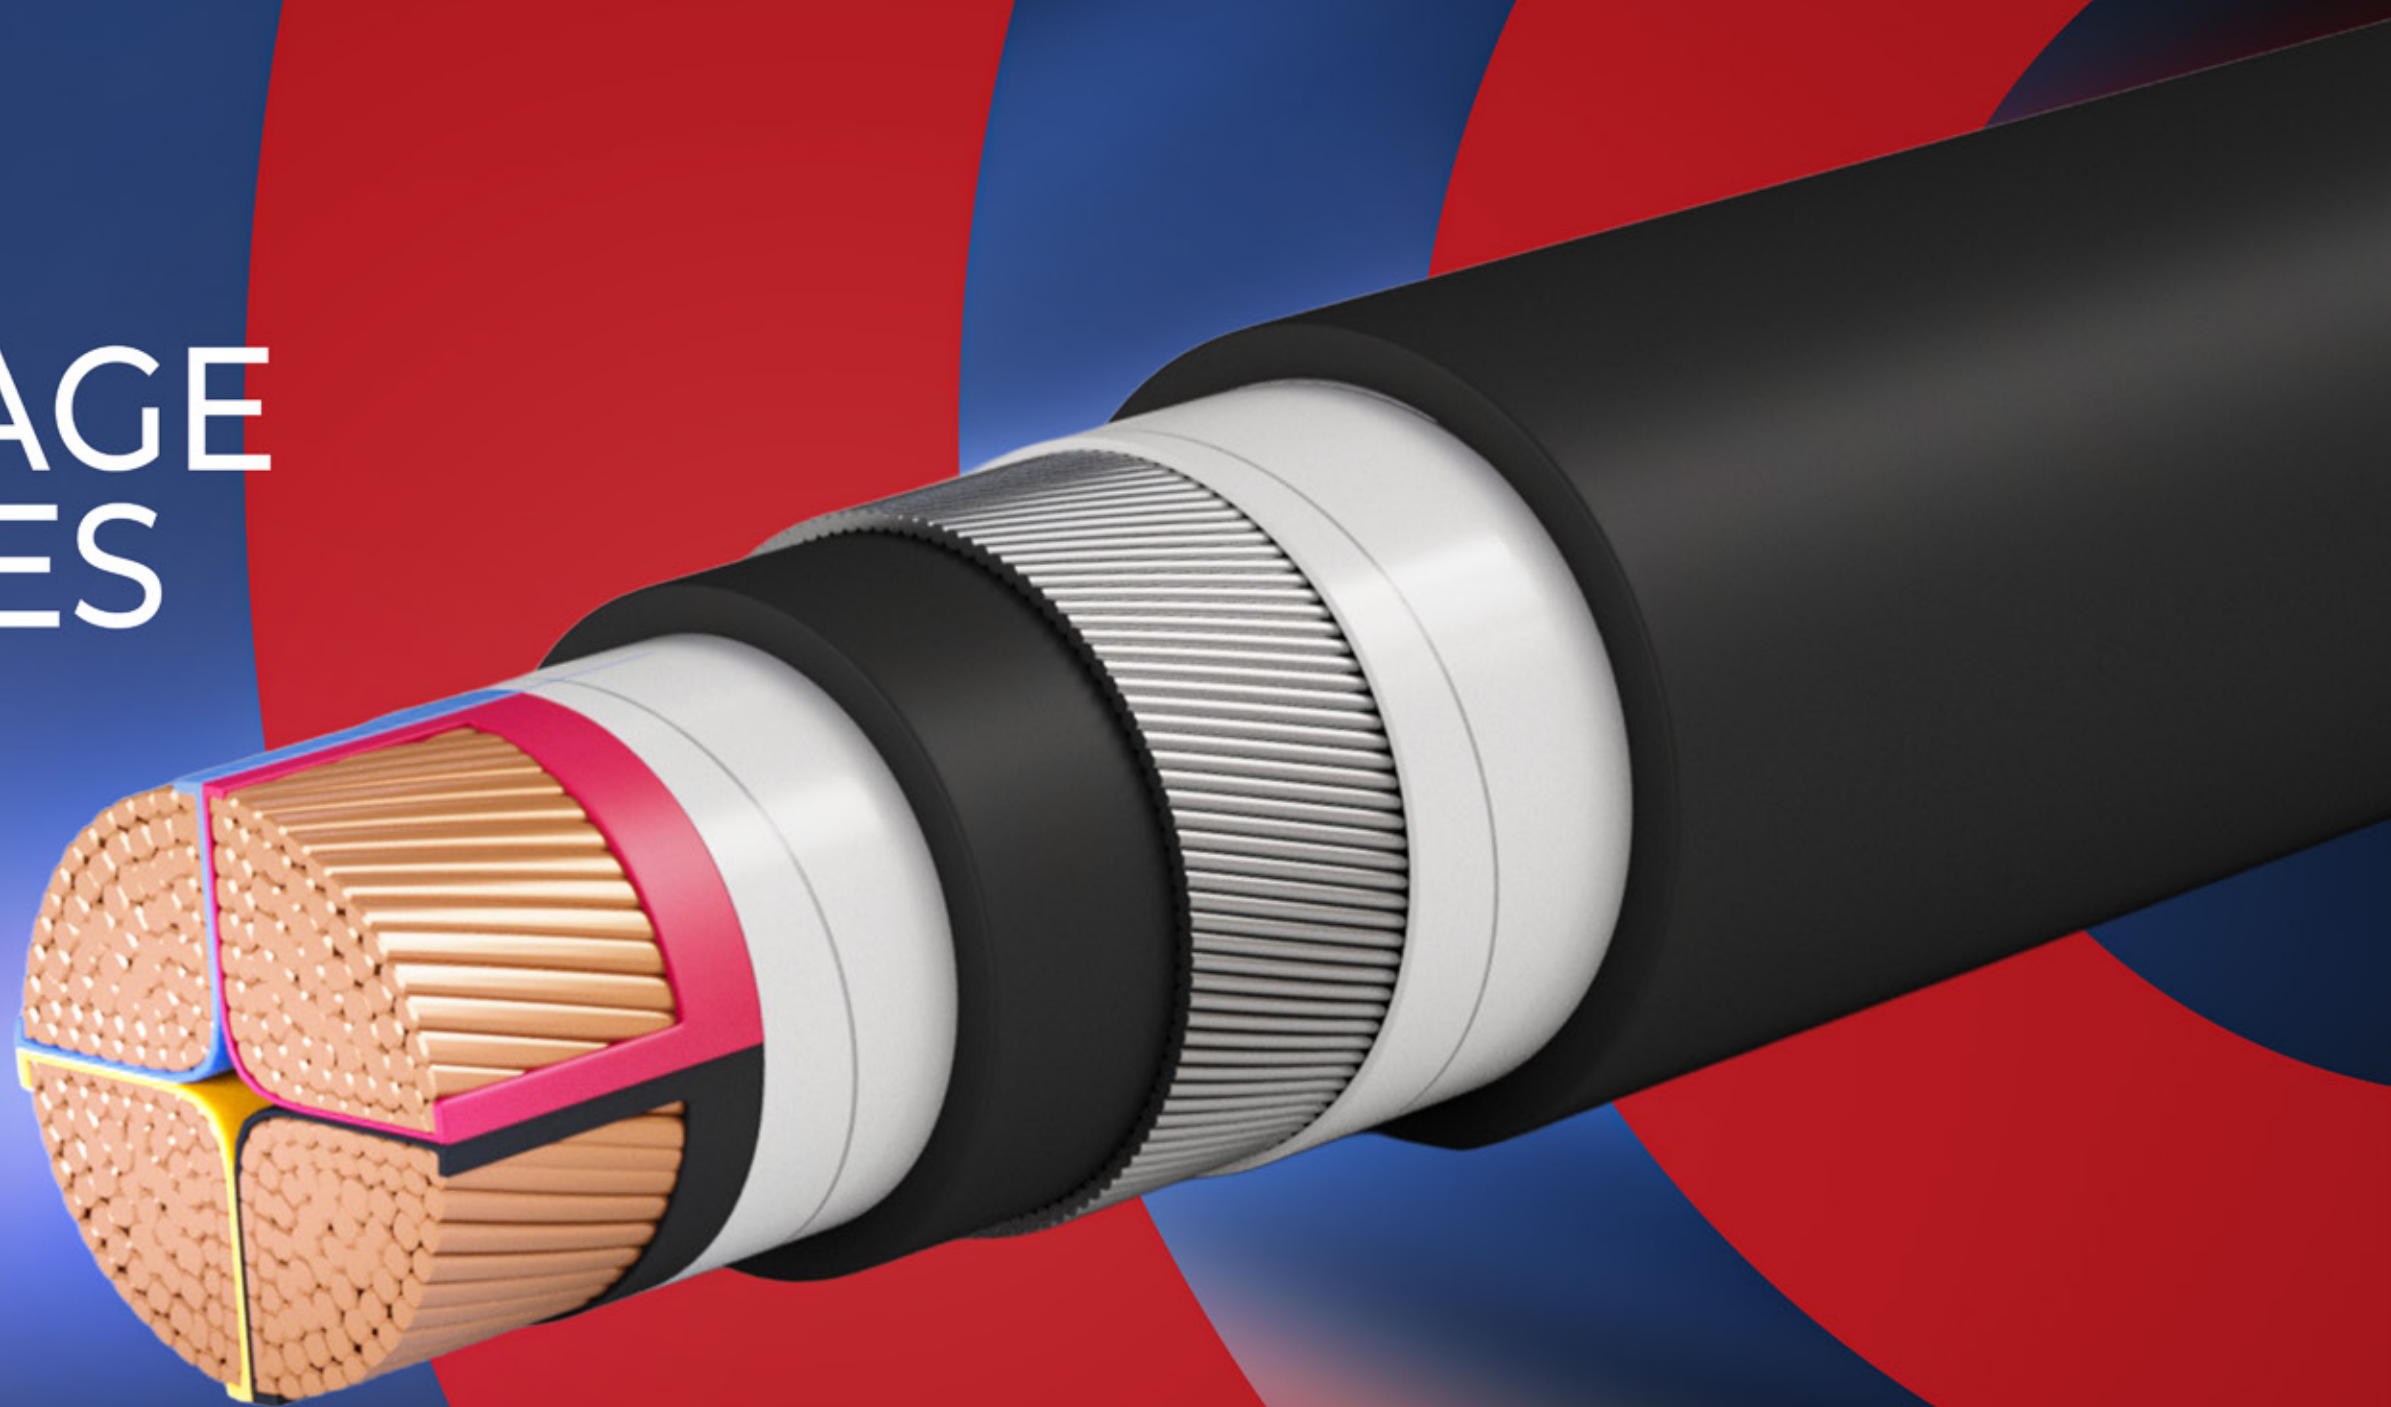

Multi Core Cables, with Stranded Circular or Sector Aluminum

Conductors, XLPE Insulated and PVC Sheathed

Voltage Grade

0.6 / 1 (1.2) KV

Description

Multicore cables of stranded Aluminum conductors are insulated with XLPE compound rated 90° C, assembled together, covered with an overall jacket of PVC compound.

Application


For outdoor and indoor installations in damp and wet locations.

Technical Data

Relevant Standard	IEC 60502
Conductor	Aluminum conductor H12 class 2
Insulation	Extruded XLPE Compound Rated 90° C
Assembly	The insulated cores are assembled together using nonhygroscopic polypropylene filler (if needed), then banded with suitable tape
Outer Sheath	Extruded PVC Compound
Insulation Color	Two Cores: Red & Black Three Cores: Red, Yellow & Black Four Cores: Red, Yellow, Blue & Black, or any other color according to customer request
Outer Sheath Color	Black (default color), or any other color according to customer request
Maximum Operating Temp.	90° C
Minimum bending Radius	10 x outer diameter
Packing Condition	Our standard length on Wooden Drum / or according to customer request

Note:-

Heat resistant or/and flame retardant PVC insulated or/ and PVC sheathed are available according to customer request

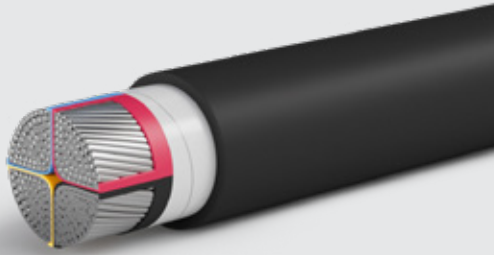

LOW VOLTAGE CABLES

Product Code	Nominal Cross Sectional Area mm²	Max. Conductor Resistance		Current Rating			Approx. Overall	Approx.
		DC at 20 °C Ω/km	AC at 90 °C Ω/km	Laid in Ground	Laid in Duct	Laid in Free Air	Diameter	Weight
				A	A	A	mm	kg/km
Two Core Cables								
PL-AT11-X3-02-UP	16 rm	1.9100	2.4489	105	74	89	15.8	320.0
PL-AT12-X3-02-UP	25 rm	1.2000	1.5387	136	97	119	19.2	470.0
PL-AT13-X3-02-UP	35 rm	0.8680	1.1131	164	118	147	21.4	590.0
Three Core Cables								
PL-AT11-X3-03-UP	16 rm	1.9100	2.4489	87	64	76	16.8	365.0
PL-AT12-X3-03-UP	25 rm	1.2000	1.5387	110	83	97	20.5	545.0
PL-AT13-X3-03-UP	35 rm	0.8680	1.1131	133	100	120	22.9	695.0
PL-AT14-X3-03-UP	50 sm	0.6410	0.8221	161	120	147	22.4	630.0
PL-AT15-X3-03-UP	70 sm	0.4430	0.5684	198	150	186	25.9	865.0
PL-AT16-X3-03-UP	95 sm	0.3200	0.4109	236	179	226	29.2	1135.0
PL-AT17-X3-03-UP	120 sm	0.2530	0.3252	273	208	271	32.6	1405.0
PL-AT18-X3-03-UP	150 sm	0.2060	0.2651	307	236	310	35.7	1725.0
PL-AT19-X3-03-UP	185 sm	0.1640	0.2115	347	272	360	39.7	2145.0
PL-AT20-X3-03-UP	240 sm	0.1250	0.1619	404	320	427	44.6	2730.0
PL-AT21-X3-03-UP	300 sm	0.1000	0.1302	456	366	492	49.3	3320.0
PL-AT22-X3-03-UP	400 sm	0.0778	0.1023	524	429	579	56.7	4330.0
PL-AT23-X3-03-UP	500 sm	0.0605	0.0809	599	506	673	63.2	5575.0
Four Core Cables								
PL-AT11-X3-04-UP	16 rm	1.9100	2.4489	88	65	78	19.0	420.0
PL-AT12-X3-04-UP	25 sm	1.2000	1.5387	114	85	103	20.0	495.0
PL-AT13-X3-04-UP	35 sm	0.8680	1.1131	137	103	128	22.4	620.0
PL-AT14-X3-04-UP	50 sm	0.6410	0.8221	166	123	156	26.1	825.0
PL-AT15-X3-04-UP	70 sm	0.4430	0.5684	204	155	198	30.2	1125.0
PL-AT16-X3-04-UP	95 sm	0.3200	0.4109	243	185	240	32.9	1475.0
PL-AT17-X3-04-UP	120 sm	0.2530	0.3252	282	214	288	37.0	1850.0
PL-AT18-X3-04-UP	150 sm	0.2060	0.2651	316	243	330	41.5	2265.0
PL-AT19-X3-04-UP	185 sm	0.1640	0.2115	358	281	382	46.3	2825.0
PL-AT20-X3-04-UP	240 sm	0.1250	0.1619	416	330	454	52.1	3600.0
PL-AT21-X3-04-UP	300 sm	0.1000	0.1302	470	377	523	57.7	4410.0
PL-AT22-X3-04-UP	400 sm	0.0778	0.1023	540	442	615	66.3	5755.0
PL-AT23-X3-04-UP	500 sm	0.0605	0.0809	617	521	715	73.8	7380.0

Four Core Cables with Reduced Neutral									
PL-AT12-X3-R3-UP	25 sm	16 rm	1.200/1.9100	1.5387 / 2.4489	113	84	101	19.4	475.0
PL-AT13-X3-R3-UP	35 sm	16 rm	0.8680/1.9100	1.1131 / 2.4489	135	102	125	21.3	575.0
PL-AT14-X3-R3-UP	50 sm	25 sm	0.6410/1.2000	0.8221 / 1.5387	164	122	153	24.7	735.0
PL-AT15-X3-R3-UP	70 sm	35 sm	0.4430/0.8680	0.5684 / 1.1131	202	153	194	28.5	995.0
PL-AT16-X3-R3-UP	95 sm	50 sm	0.3200/0.6410	0.4109 / 0.8221	240	183	235	32.4	1325.0
PL-AT17-X3-R3-UP	120 sm	70 sm	0.2530/0.4430	0.3252 / 0.5684	279	212	282	35.3	1660.0
PL-AT18-X3-R3-UP	150 sm	70 sm	0.2060/0.4430	0.2651 / 0.5684	313	241	323	39.1	1975.0
PL-AT19-X3-R3-UP	185 sm	95 sm	0.1640/0.3200	0.2115 / 0.4109	354	278	375	44.0	2500.0
PL-AT20-X3-R3-UP	240 sm	120 sm	0.1250/0.2530	0.1619 / 0.3252	412	326	445	49.3	3170.0
PL-AT21-X3-R3-UP	300 sm	150 sm	0.1000/0.2060	0.1302 / 0.2651	466	374	513	54.6	3875.0
PL-AT22-X3-S3-UP	400 sm	185 sm	0.0778/0.1640	0.1023 / 0.2115	535	438	603	62.3	5000.0
PL-AT22-X3-R3-UP	400 sm	240 sm	0.0778/0.1250	0.1023 / 0.1619	535	438	603	63.4	5220.0
PL-AT23-X3-R3-UP	500 sm	240 sm	0.0605/0.1250	0.0809 / 0.1619	611	516	701	69.7	6480.0

rm : round, Stranded

sm : Sector, Stranded

The above data is approximate and subject to manufacturing tolerances

