


LOW VOLTAGE CABLES

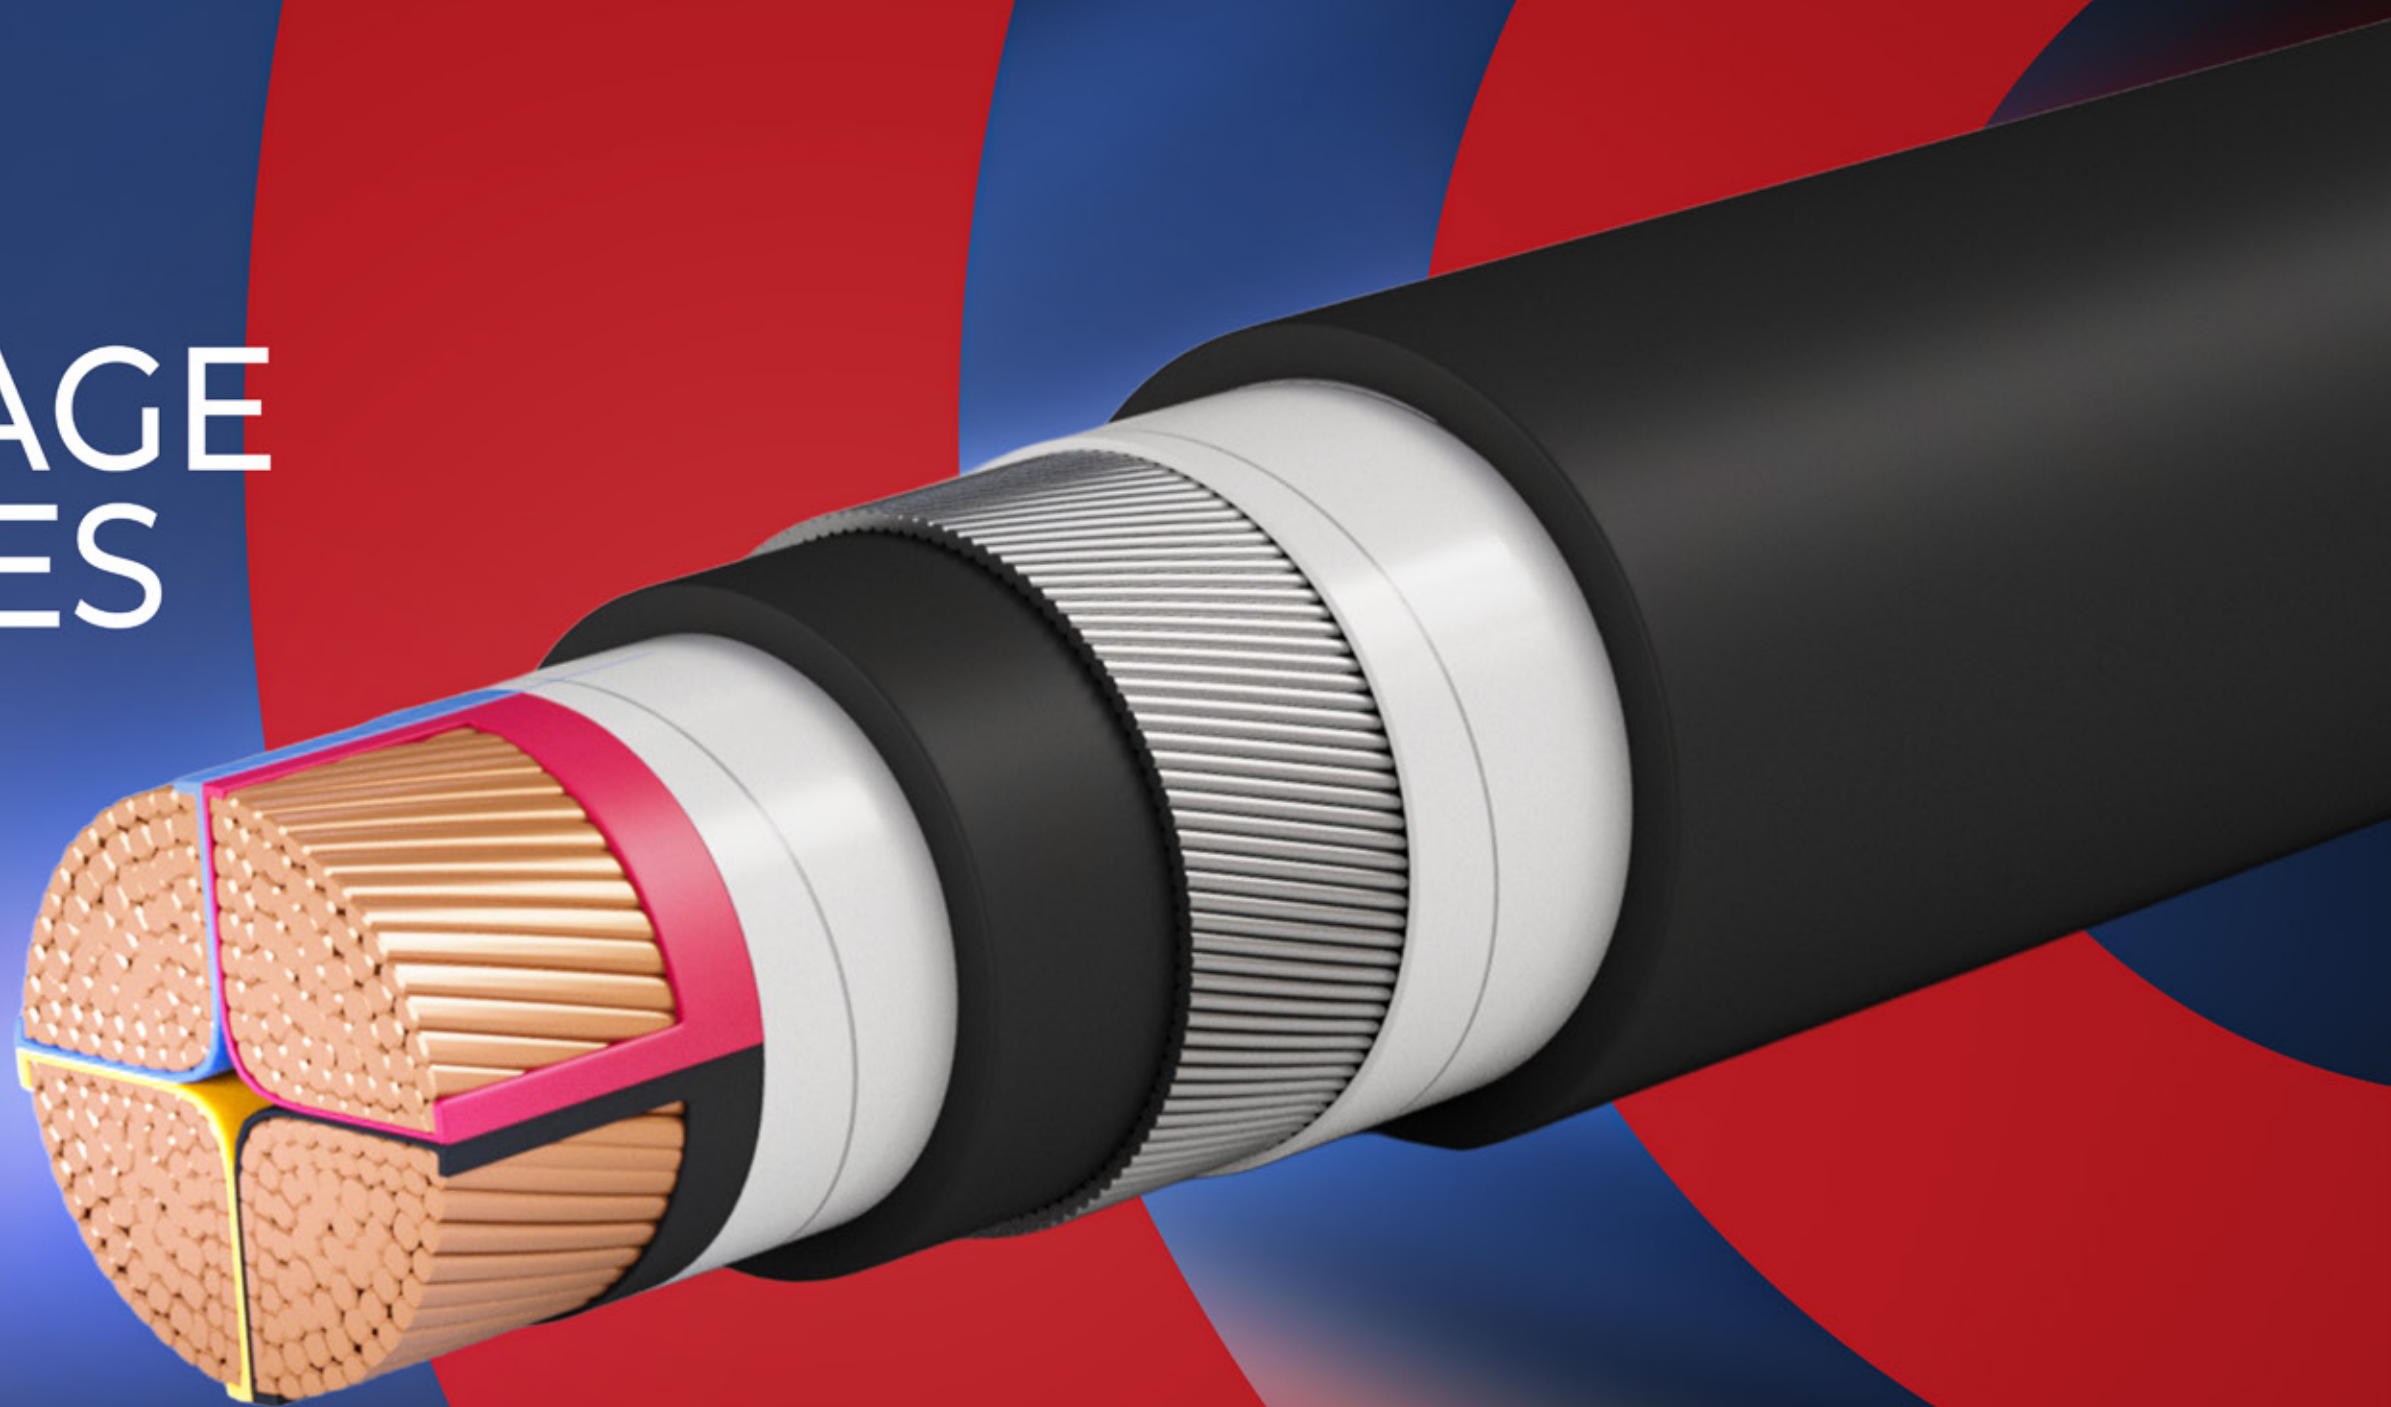

Multi Core Cables, with Stranded Circular or Sector Aluminum

Conductors, XLPE Insulated, Steel Tape Armored and PVC Sheathed

Voltage Grade

0.6 / 1 (1.2) KV

Description

Multicore cables of Stranded Aluminum conductors are insulated with XLPE compound rated 90° C, assembled together, armored with steel tape and covered with overall jacket of PVC compound.

Application


For outdoor and indoor installations in damp and wet locations, where mechanical damages are expected to occur.

Technical Data

Relevant Standard	IEC 60502
Conductor	Aluminum conductor H12 class 2
Insulation	Extruded XLPE Compound Rated 90° C
Assembly	The insulated cores are assembled together using nonhygroscopic polypropylene filler (if needed), then banded with suitable tape
Inner Sheath	Extruded PVC Compound
Armoring	Double Steel Tapes applied helically over the inner sheath.
Insulation Color	Two Cores: Red & Black Three Cores: Red, Yellow & Black Four Cores: Red, Yellow, Blue & Black, or any other color according to customer request
Outer Sheath	Extruded PVC Compound
Outer Sheath Color	Black (default color), or any other color according to customer request
Maximum Operating Temp.	90° C
Minimum bending Radius	10 x outer diameter
Packing Condition	Our standard length on Wooden Drum / or according to customer request

Note:-

Heat resistant or/and flame retardant PVC insulated or/and PVC sheathed are available according to customer request
Galvanized Steel Tapes is available according to customer request

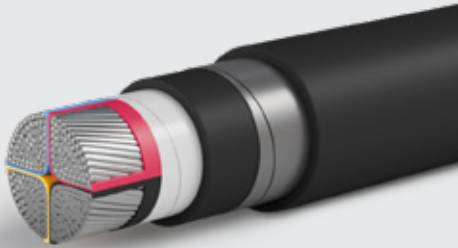

LOW VOLTAGE CABLES

Product Code	Nominal Cross Sectional Area mm²	Max. Conductor Resistance		Current Rating		Approx. Overall	Approx.
		DC at 20 °C Ω/km	AC at 90 °C Ω/km	Laid in Ground	Laid in Free Air	Diameter	Weight
				A	A		
Two Core Cables							
PL-AT11-X3-02-TP	16 rm	1.9100	2.4489	103	86	18.6	505.0
PL-AT12-X3-02-TP	25 rm	1.2000	1.5387	133	115	22.0	695.0
PL-AT13-X3-02-TP	35 rm	0.8680	1.1131	160	143	24.2	840.0
Three Core Cables							
PL-AT11-X3-03-TP	16 rm	1.9100	2.4489	84	71	20.1	510.0
PL-AT12-X3-03-TP	25 rm	1.2000	1.5387	108	94	23.8	685.0
PL-AT13-X3-03-TP	35 rm	0.8680	1.1131	130	117	26.2	820.0
PL-AT14-X3-03-TP	50 sm	0.6410	0.8221	158	146	25.2	905.0
PL-AT15-X3-03-TP	70 sm	0.4430	0.5684	194	185	28.7	1175.0
PL-AT16-X3-03-TP	95 sm	0.3200	0.4109	231	224	32.2	1495.0
PL-AT17-X3-03-TP	120 sm	0.2530	0.3252	268	268	36.8	2130.0
PL-AT18-X3-03-TP	150 sm	0.2060	0.2651	301	307	40.3	2555.0
PL-AT19-X3-03-TP	185 sm	0.1640	0.2115	340	356	44.3	3065.0
PL-AT20-X3-03-TP	240 sm	0.1250	0.1619	394	423	49.4	3780.0
PL-AT21-X3-03-TP	300 sm	0.1000	0.1302	443	487	54.3	4505.0
PL-AT22-X3-03-TP	400 sm	0.0778	0.1023	503	573	61.5	5645.0
PL-AT23-X3-03-TP	500 sm	0.0605	0.0809	572	666	68.4	7110.0
Four Core Cables							
PL-AT11-X3-04-TP	16 rm	1.9100	2.4489	86	77	21.8	600.0
PL-AT12-X3-04-TP	25 sm	1.2000	1.5387	112	102	22.8	730.0
PL-AT13-X3-04-TP	35 sm	0.8680	1.1131	134	126	25.2	880.0
PL-AT14-X3-04-TP	50 sm	0.6410	0.8221	163	154	28.9	1125.0
PL-AT15-X3-04-TP	70 sm	0.4430	0.5684	200	196	33.0	1480.0
PL-AT16-X3-04-TP	95 sm	0.3200	0.4109	238	237	37.1	2200.0
PL-AT17-X3-04-TP	120 sm	0.2530	0.3252	276	285	41.6	2705.0
PL-AT18-X3-04-TP	150 sm	0.2060	0.2651	310	326	46.1	3215.0
PL-AT19-X3-04-TP	185 sm	0.1640	0.2115	351	378	50.9	3880.0
PL-AT20-X3-04-TP	240 sm	0.1250	0.1619	406	449	56.9	4815.0
PL-AT21-X3-04-TP	300 sm	0.1000	0.1302	456	518	62.5	5745.0
PL-AT22-X3-04-TP	400 sm	0.0778	0.1023	518	609	71.5	7355.0
PL-AT23-X3-04-TP	500 sm	0.0605	0.0809	589	708	80.1	9830.0

Four Core Cables with Reduced Neutral								
PL-AT12-X3-R3-TP	25 sm	16 rm	1.200/1.9100	1.5387 / 2.4489	110	100	22.2	710.0
PL-AT13-X3-R3-TP	35 sm	16 rm	0.8680/1.9100	1.1131 / 2.4489	133	124	24.1	840.0
PL-AT14-X3-R3-TP	50 sm	25 sm	0.6410/1.2000	0.8221 / 1.5387	161	152	27.5	1020.0
PL-AT15-X3-R3-TP	70 sm	35 sm	0.4430/0.8680	0.5684 / 1.1131	198	193	31.5	1335.0
PL-AT16-X3-R3-TP	95 sm	50 sm	0.3200/0.6410	0.4109 / 0.8221	236	234	36.4	2020.0
PL-AT17-X3-R3-TP	120 sm	70 sm	0.2530/0.4430	0.3252 / 0.5684	273	279	39.5	2435.0
PL-AT18-X3-R3-TP	150 sm	70 sm	0.2060/0.4430	0.2651 / 0.5684	307	320	43.7	2875.0
PL-AT19-X3-R3-TP	185 sm	95 sm	0.1640/0.3200	0.2115 / 0.4109	347	371	48.4	3485.0
PL-AT20-X3-R3-TP	240 sm	120 sm	0.1250/0.2530	0.1619 / 0.3252	402	440	54.1	4320.0
PL-AT21-X3-R3-TP	300 sm	150 sm	0.1000/0.2060	0.1302 / 0.2651	452	508	59.2	5115.0
PL-AT22-X3-S3-TP	400 sm	185 sm	0.0778/0.1640	0.1023 / 0.2115	513	597	67.1	6445.0
PL-AT22-X3-R3-TP	400 sm	240 sm	0.0778/0.1250	0.1023 / 0.1619	513	597	68.4	6720.0
PL-AT23-X3-R3-TP	500 sm	240 sm	0.0605/0.1250	0.0809 / 0.1619	584	694	74.7	8125.0

rm : round, Stranded

sm : Sector, Stranded

The above data is approximate and subject to manufacturing tolerances

