


LOW VOLTAGE CABLES

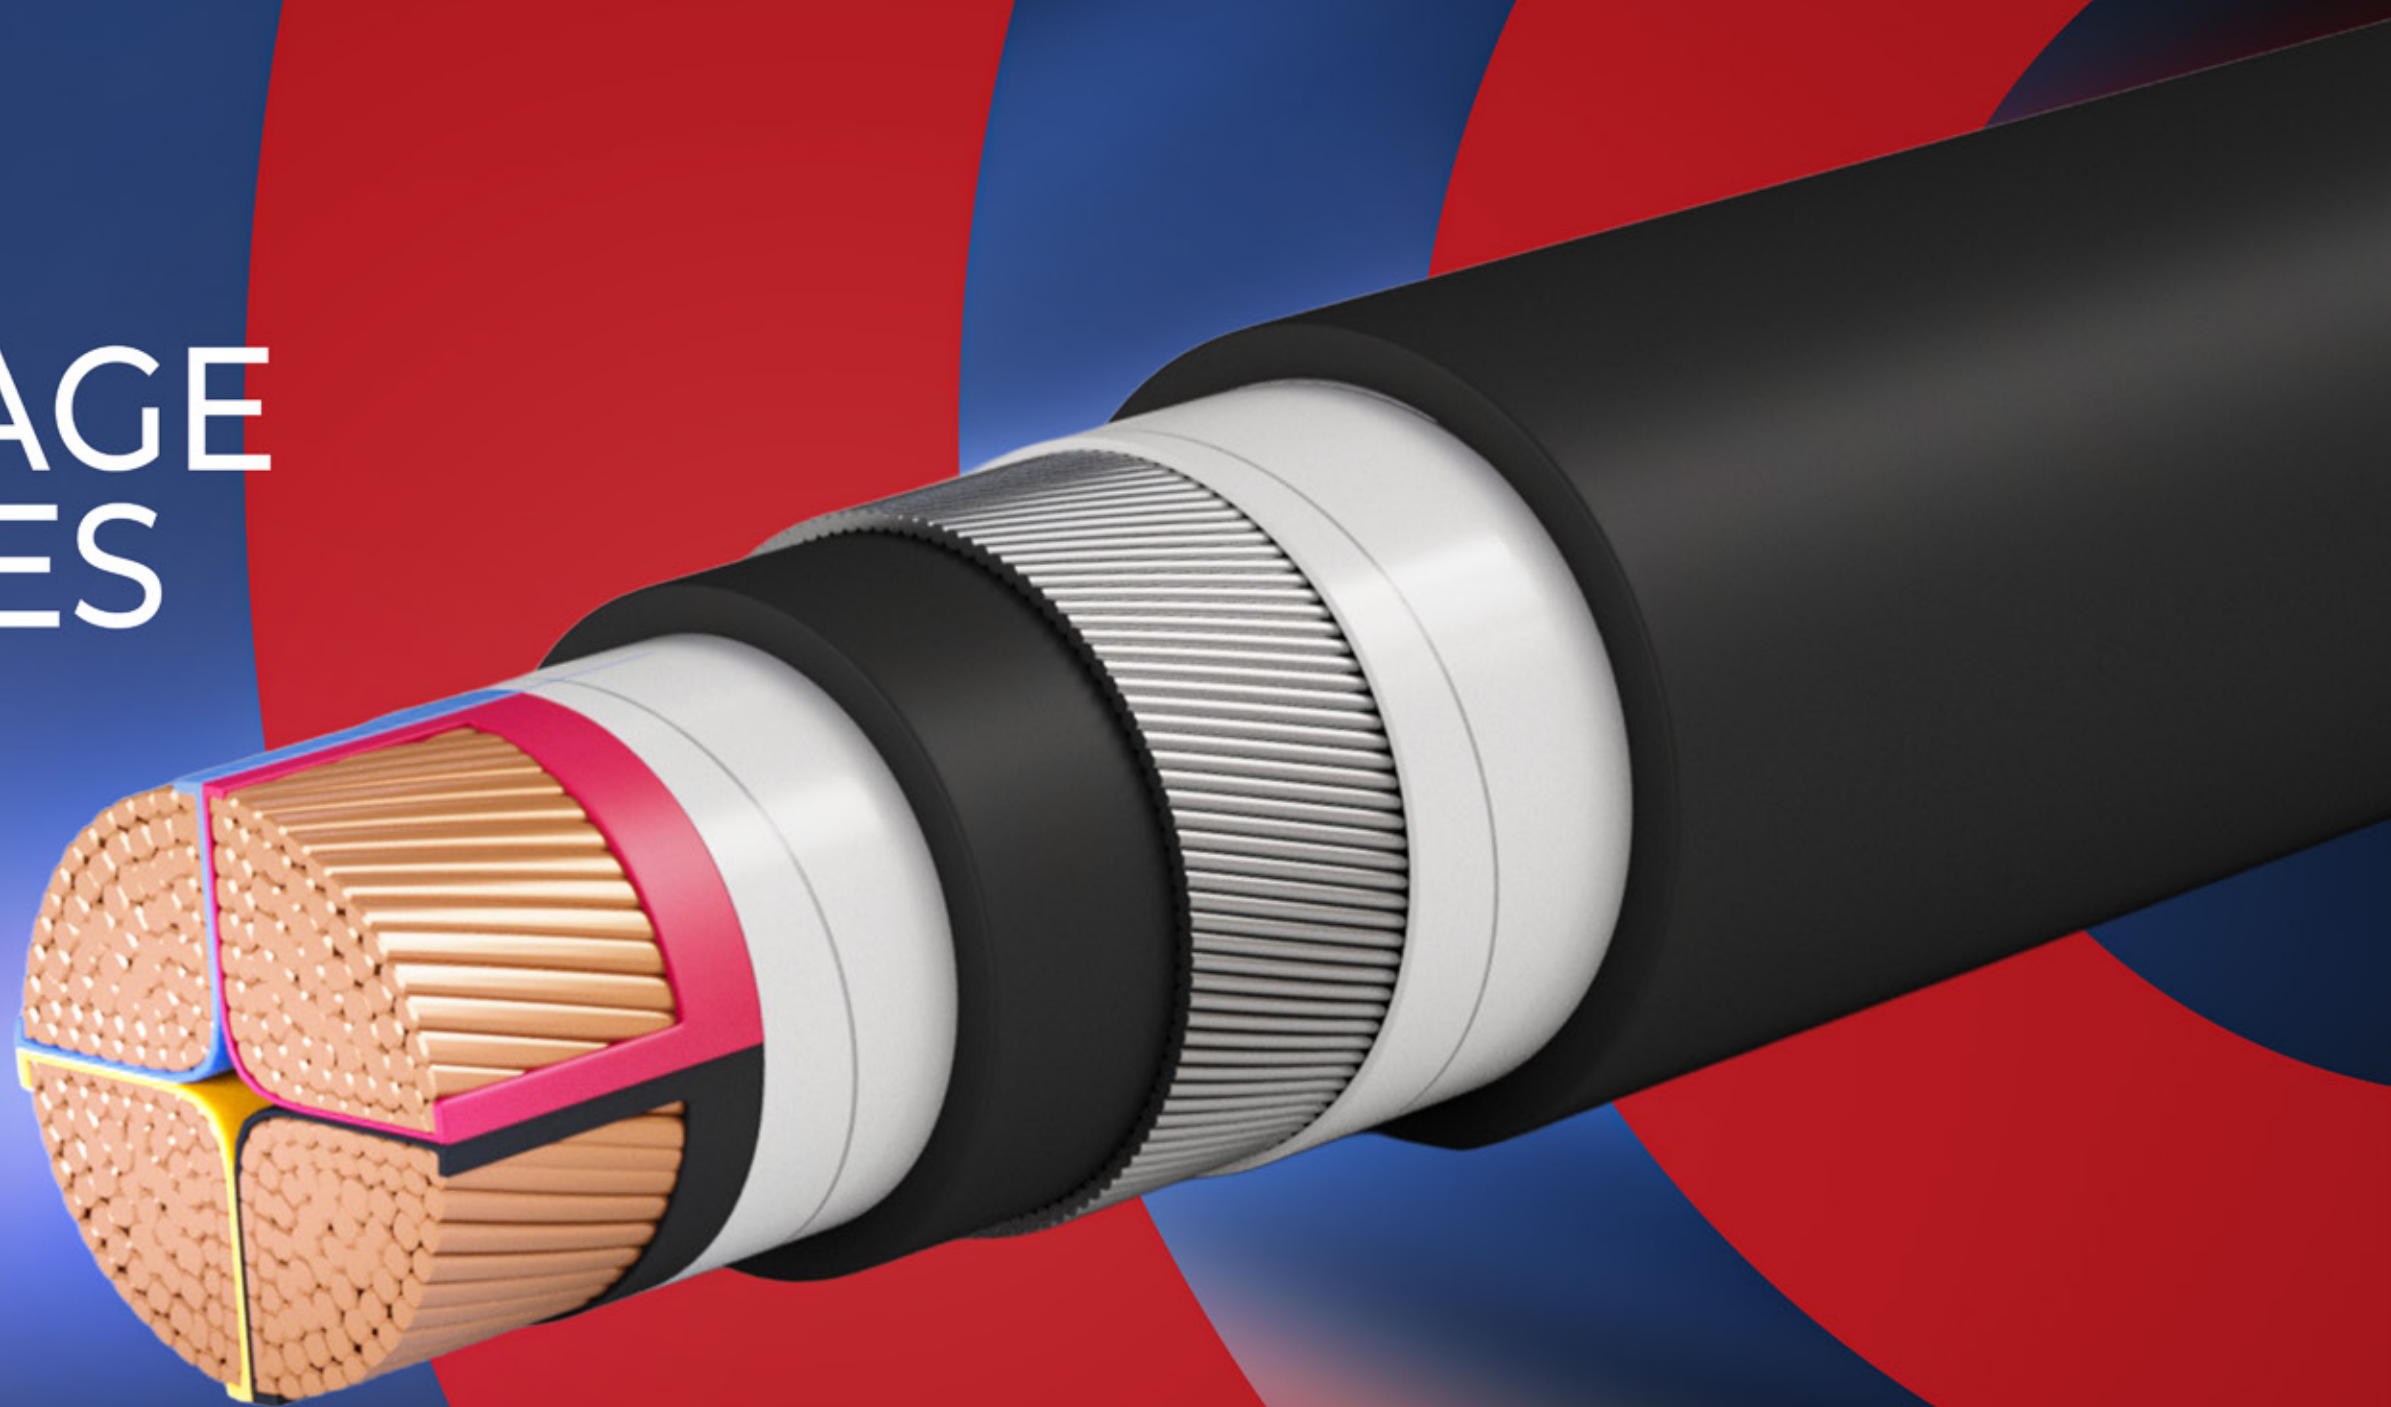

Multi Core Cables, with Stranded Circular or Sector Aluminum

Conductors, XLPE Insulated, Steel Wires Armored and PVC Sheathed

Voltage Grade

0.6 / 1 (1.2) KV

Description

Multicore cables of Stranded Aluminum conductors are insulated with XLPE compound rated 90° C, assembled together, armored with steel wires and covered with overall jacket of PVC compound.

Application


For outdoor and indoor installations in damp and wet locations, where mechanical damages are expected to occur.

Technical Data

Relevant Standard	IEC 60502
Conductor	Aluminum conductor H12 class 2
Insulation	Extruded XLPE Compound Rated 90° C
Assembly	The insulated cores are assembled together using nonhygroscopic polypropylene filler (if needed), then banded with suitable tape
Inner Sheath	Extruded PVC Compound
Armoring	Galvanized Steel Wires applied over the inner sheath.
Insulation Color	Two Cores: Red & Black Three Cores: Red, Yellow & Black Four Cores: Red, Yellow, Blue & Black, or any other color according to customer request
Outer Sheath	Extruded PVC Compound
Outer Sheath Color	Black (default color), or any other color according to customer request
Maximum Operating Temp.	90° C
Minimum bending Radius	10 x outer diameter
Packing Condition	Our standard length on Wooden Drum / or according to customer request

Note:-

Heat resistant or/and flame retardant PVC insulated or/and PVC sheathed are available according to customer request

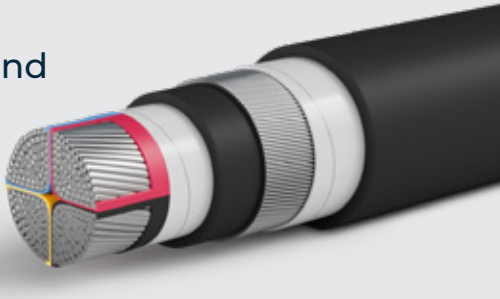

LOW VOLTAGE CABLES

Product Code	Nominal Cross Sectional Area mm²	Max. Conductor Resistance		Current Rating		Approx. Overall	Approx.
		DC at 20 °C Ω/km	AC at 90 °C Ω/km	Laid in Ground	Laid in Free Air	Diameter	Weight
				A	A	mm	kg/km
Two Core Cables							
PL-AT11-X3-02-WP	16 rm	1.9100	2.4489	103	94	21.2	790.0
PL-AT12-X3-02-WP	25 rm	1.2000	1.5387	133	125	25.3	1165.0
PL-AT13-X3-02-WP	35 rm	0.8680	1.1131	160	153	27.5	1360.0
Three Core Cables							
PL-AT11-X3-03-WP	16 rm	1.9100	2.4489	85	77	22.7	855.0
PL-AT12-X3-03-WP	25 rm	1.2000	1.5387	109	102	27.1	1215.0
PL-AT13-X3-03-WP	35 rm	0.8680	1.1131	131	124	29.5	1415.0
PL-AT14-X3-03-WP	50 sm	0.6410	0.8221	159	150	28.7	1445.0
PL-AT15-X3-03-WP	70 sm	0.4430	0.5684	196	190	33.0	2005.0
PL-AT16-X3-03-WP	95 sm	0.3200	0.4109	233	232	36.5	2410.0
PL-AT17-X3-03-WP	120 sm	0.2530	0.3252	270	272	39.9	2820.0
PL-AT18-X3-03-WP	150 sm	0.2060	0.2651	304	312	44.3	3650.0
PL-AT19-X3-03-WP	185 sm	0.1640	0.2115	344	362	48.1	4225.0
PL-AT20-X3-03-WP	240 sm	0.1250	0.1619	398	429	53.4	5115.0
PL-AT21-X3-03-WP	300 sm	0.1000	0.1302	447	495	58.3	5960.0
PL-AT22-X3-03-WP	400 sm	0.0778	0.1023	508	582	65.5	7300.0
PL-AT23-X3-03-WP	500 sm	0.0605	0.0809	578	677	73.9	9745.0
Four Core Cables							
PL-AT11-X3-04-WP	16 rm	1.9100	2.4489	86	80	25.1	1105.0
PL-AT12-X3-04-WP	25 sm	1.2000	1.5387	112	105	26.1	1230.0
PL-AT13-X3-04-WP	35 sm	0.8680	1.1131	134	129	28.7	1460.0
PL-AT14-X3-04-WP	50 sm	0.6410	0.8221	163	158	32.4	1760.0
PL-AT15-X3-04-WP	70 sm	0.4430	0.5684	200	200	37.5	2465.0
PL-AT16-X3-04-WP	95 sm	0.3200	0.4109	238	242	40.2	2905.0
PL-AT17-X3-04-WP	120 sm	0.2530	0.3252	276	288	45.6	3830.0
PL-AT18-X3-04-WP	150 sm	0.2060	0.2651	310	330	49.9	4440.0
PL-AT19-X3-04-WP	185 sm	0.1640	0.2115	351	382	54.9	5285.0
PL-AT20-X3-04-WP	240 sm	0.1250	0.1619	406	454	60.9	6360.0
PL-AT21-X3-04-WP	300 sm	0.1000	0.1302	456	523	66.5	7430.0
PL-AT22-X3-04-WP	400 sm	0.0778	0.1023	518	615	76.8	10095.0
PL-AT23-X3-04-WP	500 sm	0.0605	0.0809	589	715	84.3	12145.0

Four Core Cables with Reduced Neutral								
PL-AT12-X3-R3-WP	25 sm	16 rm	1.200/1.9100	1.5387 / 2.4489	110	104	25.5	1175.0
PL-AT13-X3-R3-WP	35 sm	16 rm	0.8680/1.9100	1.1131 / 2.4489	133	127	27.4	1345.0
PL-AT14-X3-R3-WP	50 sm	25 sm	0.6410/1.2000	0.8221 / 1.5387	161	156	31.0	1625.0
PL-AT15-X3-R3-WP	70 sm	35 sm	0.4430/0.8680	0.5684 / 1.1131	198	198	35.8	2245.0
PL-AT16-X3-R3-WP	95 sm	50 sm	0.3200/0.6410	0.4109 / 0.8221	236	240	39.5	2705.0
PL-AT17-X3-R3-WP	120 sm	70 sm	0.2530/0.4430	0.3252 / 0.5684	273	282	42.6	3180.0
PL-AT18-X3-R3-WP	150 sm	70 sm	0.2060/0.4430	0.2651 / 0.5684	307	323	47.7	4085.0
PL-CT15-X3-R3-WP	185 sm	95 sm	0.1640/0.3200	0.2115 / 0.4109	347	375	52.4	4810.0
PL-AT20-X3-R3-WP	240 sm	120 sm	0.1250/0.2530	0.1619 / 0.3252	402	445	58.1	5790.0
PL-AT21-X3-R3-WP	300 sm	150 sm	0.1000/0.2060	0.1302 / 0.2651	452	513	63.2	6730.0
PL-AT22-X3-S3-WP	400 sm	185 sm	0.0778/0.1640	0.1023 / 0.2115	513	603	72.4	9020.0
PL-AT22-X3-R3-WP	400 sm	240 sm	0.0778/0.1250	0.1023 / 0.1619	513	603	73.9	9365.0
PL-AT23-X3-R3-WP	500 sm	240 sm	0.0605/0.1250	0.0809 / 0.1619	584	701	80.0	10975.0

rm : round, Stranded
sm : Sector, Stranded

The above data is approximate and subject to manufacturing tolerances

