


LOW VOLTAGE CABLES

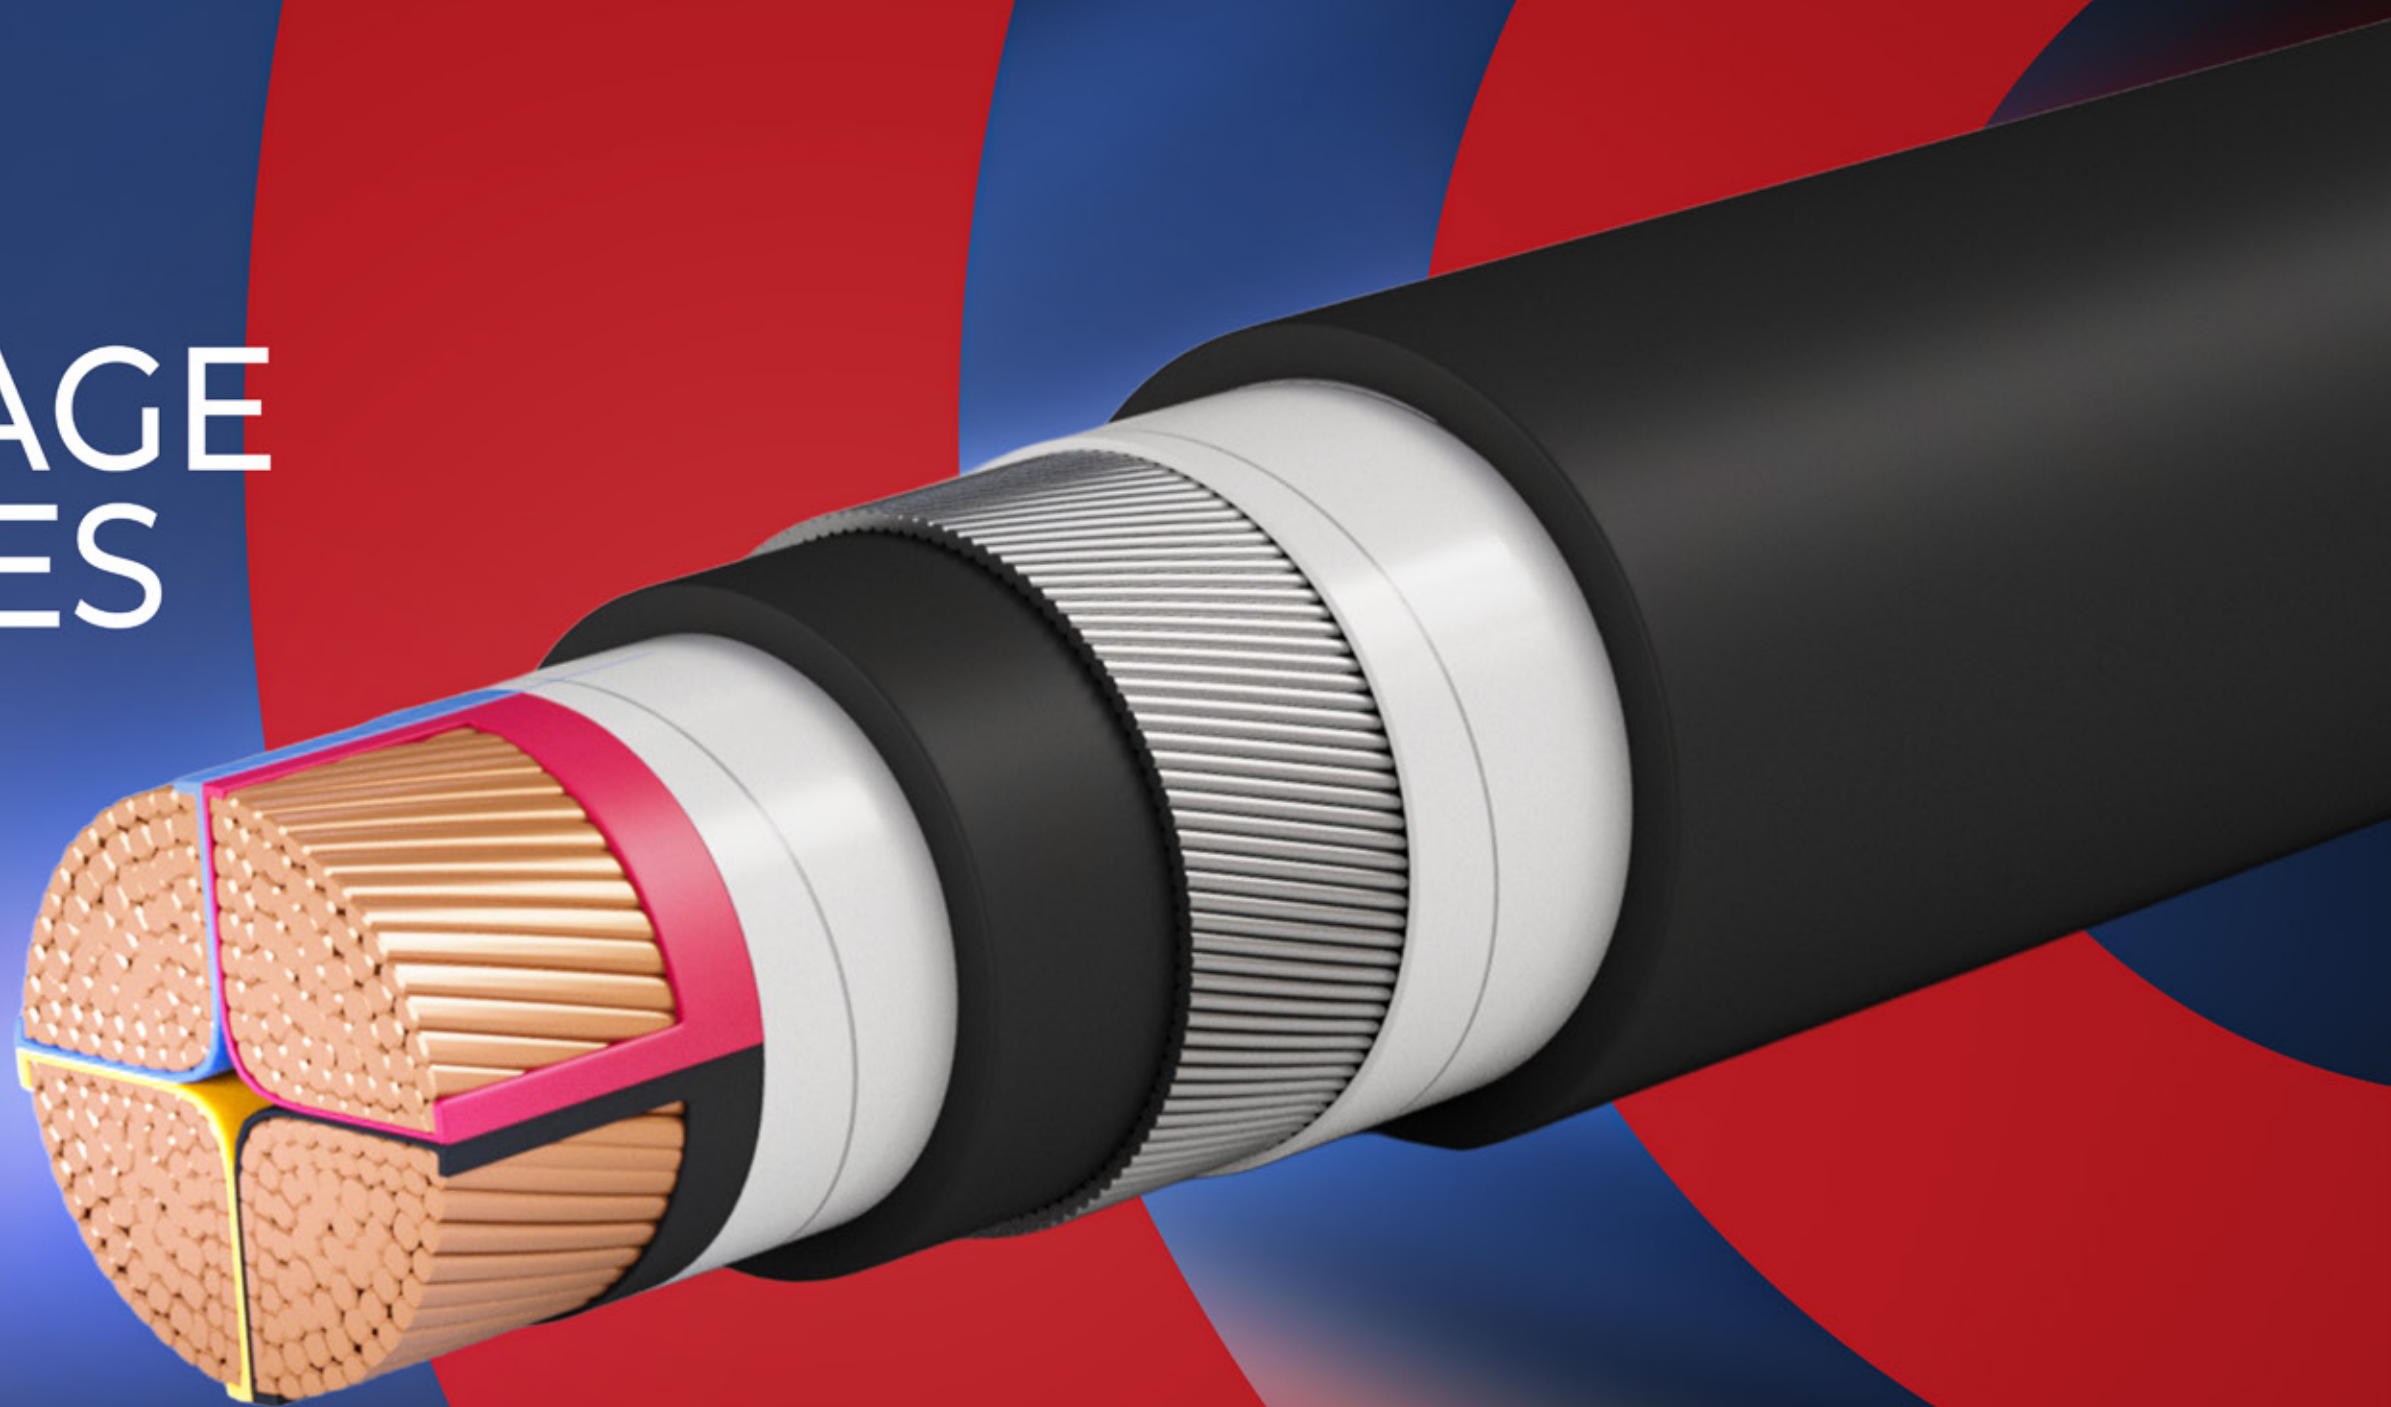

Multi Core Cables, with Stranded Circular or Sector Copper

Conductors, PVC Insulated and PVC Sheathed

Voltage Grade

0.6 / 1 (1.2) KV

Description

Multicore cables of Soft annealed Stranded Copper conductors are insulated with PVC compound rated 70° C, assembled together, covered with an overall jacket of PVC compound.

Application

For outdoor and indoor installations in damp and wet locations.

Technical Data

Relevant Standard	IEC 60502
Conductor	Plain copper conductor class 2
Insulation	Extruded PVC Compound type PVC / A Rated 70° C
Assembly	The insulated cores are assembled together using nonhygroscopic polypropylene filler (if needed), then banded with suitable tape
Outer Sheath	Extruded PVC Compound
Insulation Color	Two Cores: Red & Black Three Cores: Red, Yellow & Black Four Cores: Red, Yellow, Blue & Black, or any other color according to customer request
Outer Sheath Color	Black (default color), or any other color according to customer request
Maximum Operating Temp.	70° C
Minimum bending Radius	10 x outer diameter
Packing Condition	Our standard length on Wooden Drum / or according to customer request

Note:-

Heat resistant or/and flame retardant PVC insulated or/and PVC sheathed are available according to customer request

LOW VOLTAGE CABLES

Product Code	Nominal Cross Sectional Area mm²	Max. Conductor Resistance		Current Rating			Approx. Overall	Approx.
		DC at 20 °C Ω/km	AC at 70 °C Ω/km	Laid in Ground	Laid in Duct	Laid in Free Air	Diameter	Weight
				A	A	A	mm	kg/km
Two Core Cables								
PL-CT04-P3-02-UP	1.5 rm	12.100	14.600	31	23	23	9.4	130.0
PL-CT06-P3-02-UP	2.5 rm	7.4100	8.8700	39	30	32	10.2	165.0
PL-CT08-P3-02-UP	4 rm	4.6100	5.5400	52	38	45	12.0	230.0
PL-CT09-P3-02-UP	6 rm	3.0800	3.6900	65	48	58	13.2	295.0
PL-CT10-P3-02-UP	10 rm	1.8300	2.1900	85	65	76	14.4	395.0
PL-CT11-P3-02-UP	16 rm	1.1500	1.3900	111	77	101	16.4	545.0
PL-CT12-P3-02-UP	25 rm	0.7270	0.8701	145	107	121	19.4	805.0
PL-CT13-P3-02-UP	35 rm	0.5240	0.6273	176	129	149	21.6	1050.0
Three Core Cables								
PL-CT04-P3-03-UP	1.5 rm	12.100	14.600	25	21	20	9.9	155.0
PL-CT06-P3-03-UP	2.5 rm	7.4100	8.8700	32	27	24	10.8	195.0
PL-CT08-P3-03-UP	4 rm	4.6100	5.5400	42	35	34	12.7	280.0
PL-CT09-P3-03-UP	6 rm	3.0800	3.6900	54	42	43	14.0	365.0
PL-CT10-P3-03-UP	10 rm	1.8300	2.1900	71	56	59	15.8	480.0
PL-CT11-P3-03-UP	16 rm	1.1500	1.3900	89	70	79	18.0	665.0
PL-CT12-P3-03-UP	25 rm	0.7270	0.8702	121	89	101	21.2	975.0
PL-CT13-P3-03-UP	35 rm	0.5240	0.6274	145	108	124	23.6	1270.0
PL-CT14-P3-03-UP	50 sm	0.3870	0.4635	180	131	155	24.0	1620.0
PL-CT15-P3-03-UP	70 sm	0.2680	0.3214	220	163	195	27.1	2265.0
PL-CT16-P3-03-UP	95 sm	0.1930	0.2319	262	196	237	31.4	3075.0
PL-CT17-P3-03-UP	120 sm	0.1530	0.1844	304	231	278	33.4	3840.0
PL-CT18-P3-03-UP	150 sm	0.1240	0.1500	342	263	319	37.3	4720.0
PL-CT19-P3-03-UP	185 sm	0.0991	0.1206	386	300	367	41.5	5855.0
PL-CT20-P3-03-UP	240 sm	0.0754	0.0928	447	353	436	46.8	7655.0
PL-CT21-P3-03-UP	300 sm	0.0601	0.0752	504	403	500	51.9	9515.0
PL-CT22-P3-03-UP	400 sm	0.0470	0.0603	573	465	583	59.3	12125.0
PL-CT23-P3-03-UP	500 sm	0.0366	0.0489	647	533	669	65.8	15595.0

Four Core Cables									
PL-CT04-P3-04-UP	1.5 rm	12.100	14.600	25	21	21	10.7	185.0	
PL-CT06-P3-04-UP	2.5 rm	7.4100	8.8700	32	27	25	11.7	240.0	
PL-CT08-P3-04-UP	4 rm	4.6100	5.5400	42	35	36	13.9	350.0	
PL-CT09-P3-04-UP	6 rm	3.0800	3.6900	54	42	45	15.3	455.0	
PL-CT10-P3-04-UP	10 rm	1.8300	2.1900	71	56	61	17.3	605.0	
PL-CT11-P3-04-UP	16 rm	1.1500	1.3900	89	70	83	19.7	850.0	
PL-CT12-P3-04-UP	25 sm	0.7270	0.8702	123	91	107	21.5	1215.0	
PL-CT13-P3-04-UP	35 sm	0.5240	0.6274	148	110	132	23.9	1585.0	
PL-CT14-P3-04-UP	50 sm	0.3870	0.4635	183	134	164	28.1	2140.0	
PL-CT15-P3-04-UP	70 sm	0.2680	0.3214	224	166	207	31.7	3020.0	
PL-CT16-P3-04-UP	95 sm	0.1930	0.2319	268	200	252	35.6	4070.0	
PL-CT17-P3-04-UP	120 sm	0.1530	0.1844	310	235	296	39.0	5115.0	
PL-CT18-P3-04-UP	150 sm	0.1240	0.1500	349	268	339	43.7	6290.0	
PL-CT19-P3-04-UP	185 sm	0.0991	0.1206	394	306	390	48.3	7785.0	
PL-CT20-P3-04-UP	240 sm	0.0754	0.0928	456	360	463	54.8	10125.0	
PL-CT21-P3-04-UP	300 sm	0.0601	0.0752	514	412	531	60.9	12675.0	
PL-CT22-P3-04-UP	400 sm	0.0470	0.0603	584	475	619	69.5	16150.0	
PL-CT23-P3-04-UP	500 sm	0.0366	0.0489	660	555	710	76.8	20705.0	
Four Core Cables with Reduced Neutral									
PL-CT12-P3-R3-UP	25 sm	16 rm	0.7270/1.1500	0.8702 / 1.3900	122	90	105	20.9	1125.0
PL-CT13-P3-R3-UP	35 sm	16 rm	0.5240/1.1500	0.6274 / 1.3900	147	109	129	22.8	1405.0
PL-CT14-P3-R3-UP	50 sm	25 sm	0.3870/0.7270	0.4635 / 0.8702	181	133	161	26.9	1915.0
PL-CT15-P3-R3-UP	70 sm	35 sm	0.2680/0.5240	0.3214 / 0.6274	222	165	203	30.2	2655.0
PL-CT16-P3-R3-UP	95 sm	50 sm	0.1930/0.3870	0.2319 / 0.4635	265	198	247	33.9	3600.0
PL-CT17-P3-R3-UP	120 sm	70 sm	0.1530/0.2680	0.1844 / 0.6214	307	233	290	37.3	4585.0
PL-CT18-P3-R3-UP	150 sm	70 sm	0.1240/0.2680	0.15 / 0.6214	345	266	332	41.3	5475.0
PL-CT19-P3-R3-UP	185 sm	95 sm	0.0991/0.1930	0.1206 / 0.2319	390	303	383	46.0	6855.0
PL-CT20-P3-R3-UP	240 sm	120 sm	0.0754/0.1530	0.0928 / 0.1844	452	357	455	51.8	8875.0
PL-CT21-P3-R3-UP	300 sm	150 sm	0.0601/0.1240	0.0752 / 0.15	509	407	521	57.6	11090.0
PL-CT22-P3-S3-UP	400 sm	185 sm	0.0470/0.0991	0.0603 / 0.1206	579	470	607	65.5	14045.0
PL-CT22-P3-R3-UP	400 sm	240 sm	0.0470/0.0754	0.0603 / 0.0928	579	470	607	66.4	14650.0
PL-CT23-P3-R3-UP	500 sm	240 sm	0.0366/0.0754	0.0489 / 0.0928	654	538	697	72.7	18115.0

rm : round, Stranded
sm : Sector, Stranded

The above data is approximate and subject to manufacturing tolerances

