


LOW VOLTAGE CABLES

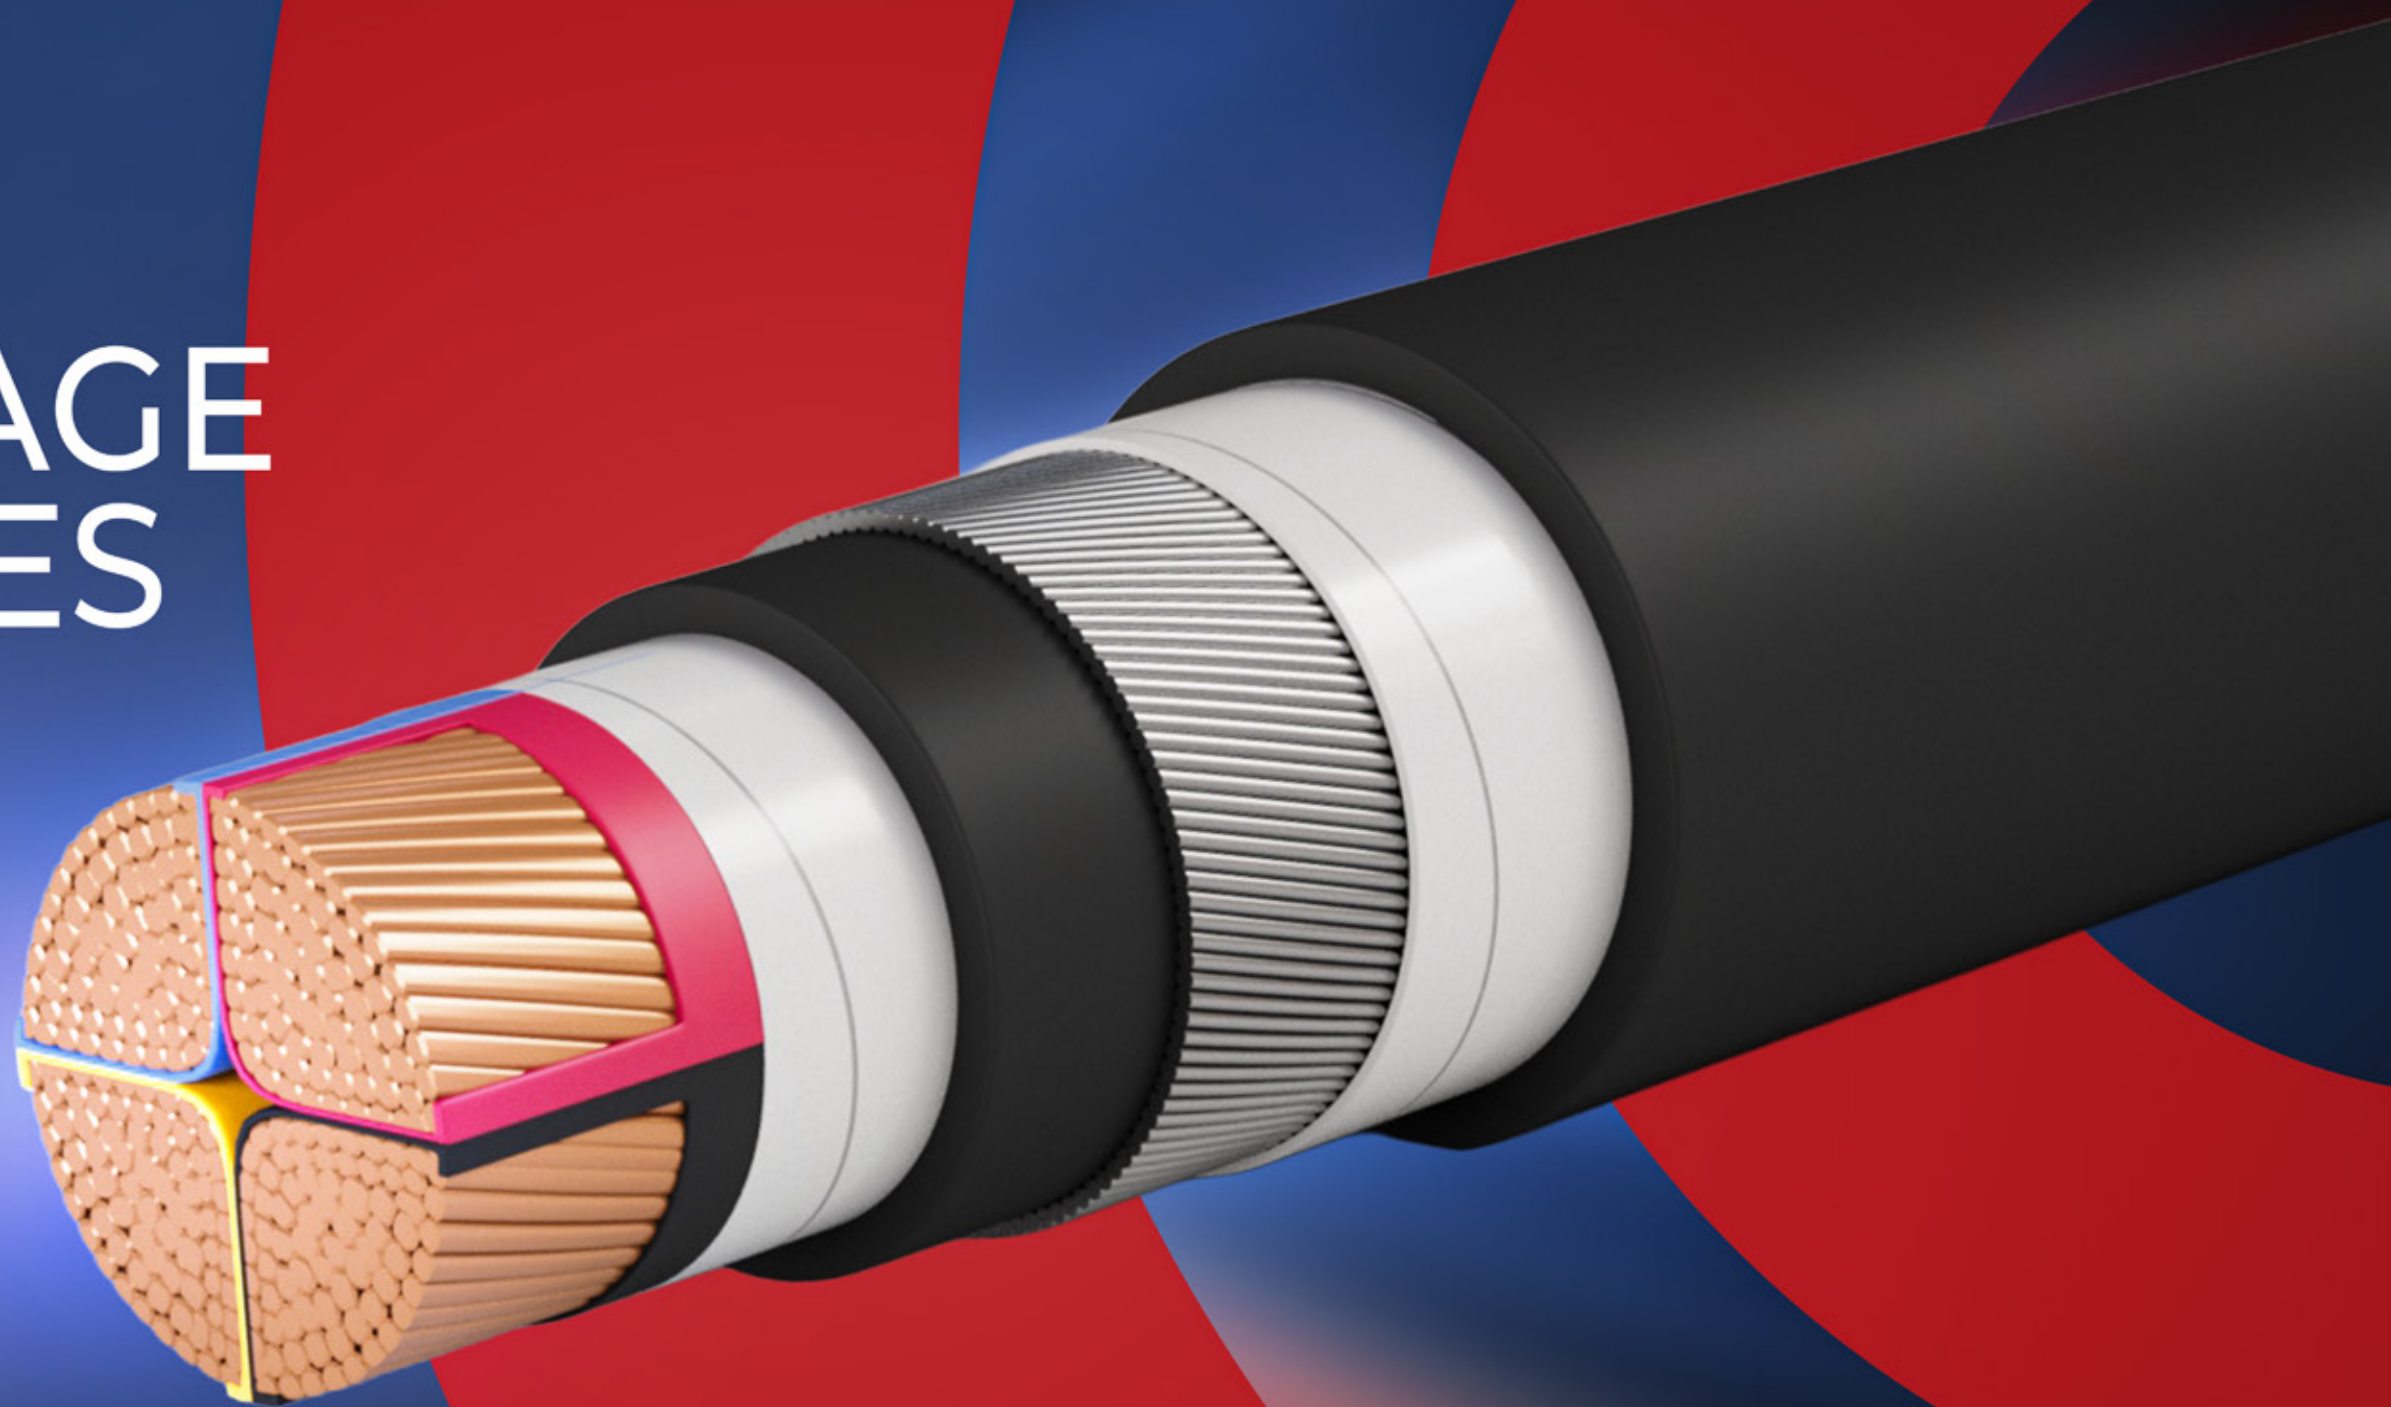

Multi Core Cables, with Stranded Circular or Sector Copper

Conductors, PVC Insulated, Steel Tape Armored and PVC Sheathed

Voltage Grade
0.6 / 1 (1.2) KV

Description
Multicore cables of Soft annealed Stranded Copper conductors are insulated with PVC compound rated 70° C, assembled together, armored with steel tape

Application
For outdoor and indoor installations in damp and wet locations, where mechanical damages are expected to occur.


Technical Data

Relevant Standard	IEC 60502
Conductor	Plain copper conductor class 2
Insulation	Extruded PVC Compound type PVC / A Rated 70° C
Assembly	The insulated cores are assembled together using nonhygroscopic polypropylene filler (if needed), then banded with suitable tape
Inner Sheath	Extruded PVC Compound
Armoring	Double Steel Tapes applied helically over the inner sheath.
Insulation Color	Two Cores: Red & Black Three Cores: Red, Yellow & Black Four Cores: Red, Yellow, Blue & Black, or any other color according to customer request
Outer Sheath	Extruded PVC Compound
Outer Sheath Color	Black (default color), or any other color according to customer request
Maximum Operating Temp.	70° C
Minimum bending Radius	10 x outer diameter
Packing Condition	Our standard length on Wooden Drum / or according to customer request

Note:-

Heat resistant or/and flame retardant PVC insulated or/and PVC sheathed are available according to customer request

Galvanized Steel Tapes is available according to customer request

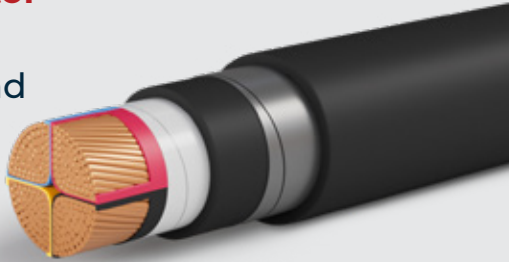

LOW VOLTAGE CABLES

Product Code	Nominal Cross Sectional Area mm²	Max. Conductor Resistance		Current Rating		Approx. Overall	Approx.
		DC at 20 °C Ω/km	AC at 70 °C Ω/km	Laid in Ground	Laid in Free Air	Diameter	Weight
				A	A	mm	kg/km
Two Core Cables							
PL-CT09-P3-02-TP	6 rm	3.0800	3.6900	65	58	16.0	455
PL-CT10-P3-02-TP	10 rm	1.8300	2.1900	85	76	17.2	565
PL-CT11-P3-02-TP	16 rm	1.1500	1.3900	111	101	19.2	735
PL-CT12-P3-02-TP	25 rm	0.7270	0.8700	142	120	22.2	1030
PL-CT13-P3-02-TP	35 rm	0.5240	0.6280	172	148	24.4	1300
Three Core Cables							
PL-CT08-P3-03-TP	4 rm	4.6100	5.5400	41	34	15.5	430
PL-CT09-P3-03-TP	6 rm	3.0800	3.6900	52	43	16.8	530
PL-CT10-P3-03-TP	10 rm	1.8300	2.1900	70	59	18.6	635
PL-CT11-P3-03-TP	16 rm	1.1500	1.3900	87	79	20.8	840
PL-CT12-P3-03-TP	25 rm	0.7270	0.8701	117	100	24.0	1180
PL-CT13-P3-03-TP	35 rm	0.5240	0.6273	141	123	26.4	1500
PL-CT14-P3-03-TP	50 sm	0.3870	0.4635	174	154	27.0	1905
PL-CT15-P3-03-TP	70 sm	0.2680	0.3214	213	194	30.1	2585
PL-CT16-P3-03-TP	95 sm	0.1930	0.2319	255	236	35.6	3760
PL-CT17-P3-03-TP	120 sm	0.1530	0.1844	295	274	37.6	4560
PL-CT18-P3-03-TP	150 sm	0.1240	0.1500	332	314	41.9	5575
PL-CT19-P3-03-TP	185 sm	0.0991	0.1206	374	362	45.9	6775
PL-CT20-P3-03-TP	240 sm	0.0754	0.0928	434	430	51.6	8720
PL-CT21-P3-03-TP	300 sm	0.0601	0.0752	484	493	56.7	10710
PL-CT22-P3-03-TP	400 sm	0.0470	0.0603	544	574	64.1	13480
PL-CT23-P3-03-TP	500 sm	0.0366	0.0489	612	659	71.0	17165
Four Core Cables							
PL-CT08-P3-04-TP	4 rm	4.6100	5.5400	42	36	16.7	515
PL-CT09-P3-04-TP	6 rm	3.0800	3.6900	54	45	18.1	635
PL-CT10-P3-04-TP	10 rm	1.8300	2.1900	71	61	20.1	775
PL-CT11-P3-04-TP	16 rm	1.1500	1.3900	89	83	22.5	1040
PL-CT12-P3-04-TP	25 sm	0.7270	0.8702	122	108	24.3	1465
PL-CT13-P3-04-TP	35 sm	0.5240	0.6274	147	132	26.7	1860
PL-CT14-P3-04-TP	50 sm	0.3870	0.4635	181	165	31.1	2480
PL-CT15-P3-04-TP	70 sm	0.2680	0.3214	222	208	35.9	3705

PL-CT16-P3-04-TP	95 sm	0.1930	0.2319	265	251	39.8	4850
PL-CT17-P3-04-TP	120 sm	0.1530	0.1844	307	294	43.6	5995
PL-CT18-P3-04-TP	150 sm	0.1240	0.1500	345	337	48.1	7270
PL-CT19-P3-04-TP	185 sm	0.0991	0.1206	390	388	53.1	8895
PL-CT20-P3-04-TP	240 sm	0.0754	0.0928	449	461	59.6	11400
PL-CT21-P3-04-TP	300 sm	0.0601	0.0752	504	529	65.7	14085
PL-CT22-P3-04-TP	400 sm	0.0470	0.0603	567	616	74.7	17825
PL-CT23-P3-04-TP	500 sm	0.0366	0.0489	637	707	83.3	23295

Four Core Cables with Reduced Neutral								
PL-CT12-P3-R3-TP	25 sm	16 rm	0.7270/1.1500	0.8702 / 1.3762	119	104	23.7	1380.0
PL-CT13-P3-R3-TP	35 sm	16 rm	0.5240/1.1500	0.6274 / 1.3762	144	128	25.6	1685.0
PL-CT14-P3-R3-TP	50 sm	25 sm	0.3870/0.7270	0.4635 / 0.8702	178	159	29.7	2225.0
PL-CT15-P3-R3-TP	70 sm	35 sm	0.2680/0.5240	0.3214 / 0.6274	218	201	33.0	3000.0
PL-CT16-P3-R3-TP	95 sm	50 sm	0.1930/0.3870	0.2319 / 0.4635	260	245	38.1	4330.0
PL-CT17-P3-R3-TP	120 sm	70 sm	0.1530/0.2680	0.1844 / 0.3214	301	287	41.9	5430.0
PL-CT18-P3-R3-TP	150 sm	70 sm	0.1240/0.2680	0.15 / 0.3214	338	329	45.9	6420.0
PL-CT19-P3-R3-TP	185 sm	95 sm	0.0991/0.1930	0.1206 / 0.2319	382	379	50.4	7880.0
PL-CT20-P3-R3-TP	240 sm	120 sm	0.0754/0.1530	0.0928 / 0.1844	443	450	56.6	10060.0
PL-CT21-P3-R3-TP	300 sm	150 sm	0.0601/0.1240	0.0752 / 0.15	494	516	62.4	13000.0
PL-CT22-P3-S3-TP	400 sm	185 sm	0.0470/0.0991	0.0603 / 0.1206	556	601	70.7	15630.0
PL-CT22-P3-R3-TP	400 sm	240 sm	0.0470/0.0754	0.0603 / 0.0928	556	601	71.6	16225.0
PL-CT23-P3-R3-TP	500 sm	240 sm	0.0366/0.0754	0.0489 / 0.0928	624	690	79.0	20500.0

rm : round, Stranded
sm : Sector, Stranded

The above data is approximate and subject to manufacturing tolerances

