


LOW VOLTAGE CABLES

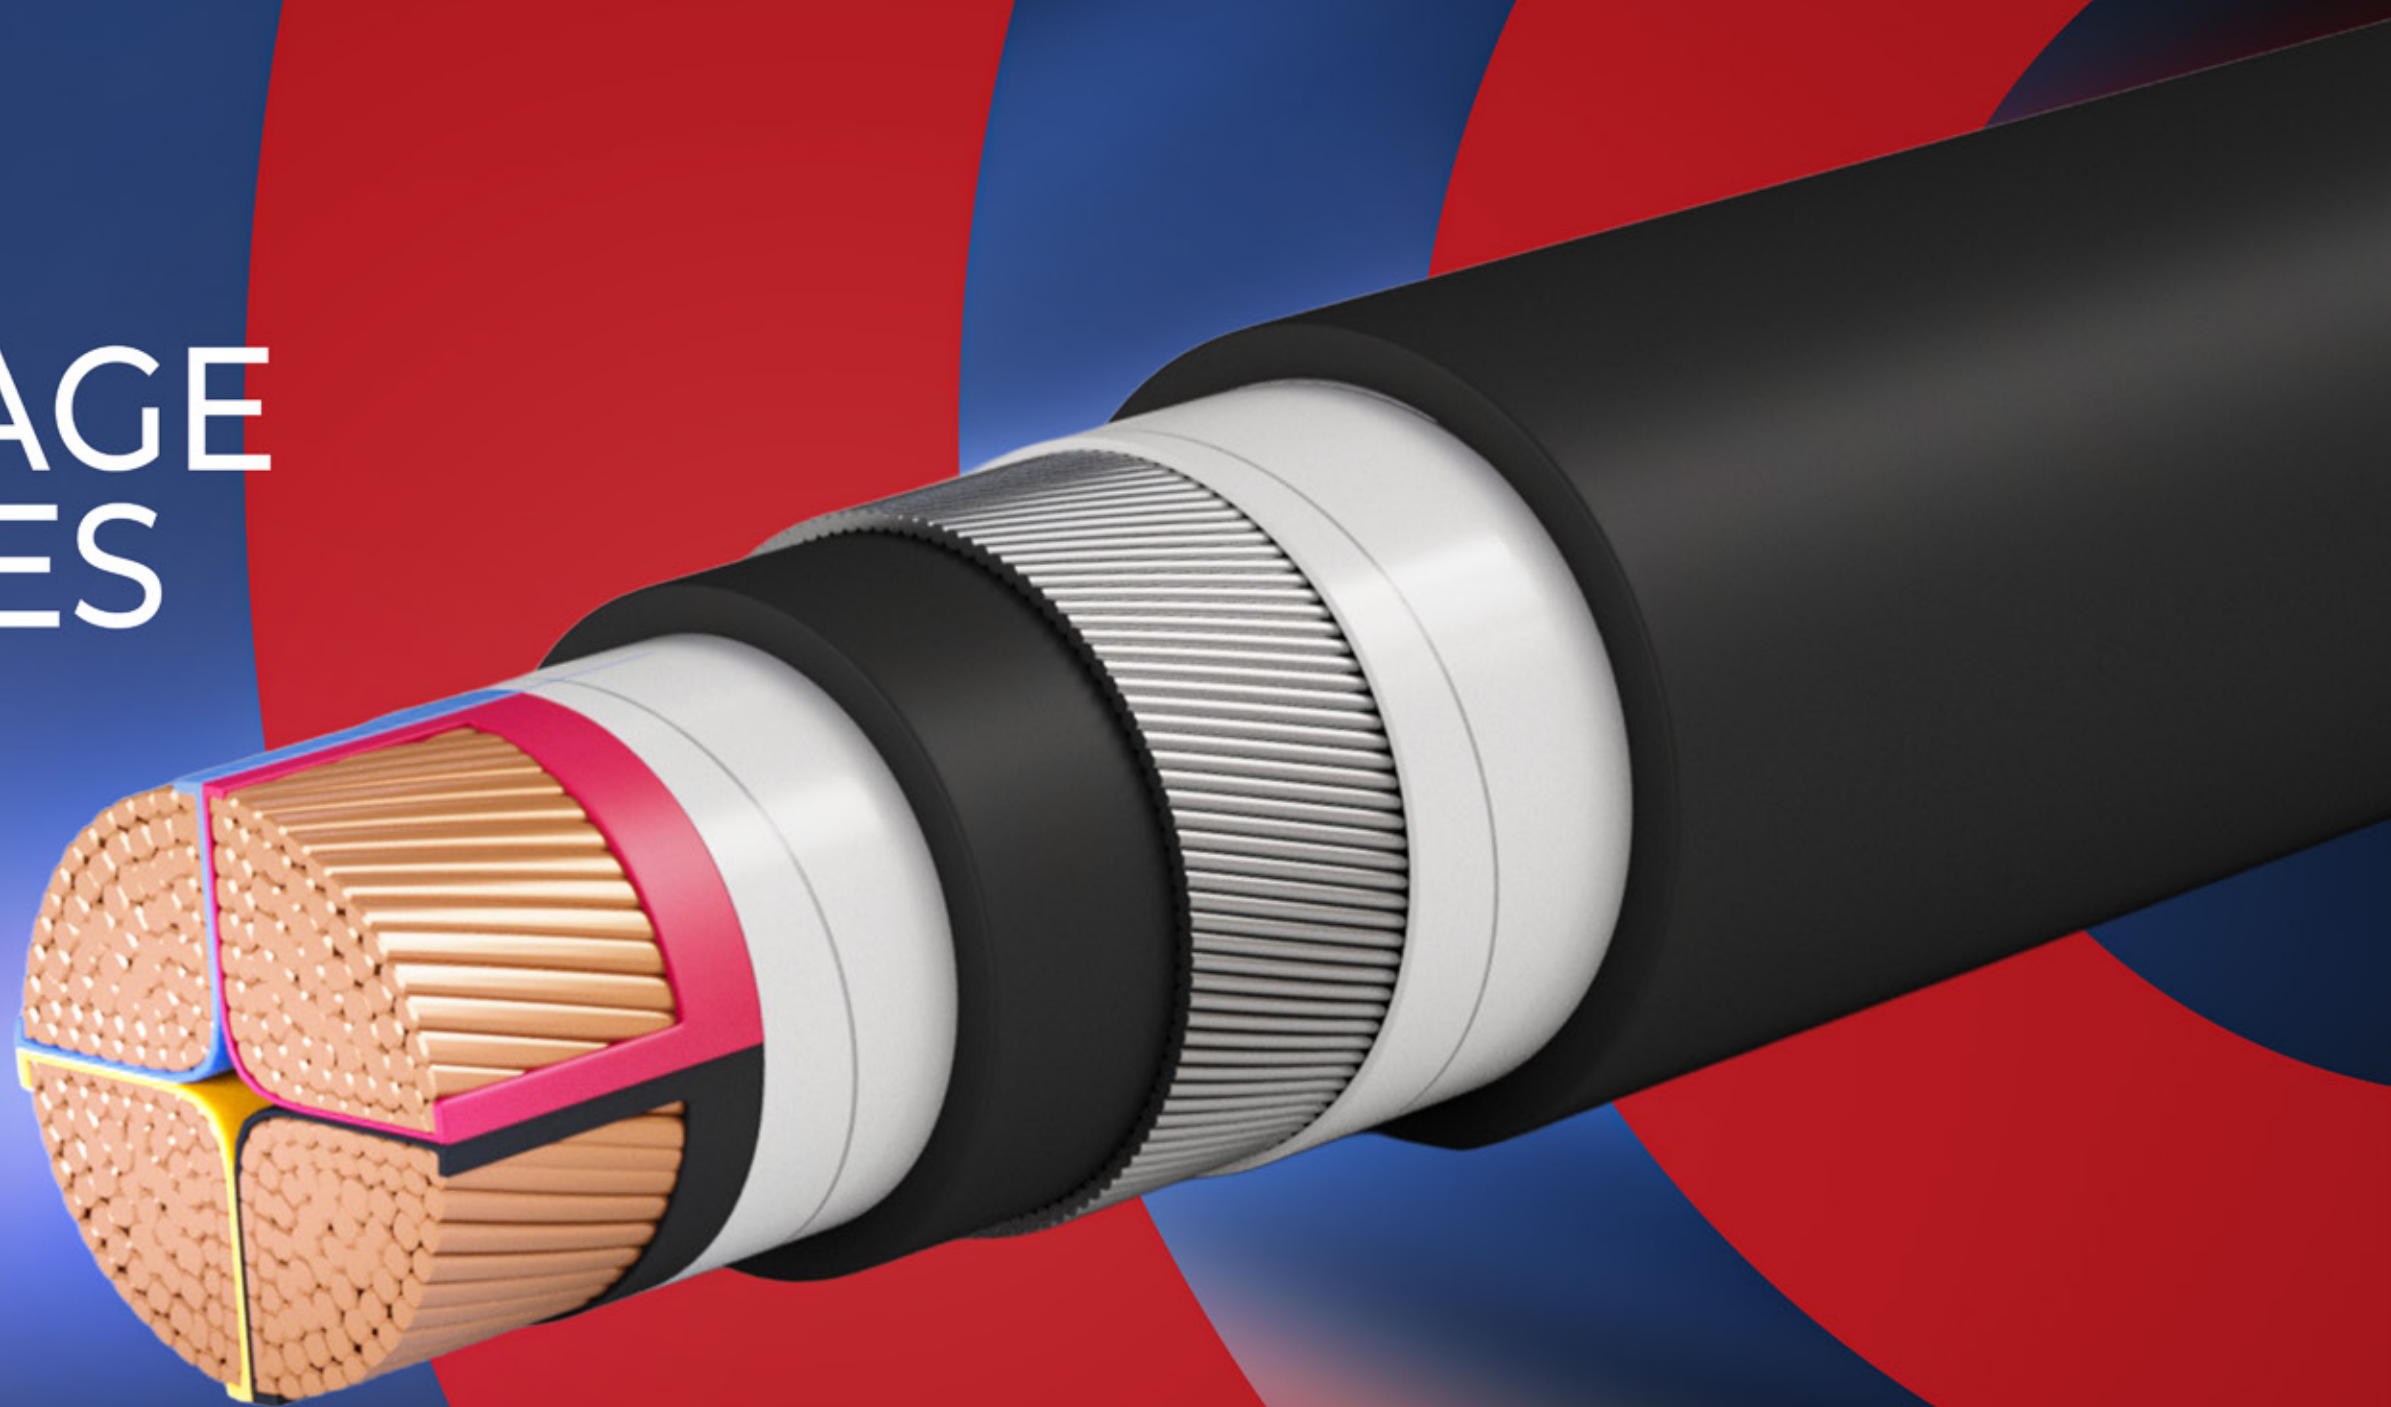

Multi Core Cables, with Stranded Circular or Sector Copper

Conductors, PVC Insulated, Steel Wires Armored and PVC Sheathed

Voltage Grade

0.6 / 1 (1.2) KV

Description

Multicore cables of Soft annealed Stranded Copper conductors are insulated with PVC compound rated 70° C, assembled together, armored with Steel Wires and covered with overall jacket of PVC compound.

Application


For outdoor and indoor installations in damp and wet locations, where mechanical damages are expected to occur.

Technical Data

Relevant Standard	IEC 60502
Conductor	Plain copper conductor class 2
Insulation	Extruded PVC Compound type PVC / A Rated 70° C
Assembly	The insulated cores are assembled together using nonhygroscopic polypropylene filler (if needed), then banded with suitable tape
Inner Sheath	Extruded PVC Compound
Armoring	Galvanized Steel Wires applied over the inner sheath.
Insulation Color	Two Cores: Red & Black Three Cores: Red, Yellow & Black Four Cores: Red, Yellow, Blue & Black, or any other color according to customer request
Outer Sheath	Extruded PVC Compound
Outer Sheath Color	Black (default color), or any other color according to customer request
Maximum Operating Temp.	70° C
Minimum bending Radius	10 x outer diameter
Packing Condition	Our standard length on Wooden Drum / or according to customer request

Note:-

Heat resistant or/and flame retardant PVC insulated or/and PVC sheathed are available according to customer request

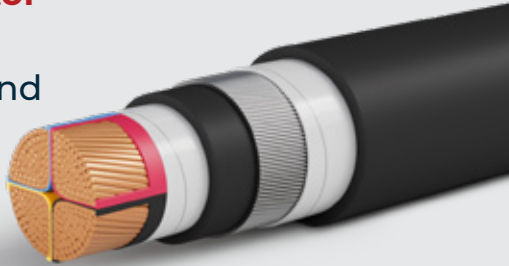

LOW VOLTAGE CABLES

Product Code	Nominal Cross Sectional Area mm²	Max. Conductor Resistance		Current Rating		Approx. Overall	Approx.
		DC at 20 °C Ω/km	AC at 70 °C Ω/km	Laid in Ground	Laid in Free Air	Diameter	Weight
				A	A	mm	kg/km
Two Core Cables							
PL-CT08-P3-02-WP	4 rm	4.6100	5.5400	52	45	17.5	595.0
PL-CT09-P3-02-WP	6 rm	3.0800	3.6900	65	58	18.7	695.0
PL-CT10-P3-02-WP	10 rm	1.8300	2.1900	85	76	19.8	825.0
PL-CT11-P3-02-WP	16 rm	1.1500	1.3900	111	101	21.8	1040.0
PL-CT12-P3-02-WP	25 rm	0.7270	0.8701	142	120	25.5	1500.0
PL-CT13-P3-02-WP	35 rm	0.5240	0.6273	172	148	27.7	1820.0
Three Core Cables							
PL-CT08-P3-03-WP	4 rm	4.6100	5.5400	41	36	18.2	655.0
PL-CT09-P3-03-WP	6 rm	3.0800	3.6900	52	45	19.5	780.0
PL-CT10-P3-03-WP	10 rm	1.8300	2.1900	70	61	21.2	945.0
PL-CT11-P3-03-WP	16 rm	1.1500	1.3900	87	84	23.4	1190.0
PL-CT12-P3-03-WP	25 rm	0.7270	0.8700	117	105	27.3	1725.0
PL-CT13-P3-03-WP	35 rm	0.5240	0.6280	141	126	29.7	2095.0
PL-CT14-P3-03-WP	50 sm	0.3870	0.4635	174	158	30.5	2500.0
PL-CT15-P3-03-WP	70 sm	0.2680	0.3214	213	199	34.4	2455.0
PL-CT16-P3-03-WP	95 sm	0.1930	0.2319	255	242	38.5	4420.0
PL-CT17-P3-03-WP	120 sm	0.1530	0.1844	295	278	40.5	5270.0
PL-CT18-P3-03-WP	150 sm	0.1240	0.1500	332	319	45.9	6735.0
PL-CT19-P3-03-WP	185 sm	0.0991	0.1206	374	367	49.9	8025.0
PL-CT20-P3-03-WP	240 sm	0.0754	0.0928	434	436	55.6	10115.0
PL-CT21-P3-03-WP	300 sm	0.0601	0.0752	484	500	60.9	12290.0
PL-CT22-P3-03-WP	400 sm	0.0470	0.0603	544	583	69.6	15955.0
PL-CT23-P3-03-WP	500 sm	0.0366	0.0489	612	669	76.3	19865.0
Four Core Cables							
PL-CT08-P3-04-WP	4 rm	4.6100	5.5400	42	33	19.4	760.0
PL-CT09-P3-04-WP	6 rm	3.0800	3.6900	54	43	20.8	905.0
PL-CT10-P3-04-WP	10 rm	1.8300	2.1900	71	58	22.7	1115.0
PL-CT11-P3-04-WP	16 rm	1.1500	1.3900	89	78	25.8	1555.0
PL-CT12-P3-04-WP	25 sm	0.7270	0.8702	121	108	27.6	2010.0

Four Core Cables							
PL-CT13-P3-04-WP	35 sm		0.5240	0.6274	145	132	2480.0
PL-CT14-P3-04-WP	50 sm		0.3870	0.4635	179	165	3390.0
PL-CT15-P3-04-WP	70 sm		0.2680	0.3214	220	208	4400.0
PL-CT16-P3-04-WP	95 sm		0.1930	0.2319	262	253	5930.0
PL-CT17-P3-04-WP	120 sm		0.1530	0.1844	304	297	7200.0
PL-CT18-P3-04-WP	150 sm		0.1240	0.1500	342	340	8600.0
PL-CT19-P3-04-WP	185 sm		0.0991	0.1206	386	392	10365.0
PL-CT20-P3-04-WP	240 sm		0.0754	0.0928	445	466	13020.0
PL-CT21-P3-04-WP	300 sm		0.0601	0.0752	499	534	15890.0
PL-CT22-P3-04-WP	400 sm		0.0470	0.0603	561	622	20610.0
PL-CT23-P3-04-WP	500 sm		0.0366	0.0489	630	714	25725.0
Four Core Cables with Reduced Neutral							
PL-CT12-P3-R3-WP	25 sm	16 rm	0.7270/1.1500	0.8702 / 1.3762	119	106	1880.0
PL-CT13-P3-R3-WP	35 sm	16 rm	0.5240/1.1500	0.6274 / 1.3762	144	130	2245.0
PL-CT14-P3-R3-WP	50 sm	25 sm	0.3870/0.7270	0.4635 / 0.8702	178	163	3090.0
PL-CT15-P3-R3-WP	70 sm	35 sm	0.2680/0.5240	0.3214 / 0.6274	218	205	3970.0
PL-CT16-P3-R3-WP	95 sm	50 sm	0.1930/0.3870	0.2319 / 0.4635	260	249	5060.0
PL-CT17-P3-R3-WP	120 sm	70 sm	0.1530/0.2680	0.1844 / 0.3214	301	290	6600.0
PL-CT18-P3-R3-WP	150 sm	70 sm	0.1240/0.2680	0.15 / 0.3214	338	332	7640.0
PL-CT19-P3-R3-WP	185 sm	95 sm	0.0991/0.1930	0.1206 / 0.2319	382	383	9240.0
PL-CT20-P3-R3-WP	240 sm	120 sm	0.0754/0.1530	0.0928 / 0.1844	443	454	11590.0
PL-CT21-P3-R3-WP	300 sm	150 sm	0.0601/0.1240	0.0752 / 0.15	494	521	14075.0
PL-CT22-P3-S3-WP	400 sm	185 sm	0.0470/0.0991	0.0603 / 0.1206	556	607	18315.0
PL-CT22-P3-R3-WP	400 sm	240 sm	0.0470/0.0754	0.0603 / 0.0928	556	607	18985.0
PL-CT23-P3-R3-WP	500 sm	240 sm	0.0366/0.0754	0.0489 / 0.0928	624	697	22765.0

rm : round, Stranded
sm : Sector, Stranded

The above data is approximate and subject to manufacturing tolerances

