


LOW VOLTAGE CABLES

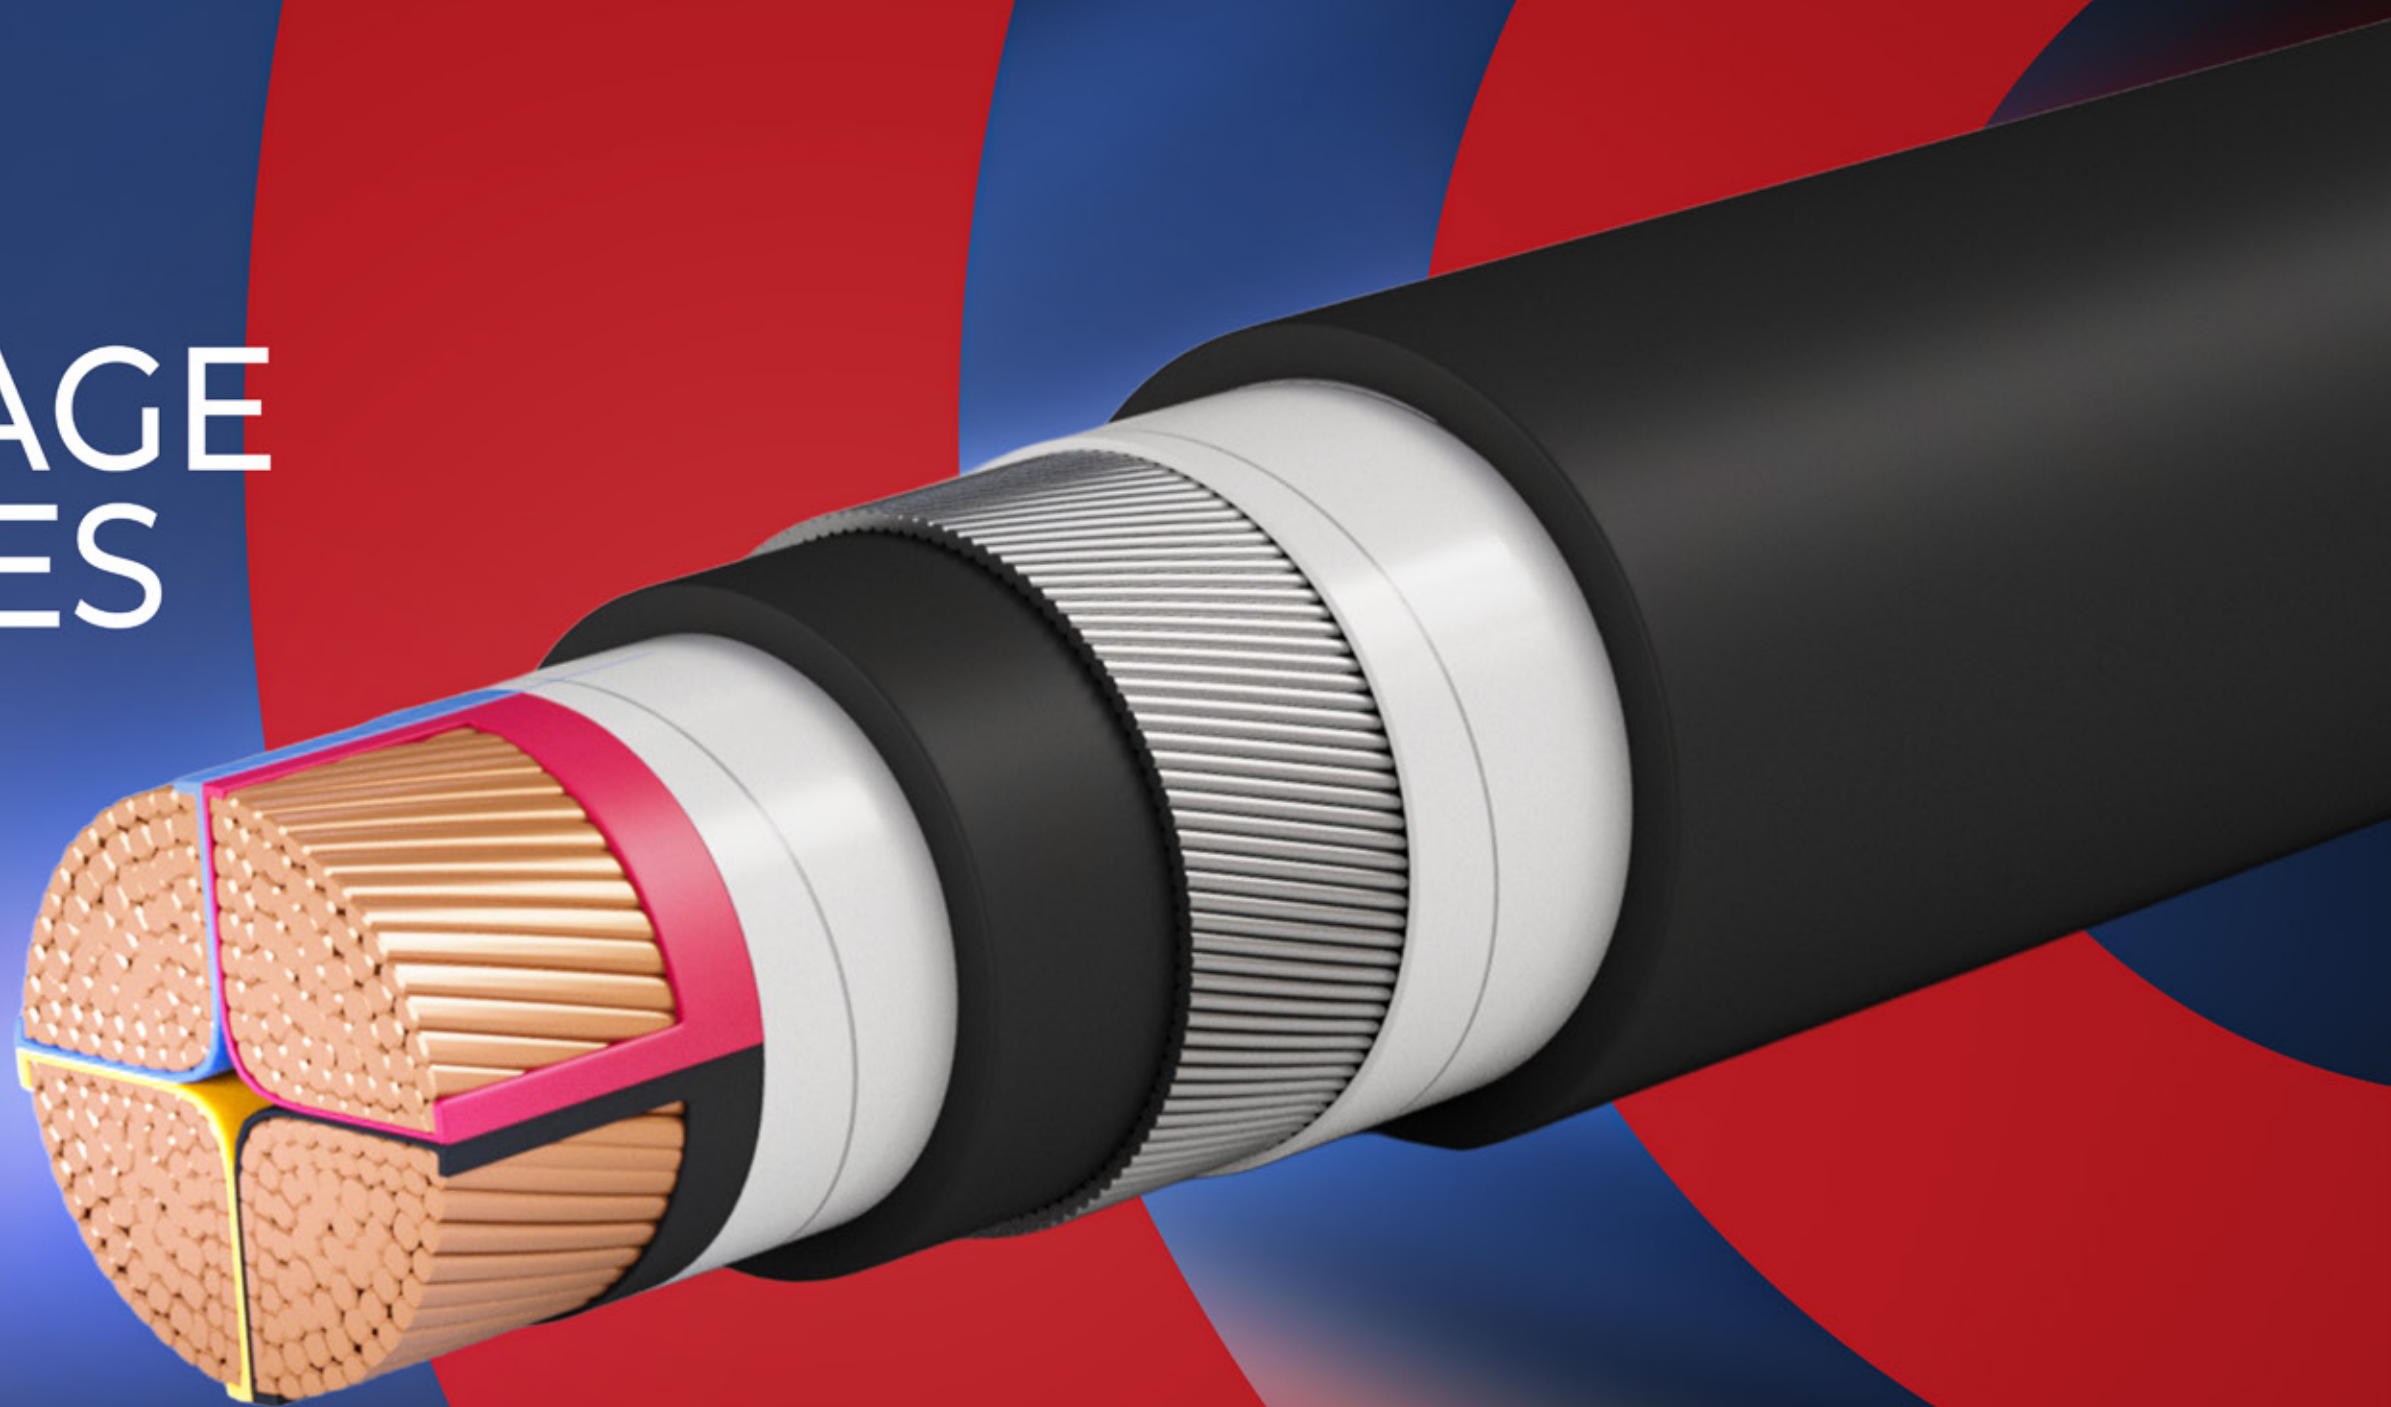

Multi Core Cables, with Stranded Circular or Sector Copper

Conductors, XLPE Insulated and PVC Sheathed

Voltage Grade

0.6 / 1 (1.2) KV

Description

Multicore cables of Soft annealed Stranded Copper conductors are insulated with XLPE compound rated 90° C, assembled together, covered with an overall jacket of PVC compound.

Application

For outdoor and indoor installations in damp and wet locations.

Technical Data

Relevant Standard	IEC 60502 OR BS 7889
Conductor	Plain copper conductor class 2
Insulation	Extruded XLPE Compound Rated 90° C
Assembly	The insulated cores are assembled together using nonhygroscopic polypropylene filler (if needed), then banded with suitable tape
Outer Sheath	Extruded PVC Compound
Insulation Color	Two Cores: Red & Black Three Cores: Red, Yellow & Black Four Cores: Red, Yellow, Blue & Black, or any other color according to customer request
Outer Sheath Color	Black (default color), or any other color according to customer request
Maximum Operating Temp.	90° C
Minimum bending Radius	10 x outer diameter
Packing Condition	Our standard length on Wooden Drum / or according to customer request

Note:-

Heat resistant or/and flame retardant PVC insulated or/and PVC sheathed are available according to customer request

Product Code	Nominal Cross Sectional Area mm²	Max. Conductor Resistance		Current Rating			Approx. Overall	Approx.
		DC at 20 °C Ω/km	AC at 90 °C Ω/km	Laid in Ground	Laid in Duct	Laid in Free Air	Diameter	Weight
				A	A	A	mm	kg/km
Two Core Cables								
PL-CT04-X3-02-UP	1.5 rm	12.100	15.400	38	28	28	9.0	115.0
PL-CT06-X3-02-UP	2.5 rm	7.4100	9.4500	46	36	37	9.8	145.0
PL-CT08-X3-02-UP	4 rm	4.6100	5.8800	63	45	51	10.8	190.0
PL-CT09-X3-02-UP	6 rm	3.0800	3.9300	79	59	66	12.0	250.0
PL-CT10-X3-02-UP	10 rm	1.8300	2.3300	103	78	87	13.2	340.0
PL-CT11-X3-02-UP	16 rm	1.1500	1.4700	133	94	116	15.2	485.0
PL-CT12-X3-02-UP	25 rm	0.7270	0.9272	175	125	154	18.2	730.0
PL-CT13-X3-02-UP	35 rm	0.5240	0.6685	211	152	189	20.4	965.0
Three Core Cables								
PL-CT04-X3-03-UP	1.5 rm	12.100	15.400	28	25	23	9.5	135.0
PL-CT06-X3-03-UP	2.5 rm	7.4100	9.4500	38	32	34	10.3	170.0
PL-CT08-X3-03-UP	4 rm	4.6100	5.8800	49	39	43	11.4	230.0
PL-CT09-X3-03-UP	6 rm	3.0800	3.9300	62	49	53	12.7	305.0
PL-CT10-X3-03-UP	10 rm	1.8300	2.3300	82	66	72	14.5	425.0
PL-CT11-X3-03-UP	16 rm	1.1500	1.4700	106	82	94	16.7	605.0
PL-CT12-X3-03-UP	25 rm	0.7270	0.9273	143	106	126	19.9	895.0
PL-CT13-X3-03-UP	35 rm	0.5240	0.6686	171	129	155	22.3	1180.0
PL-CT14-X3-03-UP	50 sm	0.3870	0.4940	207	154	189	22.4	1485.0
PL-CT15-X3-03-UP	70 sm	0.2680	0.3425	254	194	239	25.9	2125.0
PL-CT16-X3-03-UP	95 sm	0.1930	0.2471	304	231	291	29.2	2845.0
PL-CT17-X3-03-UP	120 sm	0.1530	0.1964	351	268	348	32.6	3610.0
PL-CT18-X3-03-UP	150 sm	0.1240	0.1597	395	305	400	35.7	4460.0
PL-CT19-X3-03-UP	185 sm	0.0991	0.1284	446	350	462	39.7	5525.0
PL-CT20-X3-03-UP	240 sm	0.0754	0.0988	517	409	548	44.6	7190.0
PL-CT21-X3-03-UP	300 sm	0.0601	0.0799	583	468	629	49.3	8970.0
PL-CT22-X3-03-UP	400 sm	0.0470	0.0641	663	542	732	56.7	11465.0
PL-CT23-X3-03-UP	500 sm	0.0366	0.0518	748	633	841	63.2	14815.0

Four Core Cables									
PL-CT04-X3-04-UP	1.5 rm	12.100	15.400	29	26	24	10.3	160.0	
PL-CT06-X3-04-UP	2.5 rm	7.4100	9.4500	40	33	35	11.2	210.0	
PL-CT08-X3-04-UP	4 rm	4.6100	5.8800	51	41	45	12.4	280.0	
PL-CT09-X3-04-UP	6 rm	3.0800	3.9300	64	51	55	13.9	380.0	
PL-CT10-X3-04-UP	10 rm	1.8300	2.3300	85	68	75	15.8	540.0	
PL-CT11-X3-04-UP	16 rm	1.1500	1.4700	110	85	98	18.3	770.0	
PL-CT12-X3-04-UP	25 sm	0.7270	0.9273	147	110	134	20.0	1105.0	
PL-CT13-X3-04-UP	35 sm	0.5240	0.6686	176	133	164	22.4	1455.0	
PL-CT14-X3-04-UP	50 sm	0.3870	0.4940	213	158	201	26.1	1960.0	
PL-CT15-X3-04-UP	70 sm	0.2680	0.3425	262	199	254	30.2	2815.0	
PL-CT16-X3-04-UP	95 sm	0.1930	0.2471	313	238	309	32.9	3760.0	
PL-CT17-X3-04-UP	120 sm	0.1530	0.1964	362	276	373	37.0	4795.0	
PL-CT18-X3-04-UP-	150 sm	0.1240	0.1597	407	314	430	41.5	5910.0	
PL-CT19-X3-04-UP	185 sm	0.0991	0.1284	460	361	495	46.3	7330.0	
PL-CT20-X3-04-UP	240 sm	0.0754	0.0988	533	421	588	52.1	9545.0	
PL-CT21-X3-04-UP	300 sm	0.0601	0.0799	601	482	675	57.7	11945.0	
PL-CT22-X3-04-UP	400 sm	0.0470	0.0641	683	558	786	66.3	15265.0	
PL-CT23-X3-04-UP	500 sm	0.0366	0.0518	771	652	903	73.8	19705.0	
Four Core Cables with Reduced Neutral									
PL-CT12-X3-R3-UP	25 sm	16 rm	0.7270/1.1500	0.9273 / 1.4666	146	108	131	19.4	1020.0
PL-CT13-X3-R3-UP	35 sm	16 rm	0.5240/1.1500	0.6686 / 1.4666	175	132	161	21.3	1290.0
PL-CT14-X3-R3-UP	50 sm	25 sm	0.3870/0.7270	0.494 / 0.9273	211	157	197	24.7	1740.0
PL-CT15-X3-R3-UP	70 sm	35 sm	0.2680/0.5240	0.3425 / 0.6686	259	198	249	28.5	2465.0
PL-CT16-X3-R3-UP	95 sm	50 sm	0.1930/0.3870	0.2471 / 0.494	310	235	303	32.4	3325.0
PL-CT17-X3-R3-UP	120 sm	70 sm	0.1530/0.2680	0.1964 / 0.3425	358	273	362	35.3	4290.0
PL-CT18-X3-R3-UP	150 sm	70 sm	0.1240/0.2680	0.1597 / 0.3425	403	311	417	39.1	5135.0
PL-CT19-X3-R3-UP	185 sm	95 sm	0.0991/0.1930	0.1284 / 0.2471	455	357	481	44.0	6460.0
PL-CT20-X3-R3-UP	240 sm	120 sm	0.0754/0.1530	0.0988 / 0.1964	528	417	570	49.3	8355.0
PL-CT21-X3-R3-UP	300 sm	150 sm	0.0601/0.1240	0.0799 / 0.1597	595	477	655	54.6	10445.0
PL-CT22-X3-S3-UP	400 sm	185 sm	0.0470/0.0991	0.0641 / 0.1284	676	553	763	62.3	13270.0
PL-CT22-X3-R3-UP	400 sm	240 sm	0.0470/0.0754	0.0641 / 0.0988	676	553	763	63.4	13840.0
PL-CT23-X3-R3-UP	500 sm	240 sm	0.0366/0.0754	0.0518 / 0.0988	763	646	876	69.7	17190.0

rm : round, Stranded
sm : Sector, Stranded

The above data is approximate and subject to manufacturing tolerances

