


LOW VOLTAGE CABLES

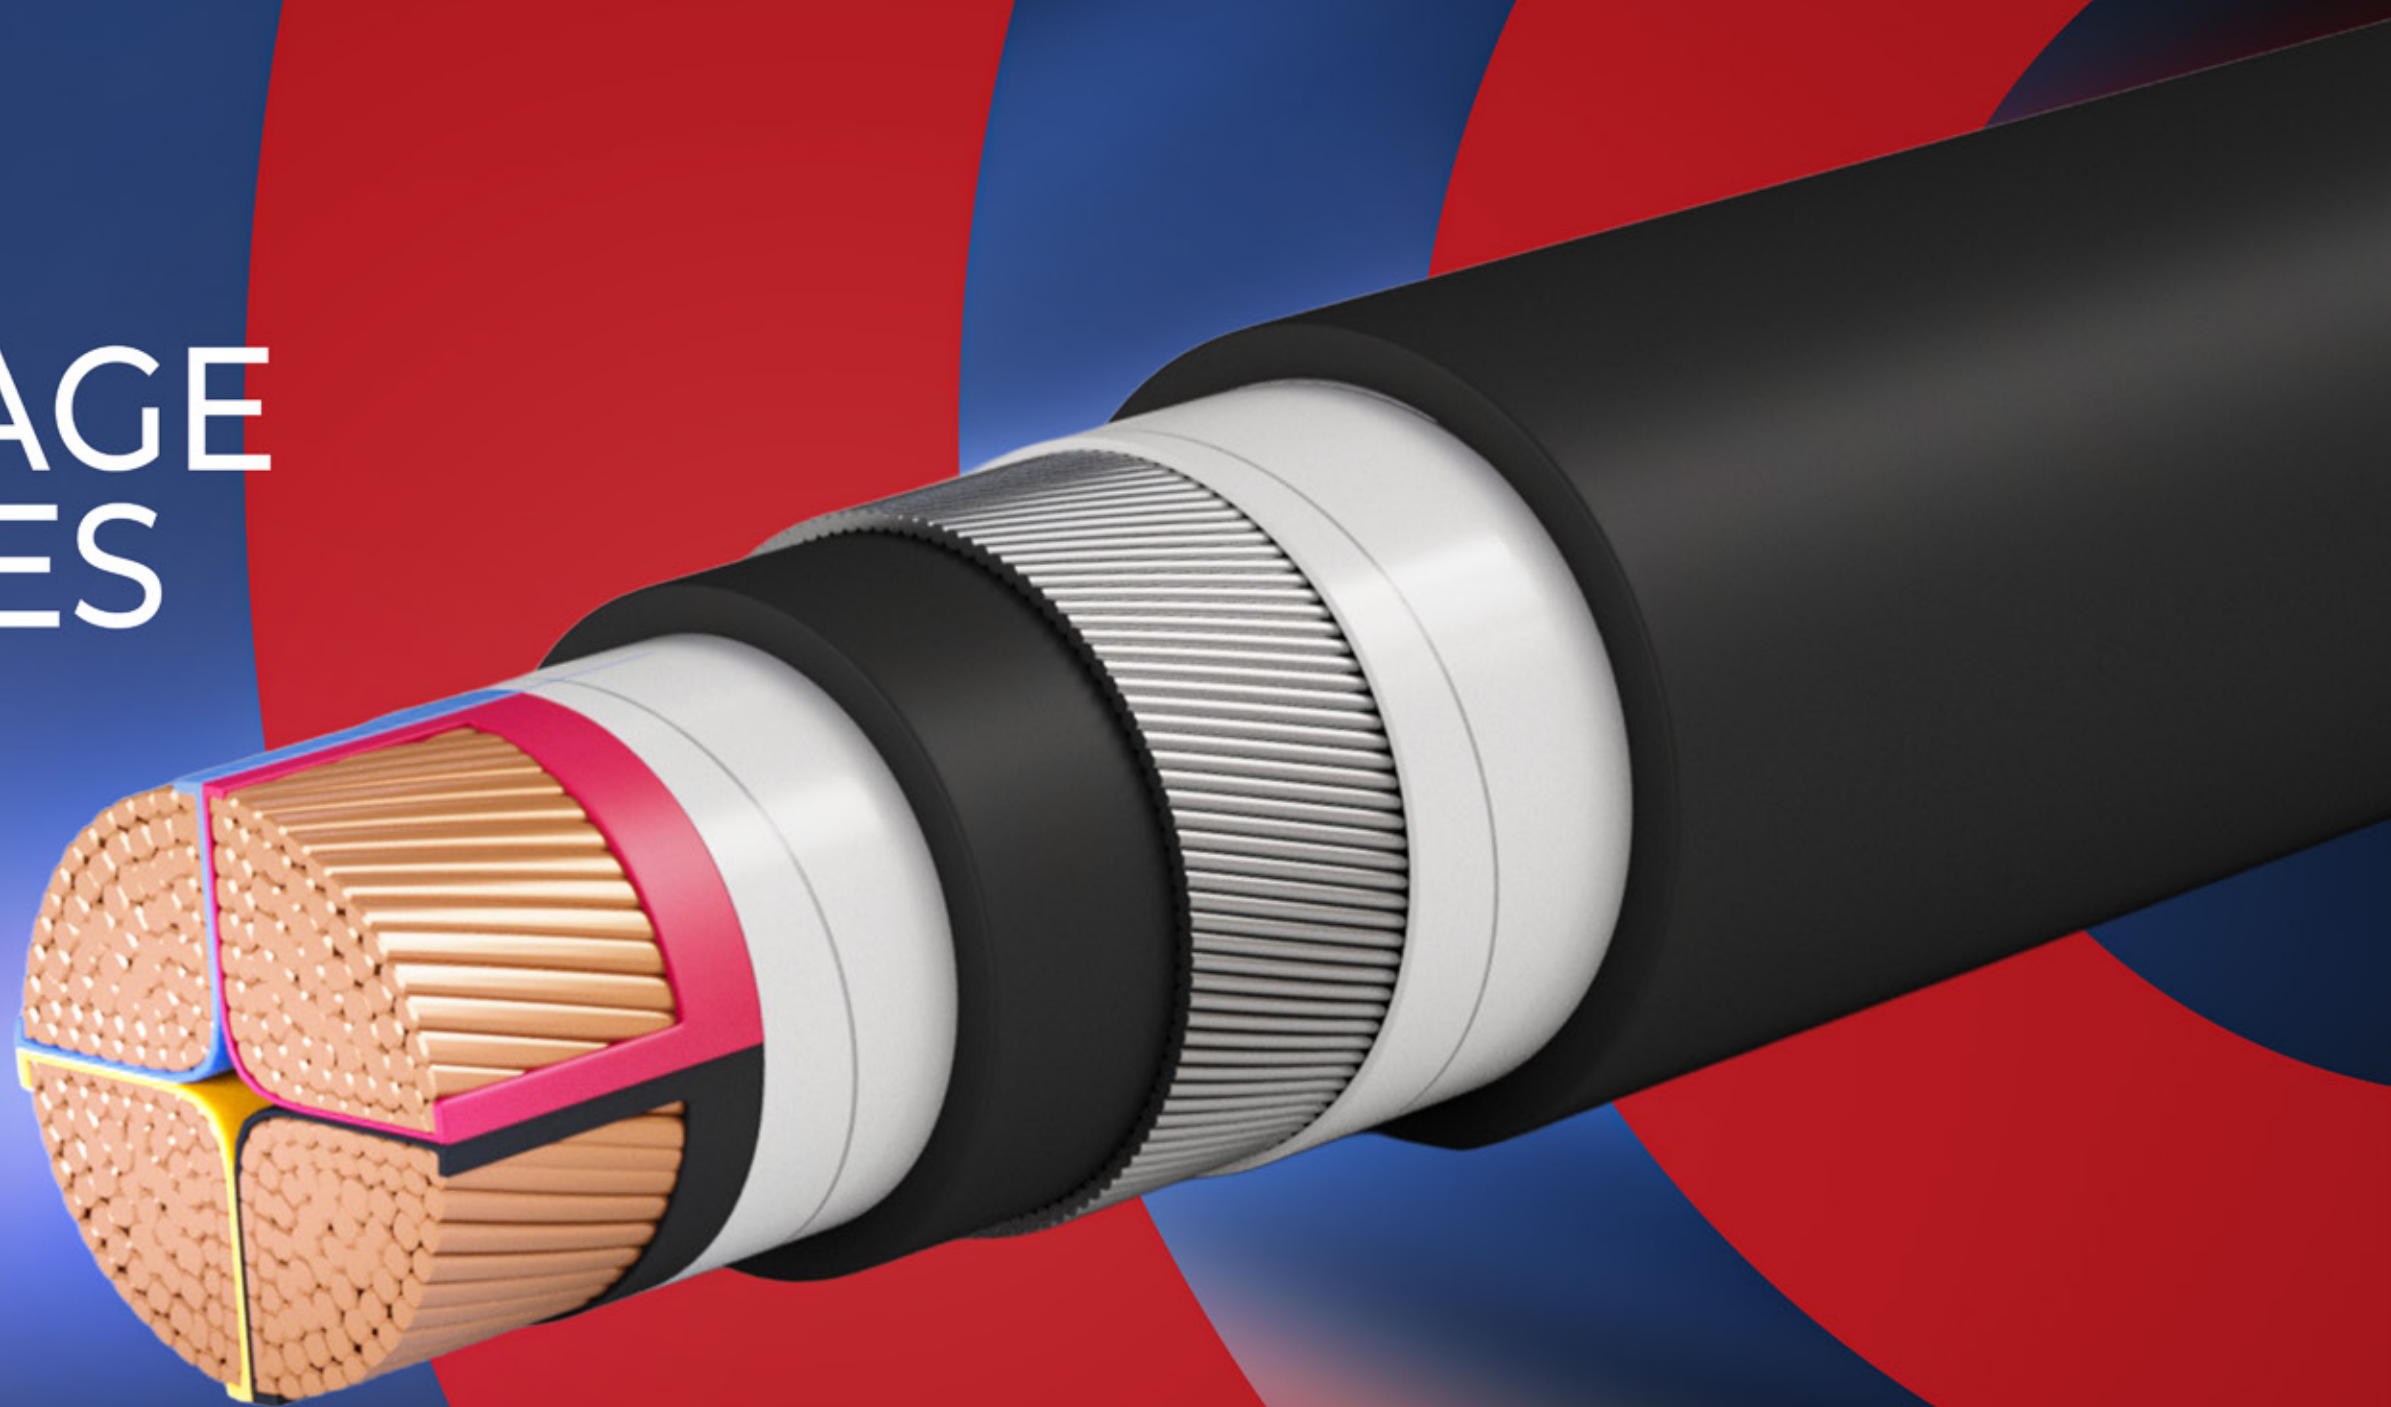

Multi Core Cables, with Stranded Circular or Sector Copper

Conductors, XLPE Insulated, Steel Tape Armored and PVC Sheathed

Voltage Grade

0.6 / 1 (1.2) KV

Description

Multicore cables of Soft annealed Stranded Copper conductors are insulated with XLPE compound rated 90° C, assembled together, armored with steel tape and covered with overall jacket of PVC compound.

Application


For outdoor and indoor installations in damp and wet locations, where mechanical damages are expected to occur.

Technical Data

Relevant Standard	IEC 60502
Conductor	Plain copper conductor class 2
Insulation	Extruded XLPE Compound Rated 90° C
Assembly	The insulated cores are assembled together using nonhygroscopic polypropylene filler (if needed), then banded with suitable tape
Inner Sheath	Extruded PVC Compound
Armoring	Double Steel Tapes applied helically over the inner sheath.
Insulation Color	Two Cores: Red & Black Three Cores: Red, Yellow & Black Four Cores: Red, Yellow, Blue & Black, or any other color according to customer request
Outer Sheath	Extruded PVC Compound
Outer Sheath Color	Black (default color), or any other color according to customer request
Maximum Operating Temp.	90° C
Minimum bending Radius	10 x outer diameter
Packing Condition	Our standard length on Wooden Drum / or according to customer request

Note:-

Heat resistant or/and flame retardant PVC insulated or/and PVC sheathed are available according to customer request
Galvanized Steel Tapes is available according to customer request

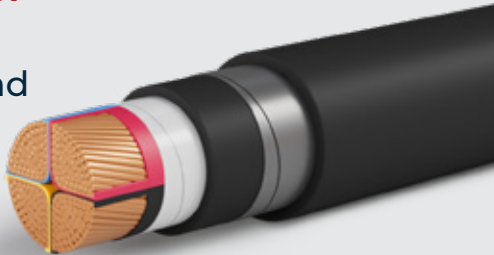

LOW VOLTAGE CABLES

Product Code	Nominal Cross Sectional Area mm²	Max. Conductor Resistance		Current Rating		Approx. Overall	Approx.
		DC at 20 °C Ω/km	AC at 90 °C Ω/km	Laid in Ground	Laid in Free Air	Diameter	Weight
				A	A		
Two Core Cables							
PL-CT09-X3-02-TP	6 rm	3.0800	3.9300	77	65	14.8	390.0
PL-CT10-X3-02-TP	10 rm	1.8300	2.3378	100	86	16.0	495.0
PL-CT11-X3-02-TP	16 rm	1.1500	1.4692	130	113	18.0	665.0
PL-CT12-X3-02-TP	25 rm	0.7270	0.9272	171	149	21.0	940.0
PL-CT13-X3-02-TP	35 rm	0.5240	0.6685	207	183	23.2	1200.0
Three Core Cables							
PL-CT09-X3-03-TP	6 rm	3.0800	3.9350	62	52	15.5	455.0
PL-CT10-X3-03-TP	10 rm	1.8300	2.3382	82	71	17.3	570.0
PL-CT11-X3-03-TP	16 rm	1.1500	1.4700	106	93	19.5	770.0
PL-CT12-X3-03-TP	25 rm	0.7270	0.9273	140	123	22.2	1175.0
PL-CT13-X3-03-TP	35 rm	0.5240	0.6686	168	151	24.6	1520.0
PL-CT14-X3-03-TP	50 sm	0.3870	0.4940	203	187	25.2	1740.0
PL-CT15-X3-03-TP	70 sm	0.2680	0.3425	249	237	28.7	2420.0
PL-CT16-X3-03-TP	95 sm	0.1930	0.2471	298	288	32.2	3190.0
PL-CT17-X3-03-TP	120 sm	0.1530	0.1964	344	344	36.8	4320.0
PL-CT18-X3-03-TP	150 sm	0.1240	0.1597	387	396	40.3	5275.0
PL-CT19-X3-03-TP	185 sm	0.0991	0.1284	437	457	44.3	6425.0
PL-CT20-X3-03-TP	240 sm	0.0754	0.0988	504	542	49.4	8225.0
PL-CT21-X3-03-TP	300 sm	0.0601	0.0799	565	622	54.3	10135.0
PL-CT22-X3-03-TP	400 sm	0.0470	0.0641	636	725	61.5	12770.0
PL-CT23-X3-03-TP	500 sm	0.0366	0.0518	715	850	68.4	16330.0
Four Core Cables							
PL-CT09-X3-04-TP	6 rm	3.0800	3.9358	63	54	16.7	545.0
PL-CT10-X3-04-TP	10 rm	1.8300	2.3387	84	74	18.6	695.0
PL-CT11-X3-04-TP	16 rm	1.1500	1.4700	108	97	21.1	945.0
PL-CT12-X3-04-TP	25 sm	0.7270	0.9273	144	132	22.8	1340.0
PL-CT13-X3-04-TP	35 sm	0.5240	0.6686	173	163	25.2	1715.0
PL-CT14-X3-04-TP	50 sm	0.3870	0.4940	209	199	28.9	2265.0
PL-CT15-X3-04-TP	70 sm	0.2680	0.3425	257	251	33.0	3160.0
PL-CT16-X3-04-TP	95 sm	0.1930	0.2471	307	306	37.1	4485.0

Four Core Cables								
PL-CT17-X3-04-TP	120 sm		0.1530	0.1964	355	366	41.6	5645.0
PL-CT18-X3-04-TP	150 sm		0.1240	0.1597	399	421	46.1	6860.0
PL-CT19-X3-04-TP	185 sm		0.0991	0.1284	450	485	50.9	8385.0
PL-CT20-X3-04-TP	240 sm		0.0754	0.0988	520	576	56.9	10755.0
PL-CT21-X3-04-TP	300 sm		0.0601	0.0799	583	661	62.5	13285.0
PL-CT22-X3-04-TP	400 sm		0.0470	0.0641	656	770	71.5	16865.0
PL-CT23-X3-04-TP	500 sm		0.0366	0.0518	736	885	80.1	22155.0
Four Core Cables with Reduced Neutral								
PL-CT12-X3-R3-TP	25 sm	16 rm	0.7270/1.1500	0.9273 / 1.4666	143	130	22.2	1260.0
PL-CT13-X3-R3-TP	35 sm	16 rm	0.5240/1.1500	0.6686 / 1.4666	171	159	24.1	1555.0
PL-CT14-X3-R3-TP	50 sm	25 sm	0.3870/0.7270	0.494 / 0.9273	207	195	27.5	2025.0
PL-CT15-X3-R3-TP	70 sm	35 sm	0.2680/0.5240	0.3425 / 0.6686	254	247	31.5	2810.0
PL-CT16-X3-R3-TP	95 sm	50 sm	0.1930/0.3870	0.2471 / 0.494	304	300	36.4	4020.0
PL-CT17-X3-R3-TP	120 sm	70 sm	0.1530/0.2680	0.1964 / 0.3425	351	359	39.5	5065.0
PL-CT18-X3-R3-TP	150 sm	70 sm	0.1240/0.2680	0.1597 / 0.3425	395	413	43.7	6035.0
PL-CT19-X3-R3-TP	185 sm	95 sm	0.0991/0.1930	0.1284 / 0.2471	446	476	48.4	7440.0
PL-CT20-X3-R3-TP	240 sm	120 sm	0.0754/0.1530	0.0988 / 0.1964	515	565	54.1	9505.0
PL-CT21-X3-R3-TP	300 sm	150 sm	0.0601/0.1240	0.0799 / 0.1597	577	648	59.2	11685.0
PL-CT22-X3-S3-TP	400 sm	185 sm	0.0470/0.0991	0.0641 / 0.1284	649	755	67.1	14710.0
PL-CT22-X3-R3-TP	400 sm	240 sm	0.0470/0.0754	0.0641 / 0.0988	649	755	68.4	15345.0
PL-CT23-X3-R3-TP	500 sm	240 sm	0.0366/0.0754	0.0518 / 0.0988	729	867	74.7	18835.0

rm : round, Stranded
sm : Sector, Stranded

The above data is approximate and subject to manufacturing tolerances

