


LOW VOLTAGE CABLES

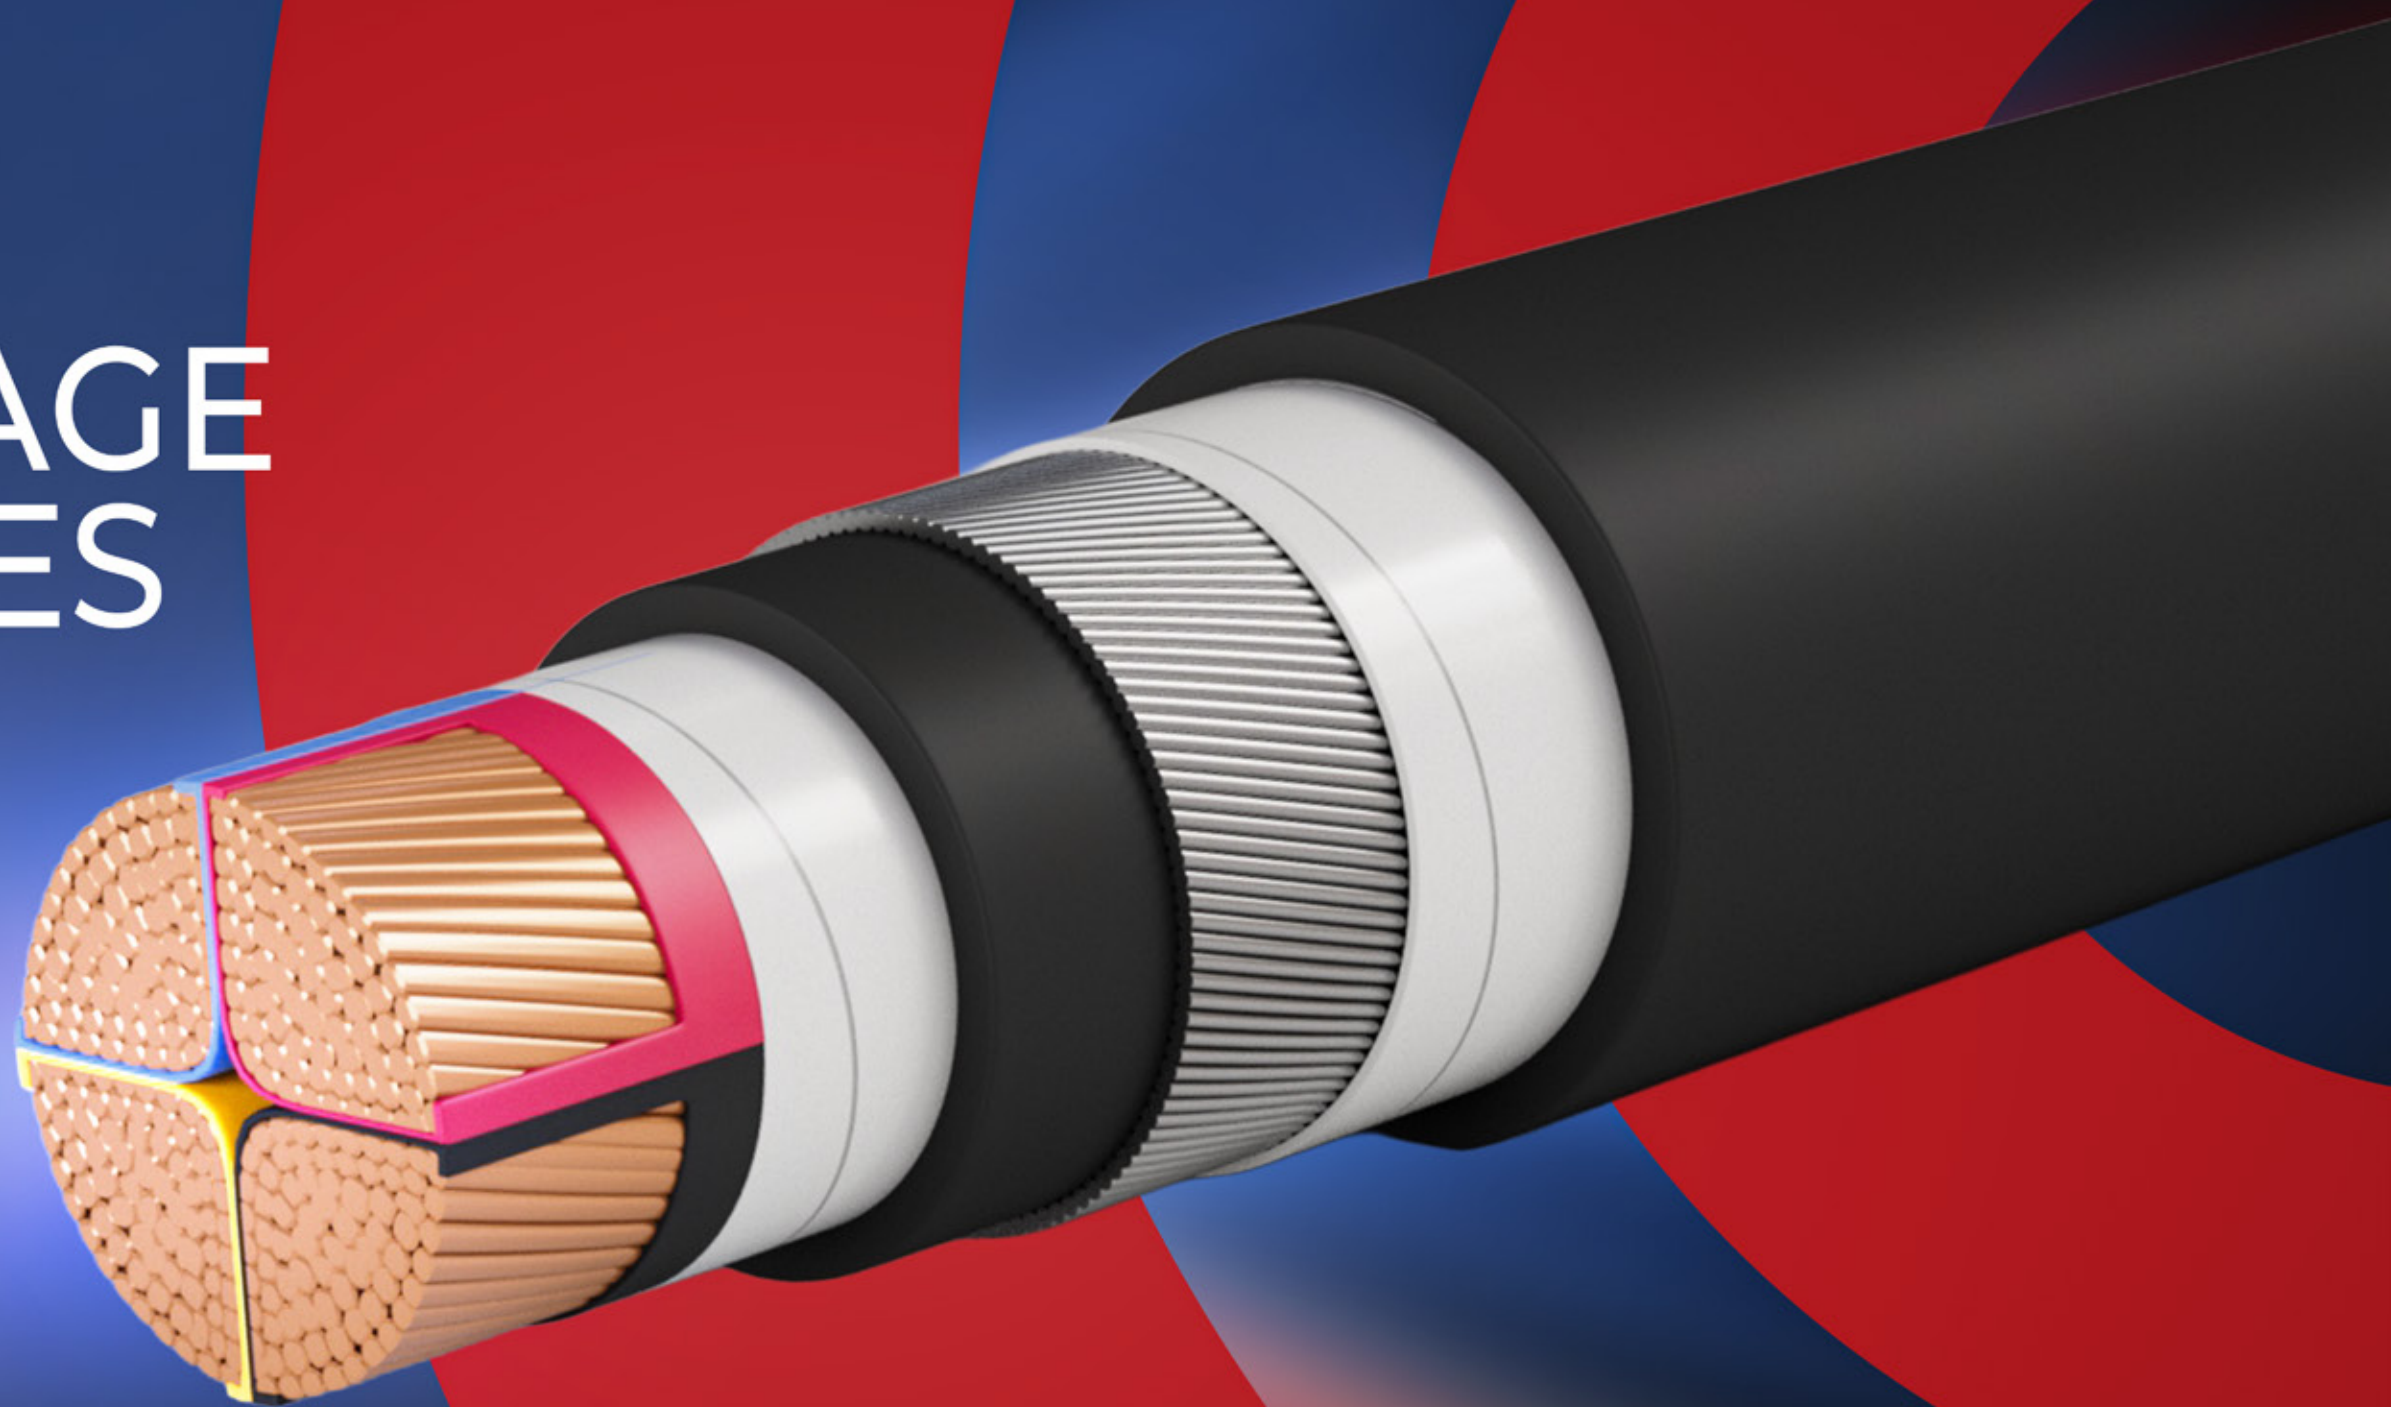

Multi Core Cables, with Stranded Circular or Sector Copper

Conductors, XLPE Insulated, Steel Wires Armored and PVC Sheathed

Voltage Grade

0.6 / 1 (1.2) KV

Description

Multicore cables of Soft annealed Stranded Copper conductors are insulated with XLPE compound rated 90° C, assembled together, armored with Steel Wires and covered with overall jacket of PVC compound.

Application

For outdoor and indoor installations in damp and wet locations, where mechanical damages are expected to occur.

Technical Data

Relevant Standard	IEC 60502 or BS 5467
Conductor	Plain copper conductor class 2
Insulation	Extruded XLPE Compound Rated 90° C
Assembly	The insulated cores are assembled together using nonhygroscopic polypropylene filler (if needed), then banded with suitable tape
Inner Sheath	Extruded PVC Compound
Armoring	Galvanized Steel Wires applied over the inner sheath.
Insulation Color	Two Cores: Red & Black Three Cores: Red, Yellow & Black Four Cores: Red, Yellow, Blue & Black, or any other color according to customer request
Outer Sheath	Extruded PVC Compound
Outer Sheath Color	Black (default color), or any other color according to customer request
Maximum Operating Temp.	90° C
Minimum bending Radius	10 x outer diameter
Packing Condition	Our standard length on Wooden Drum / or according to customer request

Note:-

Heat resistant or/and flame retardant PVC insulated or/and PVC sheathed are available according to customer request

Product Code	Nominal Cross Sectional Area mm²	Max. Conductor Resistance		Current Rating		Approx. Overall	Approx.
		DC at 20 °C Ω/km	AC at 90 °C Ω/km	Laid in Ground	Laid in Free Air	Diameter	Weight
				A	A	mm	kg/km
Two Core Cables							
PL-CT08-X3-02-WP	4 rm	4.6100	5.8892	63	55	16.3	515.0
PL-CT09-X3-02-WP	6 rm	3.0800	3.9300	79	71	17.5	610.0
PL-CT10-X3-02-WP	10 rm	1.8300	2.3378	101	92	18.6	735.0
PL-CT11-X3-02-WP	16 rm	1.1500	1.4692	130	122	20.6	945.0
PL-CT12-X3-02-WP	25 rm	0.7270	0.9272	171	161	24.3	1385.0
PL-CT13-X3-02-WP	35 rm	0.5240	0.6685	207	198	26.5	1695.0
Three Core Cables							
PL-CT08-X3-03-WP	4 rm	4.6100	5.8900	51	46	16.9	580.0
PL-CT09-X3-03-WP	6 rm	3.0800	3.9350	66	56	18.2	680.0
PL-CT10-X3-03-WP	10 rm	1.8300	2.3382	83	75	19.9	855.0
PL-CT11-X3-03-WP	16 rm	1.1500	1.4700	107	98	22.1	1095.0
PL-CT12-X3-03-WP	25 rm	0.7270	0.9273	140	132	26.0	1595.0
PL-CT13-X3-03-WP	35 rm	0.5240	0.6686	168	162	28.4	1970.0
PL-CT14-X3-03-WP	50 sm	0.3870	0.4940	203	196	28.7	2300.0
PL-CT15-X3-03-WP	70 sm	0.2680	0.3425	249	247	33.0	3265.0
PL-CT16-X3-03-WP	95 sm	0.1930	0.2471	298	301	36.5	4120.0
PL-CT17-X3-03-WP	120 sm	0.1530	0.1964	344	341	39.9	5030.0
PL-CT18-X3-03-WP	150 sm	0.1240	0.1597	387	392	44.3	6385.0
PL-CT19-X3-03-WP	185 sm	0.0991	0.1284	437	452	48.1	7605.0
PL-CT20-X3-03-WP	240 sm	0.0754	0.0988	504	536	53.4	9575.0
PL-CT21-X3-03-WP	300 sm	0.0601	0.0799	565	616	58.3	11610.0
PL-CT22-X3-03-WP	400 sm	0.0470	0.0641	636	718	65.5	14440.0
PL-CT23-X3-03-WP	500 sm	0.0366	0.0518	715	824	73.9	18880.0
Four Core Cables							
PL-CT08-X3-04-WP	4 rm	4.6100	5.8900	52	47	17.9	655.0
PL-CT09-X3-04-WP	6 rm	3.0800	3.9358	66	57	19.4	795.0
PL-CT10-X3-04-WP	10 rm	1.8300	2.3387	85	76	21.2	1005.0
PL-CT11-X3-04-WP	16 rm	1.1500	1.4700	110	100	24.4	1425.0
PL-CT12-X3-04-WP	25 sm	0.7270	0.9273	144	135	26.1	1840.0
PL-CT13-X3-04-WP	35 sm	0.5240	0.6686	173	166	28.7	2300.0
PL-CT14-X3-04-WP	50 sm	0.3870	0.4940	209	203	32.4	2895.0

Four Core Cables								
PL-CT15-X3-04-WP	70 sm		0.2680	0.3425	257	256	37.5	4150.0
PL-CT16-X3-04-WP	95 sm		0.1930	0.2471	307	312	40.2	5190.0
PL-CT17-X3-04-WP	120 sm		0.1530	0.1964	355	366	45.6	6775.0
PL-CT18-X3-04-WP	150 sm		0.1240	0.1597	399	421	49.9	8090.0
PL-CT19-X3-04-WP	185 sm		0.0991	0.1284	450	486	54.9	9790.0
PL-CT20-X3-04-WP	240 sm		0.0754	0.0988	520	576	60.9	12300.0
PL-CT21-X3-04-WP	300 sm		0.0601	0.0799	583	661	66.5	14975.0
PL-CT22-X3-04-WP	400 sm		0.0470	0.0641	656	770	76.8	19615.0
PL-CT23-X3-04-WP	500 sm		0.0366	0.0518	736	885	84.3	24480.0
Four Core Cables with Reduced Neutral								
PL-CT12-X3-R3-WP	25 sm	16 rm	0.7270/1.1500	0.9273 / 1.4666	143	135	25.5	1720.0
PL-CT13-X3-R3-WP	35 sm	16 rm	0.5240/1.1500	0.6686 / 1.4666	171	166	27.4	2060.0
PL-CT14-X3-R3-WP	50 sm	25 sm	0.3870/0.7270	0.494 / 0.9273	207	203	31.0	2630.0
PL-CT15-X3-R3-WP	70 sm	35 sm	0.2680/0.5240	0.3425 / 0.6686	254	256	35.8	3715.0
PL-CT16-X3-R3-WP	95 sm	50 sm	0.1930/0.3870	0.2471 / 0.494	304	312	39.5	4705.0
PL-CT17-X3-R3-WP	120 sm	70 sm	0.1530/0.2680	0.1964 / 0.3425	351	359	42.6	5805.0
PL-CT18-X3-R3-WP	150 sm	70 sm	0.1240/0.2680	0.1597 / 0.3425	395	413	47.7	7235.0
PL-CT19-X3-R3-WP	185 sm	95 sm	0.0991/0.1930	0.1284 / 0.2471	446	476	52.4	8760.0
PL-CT20-X3-R3-WP	240 sm	120 sm	0.0754/0.1530	0.0988 / 0.1964	515	565	58.1	10970.0
PL-CT21-X3-R3-WP	300 sm	150 sm	0.0601/0.1240	0.0799 / 0.1597	577	648	63.2	13290.0
PL-CT22-X3-S3-WP	400 sm	185 sm	0.0470/0.0991	0.0641 / 0.1284	649	755	72.4	17265.0
PL-CT22-X3-R3-WP	400 sm	240 sm	0.0470/0.0754	0.0641 / 0.0988	649	755	73.9	17970.0
PL-CT23-X3-R3-WP	500 sm	240 sm	0.0366/0.0754	0.0518 / 0.0988	729	867	80.0	21695.0

rm : round, Stranded
sm : Sector, Stranded

The above data is approximate and subject to manufacturing tolerances

