


LOW VOLTAGE CABLES

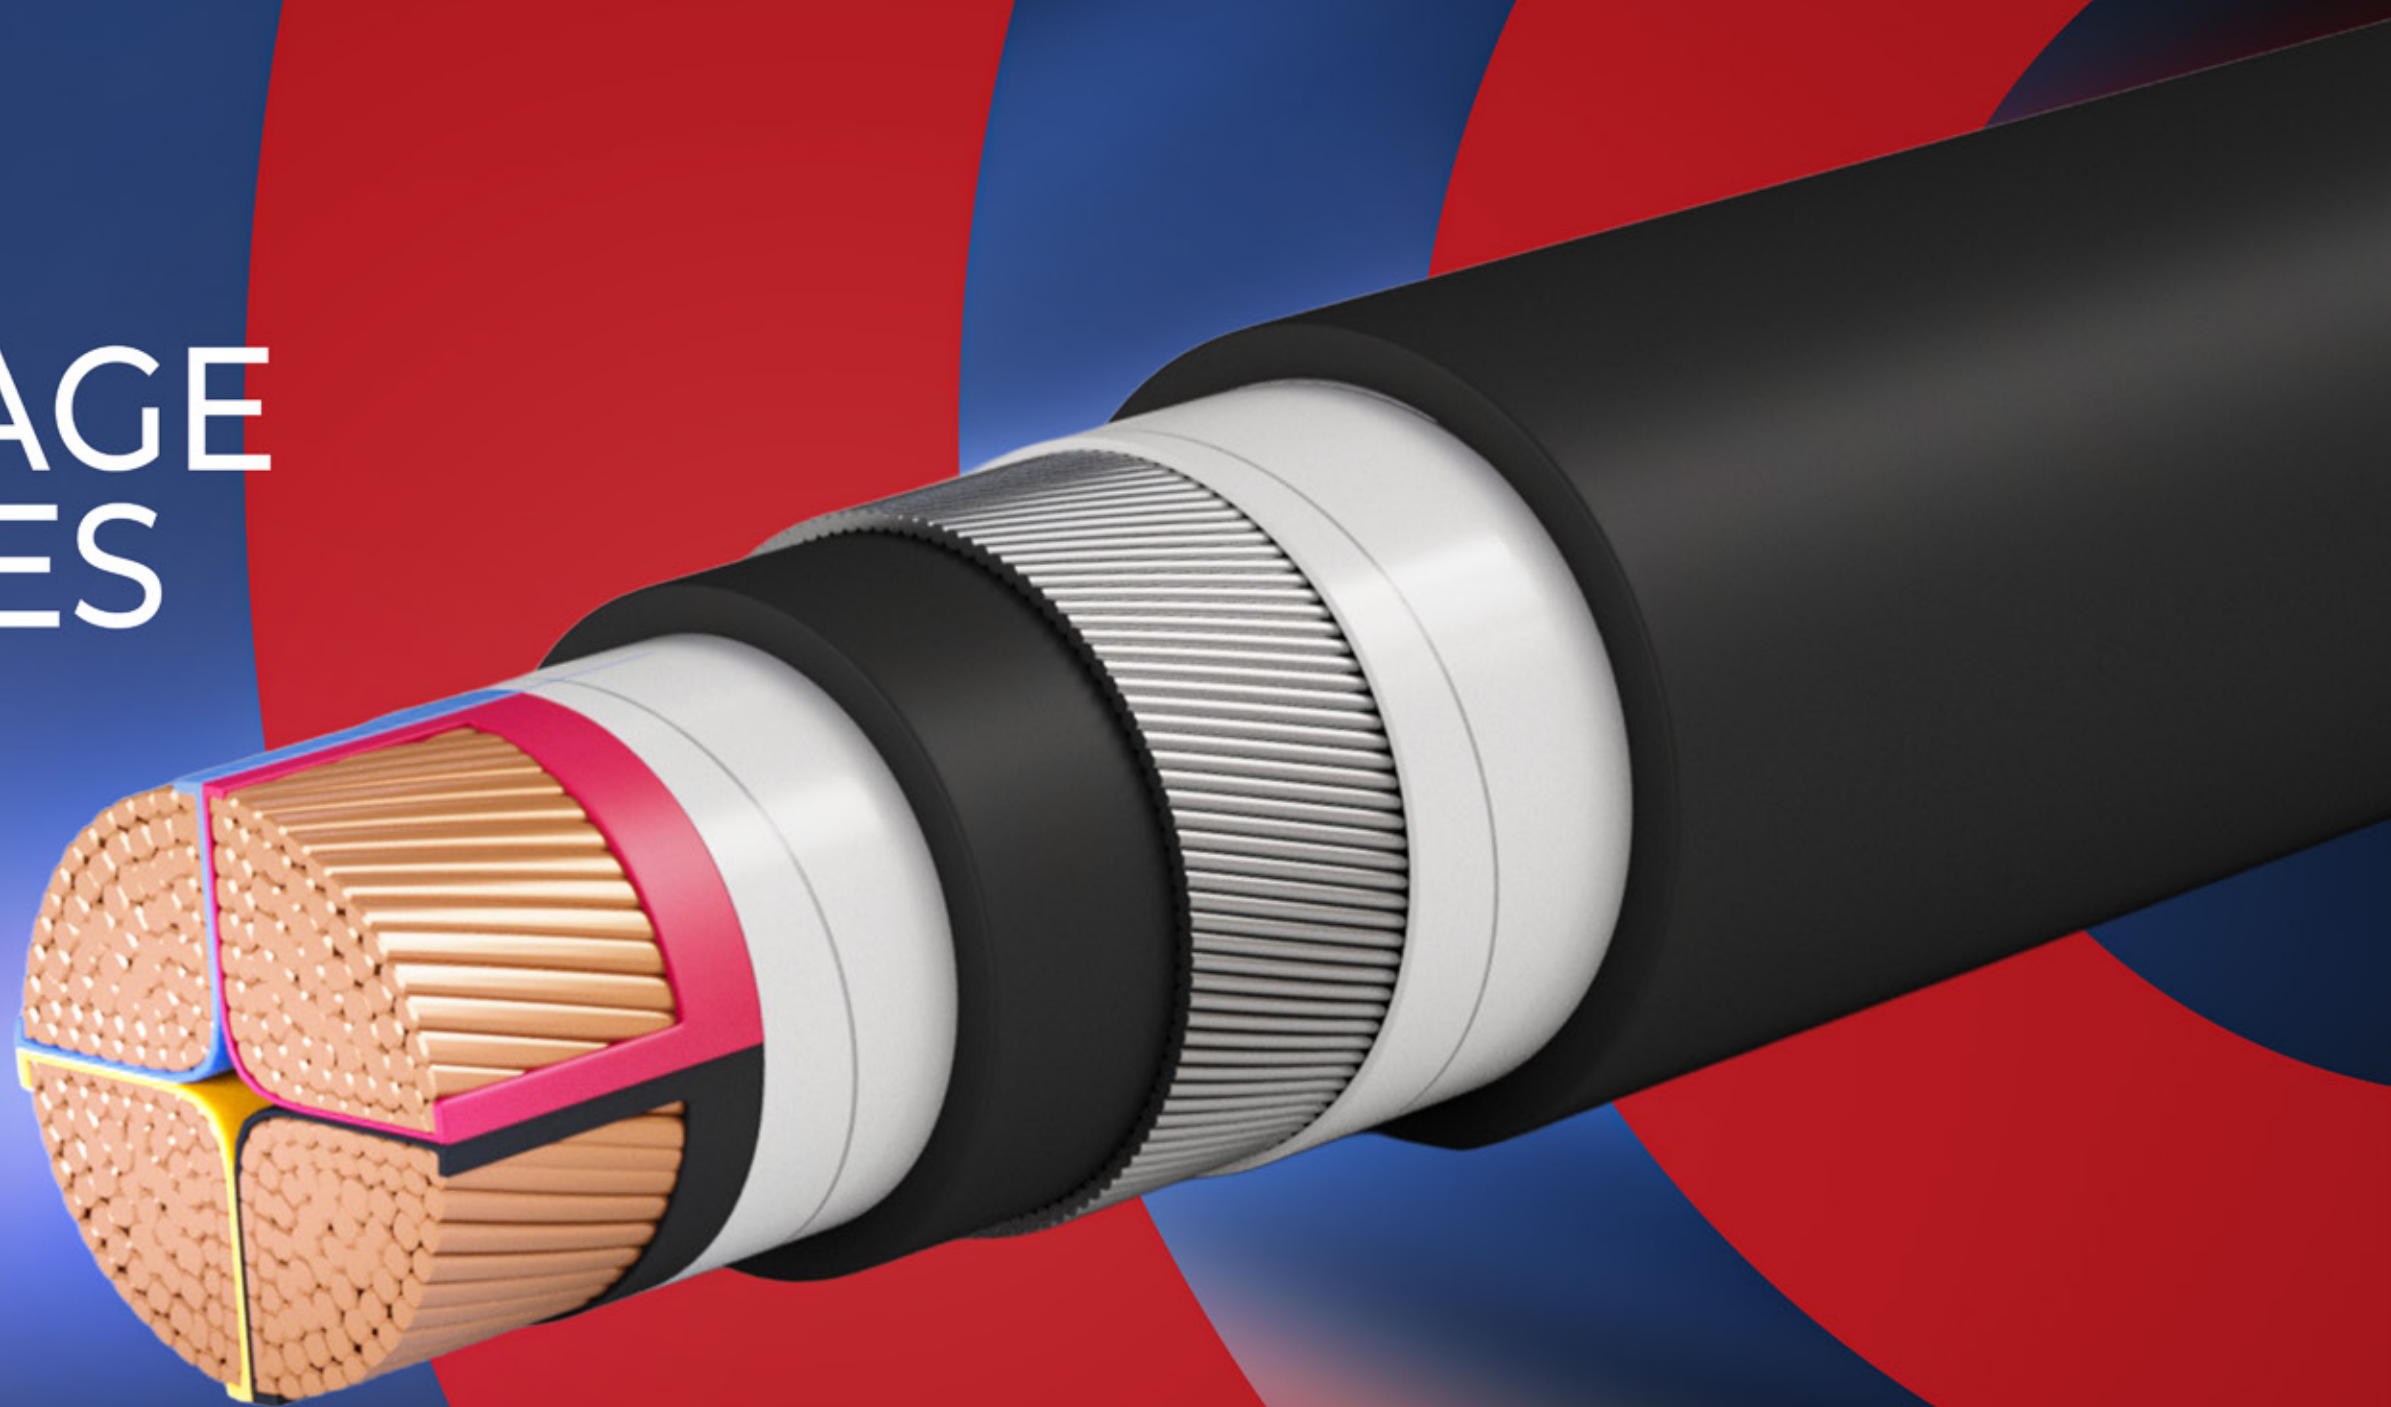

Single Core Cables, with Stranded Aluminium
Conductors, PVC Insulated , Aluminum Tape Armoured
and PVC Sheathed

Voltage Grade

0.6 /1 (1.2) KV

Description

Stranded Aluminium conductor, Insulated with PVC compound rated 70° C , Aluminum tape armoured and sheathed with PVC Compound layer.

Application


For outdoor and indoor installations in damp and wet locations where mechanical damages are expected to occur. They are normally used for power distribution in urban networks, industrial plants, as well as in thermopower and hydropower stations.

Technical Data

Relevant Standard	IEC 60502
Conductor	Aluminium conductor H12 class 2
Insulation	Extruded PVC Compound type PVC / A Rated 70° C Extruded
Inner Sheath	PVC Compound
Armoring	Aluminum tape armoured applied helically over the inner sheath.
Outer Sheath	Extruded PVC Compound
Insulation Color	Natural (default color), or any other color according to customer request
Outer Sheath Color	Black (default color), or any other color according to customer request
Maximum Operating Temp.	70° C
Minimum bending Radius	10 x outer diameter
Packing Condition	Our standard length on Wooden Drum / or according to customer request

Note:-

Heat resistant or/and flame retardant PVC insulated or/and PVC sheathed are available according to customer request

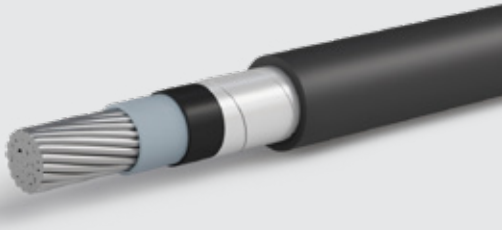

Product Code	Nominal Cross Sectional Area mm2	Max. Conductor Resistance		Current Rating					Approx. Overall	Approx.
		DC at 20 °C Ω/km	AC at 70 °C Ω/km	Laid in ground		Laid in Free Air			Diameter mm	Weight kg/km
				Flat	Trefoil	Flat separated	Flat touched	Trefoil		
				 A	 A	 A	 A	 A		
A - Aluminium Conductors										
PL-AT15-X3-01-DP	70	0.4430	0.5326	178	181	218	179	174	19.3	522
PL-AT16-X3-01-DP	95	0.3200	0.3850	213	216	265	219	213	21.3	650
PL-AT17-X3-01-DP	120	0.2530	0.3046	242	246	306	253	247	22.5	743
PL-AT18-X3-01-DP	150	0.2060	0.2483	270	275	348	289	281	24.6	884
PL-AT19-X3-01-DP	185	0.1640	0.1981	306	312	400	334	325	27.3	1077
PL-AT20-X3-01-DP	240	0.1250	0.1517	354	361	472	397	387	29.9	1319
PL-AT21-X3-01-DP	300	0.1000	0.1221	398	408	542	459	447	32.5	1566
PL-AT22-X3-01-DP	400	0.0778	0.0959	454	465	626	535	523	36.0	1949
PL-AT23-X3-01-DP	500	0.0605	0.0759	514	529	724	624	611	39.9	2404
PL-AT24-X3-01-DP	630	0.0469	0.0606	580	599	833	721	708	43.8	2920
PL-AT25-X3-01-DP	800	0.0367	0.0495	646	671	951	829	817	48.7	3619

The above data is approximate and subject to manufacturing tolerances